

protecting planet

To help raise awareness of its commitment to achieving increased sustainability, uvex has developed the **protecting planet** icon.

For uvex, **protecting planet** is more than a label. Based on the brand claim, **protecting people**, our sustainable approach integrates 3 core interlinked pillars – **ecology, economy** and **social responsibility**, that are incorporated throughout the business to improve our sustainability performance.

This explains the comprehensive audit, measurement and evaluation management process uvex undertakes along the entire value chain to ensure its products are as sustainable as possible.

uvex Bamboo TwinFlex® D xg planet





The uvex Bamboo TwinFlex[®] D xg planet is an example of the planet series product system.



protecting planet

by using bio-based material // by using recycled material // by using no harmful substances

By using bamboo viscose uvex is utilising a renewable raw material and recycled polyamide. Together, these sustainable materials account for 45 percent of the material used. The gloves also offer greater protection to the health of the wearer than stipulated by REACH regulations as they comply with the uvex list of banned substances and the skin compatibility has been dermatologically approved by the proDERM institute.



protecting planet

by using environmentallyfriendly packaging

The glove packaging has been minimised significantly. Paper wrap is used instead of rubber bands to secure bundles. Polyester bags have not been used by uvex in its glove packaging for over 11 years.



protecting planet

by having a CO₂ neutral production

uvex safety gloves are certified according to both Environmental Management ISO 14001 and Energy Management ISO 50001 and has CO_2 -neutral production rating. The new block-type thermal power station (BTTP) will further reduce the energy consumption of the Lüneburg plant thanks to the high energy efficiency of > 90% of the new technology. The BTTP already meets the official emission regulations that will become legally mandatory from 01.01.2024 and is, therefore one of the first in Germany to meet this standard.

Innovative safety gloves "Made in Germany"

Manufacturing and technology expertise



Video



uvex hand protection centre of expertise in Lüneburg

A fully integrated development process, state-of-the-art robot-controlled plant technology and strict production controls guarantee that our safety gloves are of first-class quality. Production in Germany ensures sustainable, resource-saving production and short distances from manufacturer to end-user.

Sustainable production:

- •CO2-neutral production
- Solvents and plasticisers not used in production
- Sustainable environmental and energy management (ISO 14001/ISO 50001)
- •Made locally in Germany

Social responsibility:

- •Full implementation of the ILO standard
- Continuous social audits at partner companies
- (uvex social standard)
- · Social engagement with a focus on disadvantaged children

Health:

- Over-compliance with REACH regulations on eliminating harmful substances
- Ongoing analysis of almost 200 critical substances (uvex harmful substances standard)
- Certified in line with Oeko-Tex® Standard 100
- •DERMA-certified free from allergenic substances

Comfort:

- Extremely comfortable thanks to the use of breathable natural and functional fibres
- Optimum tactile feel thanks to an ergonomic fit
- Natural feel against the skin





management



management





Environ manage

170 Detailed information on the award criteria applied by the certification bodies OEKO-TEX* and proDERM can be found at: uvex-safety.com/certificates

Extensive know-how is part of our service



We know exactly what you want.

IVEX

Our expertise is available for you at all times which forms the basis of our on-site. Risk-hazard analysis service: Our hand protection specialists work with you to determine which safety gloves are best suited to your requirements. Seminars, laboratory analyses and online tools round off our service portfolio.

Fully integrated development processes

- own yarn/liner manufacturing
- own compounding (blending)
- specially developed moulding and process technology
- innovative coating technology
- development of customer-specific solutions
- technical modifications to existing products (e.g. thermal lining)
- individual production (e.g. gloves for disabled people)

Consultation / training / application technology

- on-site consultation from uvex product specialists
- practical hand protection seminars (uvex academy)
- plant and laboratory tours for customers
- cooperation with scientific institutes
- measurement and analysis service in own laboratories
 - mechanical standard test in accordance with EN 388
 permeation tests in accordance with EN 374
 - special tests (e.g. antistatic/grip measurement/ climate test)
- individual certifications (e.g. for ingredients, coating compatibility, food product suitability)

Information / e-services

- Chemical Expert System (CES)
- designer glove plan
- online glove navigator
- online product data sheets
- online declaration of conformity

Safety Gloves Mechanical Risks / Special risks





Safety Gloves



Table of contents Standards and product advice

International standards for safety gloves

International standards for	safety gloves	Page
DIN EN 388:2019-03	Safety gloves to protect against mechanical risks	176
DIN EN ISO 374-1:2018-10	Safety gloves to protect against dangerous chemicals and micro-organisms	177
DIN EN 16350:2014-07	Safety gloves to protect against electrostatic characteristics	179
DIN EN 60903:2003	Live working - Gloves of insulating material	179
DIN EN 61482-1-2:2015-08	Working with high voltage - Clothing that protects against the thermal hazards of an electric arc – part 1–2 $$	179
DIN EN 407:2020-06	Safety gloves and other protective hand equipment designed to protect against thermal risks (heat and/or fire)	178
DIN EN 511:2006-07	Safety gloves to protect against the cold	178
	Suitable for use with foods (glove materials)	176

We help you choose the right safety gloves for your needs

Di	Discover all our helpful services on our website	
1	uvex Glove Navigator - The fast route to finding the right gloves for you	210
2	uvex Chemical Expert System - Chemicals database, permeation lists - uvex glove plan designer	210

uvex - consultation and product expertise from a single source



Contents Pictograms

These pictograms in our catalogue help you to choose the perfect safety glove.

1. Select the risk potential

requirements

OEKO-TEX® STANDARD 100

Tested for harmful substances, www.oeko-tex.com/standard100 Textiles tested for pollutants

selected for?

What is the main risk for users in the workplace?

Special risks (e.g. heat protection) 2. Determine your individual Precision All-round What type of activity are the safety gloves being Heavy duty

Mechanical protection

Working with chemicals

Cut protection

3. Defining environmental conditions

Are the activities in wet/oily or more humid or dry working environments? The bars indicate how suitable the product is for each setting.



Produced in Germany

Can be used with touchscreens

2

clima zone

ight moisture/oily


Breathability for high wearer comfort



Bamboo TwinFlex® technology for safety (cut protection) and comfort (bamboo fibre)

Dermatologically tested for skin compatibility

Detailed information on the award criteria of the certificate issuers can be found at: uvex-safety.com.sg/en/knowledge/certificates






Standards EN 388:2016

Standard for safety gloves to protect against mechanical risks

EN 388:2016 contains various test methods for comparing the mechanical performance of gloves. This standard focuses on the following six performance levels:



(a) Abrasion resistance (0 to 4)

(a) Abrasion resistance

To test the abrasion resistance of the safety glove, the material is rubbed with abrasive paper under pressure. The number of cycles required to grind a hole into the material is used as a reference value. (Highest performance class 4 = 8000 cycles)

(\mathbf{b}) Cut resistance using the coupe test

A rotating circular knife is used to test the cut resistance of a safety glove. The knife cuts through the glove material at a constant speed and constant force. The reference value is the comparison with reference material and a resulting index.

(Highest performance class 5 = index 20)

C Tear resistance

To test the tear resistance of the safety glove, the material is first cut. The reference value is the force required to tear the material. (Highest performance class 4 = 75 newtons)

d Puncture resistance

To test the puncture resistance, the material to be tested is pierced with a nail (defined dimension). The force used for this is used as a reference value.

(e) Cut resistance according to TDM

The application of the test method in accordance with ISO 13997 is relevant for materials that blunt the rotating circular knife during the coupe test (see above). The required force for cutting a material is measured at a defined distance (20 mm) (highest performance class F= 30 newton)

(f) Additional impact protection

Gloves with performance class "P" at the end offer specific impact absorption.

Suitability grades

Safety gloves for working with food must be designed in such a way that absolutely no components can be transferred to food which may

pose a hazard to human health (migration) under normal and predictable conditions.



Area of application	Aqueous pH > 4.5	Acidic pH < 4.5	Alcoholic	Fatty	Dry, non fatty
Examples	Non-alcoholic beverages Fruit Eggs Vegetables Crustaceans	Vinegar Yeast Milk Yoghurt	Wine Spirits Liqueurs	R1 = olive oil R2 = butter, margarine R3 = fish, cheese, baked goods R4 = meat, poultry R5 = sandwiches fried food	Bread Pasta Rice Tea Spices Pulses
uvex phynomic airlite A ESD	YES	YES	YES	YES (R1 – R5)	YES
uvex profi ergo/ uvex contact ergo	YES	YES	YES	YES (R1 – R5)	YES
uvex phynomic C3/ uvex phynomic C5	YES	YES	YES	YES (R1 – R5)	YES
uvex rubiflex und uvex rubiflex S	YES	YES	YES	YES (R1 – R5)	YES
uvex profastrong NF 33	YES	YES	YES	YES (R2 – R5)	YES
uvex u-fit	YES	YES	YES	YES (R3 – R5)	YES
uvex phynomic foam	YES	YES	YES	YES (R5)	YES
uvex phynomic lite (w)	YES	YES	YES	YES (R1 – R5)	YES
uvex unilite thermo	YES	YES	YES	NO	YES
uvex u-fit strong N2000	YES	NO	YES	YES (R3 – R5)	YES
uvex u-fit lite	YES	NO	YES	YES (R3 – R5)	YES
uvex u-chem 3300	YES	YES	YES	YES (R2 – R5)	YES

Standards EN ISO 374-1:2018 · DIN EN 374-5:2016

EN ISO 374-1:2018 Standard for safety gloves to protect against chemical risks

Chemical safety gloves must meet the requirements of European standard EN ISO 374-1. This standard has undergone fundamental changes in terms of certification.

Test chemicals: From the list of 18 test chemicals, the glove material must be tested for permeation as part of the certification process using 6, 3 or 1 chemical(s), depending on the type class.

A	Methanol		Primary alcohol
В	Acetone		Ketone
С	Acetonitrile		Nitrile
G	Diethylamine	polar*	Amine
н	Tetrahydrofuran		Heterocyclic, ether compounds
I	Ethyl acetate		Ester
т	Formaldehyde 37%		Aldehyde
J	n-heptane	aliphatic*	
F	Toluene	aromatic*	
D	Dichloromethane	halogenated*	Chlorinated
L	Sulphuric acid 96%		Inorganic acid, oxidising
м	Nitric acid 65%	Acids	Inorganic acid, oxidising
N	Acetic acid 99%	Acius	Organic acid
S	Hydrofluoric acid 40%		Inorganic acid
к	Sodium hydroxide 40%	Bases (alkalis)	Inorganic base
0	Ammonia water 25%	Dases (airalis)	Organic base
Р	Hydrogen peroxide 30%	Peroxide (bleach)	Peroxide

* Solvents (hydrocarbons (KWS))

Labelling of safety gloves





≈



Permeation resistance of Permeation resistance of type A: at least 30 minutes each with at least 6 test chemicals. type B: at least 30 minutes each with

Permeation resistance of type C: at least 10 minutes each with at least 1 test chemical.

EN ISO 374-1:2016/Type C

ž

With the uvex Chemical Expert System, uvex provides a multilingual, online platform to search for individual permeation times. In addition, experienced staff are available on-site and in the centre of expertise for safety gloves in Lüneburg to provide advice on all questions relating to safety gloves for protection against chemical risks.

Your uvex account manager will be happy to provide advice.

DIN EN 374-5: 2016 Standard for safety gloves to protect against dangerous chemicals and micro-organisms

To protect against microorganisms such as bacteria, fungi and viruses, safety gloves must undergo and pass special penetration tests in accordance with ISO 16604:2004 (method B). Only then may they be marked with the pictogram for EN ISO 374-5.

Labelling of safety gloves



Variant 1: Protects against bacteria. fungi and viruses

Labelling on the glove



EN ISO 374

Variant 2: Protects against bacteria and fungi

- 1 Name of the manufacturer
- 2 Glove Product Name
- 3 Performance classes, mechanical
- 4 CE conformity mark
- 5 No. of Test Institute
- 6 Letters symbolise test chemicals against which the glove has a protection index of at least class 2. 7 Pictogram with designation of
 - standard
- 8 Note enclosed instructions for use
- 9 Glove size
- 10 Expiration date
- 11 Manufacturer address

Permeation

Time measured to penetration	Protection index
> 10 min	Class 1
> 30 min	Class 2
> 60 min	Class 3
> 120 min	Class 4
> 240 min	Class 5
> 480 min	Class 6

Permeation refers to molecular penetration through the safety glove material. The time required by the chemicals to permeate, determines the performance class in accordance with EN ISO 374-1.

The actual period of protection at the workplace may vary depending on real-time process factors.


Standards EN 407:2020 · DIN EN 511:2016

DIN EN 407:2020 Standard for safety gloves providing protection against thermal risks – heat

The European **standard DIN EN 407** regulates the requirements for safety gloves that provide protection against thermal risks in applications involving heat. Safety gloves certified according to this standard protect the wearer against contact heat, radiant heat and small splashes of molten metal, for example.

However, this does not apply to the specific use of safety gloves in firefighting. According to DIN EN 407, heat protection gloves must have the following features:

- · low flammability and low flame propagation
- · low heat transmission (protection against radiant,
- convective and contact heat)
- high-temperature resistance



Important changes to standards!


In the latest version of DIN EN 407: As of 2020, the first performance class is no longer named "resistance to flammability", but is now called "limited flame spread". If the glove has not been tested for this, a new pictogram is used (see above right). However, there are no changes to the performance classes.

The test described in DIN EN 407 assigns safety gloves a performance class in relation to each of the individual thermal hazards. It is important that the glove does not come into contact with open flames if it does not meet the criteria of performance class 3 in the limited flame spread test.

DIN EN 511:2006 Standard for safety gloves providing protection against thermal risks – cold

Cold safety gloves must meet the requirements of the European **standard DIN EN 511**. The certified gloves below are designed to protect the wearer from penetrating ambient cold and from contact cold through direct contact.

Gloves can also be tested for water impermeability in accordance with EN ISO 15383, thus enabling them to protect the hands from wetness and moisture. This test is considered to have been passed if water does not penetrate the safety glove over a 30-minute period.



As with mechanical risk protection, the safety glove is assigned a different performance class for each individual aspect. The performance classes are indicated by a number from 0 to 4 next to the pictogram, whereby 4 is the highest performance class.

Standards DIN EN 16350:2014 · DIN EN 60903:2003 · DIN EN 61482-1-2:2014

DIN EN 16350:2014 Safety gloves – Electrostatic characteristics

The new standard

Choosing the right personal protective equipment (PPE) is particularly important in working environments that are hazardous or harbour health risks. For workplaces at risk of fire and explosive atmospheres, "EN 16350:2014 – Protective gloves – electrostatic properties" is the first European standard to prescribe the test conditions and minimum requirements for electrostatic properties of safety gloves.

- ► vertical resistance must be less than $1.0 \times 10^8 \Omega$
 - $(R_V < 1.0 \times 10^8 \Omega).$
- test atmosphere: ambient temperature of 23 ± 1 °C, relative humidity of 25 ± 5%.

Important notice:

Electrostatic discharge safety gloves are only effective if the wearer is grounded with resistance of less than 10⁸ Ω .

What should users take into account?

EN 16350:2014 is the first standard to define a limit value for vertical resistance for protective gloves; this value was not included in DIN EN 1149.

Users must therefore check the suitability of the protective gloves in line with EN 16350:2014.

References to EN 1149 are no longer sufficient, as this standard only describes the testing procedure and does not specify a limit value.

DIN EN 60903:2003 Live working – Gloves made from insulating material

DIN EN 60903-compliant safety gloves are category iii PPE. The insulation protection class of the insulating personal protective equipment (PPE) is determined according to the nominal voltage of the plant, with both the maximum permissible nominal AC voltage (AC) and the nominal DC voltage (DC) being calculated.

Labelling of safety gloves



Insulation protection class	Max. permissible nomi- nal AC voltage (AC)	Max. permissible nominal direct voltage (DC)
00	500 volts	750 volts
0	1,000 volts	1,500 volts
1	7,500 volts	11,250 volts
2	17,000 volts	25,000 volts
3	26,500 volts	39,750 volts
4	36,000 volts	54,000 volts

Additional identifier

	Category	Resistant to
	А	Acids
Ř—	Н	Oil
	Z	Ozone
	С	Extremely low temperatures

DIN EN 61482-1-2:2015-08 Live working - Protective clothing against the thermal hazards of an electric arc

Part 1-2: Test methods - Method 2:

Determining the arc protection class of the material and the clothing using a directed test arc (box test)

Hands are at the greatest risk of burns from short circuit electric arcs when working on electrical equipment. Unfortunately, there is no recognised standard for safety gloves in Germany for testing the potential dangers of a short circuit electric arc. Therefore, safety gloves for protection against the thermal discharge of a short circuit electric arc are generally tested in accordance with EN 61482-1-2 and classified accordingly.

More on this topic:



Class	Test current [kA]	Arcing time [ms]	Arc energy [kJ]	Incident energy [kJ/m²]
1	4	500	168 +/- 17	146 +/- 28
2	7	500	320 +/- 22	427 +/- 39

Mechanical Risks Area of application: precision/all-round





Working areas which do not have any moisture (water, oil, fat, cooling lubricant, etc.). Safety gloves for these conditions are extremely breathable. Examples: quality control, assembly work, distribution, end processing.



Working areas with some moisture. Safety gloves for these conditions are less breathable. The water/oil-repelling coating is crucial and also guarantees slip resistance. Examples: oil-coated parts, changing between dry and damp working environments.



Working areas in which hands should be protected from liquids (not chemicals). Sealed safety gloves with high slip resistance are necessary.

Examples: removing oily/wet parts from machines, outdoor activities (weather-related humidity).

uvex phynomic Perfection in 3 dimensions

1. Perfect fit



3D ergo technology precision all the way to the fingertips

- Ergonomic solution for every wearer: up to 8 perfectly coordinated sizes
- The advantages for the wearer: . the glove fits like a second skin
 - natural touch
 - maximum flexibility for fatigue-free work

2. Optimum functionality



Coatings perfectly adapted to the application at hand

- · for dry areas:
- aqua-polymer waterproofing
- · for dry and slightly damp areas: aquapolymer foam coating
- · for humid and oily areas:
- aqua-polymer xtra grip foam coating · for wet and oily areas:
- aqua-polymer pro coating
- · for applications with industrial touchscreen monitors: airLite aqua-polymer foam coating***

3. Skin safe – product safe



Enhanced skin care and product protection

Health protection

- no skin irritation
- dermatologically approved*
- certified in accordance with OEKO-TEX[®] Standard 100
- free from harmful solvents (DMF, TEA)
- free from allergenic substances

Product protection

- · silicone-free according to imprint test
- suitable for sensitive surfaces
- · does not leave any traces/marks
- · certified for food processes*

clima zone









* The uvex phynomic series was clinically tested by the proDERM® Institute for Applied Dermatological Research (Hamburg, Germany). The extremely good skin tolerability of uvex phynomic safety gloves has been dermatologically tested (proDERM® studies: 11.0356-02, 11.0482-11, 13.0202-02, 15.0188-02, 15.0219-11). Detailed information on the award criteria applied by the certification bodies OEKO-TEX® and proDERM can be found at: uvex-safety.com/certificates ** Models uvex phynomic lite/lite w, uvex phynomic air_Lite A ESD, uvex phynomic air_Lite B ESD, uvex phynomic air_Lite C ESD

Mechanical Risks Area of application: precision/all-round

An intelligent future

More and more companies are integrating intelligent methods into their production process. The digitalisation of industrial production (Industry 4.0.) is still on its way. You will be equipped for the future with the uvex phynomic airLite A ESD thanks to its touchscreen compatibility for use on almost all screens, tablets and mobile phones.



This applies to all products marked with this symbol.

Health protection and the latest uvex coating technology

The newly developed "airLite" aqua-polymer coating in combination with a high-quality liner (18 gauge) offers not only touchscreen compatibility but also the highest sensitivity and tactile feel for precision work when handling very small or fine components.

It has also been tested by the proDERM[®] institute in an elaborate user-study process and its skin compatibility has been dermatologically approved.



The uvex phynomic airLite ESD range also offers gloves with cut protection in Cut Level B and C. See page 206/207 for details.



uvex phynomic airLite A ESD

- the lightest safety glove in its class
- ESD function (DIN EN 16350:2014)
- a noticeable difference in wearer comfort: combination of high sensitivity and tactile feel, lightness and breathability
- touchscreen compatibility for use on almost all screens, tablets and mobile phones
- thin and breathable "airLite" aqua-polymer coating combines the highest sensitivity and tactile feel with touchscreen compatibility
- · very good grip in dry and slightly damp areas
- free from accelerators, health protection and skin compatibility dermatologically approved (proDERM®), highly suitable for allergy sufferers

Areas of application:

- precision assembly work
- precision work
- sorting
- quality control



You can find more information by scanning the QR code.

	uvex phynomic airLite A ESD
Art. no.	60038
Design	knitted cuff
Standard	EN 388 (3 1 1 0 X), EN 16350
Material	polyamide, elastane, carbon
Coating	palm and fingertips with
	airLite aqua-polymer coating
Suitable for	for dry and slightly damp areas of application
Colour	black
Sizes	6 to 12
Order quantity multiples	10 PR





Mechanical Risks

Area of application: precision/all-round



uvex phynomic foam

- dexterity safety glove for precision mechanical work
- very good mechanical abrasion resistance thanks to the damp-resistant aqua-polymer foam coating
- good grip in dry and slightly damp areas
- highly breathable coating
- outstanding tactile feel when assembling parts
- free from accelerators, health protection and skin compatibility dermatologically approved (proDERM®), highly suitable for allergy sufferers

Areas of application:

- · precision assembly work
- inspection
- sorting
- food processing
- packaging

- uvex phynomic allround
- light and dirt-resistant all-round safety glove for mechanical activities
- very good mechanical abrasion resistance thanks to the damp-resistant aqua-polymer foam coating
- good grip in dry and slightly damp areas
- highly breathable coating
- outstanding tactile feel when assembling parts
- free from accelerators, health protection and skin compatibility dermatologically approved (proDERM[®]), highly suitable for allergy sufferers

Areas of application:

- maintenance
- assembly
- precision work
- transport/packaging work

uvex phynomic allround

repair work

60049

knitted cuff

grey, black

5 to 12

10 PR

EN 388 (3121X)

polyamide, elastane

palm and fingertips with aqua-polymer foam coating dry areas and slightly damp areas uvex phynomic XG

- flexible and extremely durable assembly glove with the best oil grip in its class
- outstanding mechanical abrasion resistance thanks to the aqua-polymer Xtra Grip coating
- outstanding grip in oily areas
- high level of breathability with the porous foam coating
- very good tactile feel when assembling (oily) parts
- free from accelerators, health protection and skin compatibility dermatologically approved (proDERM[®]), highly suitable for allergy sufferers

Areas of application:

- precision work
- assembly
- maintenance
- repair work
- metal processing
- concrete/construction work

	uvex phynomic foam
Art. no.	60050
Design	knitted cuff
Standard	EN 388 (3121X)
Material	polyamide, elastane
Coating	palm and fingertips with
	aqua-polymer foam coating
Suitable for	dry areas and slightly damp area
Colour	white, grey
Sizes	5 to 12
Order unit	10 PR







damp and oily working conditions black, black 6 to 12 10 PR



Mechanical Risks Area of application: precision/all-round Break section Vex uvex uvex 19 EN 388:201 EN 388:2016 388:201 ₽ ₽ 60054 60060 60061 **OEKO-TEX**® **OEKO-TEX**® STANDARD 100 STANDARD 100 S02-0648 HOHENSTEIN HTTI S02-0648 HOHENSTEIN HTTI Tested for harmful substances www.oeko-tex.com/standard100 Tested for harmful substances. www.oeko-tex.com/standard100 MADE IN GERMANY MADE IN GERMANY

uvex phynomic x-foam HV

- unique safety glove with break sections
- · reduced tear resistance in the finger area with the integration of a seamless break section, which clearly reduces the risk of severe hand injuries when using handheld power tools
- very good mechanical abrasion resistance thanks to the damp-resistant aqua-polymer foam coating
- · good grip in dry and slightly damp areas
- highly breathable coating
- outstanding tactile feel when assembling parts
- free from accelerators, health protection and skin compatibility dermatologically approved (pro-DERM®), highly suitable for allergy sufferers

	uvex phynomic x-foam HV
Art. no.	60054
Design	knitted cuff
Standard	EN 388 (31X1X)
Material	polyamide, elastane
Coating	palm and fingertips with aqua-polymer foam coating
Suitable for	dry areas and slightly damp areas
Colour	orange, grey
Sizes	6 to 12
Order quantity multiples	10 PR



- NOTE: only partially suitable for handling moving machine parts
- a thorough hazard analysis with the support of our uvex hand protection specialists is vital before use
- safety glove with water-repellent aqua-polymer foam coating for use in outdoor areas
- outstanding mechanical abrasion resistance thanks to the durable coating
- · very good grip in damp and wet areas
- high level of breathability due to the coating
- very good tactile feel when assembling parts
- free from accelerators, health protection and skin compatibility dermatologically approved (pro-DERM®), highly suitable for allergy sufferers

- Areas of application: precision work
- repair work
- assembly

uvex phynomic wet · uvex phynomic wet plus

maintenance

	uvex phynomic wet	uvex phynomic wet plus
Art. no.	60060	60061
Design	knitted cuff	knitted cuff
Standard	EN 388 (3131X)	EN 388 (3131X)
Material	polyamide, elastane	polyamide, elastane
Coating	palm and fingertips with	palm and 3/4 of the back of
•	agua-polymer foam coating	the hand with agua-polymer
	,	foam coating
Suitable for	damp and oily working conditions	damp and oily working conditions
Colour	blue, anthracite	blue, anthracite
Sizes	6 to 12	6 to 12
Order quantity multiples	10 PR	10 PR
*		

Mechanical Risks

Area of application: precision/all-round/heavy duty



In addition to protective function, safety gloves for assembly work must meet a variety of other demands placed on them by the wearer. These include dexterity, a comfortable internal temperature, flexibility and a slip-resistant coating, of which all ensure the gloves do not hinder work.

These requirements are met by a number of safety gloves currently available on the market. However, the workplace often involves a combination of activities, when wearers still need to have an excellent sense of touch even if there is a significant amount of dirt or moisture. If open cell coatings continue to be used in these environments, the hands become dirty, wet or oily as well as reduced product life and regular replacement rates.

This is where uvex's new product concept comes into its own.

The coating: the innovative aqua-polymer-pro coating features dirt and moisture-repellent properties. The gloves are coated up to and including the knuckles. It remains completely flexible and offers exceptional dry and wet grip (in both wet and oily applications).

The liner: uvex has already set new standards in cut protection with the patented Bamboo-TwinFlex[®] technology. The uvex phynomic pro represents a further ground-breaking development in the Cut 1 segment.

The liner combines bamboo with polyamide/elastane. The dirt and moisture-repellent coating requires that it is particularly important that the fibre combination is absorbent and wicks moisture away from the skin. The silky feel of this fibre also feels pleasant on the skin.

Purity "Made in Germany": This product in the uvex phynomic range has also been tested by the proDERM[®] Institute to confirm the skin compatibility and dermatological tolerance through a comprehensive process of repeated patch tests and in-use studies.



uvex phynomic pro 2 · uvex phynomic pro

- high dexterity and dirt- and damp-resistant safety glove
- good mechanical abrasion resistance thanks to the durable aqua-polymer Pro coating
- very good grip in damp, wet and oily areas
- High breathability and very good moisture absorption thanks to the bamboo viscose liner
- very good tactile feel when handling parts
- outstanding wearer comfort on the skin thanks to the bamboo-polyamideelastane liner
- free from accelerators, health protection and skin compatibility dermatologically approved (proDERM®), highly suitable for allergy sufferers

- Areas of application:
- assembly
- maintenance
- repair work
- concrete/construction work
- outdoor activities

	uvex phynomic pro 2	uvex phynomic pro
Art. no.	60064	60062
Design	knitted cuff	knitted cuff
Standard	EN 388 (2121X)	EN 388 (2121X)
Material	bamboo, polyamide, elastane	bamboo, polyamide, elastane
Coating	palm and fingertips with	palm and 3/4 of the back of the hand
	aqua-polymer foam coating	with aqua-polymer pro coating
Suitable for	damp and oily working conditions	damp and oily working conditions
Colour	blue, anthracite	blue, anthracite
Sizes	6 to 12	6 to 12
Order quantity multiples	10 PR	10 PR
Sizes	6 to 12	6 to 12



Mechanical Risks Area of application: precision/all-round





uvex phynomic lite · uvex phynomic lite w

- lightweight safety glove for fatigue-free work
- good mechanical abrasion resistance thanks to the very thin but highly durable aqua-polymer impregnation
- good grip in dry and slightly damp areas
- very high level of breathability with the porous coating, which reduces sweating
- outstanding tactile feel when handling small parts
- free from accelerators, dermatologically approved skin compatibility (proDERM®), highly suitable for allergy sufferers
- Areas of application:
- precision assembly work
- precision work
- inspection
- sortingfood processing
- uvex phynomic lite w uvex phynomic lite Art. no. 60040 60041 knitted cuff knitted cuff Design Standard EN 388 (2121X) EN 388 (2121X) Material polyamide, elastane polyamide, elastane palm and fingertips with aqua-polymer impregnation dry and slightly damp areas of application Coating Suitable for palm and fingertips with aqua-polymer impregnation dry and slightly damp areas of application Colour grey, grey white, white Sizes 5 to 12 5 to 12 Order quantity multiples 10 PR 10 PR





Mechanical Risks Area of application: precision/all-round







uvex rubipor XS

- lightweight, elastic safety glove with stretch cotton material
- good grip in dry areas
- very high level of breathability with the thin layer of NBR impregnation
- very good tactile feel through the flexible stretch cotton material with elastane
- ergonomic fit

Areas of application:

- precision assembly work
- inspection
- sorting
- product protection

	uvex rubipor XS2001	uvex rubipor XS5001B
Art. no.	60276	60316
Design	knitted cuff	knitted cuff
Standard	EN 388 (1110 X)	EN 388 (1110 X)
Material	cotton interlock, elastane	cotton interlock, elastane
Coating	palm and fingertips coated	palm and fingertips coated
	with breathable	with breathable
	NBR special impregnation	NBR special impregnation
Suitable for	dry areas of application	dry areas of application
Colour	white, white	white, blue
Sizes	6 to 10	6 to 10
Order quantity multiples	10 PR	10 PR



* ... ₩

Mechanical Risks

Area of application: precision/all-round





uvex athletic lite

- · lightweight and sensitive safety glove for mechanical tasks
- matt, porous and particularly abrasion-resistant microfoam coating
- · very good grip in dry and slightly damp areas
- high breathability thanks to the porous coating, reducing sweating
- perfect fit thanks to the "slim fit" design and elastane in the liner
- free from hazardous substances in accordance with OEKO-TEX® Standard 100

Areas of application:

- · precision assembly work
- maintenance
- inspection
- sorting

uvex athletic allround

- · lightweight and dirt-resistant all-round safety glove for mechanical tasks • very good mechanical abrasion resistance thanks to the damp-
- resistant aqua-polymer foam coating
- · very good grip in dry and slightly damp areas
- perfect fit thanks to the "slim fit" design and elastane with liner • free from hazardous substances in accordance with OEKO-TEX® Standard 100

Areas of application:

- maintenance
- assembly
- transport/packaging work
- sorting

	uvex athletic lite		uvex athletic allround
Art. no.	60027	Art. no.	60028
Design	knitted cuff	Design	knitted cuff
Standard	EN 388 (4 1 3 2 X)	Standard	EN 388 (4 1 2 2 X)
Material	polyamide, elastane	Material	polyamide, elastane
Coating	palm and fingertips with NBR foam coating	Coating	palm and fingertips with NBR foam coating
Suitable for	dry and slightly damp areas	Suitable for	dry and slightly damp areas
Colour	blue, anthracite	Colour	grey, anthracite
Sizes	6 to 11	Sizes	6 to 11
Order quantity mul	Itiples 10 PR	Order quantity mult	tiples 10 PR
	•		





Mechanical Risks

Area of application: precision/all-round







uvex unilite 6605

- lightweight knitted glove with NBR foam coating for mechanical precision work
- good mechanical abrasion resistance with the polyamide liner and coating
- · good grip in dry and slightly damp areas
- breathable
- good tactile feel
- good fit
- highly flexible

Areas of application:

- precision assembly work
- fine assembly work
- inspection
- sorting

uvex unilite 7700

- flexible and durable safety glove for mechanical precision work
- good mechanical abrasion resistance with the polyamide-elastane liner and NBR polyurethane coating
- good grip in dry and slightly damp to slightly oily areas
- good tactile feel
- very good fit
- highly flexible
- Areas of application:
- precision assembly work
- precision work
- inspection
- sorting

uvex unipur 6634

- moisture-proof NBR safety glove for
- mechanical applications outdoors
- very good abrasion resistance with the polyamide liner and NBR coating
- good grip in damp areas
- good grip in damp a
 good tactile feel
- good fit
- highly flexible
- Areas of application:
- precision assembly work
- precision work
- general repair work
- maintenance

	uvex unilite 6605
Art. no.	60573
Design	knitted cuff
Standard	EN 388 (4122X)
Material	polyamide
Coating	palm and fingertips coated with
	nitrile foam coating
Suitable for	dry and slightly damp areas
Colour	black, black
Sizes	6 to 11
Order quantity multiples	10 PR



	uvex unilite 7700
Art. no.	60585
Design	knitted cuff
Standard	EN 388 (4 1 3 1 X)
Material	polyamide, elastane
Coating	palm and fingertips coated with
	NBR/polyurethane coating
Suitable for	dry and damp, oily working conditions
Colour	grey, black
Sizes	7 to 11
Order quantity multiples	s 10 PR



	uvex unipur 6634
Art. no.	60321
Design	knitted cuff
Standard	EN 388 (4131X)
Material	polyamide
Coating	palm and fingertips coated with
	NBR coating
Suitable for	damp, oily or greasy areas of
	application
Colour	grey, black
Sizes	7 to 10
Order quantity multiples	10 PR



Mechanical Risks Area of application: precision/all-round



uvex unipur 6630 · uvex unipur 6631

- light and very sensitive PU safety glove for mechanical precision work
- good mechanical abrasion resistance
- good grip in dry and slightly damp areas
- outstanding tactile feel
- very good fit
 highly flexible

- Areas of application:
- precision assembly work • precision work
- inspection
- sorting

uvex unipur 6639

- · lightweight, high dexterity and dirt-resistant PU safety glove for
- mechanical precision work good mechanical abrasion
- resistance
- good grip in dry and slightly damp areas
- outstanding tactile feel
- very good fit
 highly flexible

- Areas of application:
- precision assembly work
- precision work inspection
- sorting

uvex unipur 6630 Art. no. 60943 knitted cuff Design Standard EN 388 (4141X) Material polyamide palm and fingertips coated with polyurethane coating Coating Suitable for dry and slightly damp areas Colour white, white Sizes 6 to 11 Order quantity multiples 10 PR 6 to 11

uvex unipur 6631
60944
knitted cuff
EN 388 (4141X)
polyamide
palm and fingertips coated
with polyurethane coating
dry and
slightly damp areas
grey, grey
6 to 11
10 PR

	uvex uniput 6659
Art. no.	60248
Design	knitted cuff
Standard	EN 388 (4131X)
Material	polyamide
Coating	palm and fingertips coated with polyurethane coating
Suitable for	dry and slightly damp areas
Colour	black, black
Sizes	6 to 11
Order quantity multiples	10 PR







Mechanical Risks

Area of application: precision/all-round





uvex unipur carbon

- sensitive and anti-static safety glove for precision work with electronic
- parts
- very good grip
- fulfils requirement of DIN EN 16350:2014
 very high level of breathability
- very high level of breathal
 outstanding tactile feel
- outstanding tactlie reer

Areas of application:

- working with touchscreens
- electrical industry
- work in anti-static areas
- assembly of electronic components

	uvex unipur carbon	uvex unipur carbon FT
Art. no.	60556	60587
Design	knitted cuff	knitted cuff
Standard	EN 388 (2131X)	EN 388 (2131X)
	EN 16350	EN 16350
Material	polyamide, carbon	polyamide, carbon
Coating	palm with carbon microdots,	fingertips with thin
	fingertips with thin elastomer coating	elastomer coating
Suitable for	dry areas of application	dry areas of application
Colour	grey, black, white	grey, white
Sizes	6 to 10	6 to 10
Order quantity multiples	10 PR	10 PR

uvex unigrip

- knitted safety gloves with 13-gauge (uvex unigrip PA and uvex unigrip 6620) for precise mechanical work and 10 gauge (uvex unigrip 6624) for rougher mechanical activities
- good grip with the thin PVC dots in dry areas
- Areas of application:
- assembly
- sorting
- packaging

	uvex unigrip 6624	uvex unigrip 6620
Art. no.	60238	60135
Design	knitted cuff, 10-gauge	knitted cuff, 13-gauge
Standard	EN 388 (2 2 4 2 B)	EN 388 (2241B)
Material	polyamide, cotton	polyamide, cotton
Coating	palm and fingers coated	palm and fingers coated
	with PVC dots	with PVC dots
Suitable for	dry areas of application	dry areas of application
Colour	grey, red	white, blue
Sizes	7 to 10	7 to 10
Order quantity multiples	10 PR	10 PR







Mechanical Risks

Area of application: all-round/heavy duty



uvex contact ergo

- thick, hard-wearing cotton interlock safety glove with NBR coating
- very good grip in damp, wet and oily areas
- · good tactile feel
- ergonomic fit
- highly flexible

Art. no. Design

Standard

Material

Coating

Colour

Sizes

Suitable for

Order quantity multiples 10 PR

- water vapour absorption of the cotton lining

Areas of application:

- assembly
- inspection
- repair work
- shipping/logistics
- packaging

· cotton interlock safety glove with

good tactile feel

of the cotton lining

ergonomic fit

high flexibility

NBR coating for universal use • very good grip in damp, wet and oily areas

• very good wearer comfort due to

the high water vapour absorption

uvex profi ergo

- assembly inspection
 - maintenance

Areas of application:

· light to medium metal processing

· good wearer comfort with high

uvex contact ergo ENB20C

EN 388 (2121X), EN 407 (X1XXX)

oily and greasy areas of application

palm and fingers with special NBR coating (nitrile rubber)

60150 knitted cuff

cotton interlock

white, orange

6 to 10

	uvex profi ergo ENB20A	uv
Art. no.	60147	60
Design	knitted cuff	kn
Standard	EN 388 (2121X),	EN
	EN 407 (X 1 X X X X)	EN
Material	cotton interlock	CC
Coating	palm and 3/4 of the back of the	pa
	hand with special NBR coating	ha
	(nitrile rubber)	(n
Suitable for	damp, oily or greasy	da
	areas of application	ar
Colour	white, orange	w

6 to 11 Sizes Order quantity multiples 10 PR







Mechanical Risks

Area of application: all-round/heavy duty



uvex profi ergo XG

- safety glove with uvex Xtra Grip Technology
- very good mechanical abrasion resistance thanks to the multi-layer design for increased service life
- outstanding grip in damp, wet and oily areas
- good tactile feel
- ergonomic fit
- highly flexible

Art. no.

Design Standard

Material

Coating

Suitable for

Order quantity multiples 10 PR

Colour Sizes

 very good wearer comfort with high water vapour absorption of the cotton lining

60558

knitted cuff

cotton interlock

of application

white, orange, black 6 to 11

uvex profi ergo XG20A

EN 388 (3 1 2 1 X), EN 407 (X 1 X X X X)

palm and 3/4 of the back of the hand with special NBR coating and

Xtra Grip coating (nitrile rubber)

damp, oily or greasy areas

- Areas of application:
- assembly
- inspection
- maintenance
- light to medium metal processing

uvex profi ergo XG20

cotton interlock

of application

10 PR

white, orange, black 6 to 11

EN 388 (3 1 2 1 X), EN 407 (X 1 X X X X)

palm and whole back of the hand with special NBR and

Xtra Grip coating (nitrile rubber)

damp, oily or greasy areas

concrete/construction work

60208 knitted cuff

outdoor activities

uvex glove clip

- universal fastening options due to snap hooks
- easy handling
- suitable for all gloves
- gloves are quickly fixed and released
- perfect hold due to jagged clamps
- uncomplicated attachment to work clothing

Areas of application:

- automotive industry
- building and metal industry
- precision assembly work
- maintenance/servicing

	uvex glove clip
Art. no.	6047900
Design	glove keeper with snap hook
Material	Polycarbonate
Coating	without
Suitable for	easy access to gloves
Colour	black
Order quantity multiples	10 PC



Mechanical Risks

Area of application: Heavy duty



- mechanical activities
- very good mechanical abrasion resistance with NBR coating

uvex rubiflex NB27

EN 388 (3111X)

(nitrile rubber)

gauntlet, approx. 27 cm

damp, oily or greasy areas of application

cotton interlock fully coated with special NBR coating

89636

orange

7 to 11

- · good tactile feel
- ergonomic fit

Areas of application:

- inspection
- maintenance
- repair work
- · light to medium metal processing
- varnishing

Art. no.

Design

Standard

Material Coating

Suitable for

Order quantity multiples 10 PR

Colour

Sizes

- excellent grip in wet and oily areas
- · extremely abrasion-resistant for heavy-duty
- activities
- protection against contact heat to 100°C (level 1)
- highly flexible, seamless polyester-knit liner

Areas of application:

- maintenance/assembly
- construction industry
- metalworking industry
- manual processing work
- · oil and gas industry
- outdoor work

	uvex-unilite 7710F
Art. no.	60278
Design	knitted cuff
Standard	EN 388 (4121X),
	EN 407 (X 1 X X X X)
Material	polyester (seamless)
Coating	palm and whole back of the hand
	with NBR (nitrile rubber)
	with grip finish
Suitable for	excellent grip in wet and
	oily areas
Colour	blue, black
Sizes	7 to 11
Order quantity multiples	10 PR





and manual tasks involving raw materials • very good mechanical abrasion resistance with NBR coating

Areas of application:

- concrete/construction work
- · iron and steel industry
- wood-working
- shipping/logistics

	uvex compact NB27E	uvex compact NB27H
Art. no.	60946	60945
Design	canvas gauntlet	canvas gauntlet
Standard	EN 388 (4121B)	EN 388 (4121B)
Material	jersey cotton	jersey cotton
Coating	palm and 3/4 of the	palm and whole back
	back of the hand	of the hand
	with NBR coating	with NBR coating
	(nitrile rubber)	(nitrile rubber)
Suitable for	damp, oily or greasy a	reas of application
Colour	white, blue	white, blue
Sizes	9 to 10	10
Order quantity	10 PR	10 PR
multiples		



Mechanical Risks

Area of application: Heat risks



uvex nk

- safety glove for thermal applications
- good mechanical abrasion resistance
 very good grip in dry, damp and oily areas
- through the rough surface
- very good thermal insulation in direct contact with warm to hot objects
- suitable for contact heat up to +100 °C (as per EN 407)

Areas of application:

- · handling heavy-duty tools
- sheet metal processing
- machinery and tool manufacturing
- handling cold or hot objects

uvex k-basic extra

- Kevlar® coarse-knitted glove for mechanical and thermal activities
- very good thermal insulation in direct contact
- with warm to hot objects • suitable for contact heat up to +250 °C
- good cut protection
- good wearer comfort with cotton lining on the inside

60179

none

yellow

8, 10. 12

breathable

Art. no.

Design

Standard

Material

Coating

Colour

Sizes

Suitable for

Areas of application:

- · light to medium metal processing
- glass handling
- automotive industry

Order quantity multiples 5 PR

uvex profatherm

- cotton terry safety glove for thermal
- applications
- very good thermal insulation in direct contact with warm to hot objects

60595

- suitable for contact heat up to +250 °C
- · good wearer comfort with the cotton terry
- material on the inside

Areas of application:

- light to medium metal processing
- iron/steel industry

Art. no.

Design

Standard

Material

Coating

Colour

Sizes

Suitable for

Order quantity multiples 6 PR

· plastics processing industry

	uvex NK2722	uvex NK4022
Art. no.	60213	60202
Design	gauntlet,	gauntlet,
	approx. 27 cm	approx. 40 cm
Standard	EN 388 (2 3 4 2 X),	EN 388 (2 3 4 2 X),
	EN 407 (X 1 X X X X)	EN 407 (X 1 X X X X)
Material	cotton interlock, aramid knit	
Coating	fully coated with special NBR coating	
	(nitrile rubber)	
Suitable for	damp, oily or greasy	areas of application
Colour	orange	
Sizes	9 to 10	9 to 10
Order quantity multiples	10 PR	10 PR





uvex k-basic extra 6658

knitted cuff, 7-gauge

EN 388 (2 4 4 2 D),

EN 407 (X 2 X X X X)

cut and heat-resistant

100 % Kevlar®, cotton lining (inside)



uvex profatherm XB40

gauntlet, approx. 40 cm

insulation against heat and cold

EN 388 (2 2 4 1 B), EN 407 (X 2 X X X X)

60595

cotton terry

none

white

11

Mechanical Risks

Area of application: Cold protection



uvex unilite thermo

- winter glove with dual-layer design
- good mechanical abrasion resistance with a polymer coating that is flexible at low temperatures
- very good thermal insulation in direct contact with cold objects
- good fit

Areas of application:

- work in cold environments
- concrete/construction work
- refrigerated warehouse/stores
- forklift driver

uvex unilite thermo plus cut c

- outstanding tactile feel
- high abrasion resistance
- flexible at cold temperatures
- mechanical resistance
- very high cut protection (Level C)

Areas of application:

- work in cold environments
- construction and metalworking industry
- (refrigerated) warehouses
- forklift drivers
- handling sharp parts during:
- assembly, sorting
- packaging work

	uvex unilite thermo	uvex unilite thermo plus	uvex unilite thermo HD		uvex unilite thermo plus cut c
Art. no.	60593	60592	60942	Art. no.	60591
Design	knitted cuff	knitted cuff	knitted cuff	Design	back of the hand partially coated,
Standard	EN 388 (3131X), EN 511 (010)	EN 388 (3131X), EN 511 (010)	EN 388 (3231X), EN 511 (12X)		knitted cuff
Material	acrylic and new wool mix (lining),	acrylic and new wool mix (lining),	cotton terry material and acrylic	Standard	EN 388 (3X42C), EN 511 (02 X)
	polyamide and elastane (outer)	polyamide and elastane (outer)	(lining), nylon (outer)	Material	two-layer design: acrylic (inside),
Coating	palm and fingertips with	palm and 3/4 of the back of the	palm and whole back of the hand		glass/polyamide (outside)
	cold-flexible polymer coating	hand with cold-flexible polymer coating	with PVC coating, 3/4 grip coating	Coating	palm and fingertips with polymer
Suitable for	dry and slightly	dry and slightly	damp, oily		coating that is flexible in the cold
	damp working conditions	damp working conditions	working conditions	Suitable for	dry and slightly damp working
Colour	black, black	black, black	red, black		conditions
Sizes	7 to 11	7 to 11	8 to 11	Colour	lime, black
Order quantity multiples	10 PR	10 PR	10 PR	Sizes	7 to 11
				Order quantity multiples	3 10 PR





Mechanical Risks

Area of application: Working on live parts



EN 60903:2003



uvex power protect V1000

- protection against electrical voltages up to 1000V
- due to the anatomical shape, the glove offers high dexterity
- · high flexibility of the material offers high wearer comfort, even at low temperatures
- Areas of application:
- automotive industry
- electrical industry
- car repair shops, breakdown services
- electric power companies







uvex arc protect g1

- ergonomic fit
- good wearer comfort
- exceptional dexterity right to the
- fingertips very good protection against
- thermal discharge • arc flash protection class 1
- EN 61482-1-2 (box test)
- thermal protection
- certified according to Oeko-Tex[®] Standard 100
- Areas of application: automotive industry electronics industry
- maintenance/servicing

uvex power protect V1000 60840 Art. no. 41 cm straight cuff Design Standard EN 60903 (Class 0/RC) Material no lining Coating Suitable for natural latex. 1.6 mm good resistance to oils, acids and ozone Colour red Sizes 7 to 11 Order unit PR


	uvex arc protect g1
Art. no.	60838
Design	27 cm cuff
Standard	388:2016 (1 X 2 1 X), 407 (4 1 1 1 X X), 61482-1-2 (Class 1)
Material	modacryl, cotton, antistatic
Coating	none
Suitable for	for dry areas of application
Colour	anthracite
Sizes	7 to 11
Order quantity multiples	10 PR





Mechanical Risks

Cut protection at a glance

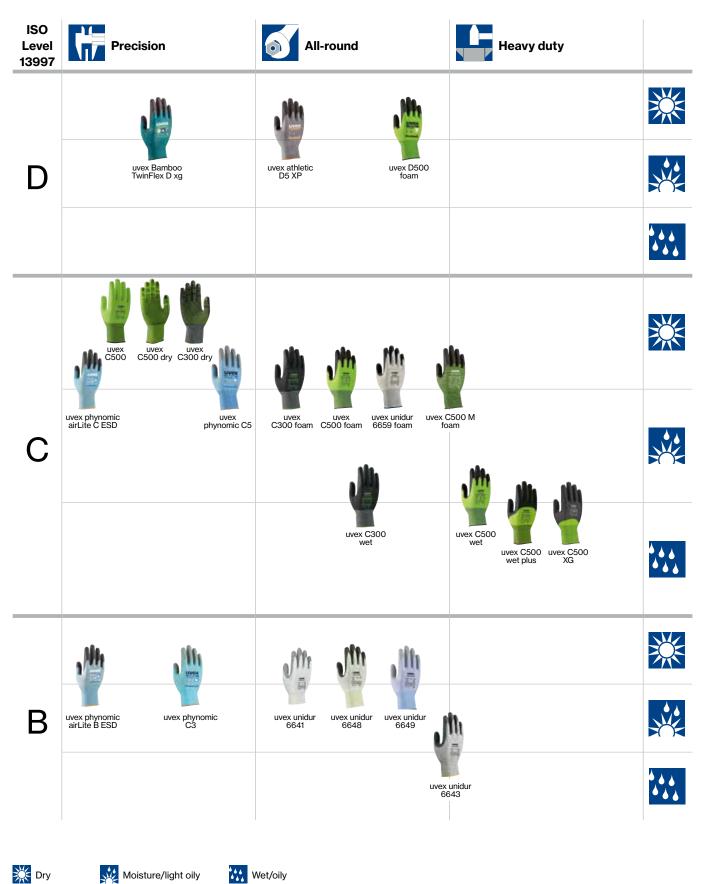

Bamboo TwinFlex® technology

High-tech for greater comfort when wearing the cut protection glove

Silky-soft feel and high moisture absorption thanks to bamboo fibre

uvex cut protection gloves based on the latest generation of patented uvex Bamboo TwinFlex® technology set new standards in protection, comfort, flexibility, dexterity and economy. The tailor-made cut-protection comfort class helps increase wearer acceptance – particularly when carrying out demanding activities – as the unique combination of silky-soft bamboo fibre and high-tech protective fibres ensures a high level of wearer comfort and good climate characteristics while also providing effective protection. After all, a safety glove can only help to prevent accidents if the user actually wears it.


Technology

Patented Bamboo TwinFlex® protection

Cut-resistant glass fibres and abrasion-resistant polyamide guarantee optimum mechanical protection. The use of steel fibres in combination with HPPE and polyamide increases the cut protection even to level D.

Patented Bamboo TwinFlex® comfort

Silky-soft, comfortable material on the inside of the bamboo-viscose glove ensures very high wearer comfort against the skin. The bamboo fibre not only feels incredibly good on the skin, it also has a very high and quick moisture absorption to keep your skin comfortable and dry while working.

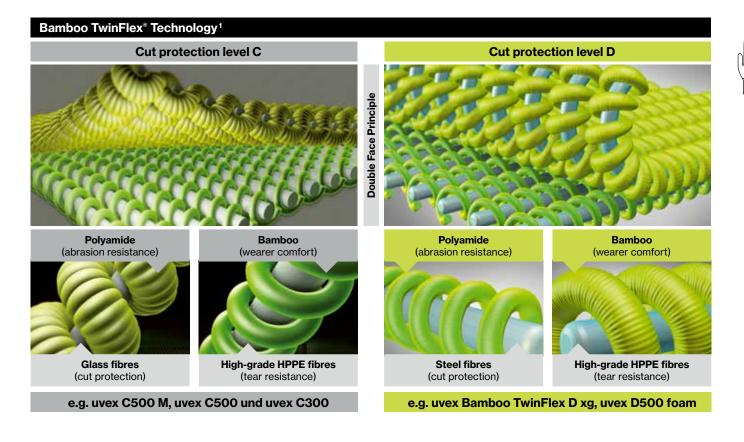

Bamboo TwinFlex[®] technology High-tech for greater comfort when wearing the cut protection glove

First-class climate control

uvex climazone - measurably enhanced comfort

- reduced sweating
- high breathability
- significantly greater moisture absorption compared to other types of fibres

Wearer comfort and an improved microclimate are the ultimate benchmarks in safety gloves. This is why the uvex climazone climate-management system in hand protection is being continuously developed together with market-leading partners and renowned testing and research institutes.



clima zone



Bamboo TwinFlex® D xg The latest generation of cut protection gloves – Cut Level D



Comfortable: Silky-soft bamboo fibre



Healthy: tested for skin compatibility



Long-lasting: uvex protexxion zone



Additional feature: Can be used with touchscreens



Local: Made in Germany



uvex Bamboo TwinFlex® D xg

- the patented Bamboo TwinFlex yarn technology ensures fast absorption and high retention of moisture as well as a silky-soft feel against the skin
- uses sustainable raw materials: Bamboo fibre, recycled polyamide
- high level of sensitivity
- adaptive fit: adapts precisely to fit the shape of the hand within a few minutes of wearing
- particularly light, thin and flexible with high cut protection due to the use of the finest steel (Cut Level D)
- touchscreen capability means there is no need to remove the glove
- heat protection: Protection against contact heat up to 100°C

• long service life thanks to uvex protexxion zone and premium Xtra-Grip coating

MADE IN GERMANY

- uvex protexxion zone with smooth material surface ensures that work processes run smoothly
- dermatologically tested, free from allergenic accelerators

	uvex Bamboo TwinFlex® D xg
Art. no.	60090
Design	knitted cuff
Standard	EN 388 (4X41D), EN 407 (X1XXXX)
Material	bamboo viscose, HPPE, steel, polyamide, elastane
Coating	Xtra-Grip Xtra polymer coating
Suitable for	dry and damp, oily areas
Colour	green, black
Sizes	6 to 12
Order quantity multiples	10 PR





Mechanical Risks

Area of application: cut protection



uvex D500 foam

- · cut protection gloves with excellent wearer comfort, well suited for all-round activities
- high abrasion resistance thanks to the innovative Soft-Grip-Coating
- very good grip in slightly damp environments
- · very high uvex cut protection with Bamboo Twin Flex® technology high flexibility
- very good tactile feel
- perfect fit with 3D Ergo man mold technology

- Areas of application:
- automotive industry
- construction
- brewery, beverage industry
- glass industry
- maintenance, servicing
- metal work industry

uvex C500 M foam

- · cut protection gloves with excellent wearer comfort, well suited for all-round activities
- outstanding mechanical abrasion resistance thanks to the innovative SoftGrip coating
- very good grip in dry and slightly damp environments
- very high level of cut protection with patented Bamboo TwinFlex® technology
- suitable for contact heat up to +100 °C, in line with EN 407
- partially reinforced thumb joints • very good tactile feel, high level
- of flexibility
- perfect fit with 3D Ergo man mould technology

· silicone-free according to imprint test

Areas of application:

- automotive industry
- construction
- breweries and beverage production
- glass industry
- maintenance
- metalworking industry

	uvex D500 foam
Art. no.	60604
Design	knitted cuff
Standard	EN 388 (4 X 4 2 D)
Material	bamboo-rayon, Dyneema® Diamond, steel, polyamide
Coating	palm and fingertips with high-performance elastomer (HPE)
	and SoftGrip foam coating
Suitable for	dry areas and slightly damp areas
Colour	lime, anthracite
Sizes	7 to 11
Order quantity multiples	10 PR







Mechanical Risks Area of application: cut protection

uvex uvex L L ≞ <u>ل</u> ₽ U <u>ل</u> ₫ ₫ 스 1 X 4 X C 2X4XC 60491 60497 60496 60600 Ø **OEKO-TEX**® X1XXXX STANDARD 100 -0648 HOHENSTEIN HTTI Tested for harmful substances. www.oeko-tex.com/standard100 MADE IN GERMANY

uvex C500

- cut protection glove or forearm protection (uvex C500 sleeve)
- with excellent wearer comfort, well suited for all-round activities
- outstanding mechanical abrasion resistance thanks to the innovative Soft Grip coating (uvex C500 wet plus and uvex C500 XG)
- very good grip in dry (all models), slightly damp/wet (uvex C500 wet
- plus) and oily (uvex C500 XG) environments • very high level of cut protection with patented uvex Bamboo TwinFlex®
- technology
- highly flexible
- very good tactile feel
- perfect fit with 3D Ergo technology
- silicone-free according to imprint test

- automotive industry
- · assembly
- maintenance
- metalworking
- shipping/logistics
- sorting
- glass handling
- sheet metal processing
- paper industry
- building and construction industry
- iron/steel industry

	uvex C500 sleeve		uvex C500	uvex C500 wet plus	uvex C500 XG
• •				·	
Art. no.	60491-07	60491-10	60497	60496	60600
Design	underarm protection with ve	elcro fastening,	knitted cuff	knitted cuff	knitted cuff
	34 cm (M), 40 cm (L)				
Standard	EN 388 (2 X 4 X C)		EN 388 (1 X 4 X C)	EN 388 (4 X 4 2 C), EN 407 (X 1 X X X X)	EN 388 (4 X 4 2 C)
Material	bamboo rayon, HPPE, glass	,	bamboo rayon, HPPE, glass,	bamboo rayon, HPPE, glass,	bamboo rayon, HPPE, glass,
	polyamide		polyamide	polyamide	polyamide
Coating	none		none	palm and 3/4 of the back of the hand	palm and whole back of the hand
				with high performance elastomer	with high performance elastomer
				(HPE) coating	(HPE) and Xtra Grip coating
Suitable for	dry areas of application		dry areas of application	damp, oily or greasy areas	damp, wet, oily or greasy
				of application	areas of application
Colour	lime		lime	lime, anthracite	lime, anthracite
Sizes	М	L	7 to 11	7 to 11	7 to 11
Order quantity multiples/	PC	PC	10 PR	10 PR	10 PR
Order unit					







Mechanical Risks

Area of application: cut protection



uvex C500

- cut protection safety gloves with outstanding wearer comfort
- outstanding mechanical abrasion resistance thanks to the innovative SoftGrip coating (uvex C500 foam and uvex C500 wet)
- very good grip in dry (all models), slightly damp (uvex C500 foam) and wet (uvex C500 wet) environments
- very high level of cut protection with patented uvex Bamboo TwinFlex[®] technology
- in line with EN 407, the model is suitable for contact heat up to +100°C (uvex C500 foam and C500 sleeve)
- highly flexible
- very good tactile feel
- perfect fit with 3D Ergo technology
- silicone-free according to imprint test

uvex C500 foam

dry areas of application

lime, anthracite 7 to 11

10 PR

60494

knitted cuff

- Areas of application:
- automotive industry
- assembly
- maintenance
- metalworking
- shipping/logistics
- sorting
- glass handling
- sheet metal processing
- paper industry
- building and construction industry

EN 388 (4 X 4 2 C), EN 407 (X 1 X X X X) bamboo rayon, HPPE, glass, polyamide

palm and fingertips with high performance

damp, oily or greasy areas of application

iron/steel industry

uvex C500 wet

lime, anthracite 7 to 11

10 PR

elastomer (HPE) coating

60492

knitted cuff

uvex C500 dry Art. no. 60499 Design knitted cuff EN 388 (X X 4 X C) Standard bamboo rayon, HPPE, glass, polyamide Material Coating palm and fingers with high performace vinyl (HPV) grip dots Suitable for dry areas of application Colour lime, anthracite Sizes 7 to 11 Order quantity multiples 10 PR





EN 388 (4 X 4 2 C), EN 407 (X 1 X X X X) bamboo rayon, HPPE, glass, polyamide

palm and fingertips with high performance

elastomer (HPE) and Soft Grip foam coating



Mechanical Risks Area of application: cut protection





- cut protection glove with excellent wearer comfort
- outstanding mechanical abrasion resistance thanks to the innovative SoftGrip coating (uvex C300 foam and uvex C300 wet)
- very good grip in dry (all models), slightly damp (uvex C300 foam) and wet (uvex C300 wet) environments
- good cut protection with patented uvex Bamboo TwinFlex® technology
- highly flexible
- very good tactile feel
- perfect fit with 3D Ergo technology
 silicone-free according to imprint test

uvex C300 foam

dry areas of application

EN 388 (3 X 4 2 C) bamboo rayon, HPPE, glass, polyamide

palm and fingertips with high performance

elastomer (HPE) and Soft Grip foam coating

60544

knitted cuff

anthracite 7 to 11

10 PR

- Areas of application:
- automotive industry
- assembly
- maintenance
- metalworking
- shipping/logistics
- sorting
- glass handling
- sheet metal processing

	uvex C300 dry
Art. no.	60549
Design	knitted cuff
Standard	EN 388 (X X 4 X C)
Material	bamboo rayon, HPPE, glass, polyamide
Coating	palm and fingers with high performance
	vinyl (HPV) grip dots
Suitable for	dry areas of application
Colour	anthracite
Sizes	7 to 11
Order quantity multiples	10 PR





uvex C300 wet 60542 knitted cuff EN 388 (4 X 4 2 C) bamboo rayon, HPPE, glass, polyamide palm and fingertips with high performance elastomer (HPE) coating damp, oily or greasy areas of application anthracite 7 to 11 10 PR

STANDARD 100 S02-0648 HOHENSTEIN HTTI Tested for harmful substances, www.oeko-tex.com/standard100

MADE IN GERMANY



uvex phynomic Perfection in 3 dimensions

Perfect fit Optimal function Absolute purity

uvex phynomic gloves are characterised by their ergonomic fit, which is perfectly matched to the intended use, and above all by their outstanding health protection. They are free from allergenic accelerators and harmful solvents, and their skin compatibility has been dermatologically approved through user testing by proDERM-Institut[®]. (see also pg. 193)

Additional functions such as touchscreen and ESD compatibility or suitability for the food industry enable use in specialist application areas





uvex phynomic airLite B ESD

- the lightest and most sensitive cut
- protection glove in Cut Level B
- ESD function
- (DIN EN 16350:2014)
- noticeable difference in wearer comfort: combination of the highest sensitivity, lightness and high breathability
- touchscreen compatibility for use on almost all screens, tablets and mobile phones
- thin, breathable "airLite" aqua-polymer coating in combination with a high-quality liner (18 gauge) offers the highest sensitivity and tactile feel for precision work
- very good grip in dry and slightly damp areas
- free from glass and steel fibres
- Areas of application:
- precision assembly work
- precision work
- inspection
- sortingfood processing
- p recound

	uvex phynomic airLite B ESD
Art. no.	60078
Design	knitted cuff
Standard	EN 388 (3 X 3 2 B), EN 16350
Material	Dyneema® Diamond Technology, polyamide, elastane, carbon
Coating	aqua-polymer coating airLite on palm and fingertips
Suitable for	dry areas and slightly damp areas
Colour	sky blue, black
Sizes	6 to 12
Order quantity multiples	10 PR



Mechanical Risks

Area of application: cut protection



uvex phynomic airLite C ESD

- the lightest and most sensitive cut protection glove in Cut Level C
- ESD function (DIN EN 16350:2014)
- · noticeably thin and sensitive in combination with high cut protection (Level C) thanks to innovative cut protection fibres: Dyneema® Diamond 2.0
- free from glass and steel fibres
- touchscreen compatibility for use on almost all screens, tablets and mobile phones
- thin, breathable "airLite" aqua-polymer coating in combination with a high-quality liner (18 gauge) offers the highest sensitivity and tactile feel for precision work
- very good grip in dry and slightly damp areas

Areas of application:

- · precision assembly work
- precision work
- inspection
- sorting
- food processing

uvex phynomic airLite C ESD Art. no. 60084 Design knitted cuff Standard EN 388 (3 X 4 2 C), EN 16350 Dyneema® Diamond 2.0 Technology, Material polyamide, elastane, carbon Coating palm and fingertips with aqua-polymer coating airLite Suitable for dry areas and slightly damp areas Colour blue, black 6 to 12 Sizes Order quantity multiples 10 PR



uvex phynomic C3

- · sensitive cut protection safety glove for mechanical activities
- suitable for use in the food industry
- very good mechanical abrasion resistance thanks to the damp-resistant aqua-polymer foam coating
- good grip in dry and slightly damp areas
- · good cut protection and high tear resistance
- highly breathable coating
- outstanding tactile feel when assembling parts

Areas of application:

- assembly
- inspection
- sorting

food processing

	uvex phynomic C3
Art. no.	60080
Design	knitted cuff
Standard	EN 388 (4 X 4 3 B)
Material	polyamide, elastane, HPPE, glass
Coating	aqua-polymer foam coating
	on palm and fingertips
Suitable for	dry areas and slightly damp areas
Colour	sky blue, grey
Sizes	6 to 12
Order quantity multiples	10 PR



uvex phynomic C5

- all-round cut protection safety glove for mechanical activities
- · suitable for use in the food industry
- very good mechanical abrasion resistance thanks to the moisture-resistant aqua-polymer foam coating
- very good grip in dry and slightly damp areas
- very good cut protection (level C) and high
- tear resistance
- highly breathable coating
 - · outstanding tactile feel when assembling parts

Areas of application:

- assembly
- inspection
- sorting

food processing



	uvex phynomic C5
Art. no.	60081
Design	knitted cuff
Standard	EN 388 (4 X 4 2 C)
Material	Dyneema® Diamond Technology,
	polyamide, elastane
Coating	palm and fingertips with
	aqua-polymer foam coating
Suitable for	dry areas and slightly damp areas
Colour	blue, grey
Sizes	6 to 12
Order quantity multiples	10 PR



Mechanical Risks

Area of application: cut protection



60210



uvex unidur 6641

- PU cut protection safety glove with highquality Special Cut Performance PE fibre
- outstanding mechanical abrasion resistance thanks to a good combination of fibres and coating
- · good grip in dry and slightly damp areas
- · good cut protection due to high-quality Special Cut Performance PE fibre
- very good tactile feel
- highly flexible
- outstanding comfort
- Areas of application:
- automotive industry
- maintenance
- assembly
- metalworking
- packaging

	uvex unidur 6641
Art. no.	60210
Design	knitted cuff
Standard	EN 388 (4 3 4 3 B)
Material	HPPE, elastane
Coating	palm and fingertips with
	polyurethane coating
Suitable for	dry areas and slightly damp areas
Colour	white, grey
Sizes	6 to 11
Order quantity multiples	10 PR







uvex unidur 6648 · uvex unidur 6649

- PU cut protection glove with HPPE fibres
- outstanding mechanical abrasion resistance
- good grip in damp and oily areas
- good cut protection with HPPE fibres
- good tactile feel
- highly flexible
- good wearer comfort

Areas of application:

- automotive industry
- repair work
- · light to medium metal processing
- packaging



uvex unidur 6643

- · NBR cut protection safety glove with high-
- outstanding mechanical abrasion resistance
- good grip in damp and oily areas
- · good cut protection due to high-quality
- Special Cut Performance PE fibre
- · good tactile feel
- highly flexible
- good wearer comfort

Areas of application:

- maintenance
- assembly
- sheet metal processing

	uvex unidur 6643
Art. no.	60314
Design	knitted cuff
Standard	EN 388 (4 3 4 4 B)
Material	HPPE, polyamide, elastane
Coating	palm and fingertips with
	NBR coating (nitrile rubber)
Suitable for	damp, oily or greasy areas
	of application
Colour	mottled grey, black
Sizes	7 to 10
Order quantity multiples	10 PR



- Art. no. knitted cuff knitted cuff Design Standard EN 388 (4 3 4 2 B) Material HPPE, elastane HPPE, polyamide, elastane Coating palm and fingertips with polyurethane coating Suitable for dry areas and slightly damp areas Colour white, black mottled blue, grey Sizes 6 to 11 7 to 11 Order quantity multiples 10 PR 10 PR





60314

- quality Special Cut Performance PE fibre
- with NBR coating

- automotive industry

- repair work

uvex unidur 6648 uvex unidur 6649 60932 60516

Mechanical Risks Area of application: cut protection



uvex unidur 6659 foam

- cut protection glove with NBR foam coating and HPPE/glass fibre
- outstanding mechanical abrasion resistance with NBR coating
- · good grip in dry and slightly damp areas
- high level of cut protection with HPPE and glass fibre combination
- very good tactile feel
- highly flexible
- outstanding comfort

Areas of application:

- automotive industry
- assembly
- maintenance
- metalworking
- shipping/logistics

	uvex unidur 6659 foam
Art. no.	60938
Design	knitted cuff
Standard	EN 388 (4 X 4 4 C)
Material	HPPE, glass, polyamide
Coating	palm and fingertips with nitrile
	foam coating
Suitable for	dry areas and slightly damp areas
Colour	mottled grey, black
Sizes	6 to 11
Order quantity multiples	10 PR



11 0050 (

uvex athletic D5 XP

- very high cut protection (Level D)
- good grip on dry and (slightly)
- oily/wet workpieces
- very good mechanical abrasion resistance
- reinforced thumb joints
- high flexibility, very good fit
- very good tactile feel
- · suitable for industrial washing

Areas of application:

- automotive industry
- metalworking industry
- glass industry
- inspection
- sorting
- packaging
- uvex athletic D5 XP Art. no. 60030 Design knitted cuff Standard EN 388 (4 X 4 3 D) Material HPPE, steel, polyamide, elastane palm and fingertips coated, micro NBR foam coating Coating Suitable for dry and slightly damp/ oily working conditions grey, anthracite Colour Sizes 6 to 11 Order quantity multiples 10 PR



uvex unidur sleeve C · uvex unidur sleeve C TL

- very high cut protection (Cut Level C)
- very thin and flexible
- high comfort
- · velcro fastening for a custom fit
- OEKO-TEX® Standard 100
- 60974: thumb loop (TL) for added safety (protection against cuts on the wrist)

Areas of application:

- automotive industry
- glass industry
- metalworking industry
- assembly
- maintenance

Colour

Order unit

Sizes

- construction work
- uvex unidur sleeve C uvex unidur sleeve C TL Art. no. 60973 60974 Design Lower arm protection Lower arm protection with velcro fastening with velcro fastening with thumb loop 46 cm (size M), 50 cm (size L) EN 388 (2 X 4 X C) Standard Material HPPE, glass, polyamide Coating without coating Suitable for for dry areas mottled grey

mottled grey

M.L

PĆ



M.L

PĆ

uvex Chemical Expert System

Consultation and product expertise from a single source

The uvex Glove Navigator

The fast route to finding the right gloves for you The uvex Glove Navigator guides you through the entire uvex safety glove range




uvex Chemical Expert System:

Online chemicals database and glove plans As a manufacturer, we offer you access to our extensive online chemicals database. In just a few steps, you can access information about the resistance of our safety gloves when handling chemicals.

Register for free and get access to the following premium features:

- Full access to the test results of all listed chemicals
- Creation and management of your own permeation lists
- Use of the glove plan designer: Access the glove plans created by our experts.
- · Creation and management of your own glove plans



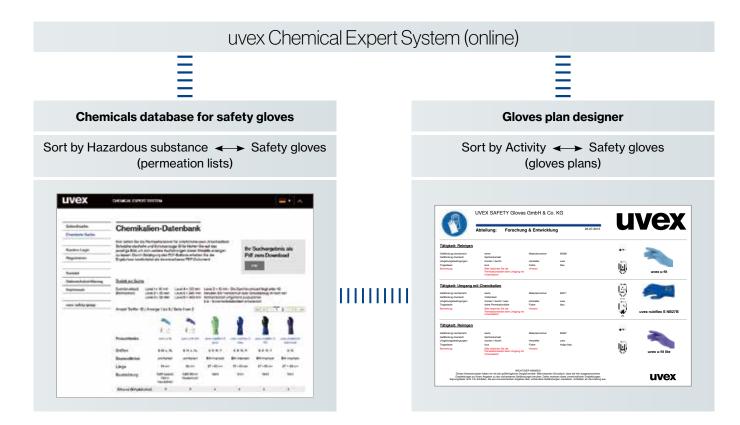

Chemical Risks Selecting the right hand protection

Chemical protection gloves must be used in a wide variety of areas of application while still enabling wearers to complete tasks effectively. This is why uvex very pays close attention to the requirements placed on the product in the possible areas of application when developing new chemical protection gloves. The matrix shown will help you choose the most suitable material for chemical protection gloves:

Handling chemicals	Example industries	Potential contact/splash	Irregular contact	Permanent contact	Explosion-prone area
aliphatic (grease, mineral oil)	Cleaning agents petroleum industry Adhesives Paint production	Nitrile	Nitrile	Nitrile	uvex rubiflex ESD
Polar	Cleaner/universal thinner Loctite/industrial adhesive Coating industry Printing industry Raw materials in the chemical industry Intermediates in the chemical industry	Nitrile Chloroprene	Nitrile Chloroprene	Butyl	uvex profabutyl
polar (alcohols)	Disinfectant, raw materials in the chemical industry	Nitrile Chloroprene	Nitrile Chloroprene	Nitrile Chloroprene Butyl	uvex rubiflex ESD, uvex profabutyl
aromatic, halogenated	Solvents for paints, resins, oils etc. Adhesives Printing and coating industry	Nitrile	Nitrile	Viton	
aqueous solutions, diluted acids/ bases	water treatment (sewage plant) commercial cleaning	Nitrile Chloroprene	Nitrile Chloroprene	Nitrile Chloroprene Chloroprene/nitrile	uvex rubiflex ESD
concentrated acids/bases	electroplating surface treatment of aluminium (anodised), steel, raw materials in the chemical industry, fertiliser production, food industry/raw materials in the polymer industry	Nitrile Chloroprene	Nitrile Chloroprene	Nitrile Chloroprene Chloroprene/nitrile Butyl	uvex profabutyl

Chemical Risks

Safety gloves with cotton support: NBR coating



uvex rubiflex S

- NBR chemical protection glove with reinforced cotton interlock supporting material
- good mechanical abrasion resistance thanks to the NBR coating
- good resistance to many chemicals, acids, alkalis, mineral oils and solvents
- good heat insulation with reinforced supporting material
- good tactile feel ergonomic fit

uvex rubiflex S

Art. no.

Design

to the high-quality cotton interlock supporting material • highly flexible

outstanding wearer comfort due

- Areas of application:
- automotive industry
- chemical industry
- machinery and tool manufacturing
 metal processing
- metal processir
 sandblasting
- food processing
- NB27S
 NB35S
 NB40S

 89646
 98891
 98902

 gauntlet,
 gauntlet,
 gauntlet,

 approx. 27 cm
 approx. 35 cm
 approx. 40 cm

 ND.282 (d 12 1 Y) EN LOG 274 10016 (Timp A)
 (Timp A) CM C D)
 D)

Standard	EN 388 (2 1 2 1 X), EN ISO 374-1:2016 / Type A (J K N O P T),		
	EN 407 (X 1 X X X X)		
Material	cotton interlock,	cotton interlock,	cotton interlock,
	reinforced	reinforced	reinforced
Coating	fully coated with NBR	fully coated with NBR	fully coated with NBR
	special coating	special coating	special coating
	(nitrile rubber),	(nitrile rubber),	(nitrile rubber),
	approx. 0.50 mm	approx. 0.50 mm	approx. 0.50 mm
Suitable for	very good resistance to	grease, mineral oils and	many chemicals
Colour	green	green	green
Sizes	8 to 11	8 to 11	8 to 11
Order quantity multiples	10 PR	10 PR	10 PR

- uvex rubiflex S (long version)
- long NBR chemical protection glove with reinforced cotton interlock supporting material
- additional elastic collar at gauntlet end (NB60SZ/NB80SZ)
- good mechanical abrasion resistance thanks to the NBR coating
- good resistance to many chemicals, acids, alkalis, mineral oils and solvents
- good tactile feel
 ergonomic fit

- outstanding wearer comfort due to the high-quality cotton interlock supporting material
 highly flexible
- Areas of application:
- chemical industry
- sewer construction
- municipal cleaning
- sandblasting
- uvex rubiflex S NB60S NB80S NB60SZ NB80SZ Art. no. 89647 60190 89651 60191 gauntlet elastic collar at elastic collar at Design gauntlet approx. 60 cm approx. 80 cm gauntlet end, gauntlet end, approx. 60 cm approx. 80 cm Standard EN 388 (2 1 2 1 X), EN ISO 374-1:2016/Type B (J K O P T), EN 407 (X 1 X X X X) Material cotton interlock, cotton interlock, cotton interlock, cotton interlock, reinforced reinforced reinforced reinforced fully coated with special NBR coating (nitrile rubber), approx. 0.50 mm Coating Suitable for very good resistance to grease, mineral oils and many chemicals green green 9 to 11 Colour green green 9 to 11 9 to 11 Sizes 9 to 11 Order quantity multiples 10 PR 10 PR 10 PR 10 PR

Chemical Risks

Safety gloves with cotton support: NBR coating



- · lightweight, stockinette NBR che-
- mical protection glove with optimal grip properties very good mechanical abrasion
- resistance and good lifecycle thanks to multi-layered structure
- outstanding grip in wet and oily areas thanks to uvex Xtra Grip technology
- good resistance to grease, mineral oils and many chemicals
- very good tactile feel
- ergonomic fit
- outstanding wearer comfort due to the high-quality cotton interlock supporting material

• extremely high flexibility uvex rubiflex S XG27B uvex rubiflex S XG35B Art. no. 60560 60557 gauntlet, approx. 27 cm Design gauntlet, approx, 35 cm Standard EN 388 (3121X) EN 388 (3121X) EN ISO 374-1:2016/Type A (J K N O P T), EN 407 (X 1 X X X X) Material cotton interlock cotton interlock fully coated with special NBR fully coated with special NBR Coating coating (nitrile rubber) and coating (nitrile rubber) and XG Grip coating, approx. 0.40 mm XG Grip coating, approx. 0.40 mm Suitable for very good resistance to grease, very good resistance to grease, mineral oils and many chemicals mineral oils and many chemicals Colour blue, black blue, black Sizes 7 to 11 7 to 11 Order quantity multiples 10 PR 10 PR

Areas of application:

automotive industry

chemical industry

laboratories

maintenance

processing

- very lightweight, stockinette NBR chemical protection glove suited to handling a variety of chemicals
- good mechanical abrasion resistance thanks to the NBR
- coating · good grip in damp and wet areas
- good resistance to grease,
- mineral oils and many chemicals outstanding tactile feel
- ergonomic fit
- outstanding wearer comfort due to the high-quality cotton
- interlock supporting material
- extremely high flexibility
- uvex rubiflex S NB35B uvex rubiflex S NB27B Art. no. 60271 60224 gauntlet, approx. 35 cm Design Standard gauntlet, approx, 27 cm EN 388 (2111X) EN 388 (2111X) EN ISO 374-1:2016/Type A (J K N O P T), EN 407 (X 1 X X X X) Matorial cotton interlock cotton interlock fully coated with special NBR fully coated with special NBR Coating coating (nitrile rubber), coating (nitrile rubber), approx. 0.40 mm approx. 0.40 mm Suitable for good resistance to grease, good resistance to grease, mineral oils and many chemicals mineral oils and many chemicals Colour blue blue 7 to 11 6 to 11 Sizes Order quantity multiples 10 PR 10 PR

Areas of application:

automotive sector

chemical industry

food processing

 laboratories varnishing

Chemical Risks

Safety gloves with bamboo-fiber/nylon support: NBR coating



	uvex u-chem 3300
Art. no.	60971
Design	cuff, fully coated, approx. 32 cm
Standard	EN 388 (2121X), EN ISO 374-1:2016
	Type A (J K L O P T)
Material	Bamboo-rayon/Nylon
Coating	NBR (nitrile butadiene rubber),
	approx. 0.21 mm
Suitable for	good resistance to grease,
	mineral oils and many chemicals
Colour	blue
Sizes	7 to 11
Order quantity multiples	10 PR

	uvex u-chem 3200
Art. no.	60972
Design	cuff, fully coated, approx. 35 cm
Standard	EN 388 (3 1 3 1 X), EN ISO 374-1:2016 /
	Type A (J K L M O T)
Material	nylon weave
Coating	NBR (nitrile butadiene rubber),
	approx. 0.50 mm
Suitable for	good resistance to grease,
	mineral oils and many chemicals
Colour	petrol, black
Sizes	7 to 12
Order quantity multiples	10 PR

	uvex u-chem 3100
Art. no.	60968
Design	cuff, fully coated, aproxx. 30 cm
Standard	EN 388 (4 1 2 1 X), EN ISO 374-1:2016 /
	Type A (A J K L M O)
Material	cotton (seamless)
Coating	NBR (nitrile butadiene rubber),
	approx. 0.50 mm
Suitable for	good resistance to grease,
	mineral oils and many chemicals
Colour	black
Sizes	8 to 11
Order quantity multiples	10 PR

Chemical Risks

Safety gloves with cotton interlock lining material: CR/NBR coating



uvex u-chem 3500

- sensitive NBR broadband chemical protection glove (protection against 11 of 18 test chemicals). Material combination of nitrile and chloroprene protects against alcohols, aliphatic hydrocarbons, and concentrates acids and bases with a permeation time of ≥ 120 minutes.
- protection against contact heat 100 ° C (Level 1)
 very good fit, very high wearing comfort thanks
- to seamless cotton liner

- chemical industry: Mixing, transferring and processing chemicals
- printing industry (e.g. cleaning of printing rollers)
 electroplating Surface treatment (e.g. aluminium
- profiles) • maintenance, pipe fittings
- rescue operations where the type of chemicals is unclear

	uvex u-chem 3500
Art. no.	60188
Design	cuff, fully coated, approx. 32cm
Standard	EN ISO 374-1:2016 / Typ A (A C J K L M N O P S T), EN ISO 374-5:2016 VIRUS,
	EN 388 (3 1 2 1 X), EN 407 (X 1 X X X X)
Material	cotton (seamless)
Coating	fully coated with Chloroprene and NBR (nitrile butadiene rubber)
Suitable for	good resistance to acetone, cleaning agents, adhesives, solvents
Colour	orange
Sizes	7 to 11
Order quantity multiples	10 PR

Chemical Risks

Safety gloves with cotton support: conductive NBR coating

The ideal solution for areas with explosive atmospheres

The introduction of the new standard EN 16350:2014 (Protective gloves – electrostatic properties) is the first standard to prescribe the electrostatic properties and testing procedure of safety gloves for work environments with risk of explosive atmospheres and fire.

- The testing conditions and minimum requirements in accordance with EN 16350:2014 are as follows:
- The contact resistance must be less than 1.0 \times 10⁸ Ω
- $(R_V < 1.0 \times 10^8 \Omega)$. • Contact resistance R_V was tested in accordance with
- EN 1149-2:1997.
- Test atmosphere: ambient temperature 23°C $\pm 1^{\circ}$ C, relative air humidity 25% $\pm 5\%$.


uvex rubiflex ESD fulfils the requirements of the new norm EN 16350:2014.





MADE IN GERMANY

Functional combination of liner and coating



surface of skin

uvex rubiflex ESD

- lightweight, stockinette and antistatic NBR chemical protection glove for applications in areas with explosion risks
- good mechanical abrasion resistance thanks to the NBR coating
- good grip in damp and wet areas
 good resistance to grease,
- mineral oils and many chemicals
- outstanding tactile feel
- ergonomic fit

- outstanding wearer comfort due to the high-quality cotton interlock/carbon supporting material
- extremely high flexibility

- automotive industry
- chemical industry
- paint shop
- refineries
- plastics processing operations
- work in anti-static areas

	uvex rubiflex ESD NB35A
Art. no.	60954
Design	gauntlet, approx. 35 cm
Standard	EN 388 (2 1 1 1 X), EN ISO 374-1:2016 / Type A (J K L O P T),
	EN 16350, EN 407 (X 1 X X X X)
Material	cotton interlock/carbon
Coating	fully coated with special conductive NBR coating (nitrile rubber),
	approx. 0.40 mm
Suitable for	good resistance to grease, mineral oils and many chemicals
Colour	black
Sizes	6 to 11
Order quantity multiples	10 PR



Chemical Risks Unsupported safety gloves



MADE IN GERMANY

uvex profabutyl

- · chemical protection glove without stockinette made from butyl rubber good grip in damp and wet areas
- · good resistance to polar bonds such as esters, ketones, aldehydes, amines and saturated saline solutions, plus acids and alkalis
- good fit
- highly flexible • satisfies the requirements of DIN EN 16350:2014

Areas of application:

chemical industry

• working in antistatic areas

uvex profaviton

- chemical protection gloves made from butyl rubber with Viton® outer layer
- good grip in damp and wet areas
- good resistance to aliphatic and aromatic hydrocarbons (e.g. hexane, benzene, toluene, xylene and others), halogenated hydrocarbons (e.g. trichloroethylene, perchloroethylene, dichloromethane and others) organic and inorganic acids (diluted to concentrated), as well as saturated saline solutions
- good fit • highly flexible

Areas of application: chemical industry

uvex profabutyl B-05R Art. no. 60949 gauntlet, rolled edge, approx. 35 cm EN 388 (2 0 1 0 X), EN 374 (A B I K L N O T), EN 16350 Design Standard Material without stockinette seamlessly coated with bromobutyl (approx. 0.50 mm) Coating Suitable for good resistance to polar bonds acids and alkalis Colour black Sizes 7 to 11 Order unit PR

	uvex profaviton BV-06
Art. no.	60957
Design	gauntlet, rolled edge, approx. 35 cm
Standard	EN 388 (2 1 2 0 A), EN ISO 374-1:2016/Type A (A F K L M N)
Material	without stockinette
Coating	seamlessly coated with bromobutyl (approx. 0.40 mm)
	and Viton [®] outer layer (approx. 0.20 mm)
Suitable for	good resistance to aliphatic and aromatic hydrocarbons,
	halogenated hydrocarbons
Colour	black
Sizes	8 to 11
Order unit	PR


Chemical Risks


Area of application: cut protection



uvex protector chemical

- very robust safety glove with multi-layer technology combining
- impermeability and optimal cut protection very high level of cut protection with the mul-
- ti-layer design of the supporting material made from cotton, HPPE and glass
- good grip in damp, wet and oily areas
- uvex protector chemical also offers protection against chemicals
- · good wearer comfort





NBR impregnation for enhanced grip high cut-resistant HPPE/glass/ polyamide nitrile coating to protect against chemicals cotton layer for outstanding wearer comfort surface of skin

	uvex protector chemical NK2725B	uvex protector chemical NK4025B
Art. no.	60535	60536
Design	gauntlet, approx. 27 cm	gauntlet, approx. 40 cm
Standard	EN 388 (4 X 4 4 C),	EN 388 (4 X 4 4 C),
	EN ISO 374-1:2016/Type A (J K N O P T)	EN ISO 374-1:2016/Type A (J K N O P T)
Material	sandwich liner: cotton interlock, HPPE, glass, PA	
Coating	fully coated with special NBR coating (nitrile rubber)	
Suitable for	good resistance to oil, grease and many chemicals	
Colour	blue	blue
Sizes	9 to 10	9 to 10
Order quantity multiples	10 PR	10 PR

- Areas of application:
- work with high cut hazards and contact with chemicals
- handling heavy-duty tools
- sheet metal processing
- machinery and tool manufacturing

uvex u-chem 3200 cut D

- superior grip in oily conditions
- flexibility and grip
- high cut protection level D
- excellent fit
- handling sharp parts

- construction industry
- chemical industry
- printing industry
- inspection/maintenance work
- metalworking (cleaning)
- metalworking industry
- petroleum industry
- oil and gas industry
- petrochemicals
- repair/maintenance

	uvex u-chem 3200 cut D
Art. no.	60636
Design	gauntlet, fully coated, approx. 35 cm
Standard	EN 388 (4 X 4 1 D),
	EN ISO 374-1:2016/
	type A (J K L M O T)
Material	Steel, PES, PA
Coating	fully coated with special NBR
	coating (nitrile rubber)
Suitable for	good resistance to oils, fats
	and many chemicals
Colour	petrol, black
Sizes	7 to 11
Order quantity multiples	10 PR

Chemical Risks Unsupported safety gloves



uvex profastrong

- sensitive NBR chemical protection glove with flocked cotton
- outstanding mechanical abrasion resistance
- good grip in damp and wet areas thanks to the Grip structure in the palm
- good resistance to many oils, grease, acids and alkalis
- good tactile feel
- good fit
- highly flexible

Areas of application:

- automotive industry
- chemical industry
- printing industry
- laboratories
- food industry



uvex profapren

- flexible chloroprene chemical protection glove with flocked cotton
- good grip in damp and wet areas thanks to the Grip structure in the
- palm • good resistance to many chemicals and solvents
- good tactile feel
- very good fit
- highly flexible

Areas of application:

- chemical industry
- printing industry
- metalworking (cleaning)
- cleaning work

uvex profastrong NF33 Art. no. 60122 Design gauntlet, palm with grip structure, approx. 33 cm Standard EN 388 (4 1 0 1 X), EN ISO 374-1:2016/Type A (A J K L O T), EN ISO 374-5:2016 VIRUS Material flocked cotton Coating fully coated with NBR (nitrile rubber), approx. 0.38 mm Suitable for good resistance to oils, grease, acids and solvents green 7 to 11 Colour Sizes Order quantity multiples 12 PR

	(
	uvex profapren CF33
Art. no.	60119
Design	gauntlet, roughened palm, approx. 33 cm
Standard	EN 388 (3 1 3 1 X), EN ISO 374-1:2016/Type A (A K L M N O),
	EN ISO 374-5:2016
Material	flocked cotton
Coating	fully coated with polychloroprene (latex inner), approx. 0.71 mm
Suitable for	good resistance to many chemicals
Colour	dark blue
Sizes	7 to 10
Order quantity multiples	10 PR

Chemical Risks

Disposable safety gloves

The uvex u-fit product range, provides high-quality disposable safety gloves, which guarantee a high level of safety and functionality.

uvex u-fit gloves ensure reliable wearer protection throughout industries, including the chemical, medical, food and light industry sectors enabling comfortable and precise work. uvex disposable safety gloves are available in four different materials to cater for a wide range of application areas:

uvex u-fit lite uvex u-fit uvex u-fit ft uvex u-fit strong N2000

	uvex u-fit lite	uvex u-fit	uvex u-fit strong N2000		
Material	accelerator-free NBR (nitrile rubber)	NBR (nitrile rubber)	NBR (nitrile rubber)		
	wall thickness 0.06mm	wall thickness 0.10 mm	wall thickness 0.20 mm		
	silicone-free	silicone-free	silicone-free		
	powder-free	powder-free	powder-free		
	no latex proteins	no latex proteins	no latex proteins		
Certification	EN ISO 374	EN ISO 374	EN ISO 374		
	handling foodstuffs	handling foodstuffs	handling foodstuffs		
Characteristics	high level of sensitivity	good mechanical abrasion resistance	very good abrasion resistance		
	hypo-allergenic	good chemical resistance (splashproof)	increased chemical resistance (splash-proof)		
Handling	reinforced rolled edge – easy to put on	reinforced rolled edge – easy to put on	reinforced rolled edge – easy to put on		





Please contact us if you require a copy of our complete resistance list.

Detailed information can also be found in the uvex Chemical Expert System online

Area of application	uvex u-fit lite	uvex u-fit; uvex u-fit ft	uvex u-fit strong N2000
Precision assembly work, dry/oily	+ +	+	-
Assembly work, dry/oily	+	+	++
Product protection	++	++	+
Gentle cleaning	+	+	++
Inspection	++	++	+
Food handling	+	+	+
Chemicals	short-term work, in acc. with resistance list	short-term work, in acc. with resistance list	in acc. with resistance list
Paint shop	as splash protection	as splash protection	full contact in acc. with resistance list



Chemical Risks Disposable safety gloves



uvex u-fit lite

- very light and thin NBR disposable glove (0.06 mm)
- good grip with the roughened fingertips
- good mechanical resistance
- reliable spray protection when handling chemicals such as acids, alkalis, solids or aqueous saline solutions
- silicone-free according to imprint test
 outstanding tactile feel
- very good fit
- extremely high flexibility
- accelerator-free

Areas of application:

- precision assembly work
- inspection
- short periods handling chemicals
- paint shop (as splash protection)
- food processing
- gentle cleaning
- product protection

uvex u-fit · uvex u-fit ft

- thin and reliable NBR disposable glove (0.10 mm)
- good grip with the roughened surface
- 60166: good grip with the roughened fingertips
- very good abrasion resistance
- reliable spray protection when handling chemicals such as acids, alkalis, solids or aqueous saline solutions
- silicone-free according to imprint test
- outstanding tactile feel
- very good fit
 - extremely high flexibility

Areas of application:

- precision assembly work
- inspection
- short periods handling chemicals
- paint shop (as splash protection)
- food processing
- gentle cleaning
- genue cleaning
 product protection
- 60166: healthcare

uvex u-fit strong N2000

- reinforced disposable glove made from nitrile rubber (0.20 mm)
- for protection against many chemicalsgood grip
- outstanding tactile feel
- very high mechanical strength
- silicone-free according to imprint test

- laboratories
- chemical industry
- precision assembly work
- painting work
- cleaning
- food industry

	uvex u-fit lite	uvex u-fit	uvex u-fit ft	uvex u-fit strong N2000
Art. no.	60597	60596	60166	60962
Design	roughened fingertips, approx. 24 cm	roughened surface, approx. 24 cm	roughened fingertips, approx. 24 cm	textured surface of fingertips, approx. 28 cm
Standard	EN ISO 374-1:2016/Type B (K P T),	EN ISO 374-1:2016/Type B (K P T),	EN ISO 374-1:2016/Type B (J K P T),	EN ISO 374-1:2016/Type A (J K L O P S T),
	EN 374-5:2016 VIRUS	EN 374-5:2016 VIRUS	EN 374-5:2016 VIRUS	EN 374-5:2016 VIRUS
Material	without stockinette	without stockinette	without stockinette	no lining
Coating	NBR (nitrile rubber), approx. 0.06 mm	NBR (nitrile rubber), approx. 0.10 mm	NBR (nitrile rubber), approx. 0.10 mm	NBR (nitrile butadiene rubber), approx. 0.20 mm
Suitable for	highly resistant to grease and oil	highly resistant to grease and oil	highly resistant to grease and oil	good resistance to grease,
				mineral oils and many chemicals
Colour	indigo blue	blue	blue	blue
Sizes	S to XL	S to XL	XS to XL	S to XXL
Order unit	BOX	BOX	CT	BOX
Content	box of 100 PC	box of 100 PC	10 boxes of 100 PC	box of 50 PC

Safety Gloves _{Overview}

Art. no.	Art. code	Sizes	Colour	Page	Art. no.	Art. code	Sizes	Colour	Page
60027	uvex athletic lite	6 to 11	blue, anthracite	188	60498	uvex C500 M foam	7 to 11	lime, black, anthracite	202
60028	uvex athletic allround	6 to 11	grey, anthracite	188	60499	uvex C500 dry	7 to 11	lime, anthracite	204
60030	uvex athletic D5 XP	6 to 11	grey, anthracite	209	60516	uvex unidur 6649	7 to 11	mottled grey, grey	208
60038	uvex phynomic airLite A ESD	6 to 12	black	182	60535	uvex protector chemical NK2725B	9 to 10	blue	218
60040	uvex phynomic lite	5 to 12	grey, grey	186	60536	uvex protector chemical NK4025B	9 to 10	blue	218
60041	uvex phynomic lite w	5 to 12	white, white	186	60542	uvex C300 wet	7 to 11	anthracite	205
60049	uvex phynomic allround	5 to 12	grey, black	183	60544	uvex C300 foam	7 to 11	anthracite	205
60050	uvex phynomic foam	5 to 12	white, grey	183	60549	uvex C300 dry	7 to 11	anthracite	205
60054	uvex phynomic x-foam HV	6 to 12	orange, grey	184	60556	uvex unipur carbon	6 to 10	grey	191
60060	uvex phynomic wet	6 to 12	blue, anthracite	184	60557	uvex rubiflex S XG35B	7 to 11	blue, black	213
60061	uvex phynomic wet plus	6 to 12	blue, anthracite	184	60558	uvex profi ergo XG20A	6 to 11	white, orange, black	193
60062	uvex phynomic pro	6 to 12	blue, anthracite	185	60560	uvex rubiflex S XG27B	7 to 11	blue, black	213
60064	uvex phynomic pro 2	6 to 12	blue, anthracite	185	60573	uvex unilite 6605	6 to 11	black, black	189
60070	uvex phynomic XG	6 to 12	black, black	183	60585	uvex unilite 7700	7 to 11	grey, black	189
60078	uvex phynomic airLite B ESD	6 to 12	light blue	206	60587	uvex unipur carbon FT	6 to 10	grey	191
60080	uvex phynomic C3	6 to 12	sky blue	207	60591	uvex unilite thermo plus cut C	7 to 11	lime, black	196
60081	uvex phynomic C5	6 to 12	blue, grey	207	60592	uvex unilite thermo plus	7 to 11	black	196
60084	uvex phynomic airLite C ESD	6 to 12	light blue	207	60593	uvex unilite thermo	7 to 11	black	196
60090	uvex BambooTwinflex®	6 to 12	green, black	201	60595	uvex profatherm XB40	11	white	195
60119	uvex profapren CF33	7 to 10	dark blue	219	60596	uvex u-fit	S to XL	blue	221
60122	uvex profastrong NF33	7 to 11	green	219	60597	uvex u-fit lite	S to XL	indigo blue	221
60135	uvex unigrip 6620	7 to 10	white, blue	191	60600	uvex C500 XG	7 to 11	lime, anthracite	203
60147	uvex profi ergo ENB20A	6 to 11	white, orange	192	60604	uvex D500 foam	7 to 11	lime, anthracite	202
60148	uvex profi ergo ENB20	6 to 10	white, orange	192	60636	uvex u-chem 3200 cut D	7 to 11	lime, anthracite	218
60150	uvex contact ergo	6 to 10	white, orange	192	60838	uvex arc protect g1	7 to 11	anthracite	197
60179	uvex k-basic extra 6658	8, 10, 12	yellow	195	60840	uvex power protect V1000	7 to 11	red	197
60166	uvex u-fit ft	XS to XL	blue	221	60932	uvex unidur 6648	6 to 11	white, black	208
60188	uvex u-chem 3500	7 to 11	orange	215	60938	uvex unidur 6659 foam	6 to 11	mottled grey, black	209
60190	uvex rubiflex S NB80S	9 to 11	green	212	60942	uvex unilite thermo HD	8 to 11	orange, black	196
60191	uvex rubiflex S NB80SZ	9 to 11	green	212	60943	uvex unipur 6630	6 to 11	white	190
60202	uvex NK4022	9 to 10	orange	195	60944	uvex unipur 6631	6 to 11	grey	190
60208	uvex profi ergo XG20	6 to 11	white, orange, black	193	60945	uvex compact NB27H	10	white, blue	194
60210	uvex unidur 6641	6 to 11	white, grey	208	60946	uvex compact NB27E	9 to 10	white, blue	194
60213	uvex NK2722	9 to 10	orange	195	60949	uvex profabutyl B-05R	7 to 11	black	217
60224	uvex rubiflex S NB35B	7 to 11	blue	213	60954	uvex rubiflex ESD NB35A	6 to 11	black	216
60238	uvex unigrip 6624	7 to 10	grey, red	191	60957	uvex profaviton BV-06	8 to 11	black	217
60248	uvex unipur 6639	6 to 11	black, black	190	60962	uvex u-strong N2000	S to XXL	blue	221
60271	uvex rubiflex S NB27B	7 to 11	blue	213	60968	uvex u-chem 3100	8 to 11	black	214
60276	uvex rubipor XS2001	6 to 10	white, white	187	60971	uvex u-chem 3300	7 to 11	blue	214
60278	uvex unilite 7710F			194	60972	uvex u-chem 3200	7 to 12	petrol, black	214
60314	uvex unidur 6643	7 to 10	mottled grey, black	208	60973	uvex unidur sleeve C	M, L	mottled grey	209
60316	uvex rubipor XS5001B	6 to 10	white, blue	187	60974	uvex unidur sleeve C TL	M, L	mottled grey	209
60321	uvex unipur 6634	7 to 10	grey, black	189	89636	uvex rubiflex NB27	7 to 11	orange	194
6047900	uvex glove clip	-	black	205	89646	uvex rubiflex S NB27S	8 to 11	green	212
60491	uvex C500 sleeve	M, L	lime	203	89647	uvex rubiflex S NB60S	9 to 11	green	212
60492	uvex C500 wet	7 to 11	lime, anthracite	204	89651	uvex rubiflex S NB60SZ	9 to 11	green	212
60494	uvex C500 foam	7 to 11	lime, anthracite	204	98891	uvex rubiflex S NB35S	8 to 11	green	212
60496	uvex C500 wet plus	7 to 11	lime, anthracite	202	98902	uvex rubiflex S NB40S	8 to 11	green	212
60497	uvex C500	7 to 11	lime	202					