



uvex

Safety Footwear with BOA® Fit System

protecting people

uvex

Safety Footwear with BOA® Fit System

Dial. Lace. Guides.

The BOA® Fit System.

Delivering fit solutions purpose-built for performance, the BOA® Fit System is featured in products across industries (in medical, sports and workwear) and consists of three integral parts: a micro-adjustable dial, a super-strong lightweight lace and low friction lace guides.

Each individual adjustment not only improves the fit of the product, but also enables a precise fit to be achieved quickly and effortlessly.

DIAL A dial that adjusts fit with precision click by click.
LACE Lightweight, super-strong lace, expertly configured for comfort and performance.
GUIDES Low-friction guides to ensure a smooth closure, every time.

The BOA® benefits.

FIT TO PERFORM.

Achieve a precise fit quickly and effortlessly. Even fine adjustments can be made quickly and easily while working, allowing you to concentrate fully on the job in hand.

as you do, so you can stay focused and confident in any environment – without ever having to remove your gloves.

BUILT FOR LIFE.

When we say tough, we mean it. Engineered with ultra-durable materials, the BOA® Fit System is extensively tested in the harshest conditions.

CONFIDENCE IN ALL CONDITIONS.

Designed to reduce contamination by shedding ice, dirt, oil and other elements, the BOA® Fit System will work as hard

STAY SECURE AND FOCUSED.

Boa's precision engineered laces are contained inside the system, out of your way and out of machinery.



Fit for life with BOA®.

The BOA® Fit System dials and laces are guaranteed for the lifetime of the product on which they are integrated.

How it works.



push
in to
engage



turn
to
tighten



pull up
for quick
release



uvex 1 G2



uvex 1 G2 Shoe S3 SRC

uvex 1 G2	Shoe
Art. no. Width 10	68401
Art. no. Width 11	68402
Art. no. Width 12	68403
Standard EN ISO 20345:2011	S3 SRC
Standard EN ISO 20345:2022	S3L FO SC SR
Upper	microvelour
Lining	distance mesh lining
Sizes	35 to 52
Order unit	PR

GENERAL FEATURES:

- ultra-lightweight S3 safety shoe
- made from synthetic materials, so suitable for people allergic to chrome
- all sole materials are free of silicone, plasticisers and other paint wetting impairment substances
- BOA® Fit System (consisting of a micro-adjustable dial, super-strong lightweight laces and low friction lace guides) for a fast, effortless, precision fit

PROTECTION FEATURES:

- new, innovative uvex i-PUREnrj sole technology with the highest level of shock-absorbing properties at the forefoot and at the heel, excellent rebound over the entire midsole and optimal stability thanks to the foam heel basket
- ergonomically designed TPU outsole uvex x-tended grip incorporates the latest biomechanical research, is highly durable and therefore offers excellent slip resistance. The tread is particularly suited to industrial floor surfaces
- meets the ESD specification with volume resistance under 35 megaohms
- new wider metal-free uvex xenova® protective toe cap for more toe room and optimum fit – compact design, anatomical shape, good lateral stability and no thermal conductivity
- penetration-resistant, non-metallic midsole in accordance with current safety standards, does not restrict flexibility of the shoe

COMFORT FEATURES:

- outstanding wearer comfort thanks to a newly developed last and climate-optimised, breathable materials
- virtually seam-free construction made from high-tech microvelour material to eliminate pressure points, hydrophobic
- removable antistatic comfortable insole with a moisture transport system, additional shock absorption around the heel and forefoot and excellent support for the arch
- soft padding on dust tongue and collar
- sizes 35 to 40 have been produced using a women's last

AREAS OF APPLICATION:

- light applications



clima zone

uvex 1

uvex 1 Perforated shoe S1 SRC

uvex 1	Perforated shoe
Art. no. Width 10	65657
Art. no. Width 11	65658
Art. no. Width 12	65659
Standard EN ISO 20345:2011	S1 SRC
Standard EN ISO 20345:2022	S1 FO SR
Upper	microvelour
Lining	distance mesh lining
Sizes	35 to 52
Order unit	PR



uvex 1 Shoe S2 SRC

uvex 1	Shoe
Art. no. Width 10	65667
Art. no. Width 11	65668
Art. no. Width 12	65669
Standard EN ISO 20345:2011	S2 SRC
Standard EN ISO 20345:2022	S2 FO SR
Upper	microvelour
Lining	distance mesh lining
Sizes	35 to 52
Order unit	PR

GENERAL FEATURES:

- ultra-lightweight, versatile and perforated S1 safety shoe and S2 safety shoe
- made from synthetic materials, so suitable for people allergic to chrome
- all sole materials are free of silicones, plasticisers and other paint wetting impairment substances
- BOA® Fit System (consisting of a micro-adjustable dial, super-strong lightweight laces and low friction lace guides) engineered to optimise fit and provide precision, adaptability, and control

PROTECTION FEATURES:

- meets the ESD specification with volume resistance under 35 megaohms
- 100% metal-free uvex xenova® toe cap – compact design, anatomical shape, good lateral stability, no thermal conductivity
- ergonomically designed outsole made from dual density polyurethane with excellent slip resistance

COMFORT FEATURES:

- outstanding wearer comfort results from a newly developed last and climate-optimised, breathable materials with perforation (S1 model)
- virtually seam-free construction made from high-tech microvelour material to eliminate pressure points
- removable antistatic comfortable insole, with a moisture transport system and additional shock absorption around the heel and forefoot
- soft padding on collar and tongue
- sizes 35 to 40 have been produced using a women's last

AREAS OF APPLICATION:

- light applications





uvex 1 x-tended support Perforated Shoe S1 P SRC

uvex 1 x-tended support	Perforated shoe
Art. no. Width 10	65681
Art. no. Width 11	65682
Art. no. Width 12	65683
Standard EN ISO 20345:2011	S1 P SRC
Standard EN ISO 20345:2022	S1 PL FO SR
Upper	microvelour
Lining	distance mesh lining
Sizes	35 to 52
Order unit	PR

uvex 1 x-tended support

GENERAL FEATURES:

- ultra-lightweight and versatile perforated S1 P safety shoe and S3 safety shoe
- made from synthetic materials, so suitable for people allergic to chrome
- all sole materials are free of silicones, plasticisers and other paint wetting impairment substances
- foamed polyurethane scuffcap helps increase product life of upper
- BOA® Fit System (consisting of a micro-adjustable dial, super-strong lightweight laces and low friction lace guides) engineered to optimise fit and provide precision, adaptability, and control

PROTECTION FEATURES:

- meets the ESD specification with volume resistance under 35 megaohms
- 100% metal-free uvex xenova® toe cap – compact design, anatomical shape, good lateral stability, no thermal conductivity
- ergonomically designed outsole made from dual density polyurethane with excellent slip resistance
- 'x-tended' support: medial and lateral heel support for the foot with specially designed side frame – provides additional protection from ankle twisting, stabilises and guides the foot while providing impact protection
- penetration-resistant, non-metallic midsole in accordance with the latest safety standards, does not restrict flexibility of the shoe

COMFORT FEATURES:

- outstanding wearer comfort thanks to a newly developed last and climate-optimised, breathable materials with perforation (S1 P model) or water-repellent (S3 model)
- virtually seam-free construction made from high-tech microvelour material to eliminate pressure points
- removable antistatic comfortable insole, with a moisture transport system and additional shock absorption around the heel and forefoot
- soft padding on collar and tongue
- sizes 35 to 40 have been produced using a women's last


Areas of application:

- light applications



uvex 1 x-tended support Shoe S3 SRC

uvex 1 x-tended support	Shoe
Art. no. Width 10	65671
Art. no. Width 11	65672
Art. no. Width 12	65673
Standard EN ISO 20345:2011	S3 SRC
Standard EN ISO 20345:2022	S3L FO SR
Upper	microvelour
Lining	distance mesh lining
Sizes	35 to 52
Order unit	PR

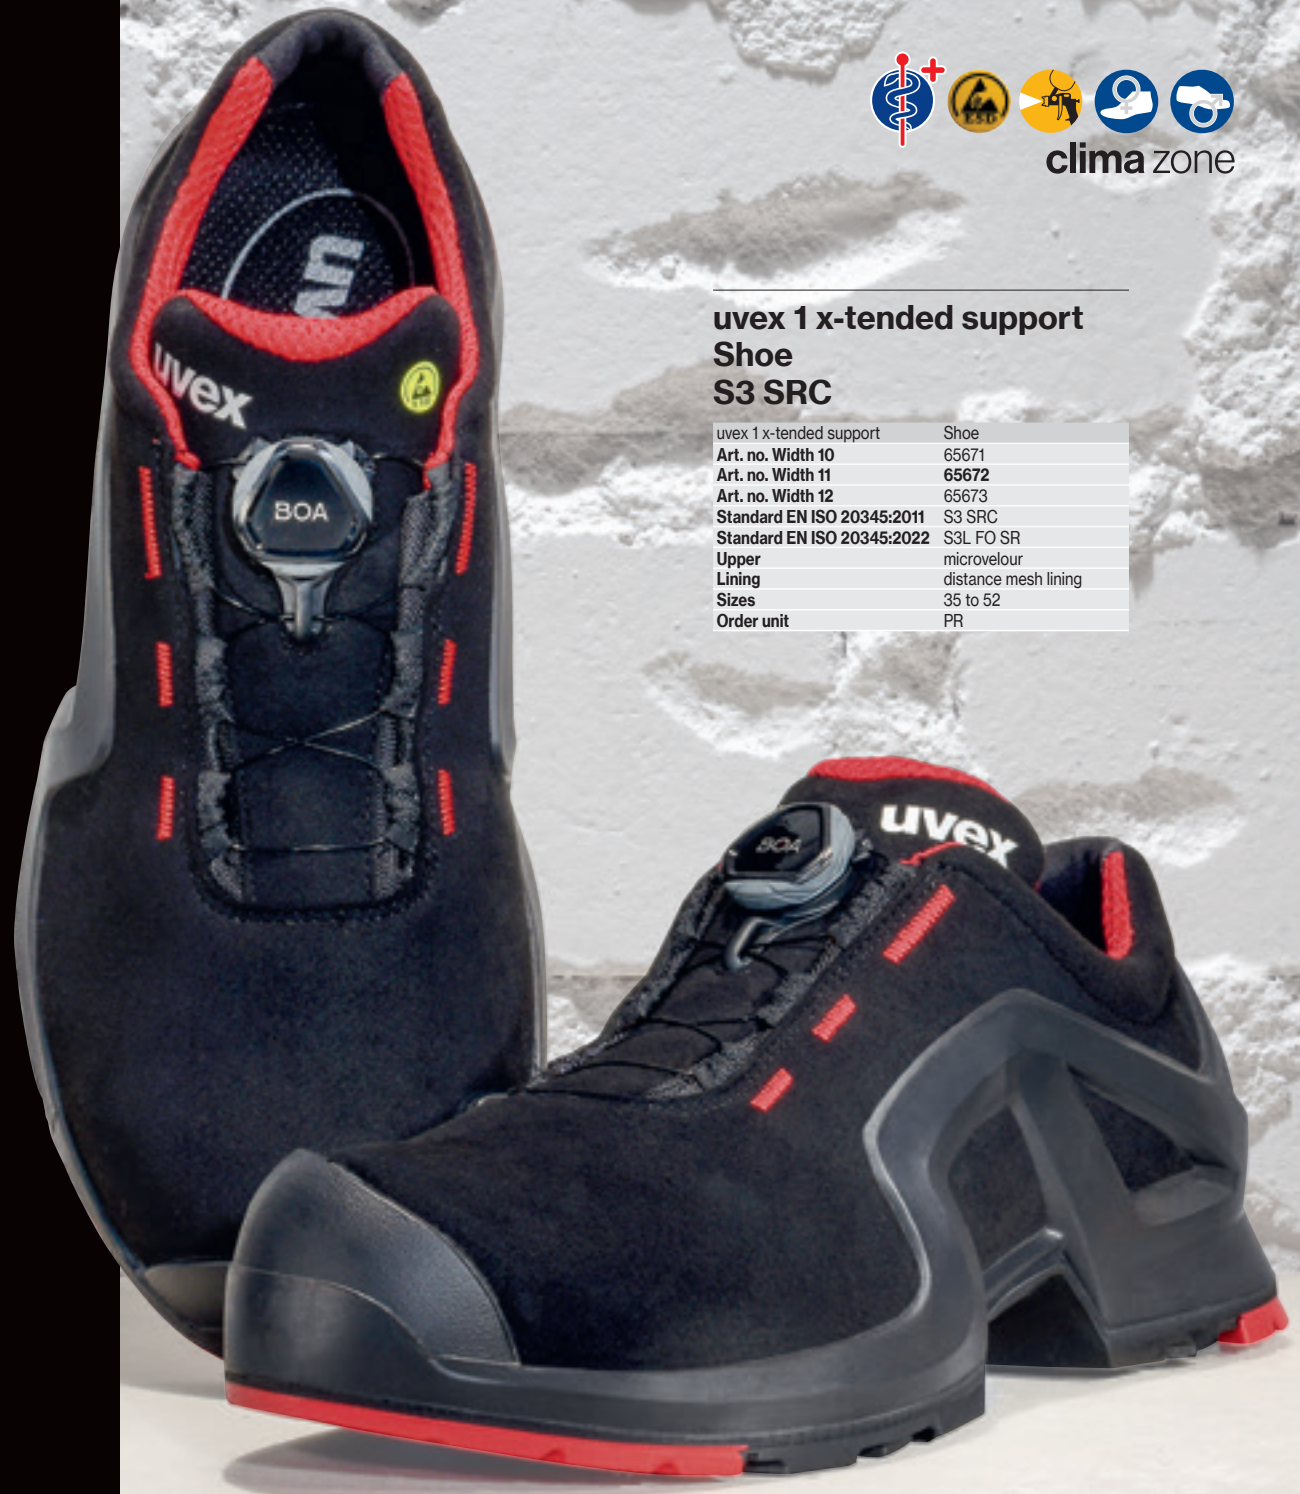

uvex 2 MACSOLE®

GENERAL FEATURES:

- lightweight and flexible safety shoe and lace-up boot
- foamed polyurethane scuffcap helps increase product life of upper
- BOA® Fit System (consisting of a micro-adjustable dial, super-strong lightweight laces and low friction lace guides) engineered to optimise fit and provide precision, adaptability, and control

PROTECTION FEATURES:

- 100% waterproof and breathable thanks to SympaTex® lining (WR label)
- meets the ESD specification with volume resistance under 35 megaohms
- 100% metal-free uvex xenova® toe cap – compact design, anatomical shape, good lateral stability, no thermal conductivity
- ultra lightweight, double-layer sole made from optimal shock-absorbing midsole and MACSOLE® rubber outsole with excellent anti-slip properties
- HI marking for heat-insulating substructure (tested in accordance with standard at +150°C)
- HRO marking for heat-resistant substructure for brief exposure up to +300°C
- secure grip when climbing on ladders due to the stabilising arch support
- penetration-resistant, non-metallic midsole in accordance with the latest safety standards, does not restrict flexibility of the shoe

COMFORT FEATURES:

- outstanding wearer comfort thanks to a newly developed last and climate-optimised, breathable materials
- virtually seam-free construction made from particularly soft cowhide leather to eliminate pressure points
- removable antistatic comfortable insole, with a moisture transport system and additional shock absorption around the heel and forefoot
- soft padding on collar and dust tongue
- sizes 35 to 40 have been produced using a women's last

AREAS OF APPLICATION:

- medium applications



uvex 2 MACSOLE® Lace-up boot S3 HI HRO SRC

uvex 2 MACSOLE®	Lace-up boot
Art. no. Width 10	65321
Art. no. Width 11	65322
Art. no. Width 12	65323
Standard EN ISO 20345:2011	S3 HI HRO SRC
Standard EN ISO 20345:2022	S3L FO HI HRO SR
Upper	water-repellent, full-grain smooth leather
Lining	textile
Sizes	35 to 52
Order unit	PR



uvex 2 MACSOLE® Shoe S3 HI HRO SRC

uvex 2 MACSOLE®	Shoe
Art. no. Width 10	65311
Art. no. Width 11	65312
Art. no. Width 12	65313
Standard EN ISO 20345:2011	S3 HI HRO SRC
Standard EN ISO 20345:2022	S3L FO HI HRO SR
Upper	water-repellent, full-grain smooth leather
Lining	distance mesh lining
Sizes	35 to 52
Order unit	PR



uvex 2 xenova[®]

uvex 2 xenova[®] Perforated shoe S1 P SRC

uvex 2 xenova [®]	Perforated shoe
Art. no. Width 10	95581
Art. no. Width 11	95582
Art. no. Width 12	95583
Standard EN ISO 20345:2011	S1 P SRC
Standard EN ISO 20345:2022	S1 PL FO SR
Upper	microvelour
Lining	distance mesh lining
Sizes	38 to 52
Order unit	PR



uvex 2 xenova[®] Boot S3 SRC

uvex 2 xenova [®]	Boot
Art. no. Width 10	95691
Art. no. Width 11	95692
Art. no. Width 12	95693
Standard EN ISO 20345:2011	S3 SRC
Standard EN ISO 20345:2022	S3L FO SC SR
Upper	water-repellent, full-grain leather
Lining	distance mesh lining
Sizes	38 to 52
Order unit	PR



GENERAL FEATURES:

- lightweight, modern, perforated S1 P safety shoe and boot
- made from synthetic materials, so suitable for people allergic to chrome
- all sole materials are free of silicones, plasticisers and other paint wetting impairment substances
- BOA[®] Fit System (consisting of a micro-adjustable dial, super-strong lightweight laces and low friction lace guides) engineered to optimise fit and provide precision, adaptability, and control.

PROTECTION FEATURES:

- meets the ESD specifications with volume resistance under 35 megaohms
- 100% metal-free uvex xenova[®] safety toe cap – compact design, anatomical shape, good lateral stability, no thermal conductivity
- penetration-resistant, non-metallic midsole in accordance with the latest safety standards, does not restrict flexibility of the shoe
- ergonomically designed outsole made from dual density polyurethane with excellent slip resistance
- reflective elements for better visibility

COMFORT FEATURES:

- lightweight with excellent shock-absorbing properties
- outstanding wearer comfort thanks to a newly developed last and climate-optimised, breathable materials
- removable antistatic comfortable insole, with a moisture transport system and additional shock absorption around the heel and forefoot
- soft padding on tongue and collar

AREAS OF APPLICATION:

- medium applications



uvex 2 trend



GENERAL FEATURES:

- sporty S1 P safety sandal with a wide fit
- breathable microvelour is made from synthetic materials, so suitable for people allergic to chrome
- all sole materials are free of silicones, plasticisers and other paint wetting impairment substances
- BOA® Fit System (consisting of a micro-adjustable dial, super-strong lightweight laces and low friction lace guides) engineered to optimise fit and provide precision, adaptability, and control.

PROTECTION FEATURES:

- meets the ESD specifications with volume resistance under 35 megaohms
- Reliable protection for the wearer and material: steel toe cap, steel midsole and stabilising uvex anti-twist heel cap to prevent ankle twisting
- ergonomically designed outsole made from dual density polyurethane with excellent slip resistance
- reflective elements for better visibility

COMFORT FEATURES:

- ideal foot climate constantly maintained due to uvex climazone: highly breathable lining and upper with perforation and comfortable climatic insole with moisture transport system
- soft, comfortable fit with no pressure points – with soft padding on the collar and a padded tongue
- removable antistatic comfortable insole, with a moisture transport system and additional shock absorption around the heel and forefoot

AREAS OF APPLICATION:

- medium applications



uvex 2 trend Perforated shoe S1 P SRC

uvex 2 trend	Perforated shoe
Art. no. Width 10	69081
Art. no. Width 11	69082
Art. no. Width 12	69083
Standard EN ISO 20345:2011	S1 P SRC
Standard EN ISO 20345:2022	S1 P FO SR
Upper	microvelour
Lining	distance mesh lining
Sizes	38 to 52
Order unit	PR

uvex 2 trend	Perforated shoe
Art. no. Width 10	69381
Art. no. Width 11	69382
Art. no. Width 12	69383
Standard EN ISO 20345:2011	S1 P SRC
Standard EN ISO 20345:2022	S1 P FO SR
Upper	microvelour
Lining	distance mesh lining
Sizes	36 to 52
Order unit	PR



clima zone

Models at a glance

S1

Shoe



S1P

Shoe



S1P

Shoe



S2

Shoe



S3

Shoe



S3

Lace-up boot



uvex



09.22/PDF Rights of technical changes reserved.
© 2022 - UVEX ARBEITSSCHUTZ GMBH

UVEX ARBEITSSCHUTZ GMBH
Wuerzburger Straße 181-189
90766 Fuerth
GERMANY

T: +49 911 9736-0
F: +49 911 9736-1760
E: safety@uvex.de
I: uvex-safety.com

protecting people

uvex-safety.com