

protecting people

Our customers

... produce medicines, build cars, drive excavators, hike up mountains, ride bobsleighs, build bridges, renovate bathrooms, work with chemicals, take part in downhill mountain biking, cook food, do sport with the family, clean windows, lay tiles, extinguish fires, install windows, design aeroplanes, go on ski trips, dig pits, do gardening, saw wood, renovate houses, install heating, develop vaccines, operate crane systems, save lives, lay cables and pipes, perform laboratory research, work with lasers, build and operate machines, weld metals, go mountain biking, deliver parcels, lay parquet flooring, assemble photovoltaic systems, go horse riding, cycle racing bikes, go tobogganing, build ships, go skiing, jump from the highest ski jumps, lay power cables, install sockets, maintain roads, produce steel, win Tour de France stages, compete in triathlons, build tunnels, hike in the snow, put up and paint new walls, win the World Cup, manufacture tools, build roof trusses, or in a nutshell:

made2perform

Dear customers,

For almost 25 years now, the guiding principle of protecting people has been our mission and our responsibility. In order to protect people, we develop, produce and distribute products and services for sports, leisure and work. Whether on the ski slope or in the workplace: uvex reliably protects people in a wide variety of situations. We take this endeavour very seriously and want to align our brands with this clear mission statement.

Protecting people gives us a clear direction in our daily work: From product development, all the way to communication. This mission describes our self-image as a responsible company. Across all our activities, we also want to offer you significant added value in our products and services by bringing you a high level of innovation.

Sustainable action to protect people and the environment is the central basis for us to continue to be successful, together with you, in the future.



protecting people


uvex protects people and the planet

The Board of Management, UVEX SAFETY GROUP GmbH & Co. KG

Stefan Brück

Sandra Hasslinger

Martin Leusmann



less

CO₂ emissions since 2013 (Scope 1 and 2)



☑ The uvex sustainability transformation

We place the highest demands on ourselves

For uvex, sustainability is a key focus and has been for over a decade. We are aware of our responsibility and are actively engaging in the current social and technical transformation process. Our mission of **protecting people** instils in us the obligation to protect the environment. That is why uvex checks, evaluates and optimises all steps along the value creation chain so that we can continue to be at the forefront in the discipline of sustainability. We integrate sustainability holistically into our processes. We have identified four focus areas and set measurable targets throughout the Group, right down to the plant level.



Ecological transformation We strive for climate neutrality and an environmentally friendly footprint throughout the entire value creation chain.



Social responsibility

We create social value and bring about a positive change in society and our supply chain through our entrepreneurial thinking and actions. 127

Innovation cycle We drive innovation in our products and services through resource efficiency, durability and recyclability.

The four uvex focus areas



Safeguarding health and the

environment We stand for sophisticated pollutant management with the aim of impacting people's health and the environment as little as possible.


\bigcirc CO₂ product footprint

We ensure transparency and provide you with an indicator for the selection of more sustainable PPE

We assess the CO₂ footprint for an increasing number of products. This makes the sustainability of our products measurable, comparable and improvable. The CO2 symbol on our products provides our customers with a clear and reliable indication of the CO₂ product footprint.



More information can be found in the online folder uvex CO₂ product footprint

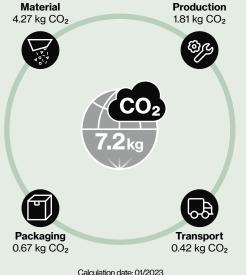

Calculation date: 01/2023 Example: uvex 1 G2 planet safety shoe

We take into account not only the emissions from

Emissions transparency of our products

our own production steps (Scope 1 and 2), but also the emissions from the production of the materials we process (Scope 3).



established sustainability

For uvex, the long-term sustainability measures that are widely rolled out are a matter of course

- 98.4 percent renewable energy sources since 2014
- 97.3 percent of gas consumption is CO2 offset
- "Made in uvex", produced at European sites (< 1,000 km radius from Fuerth)
- · Packaging made mainly of waste paper
- · Code of conduct



More information can be found in the online folder uvex established sustainability



Pioneering occupational safety from uvex

The automotive industry is one of the most important economic sectors in Europe. uvex offers high-quality and innovative occupational safety solutions from head to toe: We already protect over one million employees in the automotive industry around the world with our PPE solutions.



Professional industry solutions To learn more about our extensive range, visit uvex-safety.com/en/automotive Production

The electromobility sector

Sales and service

Safe e-mobility with uvex PPE solutions

Electromobility is one of the key areas of activity in the automotive industry. uvex offers special occupational safety solutions, for example in the production of high-performance batteries, in order to reliably protect the production team from the dangers of high voltage or short circuit electric arcs during daily work.



Reliable occupational safety

- comprehensive range of solutions for the
- high-voltage sector and ESD workplaces
 attractive design with high wearer acceptance of the PPE
- continuous communication with customers for the development of individual PPE solutions

- reliable premium partner
 decades of experience in the automotive industry
 cooperation in research and development
- (future projects/joint developments)

laboratory support (glove expert system)

 technical on-site support (e.g. workplace inspections)



Want to find out more about uvex occupational safety solutions for the automotive industry? Simply get in touch with our team of experts. Just scan the QR code.

uvex automotive



uvex occupational safety shop for business customers You can find the comprehensive range of PPE for the construction industry at uvex-safety.com/en/construction



All products accompanied by this symbol are ideal for use in the construction industry.

Safety in the construction sector

There is a range of challenges which must be faced in the construction industry, with tasks ranging from preparatory site works and civil engineering to building installation and interior fitting. To achieve optimal results, everyone involved must work in flawless synergy with each other – as must all items of personal protective equipment.



uvex has developed and selected over 150 innovative PPE products for the construction industry, all of which are designed to meet the specific needs of the sector. With over 12 product categories, the uvex profisystem construction covers all areas of application optimally and has a professional solution for every use – from head to toe. Our occupational safety experts understand the needs of the construction industry, and can provide expert advice to help you select the right PPE.

uvex Hex/Armor

Stong team Since 2016 uvex and HexArmor have been working together with innovative protective equipment to ensure trust, safety and reliable protection for people.

uvex fire & rescue

PPE/protective equipment for fire departments.

Our innovative PPE solutions, which we have developed in cooperation with fire departments, offer optimal safety to those working in the emergency services. For technical rescue and reliable post fire gross decontamination: Our practical and comprehensive product systems are ideal for the requirements of everyday life in the fire brigade and meet all standards and specifications.



Further information at uvex-safety.com/en/ fire-and-rescue

Technical rescue

Whether it's a technical emergency rescue, securing and lifting loads or emergency door opening: The uvex product system for technical rescue protects emergency services during all technical operations - and can be perfectly combined with firefighter protective clothing.

Post fire gross decontamination

After fighting a fire, consistent and effective post fire gross decontamination is essential: Our sophisticated product system protects against hazardous fire residues on the equipment.





HexArmor[®] helix 3007



» page 263





uvex pheos cx2 › page 43





uvex megasonic › page 60



Hearing protection

uvex xact-fit > page 94

Respiratory protection



uvex silv-Air 3210 page 182



Fire Crew Support Crew

Complete sets

uvex Firefighter

Accessories



uvex under-helmet cap › page 138





back patches

For professional use - eye protection for special forces

Special forces rely on first-class equipment for their operations all around the world, which gives them a crucial advantage. This includes particularly effective eye protection, guaranteed to be absolutely distortion-free and can adapt to any situation.

uvex apache safety spectacles boast maximum robustness, a modern, sporty design and optimal wearer comfort – and come in a set with a case as well as replacement lenses in orange and UV protection grey.



uvex apache spec

The lightweight safety spectacles with slim arm geometry boast the perfect fit and permanent anti-fog coating for continually clear vision.



uvex apache goggle The sturdy goggles with flame-retardant headband and permanent anti-fog coating offers reliable protection.



uvex apache sets

uvex apache safety spectacles come in a set with **a case and replacement lenses** in orange and UV protection grey.





Further information at: uvex-safety.com/en/ products/safety-glassesfor-special-forces/





orocurement

E-procurement faster processing, lower costs.

Digital ordering processes (e-procurement) simplify purchasing processes, save time and reduce costs.

Take advantage of e-procurement with uvex:



We supply electronic catalogues

- Static:
- BMECat 1.2 & 2005
- Ariba cif-cat
- · Coupa csv-cat
- eCat csv
- Ariba xlsx-cat
- Dynamic:
- OCI/d
- Punchout levels 1 & 2

With the common

- classification systems
- eClass
- UNSPSC
- eTIM

Receive the following messages via EDI

- Orders
- Order confirmations
- · Delivery advice
- Invoice

Via the following EDI communication channels

- SMTP
- HTTPS/HTTP
- FTP/SFTP
- OFTP
- X.400
- AS2

In all common EDI message formats

- EDIFACT
- OpenTRANS
- xCML
- IDOC
- XML & cXML
- CSV
- VDA
- xCBL
- ASCII



Further information at: uvex-safety.com/ e-procurement


UVex e-

For your success in e-commerce – uvex offers optimal solutions for your digital sales channels.

Take advantage of our comprehensive electronic services:



Further information at: uvex-safety.com/ dealer-service

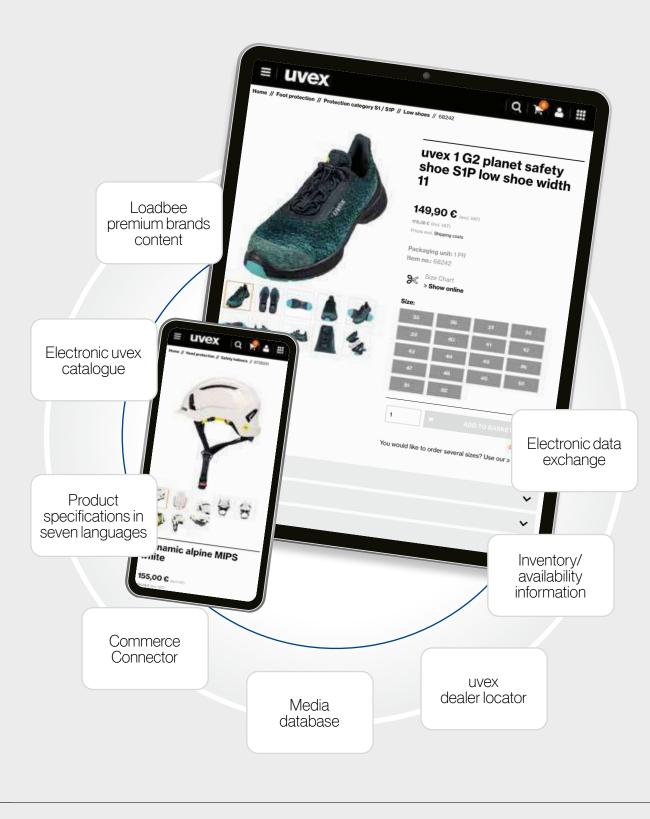

uvex e-commerce

uvex

12

One brand. One mission.

uvex products protect people at work, in sport and for leisure. As a partner of international top-level sport, uvex equips over 1000 professional athletes worldwide, e.g. with ski goggles, equestrian riding helmets and cycling helmets.



The transfer of knowledge between uvex safety and uvex sports makes our products even safer, more functional and more comfortable – both product divisions benefit mutually from the collaboration.

This is evident in our supravision coating technology, for example, which is used equally by both uvex safety and uvex sports. This unique coating ensures maximum antifogging properties on sports goggles and safety spectacles, enabling the wearer to put in their very best performance at work or at play.





 $\left| \right\rangle$

Safety Eyewear

Product system planet series > Safety Eyewear

uvex has developed the **protecting planet** icon, to help raise awareness of its commitment to achieving increased sustainability. Based on the brand claim, **protecting people**, our sustainable approach integrates three core interlinked pillars – **ecology, economy** and **social responsibility**, that are incorporated throughout the business to improve our sustainability performance.

This explains the comprehensive audit, measurement and evaluation management process uvex undertakes along the entire value chain to ensure its products are as sustainable as possible.

uvex pheos nxt planet

MADE IN GERMANY





Side arms

- hard component made from 65 percent recycled material
- > soft component made from 47.4 percent recycled material, using waste from the recycling bin

Lens

> 100 percent mass-balanced polycarbonate**



protecting planet

by using environmentallyfriendly packaging

Films of polyester bags

 up to 70 percent recycled material from production waste

Cartons

> made of over 90 percent recycled paper

orotecting plane

Lens

mass-balanced** PC

Hard components of side arms

uvex

from recycled material

Soft components of side arms

7.4%

from post-consumer recycled material (PCR)



protecting planet

by reducing waste

Paper for instruction manuals > 60 percent reduction

Packaging units

- > increase from 5 to 10 pairs of spectacles reduces packaging material and causes less waste
- Mass balancing is a bookkeeping method that is used to record and track the mass flows of plastics, for example, along the entire value creation chain. In the manufacturing process, some fossil-based raw materials are replaced by more sustainable alternatives, for example through the use of biomass or recycled raw materials. The mass balancing approach enables manufacturers to verify the use of bio-based or recycled content to a proportion of the plastics produced, resulting in a material with a significantly lower CO₂ footprint. However, the exact proportion of bio-based or recycled material in the end product can no longer be precisely determined. At uvex, mass-balanced material is used in the lenses of the plant models, enabling a significant reduction in their CO₂ footprint. By purchasing mass-balanced polycarbonate, uvex is helping to replace fossil-based raw materials with bio-based materials.

9128295

The uvex brand is our responsibility

We have been producing and selling high-quality products for the protection of people in sport, leisure and work for **over 90 years**. And if you want to protect people, **you have to take responsibility**.

It is precisely from this mission that our obligation derives to act in a **sustainable**, **social and socially-responsible** manner.

uvex safety

eyewear

Sustainability without compromising quality

In the PPE sector, the use of recycled or bio-based materials must not impair the protective properties under any circumstances – this makes the search for and use of sustainable materials a major challenge.

Nevertheless, we have succeeded in qualifying suitable recycled and bio-based (and, in some cases, mass-balanced^{**}) materials, which can be processed and used in the manufacture of some of our top sellers:

Lenses

mass-balanced** PC made from bio-based raw materials

Side arms

recycled or bio-based material and PCR¹

Frame

recycled PET bottles or bio-based material³ as well as PCR¹ and PIR²

Expanded range of replacement lenses

Conserving resources, reducing waste Instead of disposing of all parts of the

safety eyewear, we make it easy to replace the lens so that the frame can be used for longer. This enables us to save material and energy in production and contributes to sustainability and waste prevention.


Coupling parts and headband hooks recycled PET bottles

Soft face seal recycled granulate (PIR²) and PCR¹

Headband recycled yarn, bio-based material³ (headband slider) The proportion of recycled, biobased material varies from model to model, but always lies between


13.0% and 100%

This enables CO2 savings of 29.0% up to 71.0%



for spectacles, up to -44%

for goggles, up to -82%

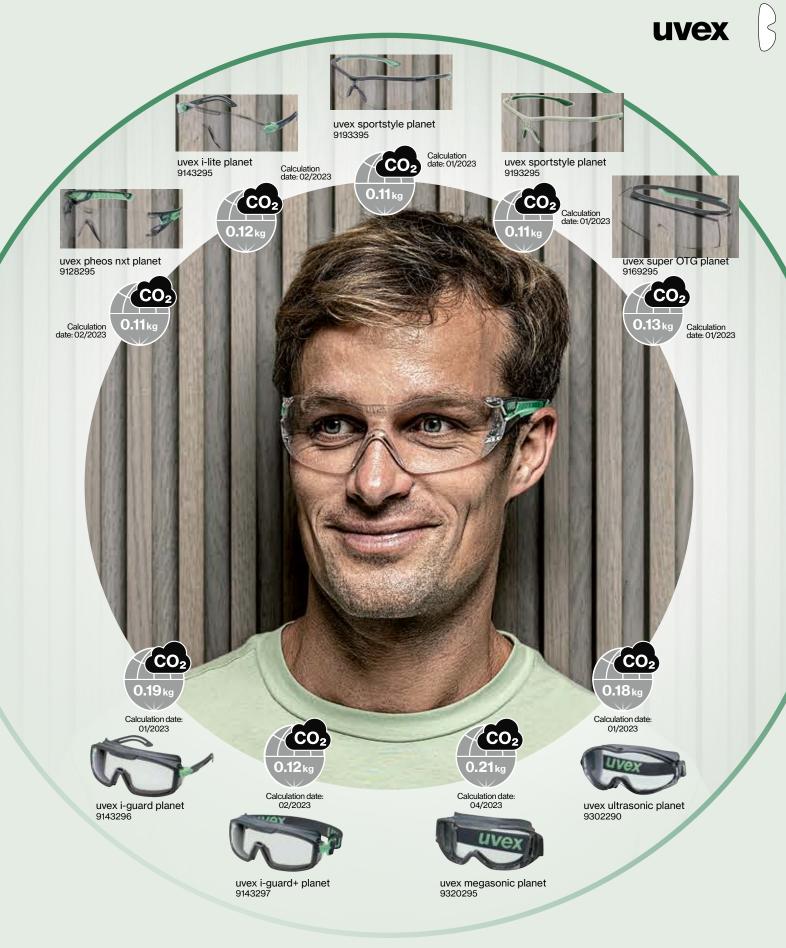

Emissions transparency of our products We take into account not only the emissions from our own production steps (Scope 1 and 2), but also the emissions from the production of the materials we use (Scope 3). The carbon footprint is the result of an emissions calculation of all greenhouse gases released by an activity. The effect that various greenhouse gases have on the climate is expressed in CO2 equivalents (kg CO2 eq)

Innovative safety eyewear — made in Germany

uvex safety eyewear centre of expertise

Innovative safety eyewear for the highest quality standards

In Fürth, Bavaria, uvex develops and produces first-class and highly functional safety spectacles, goggles, prescription spectacles and laser protection eyewear. The uvex plant is certified in accordance with ISO 9001:2015 and ISO 50001:2011, and relies on state-of-the-art technology and strategic partnerships to develop future-oriented technologies and products.



uvex safety eyewear greatly exceeds all requirements of the applicable standards. Because good is not good enough for us.

Perfection as standard from uvex

All safety eyewear is comprehensively tested at the uvex test centre: As well as satisfying national and international safety standards, every item of safety eyewear also meets the exacting uvex standard in terms of functionality, ergonomics, durability and wearer comfort.

Innovative coating technologies are one of uvex's core competencies. The improved uvex supravision excellence universal coating exceeds the anti-fogging requirements of the EN 168 standard four times over.

New uvex product and innovation highlights





The product highlight: With its great design, lightness and fit, the uvex pheos nxt is the perfect addition to our pheos family.

The innovation highlight: With uvex IR-ex, uvex is offering safety eyewear with IR protection filters for the first time. The special feature of the filter is that it meets the requirements of multiple standards.

You can find more information about our new products on pages 14/15, 30/31 and 68/69.



Perfect vision for maximum safety

uvex coating expertise

It all comes down to the coating

Looking through lenses that are fogged up, scratched or dirty significantly increases the risk of accidents during the working day. uvex has been synonymous with innovative coating technologies for decades: In our centre of expertise in Fürth, we develop and produce scratch-resistant and anti-fog lenses for a multitude of applications.



The innovative coating technology makes uvex safety eyewear a reliable companion during day-to-day work — in a variety of applications.

Innovative manufacturing process

Conventional safety eyewear combines anti-fogging properties and scratch-resistance on both sides of the lens: This reduces the scratch-resistance and the anti-fogging effect is lessened by regular cleaning. Unlike conventional processes, the unique uvex process applies different coatings to either side of the lens.

Perfect vision whatever the situation

The outside of uvex lenses has an extremely scratchresistant, chemical-resistant and easy-to-clean coating, while the inside is coated with a highly durable anti-fog effect – for perfect vision and maximum safety. Lenses are also available with an extremely scratchresistant or anti-fog coating on both sides – depending on the working environment.

uvex supravision excellence - next level performance

uvex has further improved its proven uvex supravision excellence coating technology once again: All lenses now offer twice the performance in terms of anti-fogging time, exceeding the requirements of the EN 168 standard four times over.

dry 0% RH



uvex supravision excellence

| Interior | Performance | Exterior |
|---|--------------------|----------|
| | Anti-fog | |
| $\blacktriangle \blacktriangle \blacktriangle \bigtriangleup$ | Scratch-resistance | |

- · Unique dual-action permanent anti-fog coating on the interior of the lens and a scratch-resistant hard coating on the exterior. This allows each coating to perform at maximum efficiency.
- extremely scratch-resistant and chemical-resistant on the outside of the lens with non-stick, easy to clean technology
- · long lasting anti-fog performance on the inside
- anti-fog performance will not diminish even after repeated cleaning
- suitable for a wide range of workplaces

cold -20°C



uvex supravision plus

| Interior | Performance | Exterior |
|---|--------------------|---|
| | Anti-fog | |
| $\blacksquare \blacksquare \blacksquare \bigtriangleup$ | Scratch-resistance | $\blacktriangle \blacktriangle \blacktriangle \bigtriangleup$ |

· long lasting anti-fog performance and scratch-resistance on both sides

- anti-fog performance will not diminish even after repeated cleaning
- suitable for environments where there is high humidity and/or frequent temperature fluctuations



scan for QR-Code for further information. uvex-safety.com/en/antifog

Find your ideal lens coating

- 1. Select the temperature which best represents your working environment on the horizontal temperature axis.
- 2. Define the air humidity of your environment in percentage terms and find the value on the diagonal axis.

1500 RH

2500 RH

-10°C


3500

-**5**°C

- 3. Determine the level of dirt on the vertical axis.
- 4. Connect these three points to form a triangle.
- 5. The part of the triangle with the largest area indicates the lens coating most suited for your workplace.




Coating technology Core Coatings

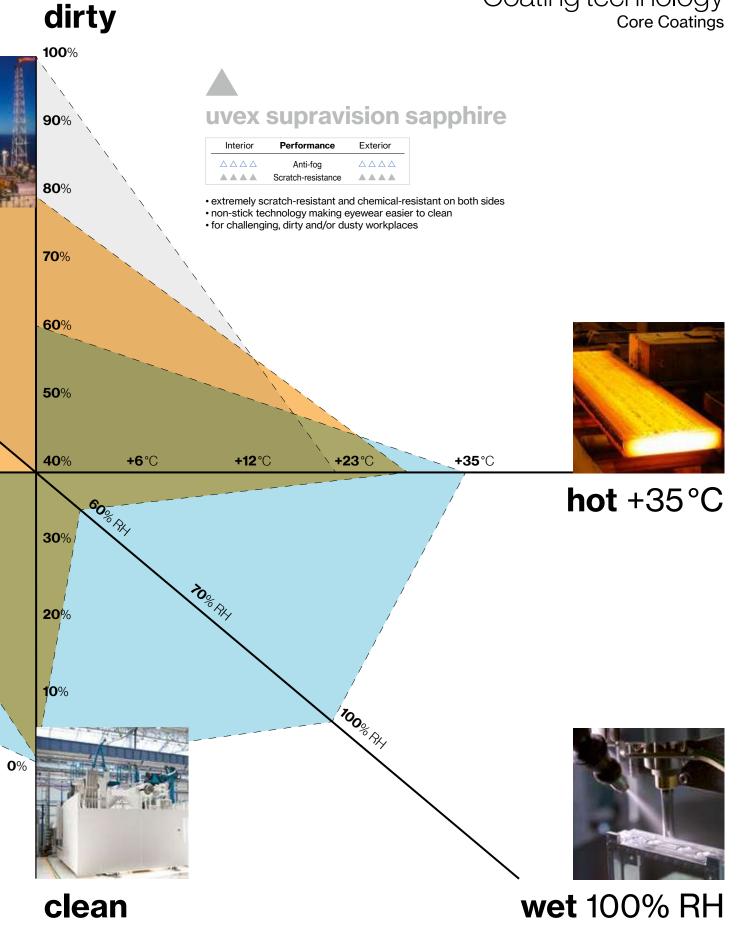

Coating technology

Special Coatings

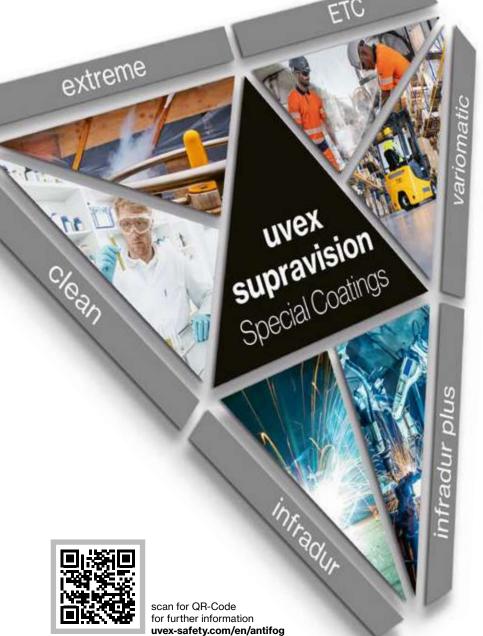

| Interior | Performance | Exterior |
|---|--------------------|----------|
| | Anti-fog | |
| $\blacksquare \blacksquare \blacksquare \bigtriangleup$ | Scratch-resistance | |

Self-tinting coating that darkens when exposed to UV. Benefits from highly effective anti-fog performance inside, extremely scratch-resistant on the outside.

Self-tinting coating:

· automatically darkens within 10 sec. and lightens within 30 sec.

Areas of application:

 frequent moves between indoor and outdoor environments or light and dark workspaces

uvex supravision variomatic uvex supravision infradur

| Interior | Performance | Exterior |
|----------|--------------------|-------------------------------|
| | Anti-fog | $\Delta \Delta \Delta \Delta$ |
| | Scratch-resistance | |

Specifically developed for welding applications. Extremely high scratch-resistance on both sides. Minimises burns from welding sparks. Areas of application:

· suitable for very dirty, dry welding applications where there is minimal risk of fogging

uvex supravision extreme

| Interior | Performance | Exterior |
|---|--------------------|-------------------------------|
| | Anti-fog | $\Delta \Delta \Delta \Delta$ |
| $\blacktriangle \blacktriangle \bigtriangleup \bigtriangleup$ | Scratch-resistance | |

Interior:

- durable, permanent anti-fog performance
- · coating forms a thin veil of water without
- impairing vision

Exterior:

- extremely scratch-resistant, chemicalresistant and easy to clean
- Areas of application:
- · prolonged exposure to high risk of fogging and dirt

uvex supravision ETC (extreme temperature conditions)

| Interior | Performance | Exterior |
|---|--------------------|---|
| | Anti-fog | |
| $\blacktriangle \blacktriangle \bigtriangleup \bigtriangleup$ | Scratch-resistance | $\blacktriangle \blacktriangle \bigtriangleup \bigtriangleup$ |

Interior and exterior:

- durable, permanent anti-fog performance · coating forms a thin veil of water in humid
- environments without impairing vision

Areas of application:

 workplaces with high humidity and/or frequent temperature fluctuations

uvex supravision clean

| Interior | Performance | Exterior |
|----------|--------------------|-------------------------------|
| | Anti-fog | $\Delta \Delta \Delta \Delta$ |
| | Scratch-resistance | |

Specifically developed for the health care sector. Lenses with uvex supravision clean are autoclavable.

Interior:

- lasting anti-fog performance
- anti-fog performance lasts a minimum of 20 autoclave cycles

Exterior:

- extremely scratch-resistant, chemicalresistant and easy to clean
- Areas of application:
- dry, clean environments

uvex supravision infradur plus

| Interior | Performance | Exterior |
|----------|--------------------|----------|
| | Anti-fog | |
| | Scratch-resistance | |

Specifically developed for welding applications. Lasting anti-fog performance on the inside, extremely scratch-resistant outside and minimises burns from welding sparks.

Areas of application:

· suitable for dirty, welding environments with a high possibility of fogging



The new standard for safety eyewear EN ISO 16321

Unpacking the new standard and what it means for your safety eyewear

For more than 20 years, the EN 166 standard has defined all of the requirements and standards for safety eyewear within the European Union and the United Kingdom. EN 166 is now being replaced by EN ISO 16321. The new standard contains a range of international standards that will entail some significant changes to product requirements and test methods.

Entry into force and transition period

In May 2023, EN ISO 16321 was formally published in the Official Journal of the European Union as a harmonised standard and replacement for EN 166. **The legal introduction of the new standard will take effect in November 2024.** From this date, products may only be tested and certified by official bodies in accordance with the new EN ISO 16321 standard.

However, existing **certificates based on EN 166 will remain** valid until their respective official expiry dates, **but for a maximum of five years.** This means that products that are certified or recertified in accordance with EN 166 by 31 October 2024 may be labelled and placed on the market in accordance with EN 166 until 31 October 2029. During this **transition period**, safety eyewear **in accordance with both EN 166 and EN ISO 16321** will be available on the market. For dealers, by contrast, there is no end date by which they must have sold their EN 166-certified products!

Scope and background

The ISO was established primarily for **updating** and adapting **already defined tests and test methods** to match the current technological standards. It is also designed to achieve, where possible, **the global harmonisation** of the various PPE standards in force in different regions of the world. When defining the requirements and test methods, ISO has taken all international standards currently in force (e.g. AS/NZS, ANSI etc.) into account and has incorporated elements of them into the unified and harmonised standard ISO 16321. However, member countries are free to choose whether to apply the new ISO standard or to maintain their existing, currently applicable national standards. In the future, this will allow for greater consistency in international product markings **and universal minimum standards**.

In the European Union and the United Kingdom, EN ISO 16321 will replace the current standard EN 166 when it comes into force. Other international PPE markets may follow in the future.

The following pages contain an overview of the markings set out by EN 166 and EN ISO 16321.

If you have any questions, please do not hesitate to contact our customer service.

EN ISO 16321 – The most important changes at a glance:

- EN ISO 16321 includes EN ISO 16321-1 (general requirements; UV, sunglare and IR filters), EN ISO 16321-2 (welding protection filters) and EN ISO 16321-3 (mesh visors).
- The markings for all safety eyewear and visors will be updated. As a result, new certificates will be required for all affected products.
- New test heads and coverage areas have been defined, and certification of different head sizes (S, M, L) is now also permitted.
- The mechanical strength for goggles and face protection will be reduced to 80 m/s and 120 m/s (previously 120 m/s and 190 m/s).
- Additional, optional tests for e.g. chemical resistance, liquid flows and electrostatic discharges are made possible.
- Various tests and markings will be limited to certain product areas, e.g. it will only be possible to use marking 9 (protection against molten metals) for visors.



Further information about EN ISO 16321 and more detailed information about the changes can be found on our blog:

Scan the QR code for more information. uvex-safety.com/blog/new-protective-eyewearstandards-en-iso-163212022/



Markings in accordance with EN 166

Markings on lenses in accordance with EN 166


Filter


| 2 | UV protection filter (EN 170) |
|------|---|
| 2C/3 | UV protection filter with colour recognition (EN 170) |
| 4 | IR protection filter (EN 171) |
| 4C | IR protection filter with colour recognition (EN 171) |
| 5 | Sunglare filter for industrial use (EN 172) |
| 6 | Sunglare filter with infrared requirement (EN 172) |
| | |

Tinting levels

| Marking | Light transmittance | Available uvex tints |
|---------|------------------------|---|
| 1,2 | 74.4–100% | AR, clear, amber |
| 1,4 | 58.1-80% | CBR65 |
| 1,7 | 43.2-58.1% | Silver mirror 53% |
| 2,5 | 17.8–29.1% | CBR23, grey 23% |
| 3,1 | 8–17.8% | Grey 12%, silver mirror 12%, polavision |
| 1,7 | 43.2–58.1% | Welding shade level 1,7 |
| 3 | 8.5–17.8% | Welding shade level 3 |
| 5 | 1.2–3.2% | Welding shade level 5 |
| 1,7 | 43.2–58.1% | Infrared protection IR-ex level 1,7 |
| 3 | 8.5–17.8% | Infrared protection IR-ex level 3 |
| 5 | 1.2–3.2% | Infrared protection IR-ex level 5 |

Markings on frames in accordance with EN 166

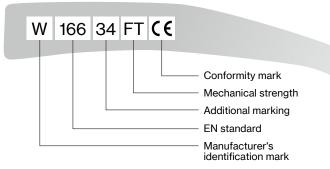

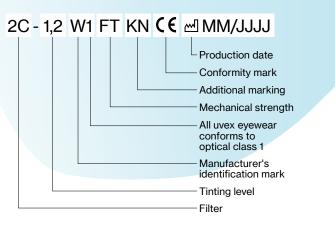

Mechanical strength

| None | Minimum robustness (filters only) | |
|--|--|--|
| 5 | Increased robustness | |
| | Low-energy impact (45 m/s or 162 km/h) | |
| 1 | Medium-energy impact (120 m/s or 432 km/h) | |
| ۱. | High-energy impact (190 m/s or 684 km/h) | |
| Tested under extreme temperatures (-5°C/+55°C) | | |

Additional markings*

| к | Surface resistance to damage by small particles in accordance with EN 168 (scratch resistance) |
|---|---|
| Ν | Resistance to fogging in accordance with EN 168 |
| 8 | Protection against short-circuit electric arcs |
| 9 | Protection against molten metal and hot solids |
| | |

| None | General use |
|------|--|
| 3 | Protection against liquids (drops and splashes) |
| 4 | Protection against large dust particles with a grain size of > 5 μ m |
| 5 | Protection against gases, vapours, smoke, fumes and fine dust particles with a grain size of < 5 μ m |
| 8 | Protection against short-circuit electric arcs (visors only) |
| 9 | Protection against molten metal and hot solids |

Mechanical strength

| Minimum robustness (filters only) |
|--|
| Increased robustness |
| Low-energy impact (45 m/s or 162 km/h) |
| Medium-energy impact (120 m/s or 432 km/h) |
| High-energy impact (190 m/s or 684 km/h) |
| Tested under extreme temperatures (-5°C/+55°C) |
| |



Markings in accordance with EN ISO 16321

Markings on lenses in accordance with EN ISO 16321

| W UL 1,2 CT 1 | KN 🧲 🖻 MM/JJJJ |
|---------------|--|
| | Production date Conformity mark Additional marking All uvex eyewear conforms to optical class 1 |
| | Mechanical strength |
| | Tinting level |
| | Filter |
| | Manufacturer's identification mark |

Tinting levels

UV protection filter

Welding protection filter

Infrared protection filter

Signal light detection

Sunglare filter

Filter U

G

w

+L

D E

R/RR

| Marking | Light transmittance | Available uvex tints | | |
|---------|------------------------|---|--|--|
| U1,2 | 74.4–100% | AR, clear, amber | | |
| G1 | 43.2-80% | CBR65, silver mirror 53% | | |
| G2 | 17.8–43.2% | CBR23, grey 23% | | |
| G3 | 8–17.8% | Grey 12%, silver mirror 12%, polavision | | |
| W1,7 | 43.2–58.1% | Welding shade level 1,7 | | |
| W3 | 8.5–17.8% | Welding shade level 3 | | |
| W5 | 1.2–3.2% | Welding shade level 5 | | |
| RL1,7 | 43.2–58.1% | Infrared protection IR-ex level 1,7 | | |
| RL3 | 8.5–17.8% | Infrared protection IR-ex level 3 | | |
| RL5 | 1.2–3.2% | Infrared protection IR-ex level 5 | | |


(optional, can be additionally certified for each filter)

Mechanical strength

| None | Drop ball test in accordance with EN ISO 16321 (basic requirement) | | | | |
|--|--|--|--|--|--|
| C Low-energy impact (45 m/s or 162 km/h) | | | | | |
| D | Medium-energy impact (80 m/s or 288 km/h) | | | | |
| E High-energy impact (120 m/s or 432 km/h) | | | | | |
| HM* High-mass impact (500 g steel projectile, drop height 1.27 | | | | | |
| T * Tested under extreme temperatures (-5°C/+55°C) | | | | | |
| - | Tested under extreme temperatures (-5°C/+55°C) | | | | |
| | Surface resistance to damage by small particles | | | | |

| Ν | Resistance to fogging in accordance with EN ISO 16321 | | |
|----|---|--|--|
| 7 | Protection against radiant heat | | |
| 9 | Protection against molten metal and hot solids | | |
| СН | Chemical resistance | | |

Markings on frames in accordance with EN ISO 16321

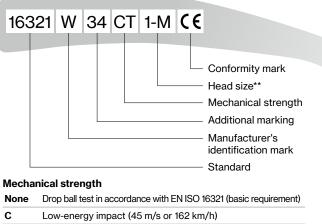

| | Low-energy impact (45 m/s or 162 km/h) |
|---|---|
| | Medium-energy impact (80 m/s or 288 km/h) |
| | High-energy impact (120 m/s or 432 km/h) |
| * | High-mass impact (500 g steel projectile drop height 127 m) |

| HM* | High-mass impact (500 g steel projectile, drop height 1.27 m) |
|-----|---|
| | |

 T*
 Tested under extreme temperatures (-5°C/+55°C)

Additional markings*

| 3 | Protection against liquids (drops and splashes) |
|----|--|
| 4 | Protection against large dust particles with a grain size of > 5 μ m |
| 5 | Protection against gases, vapours, smoke, fumes and fine dust particles with a grain size of < 5 μm |
| 6 | Protection against high-pressure liquid flows |
| 7 | Protection against radiant heat (visors only) |
| 8 | Protection against short-circuit electric arcs (visors only) |
| 9 | Protection against molten metal and hot solids (visors only) |
| СН | Chemical resistance |

Head sizes

| 1-S | Small, European test head | | |
|-------|---------------------------------------|--|--|
| 1-M** | Medium, European test head (standard) | | |
| 1-L | Large, European test head | | |
| 2-S | Small, Asian test head | | |
| 2-M | Medium, Asian test head | | |
| 2-L | Large, Asian test head | | |
| | | | |

* Optional ** 1-M is the standard. If only 1-M has been tested, this does not have to be marked on the frame or on the packaging.

Lens tinting

A lens solution for every light environment



CLEAR Protoction

Protection: UV400 Marking: 2(C)-1.2 Transmission: approx. 91%

tint with glare protection not necessary

Protection against **mechanical** hazards without glare

Standards: EN 166, EN 170; EN ISO 16321, UV protection filter



AMBER Protection: UV400 Marking: 2(C)-1.2 Transmission: approx. 88%

Protection against **mechanical hazards** without **glare**, with **contrast enhancement**

Standards: EN 166, EN 170; EN ISO 16321, UV protection filter



CBR65 Protection: UV400 Marking: 5-1.4 Transmission: approx. 65%

Protection offering relaxing, focused vision

Standards: EN 166, EN 172; EN ISO 16321, Sunglare filter

• uvex pheos nxt (p. 31), uvex i-5 (p. 39), uvex sportstyle (p. 42), uvex pheos cx2 (p. 43), uvex super f OTG (p. 59), uvex pheos cx2 sonic (p. 61)



AR (anti-reflective) Protection: UV400 Marking: 2(C)-1.2 Transmission: approx. 96.5%

Optimum **anti-reflective** protection with high degree of light transmission

Standards: EN 166, EN 170; EN ISO 16321, UV protection filter • uvex sportstyle (p. 42), uvex i-3 (p. 46)



74-100% transmission



26



Lens tinting



CBR23

Protection: UV400 Marking: 5-2.5 Transmission: approx. 23% Protection against natural glare with signal colour recognition and increased contrast effect

Standards: EN 166, EN 172; EN ISO 16321, Sunglare filter

▶ uvex pheos nxt (p. 31), uvex i-5 (p. 39), uvex sportstyle (p. 42), uvex pheos cx2 (p. 43), uvex megasonic (p. 60)



SILVER MIRROR 53% Protection: UV400 Marking: 5-1.7 Transmission: approx. 53%

Protection in changing light conditions

Standards: EN 166, EN 172; EN ISO 16321, Sunglare filter

▶ uvex pheos (p. 44), uvex i-works (p. 49)



POLAVISION Protection: UV400 Marking: 5-3.1 Transmission: approx. 14%

Reduction of irritating surface reflection by filtering scattered light

Standards: EN 166, EN 172; EN ISO 16321, Sunglare filter uvex polavision (p. 56)



SILVER MIRROR 12% Protection: UV400 Marking: 5-3.1 Transmission: approx. 12%

Protection from both highly artificial light and natural glare conditions

Standards: EN 166, EN 172; EN ISO 16321, Sunglare filter ▶ uvex sportstyle (p. 42), uvex pheos cx2 (p. 43), uvex i-3 (p. 46)



GREY 23% Protection: UV400 Marking: 5-2.5 Transmission: approx. 23%

Protection against natural glare with signal colour recognition

Standards: EN 166, EN 172; EN ISO 16321, Sunglare filter

43-58%

transmission



GREY 12% Protection: UV400 Marking: 5-3.1 Transmission: approx. 12%

18-29%

transmission

Protection against natural glare with signal colour recognition

Standards: EN 166, EN 172; EN ISO 16321, Sunglare filter ▶ uvex pheos cx2 (p. 43)

tint with glare protection recommended



8-18% transmission tint with contrast adjustment not necessar

uvex UV400


100% UV protection. 100% safety. 100% uvex.

The EN166/170 standard requires safety eyewear to provide UV protection up to 380 nm. The latest scientific findings show that this is not enough. The WHO (World Health Organization) recommends UV protection up to 400 nm.

"The reasons why the WHO recommends UV400 protection are clear. The outer tissues of the eye, cornea and lens fully absorb UV light. While UVB light primarily damages the genetic material, UVA rays penetrate deeper, cause thermal damage and magnify the effects of UVB light."

uvex UV400 – **included in all uvex safety eyewear** Whether you choose clear or tinted lenses, all uvex safety spectacles are equipped with uvex UV400 effective UV protection as standard – as well as pleasant wearer comfort, a sporty design and top-quality lens coatings.

Even without sun, UV rays can still put strain on the eye When working outdoors, your eyes are regularly exposed to harmful UV radiation – even when it is cloudy. The result: using insufficient protection risks may cause dangerous long-term damage such as corneal injury, cataracts and blindness.

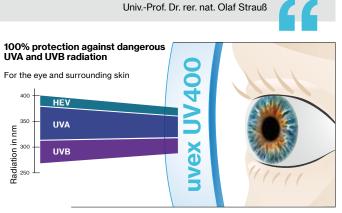

uvex UV400 offers complete protection against UVA and UVB radiation as well as high-energy visible light (HEV) up to a wavelength 400 nm.

uvex UV400 not only filters 100% of UVA rays (20% still passes through 380 nm lenses), it also completely minimises temperature-induced cell changes – a factor which increases tenfold in the percentage of total cell damage in the range from 380 to 400 nm. In addition, the dangerous, damaging blue light content (HEV), which is also harmful to the retina, is reduced by 15%.

uvex safety eyewear, 100% safety.


uvex CBR65 · uvex CBR23

Fatigue-free, comfortable vision

Preventive protection against blue light

The properties of the uvex CBR65 and CBR23 lens technology are significantly different to those of uvex UV400. They filter high-energy visible light (HEV) – which causes particular strain on the retina in the range from 380 nm to 450 nm – by up to 50 or 95%.



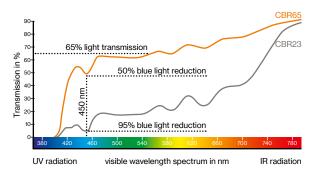

Strain on the eye caused by blue light has increased enormously as a result of intensive use of electronic devices (PCs, smartphones, tablets, LED TVs etc.) and the switch from incandescent light bulbs to LEDs. The short-term effects of this include eye strain, headaches and poor concentration, while in the long term there is an increased risk of age-related macular degeneration. uvex CBR65 and CBR23 reliably protect the eye against health risks without disrupting the body's internal clock.

Contrast

Contrast enhancement Better contrast for clearer vision, helping to reduce strain on the eyes – even in diffused light.

Bluelight reduction

Blue light reduction Blue light is reduced by up to 50 or 95%.

Relaxed vision

Relaxed vision Ideal for high-concentration work; the eyes get less tired even when working for longer periods.

65% transmission

Slight tint

Ideal for use both indoors and outdoors. Ideal for working in bright LED lights, for example.



9128064

9193064





9198064











% transmission

Optimal protection against glare

Especially for working outdoors.

9128223



9193223



9320223

For more information, visit uvex-safety.com/en/product-group/uvex-cbr65/



9183223





11111

grip. fit. vented. UVEX pheos nxt

The uvex pheos nxt combines a classic sporty design with comfort, lightness and optimum protection.

The special design of the arms is not just visually impressive: the directional structure ensures extremely good grip – even for demanding work.

Numerous cut-outs in the side arms improve air circulation and make the spectacles lightweight without sacrificing strength.

In addition, the large panoramic lens offers a wide, distortion-free field of vision to provide a clear, comfortable view.

uvex

The uvex pheos nxt is an appealing all-rounder and ideal companion for a wide range of working conditions.



The innovative side arm design allows **maximum air circulation** for climate-optimised wearer comfort.



The **grip structure** guarantees a secure fit even during demanding work.



The proven **uvex supravision coating technology** (with UV400 protection) offers a distortion-free field of view at all times.




Lightweight design for an even more comfortable fit.



Safety Spectacles

uvex pheos nxt · uvex pheos nxt planet

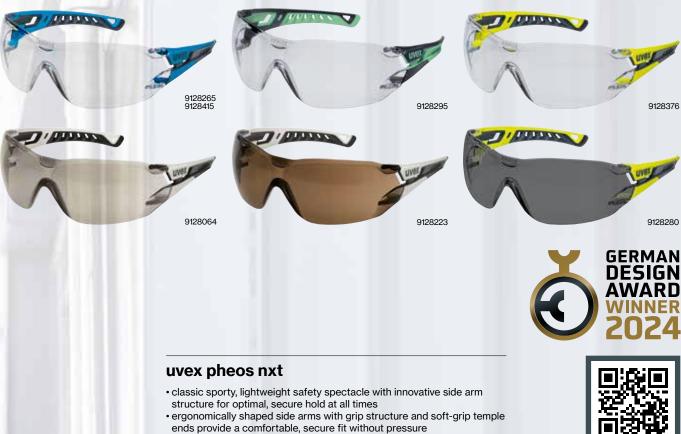

- numerous recesses in the side arms provide increased air circulation for excellent climate-optimised wearer comfort
- nose bridge designed for all-day comfort
- · robust polycarbonate lens with uvex's proven supravision coating tech-
- nology permanent anti-fog and scratch-resistant lens UV400 100% protection against dangerous UV radiation up to 400 nm
- metal-free

| uvex pheos nxt | | uvex pheos nxt planet | | |
|--------------------------|-----------------------------|-----------------------------|-----------------------------|--------------------------|
| Art. no. | 9128265 | 9128295 | 9128415 | 9128376 |
| Version | uvex supravision excellence | uvex supravision excellence | uvex supravision ETC | uvex supravision extreme |
| Standard | | | EN 166. EN 170 | EN 100 EN 170 |
| o tantaan a | EN 166, EN 170 | EN 166, EN 170 | | EN 166, EN 170 |
| Frame | blue, anthracite | anthracite, jade | blue, anthracite | lime, anthracite |
| _ | W 166 FT CE | W 166 FT CE | W 166 FT CE | W 166 FT CE |
| Lens | PC clear | PC clear (mass balanced) | PC clear | PC clear |
| | UV400 | UV400 | UV400 | UV400 |
| | 2C-1.2 W1 FTKN CE | 2C-1.2 W1 FTKN CE | 2C-1,2 W1 FTKN CE | 2C-1,2 W1 FTKN CE |
| Weight | 25 g | 25 g | 25 g | 25 g |
| Order quantity multiples | 10 PC | 10 PC | 10 PC | 10 PC |
| | | | | |
| | | | | |
| uvex pheos nxt | | | | |
| Art. no. | 9128064 | 9128223 | 9128280 | |
| Version | uvex supravision excellence | uvex supravision excellence | uvex supravision excellence | |
| | sunglare filter | sunglare filter | sunglare filter | |
| Standard | EN 166, EN 172 | EN 166, EN 172 | EN 166, EN 172 | |
| Frame | white, black | white, black | lime, anthracite | |
| | W 166 FT CE | W 166 FT CE | W 166 FT CE | |
| Lens | PC CBR65 | PC CBR23 | PC grey 23% | |
| | UV400 | UV400 | UV400 | |
| | 5-1,4 W1 FTKN CE | 5-2.5 W1 FTKN CE | 5-2,5 W1 FTKN CE | |
| Weight | 25 g | 25 g | 25 g | |
| Order quantity multiples | 10 PC | 10 PC | 10 PC | |
| | | | | |

For more information, visit uvex-safety.com/ pheosnxt

sustainable. flexible. safe.



uvex i-guard

additional protection against liquids, particles and dirt thanks to the highly flexible frame that adapts to any face shape without pressure (marking 3 and 4 in accordance with EN 166) uvex i-guard

uvex i-lite impressive modern design with flat lens geometry

vex i-lite



uvex i-guard+

uvex i-guard+

goggles with headband go above and beyond the minimum requirements and boast increased mechanical strength

UVEX I-range redot winner 2022

The uvex i-range is our new flexible 3in1 safety eyewear range that allows wearers to select the right product for the workplace hazard or environment.



x-tended sideshield for additional side protection



Ergonomically shaped side arms for a perfect fit and secure hold without creating pressure points



Flat lens design for an unrestricted field of vision



Three-stage adjustable side arms for individual customisation



With proven **uvex supravision coating technology** and UV400 protection



Soft and flexible face seal made from sustainable materials for a universal fit



Made of recycled and bio-based materials to conserve resources and protect the environment



uvex i-guard+ kit can be specifically adjusted to any application thanks to the flexibility to swap the side arms and headband



uvex i-range planet sustainably manufactured models made from recycled, bio-based material





uvex i-range · uvex i-range planet



uvex i-range

- versatile 3in1 safety eyewear range allows eyewear to be adapted according to workplace hazards
- large, flat lens delivers unrestricted field of vision
- x-tended sideshield offers additional protection from hazards
- side arms with multi-incline points allow for a high level of individualisation to ensure a good fit for all facial shapes and head widths
- ergonomically shaped side arms provide a secure fit without pressure
- robust polycarbonate lens with uvex's proven supravision coating technology – permanent anti-fog and scratch-resistant lens

• UV400 – 100 % protection against dangerous UV radiation up to 400 nm

9143265

9143266 9143376

9143267

- nachhaltiger Vorteil: Scheiben und Kopfbänder können bei Bedarf ausgetauscht werden
- metal-free
- uvex i-guard: soft, flexible face seal adapts to the wearer providing both protection and comfort. It also protects against droplets or splashes of liquids and large dust particles (markings 3 and 4)
- uvex i-guard+: above features together with increased impact protection
- uvex i-guard+ kit: interchangeable side arms and headband means eyewear can be worn as either a spectacle or goggle depending on the workplace hazards

Ľ

reddot winner 2022



For more information, visit **uvex-safety.com/en/irange**

| Weight Order quantity multiples | 32 g 10 PC | 32 g 10 PC | 32 g 10 PC | 48 g 8 PC | 48 g 8 PC | 48 g 8 PC |
|------------------------------------|-----------------------------|-----------------------------|-----------------------------|-----------------------------|-----------------------------|--------------------------|
| | 2C-1.2 W1 FKN CE | 2C-1.2 W1 FKN CE | 5-2.5 W1 FKN CE | 2C-1.2 W1 FKN CE | 2C-1.2 W1 FKN CE | 2C-1.2 W1 FKN CE |
| | UV400 | UV400 | UV400 | UV400 | UV400 | UV400 |
| Lens | PC clear | PC clear (mass balanced) | PC grey 23% | PC clear | PC clear (mass balanced) | PC clear |
| | W 166 F CE | W 166 F CE | W 166 F CE | W 166 34 F CE | W 166 34 F CE | W 166 34 F CE |
| Frame | anthracite, blue | anthracite, jade | anthracite, lime | anthracite, blue | anthracite, jade | anthracite, blue |
| Standard | EN 166, EN 170 | EN 166, EN 170 | EN 166, EN 172 | EN 166, EN 170 | EN 166, EN 170 | EN 166, EN 170 |
| | · | | sunglare filter | | | |
| Version | uvex supravision excellence | uvex supravision extreme |
| Replacement lens | 9143255 | - | - | 9143255 | - | - |
| Art. no. | 9143265 | 9143295 | 9143281 | 9143266 | 9143296 | 9143376 |
| uvex i-range | uvex i-lite | uvex i-lite planet | uvex i-lite | uvex i-guard | uvex i-guard planet | uvex i-guard |

| uvex i-range | uvex i-guard | uvex i-guard+ | uvex i-guard+ planet | uvex i-guard+ | uvex i-guard+ | uvex i-guard+ kit |
|--------------------------|-----------------------------|-----------------------------|-----------------------------|--------------------------|-----------------------------|-----------------------------|
| Art. no. | 9143282 | 9143267 | 9143297 | 9143377 | 9143283 | 9143300 |
| Replacement lens | - | 9143255 | - | - | - | 9143255 |
| Replacement headband | uvex supravision excellence | 9143011 | 9143013 | 9143011 | - | 9143011 |
| Version | sunglare filter | uvex supravision excellence | uvex supravision excellence | uvex supravision extreme | uvex supravision excellence | uvex supravision excellence |
| | | | | | sunglare filter | |
| Standard | EN 166, EN 172 | EN 166, EN 170 | EN 166, EN 170 | EN 166, EN 170 | EN 166, EN 172 | EN 166, EN 170 |
| Frame | anthracite, lime | anthracite, blue | anthracite, jade | anthracite, blue | anthracite, lime | anthracite, blue |
| | W 166 34 F CE | W 166 34 B CE | W 166 34 B CE | W 166 34 B CE | W 166 34 B CE | W 166 34 B CE |
| Lens | PC grey 23% | PC clear | PC clear (mass balanced) | PC clear | PC grey 23% | PC clear |
| | UV400 | UV400 | UV400 | UV400 | UV400 | UV400 |
| | 5-2.5 W1 FKN CE | 2C-1.2 W1 BKN CE | 2C-1.2 W1 BKN CE | 2C-1.2 W1 BKN CE | 5-2.5 W1 BKN CE | 2C-1.2 W1 BKN CE |
| Weight | 48 g | 50 g | 50 g | 50 g | 50 g | 56 g |
| Order quantity multiples | 8 PC | 8 PC | 8 PC | 8 PC | 8 PC | 8 PC |

MADE IN GERMANY



stylish. safe. sustainable.

Designed to recycle

Thanks to an innovative new production technology, the uvex pure-fit can be manufactured fully automatically from just one material without the need for additional assembly.

It is made entirely of polycarbonate and is therefore 100% recyclable – just like the product packaging.

This makes the uvex pure-fit an extremely sustainable solution.

Not just innovative but comfortable too: These safety spectacles are extremely lightweight. The flexible side arms fit perfectly to any head shape and ensure a secure hold.

The uvex pure-fit is available in two different versions: uncoated and, of course, coated with the proven uvex supravision coating technology.

uvex pure-fit



Frameless and innovative lens design for an optimum, unrestricted field of vision



Flexible side arms for a perfect fit and secure hold without creating pressure points

Г

With proven uvex supravision coating technology or uncoated – but always with UV400 protection



Safety Spectacles uvex pure-fit



scan for QR-Code for further information. uvex-safety.com/en/purefit

x-tended sideshield for additional side protection



reduced to the max - pure, ultra-lightweight safety eyewear made of polycarbonate, weighing only 19 grams







9145014

AWARE



uvex pure-fit

- reduced to the max pure, ultralight safety spectacle with innovative side arm concept weighing only 19 grams
- frameless lens design for a wide field of vision
- x-tended sideshield offers additional protection from hazards
- flexible side arms deliver the perfect secure, pressure-free fit
- nose bridge designed for all-day comfort
- robust polycarbonate lens with uvex's proven supravision coating
- technology permanent anti-fog and scratch-resistant lens UV400 100% protection against dangerous UV radiation up to 400 nm
- metal-free

| uvex pure-fit | | |
|--------------------------|-----------------|-----------------------------|
| Art. no. | 9145014 | 9145265 |
| Version | uncoated | uvex supravision excellence |
| Standard | EN 166, EN 170 | EN 166, EN 170 |
| Frame | transparent | transparent |
| | W 166 FT CE | W 166 FT CE |
| Lens | PC clear | PC clear |
| | UV400 | UV400 |
| | 2C-1.2 W1 FT CE | 2C-1.2 W1 FTKN CE |
| Weight | 19 g | 19 g |
| Order quantity multiples | 75 PC | 75 PC |
| | | |



MADE IN GERMANY

strong. sporty. functional.

eXXtremely cool look dynamic, attractive frame design



maXXimum comfort

ergonomically shaped side arms and soft grip temple ends – now even more comfortable to wear, while still providing a secure hold

fleXXible nose pad for a non-slip and pressure-free fit eXXcellent vision with proven uvex supravision coating technology and UV400 protection

uvex suXXeed

eXXtra protection against particles, dirt and dust is provided by the optional clip-in frame



PLUS X AWAR 2022 Addited for High Quality Design



ζ

Safety Spectacles

uvex suXXeed \cdot uvex suXXeed guard



uvex suXXeed

- sporty safety spectacle in an appealing, dynamic design
 ergonomically shaped side arms with soft-grip temple ends
- provide a comfortable, secure fit without pressure • soft, flexible nose pad adapts to the wearer, delivering
- a non-slip and pressure-free fit
- UV400 100% protection against dangerous UV radiation up to 400 nm
- robust polycarbonate lens with uvex's proven supravision coating technology – permanent anti-fog and scratch-resistant lens
- optional clip-in frame seal provides extra protection against particles, dirt and dust
- a sustainable benefit: lenses can be replaced when required
- metal-free




| uvex suXXeed | | | | uvex suXXeed guard | |
|--------------------------|-----------------------------|-------------------------------|------------------------|-----------------------------|-------------------------------|
| Art. no. | 9181265 | 9181268 | 9181415 | 9181180 | 9181365 |
| Replacement lens | 9181255 | 9181255 | - | 9181255 | - |
| Version | uvex supravision excellence | e uvex supravision excellence | e uvex supravision ETC | uvex supravision excellence | e uvex supravision excellence |
| | | | | incl. clip-in frame | contrast-enhancing |
| Standard | EN 166, EN 170 | EN 166, EN 170 | EN 166, EN 170 | EN 166, EN 170 | EN 166, EN 170 |
| Frame | anthracite, blue | black, light grey | anthracite, blue | anthracite, blue | black, light grey |
| | W 166 FT CE | W 166 FT CE | W 166 FT CE | W 166 FT CE | W 166 FT CE |
| Lens | PC clear | PC clear | PC clear | PC clear | PC amber |
| | UV400 | UV400 | UV400 | UV400 | UV400 |
| | 2C-1.2 W1 FTKN CE | 2C-1.2 W1 FTKN CE | 2C-1.2 W1 FTKN CE | 2C-1.2 W1 FTKN CE | 2C-1.2 W1 FTKN CE |
| Weight | 28 g | 28 g | 28 g | 33 g | 28 g |
| Order quantity multiples | 10 PC | 10 PC | 10 PC | 10 PC | 10 PC |

| Art. no.9181281918128891818809181001Versionuvex supravision excellenceuvex supravision excellenceuvex supravision variomaticclip-in framesunglare filtersunglare filterself-tinting lensesfor uvex suXxeedStandardEN 166, EN 172EN 166, EN 172EN 166, EN 170Frameanthracite, limeblack, light greyblack, light greyblackW 166 FT CEW 166 FT CEW 166 FT CELensPC grey 23%PC grey 23%PC light greenUV400UV400UV400UV4005-2.5 W1 FTKN CE2-1.2 W1 FTKN CE5-2.5 W1 FTKN CEWeight28 g28 g28 g5 g | | | | | |
|--|--------------------------|-----------------------------|-----------------------------|-----------------------------|------------------|
| Version uvex supravision excellence uvex supravision variomatic clip-in frame sunglare filter sunglare filter self-tinting lenses for uvex suXXeed Standard EN 166, EN 172 Frame anthracite, lime black, light grey black, light grey black W 166 FT CE W 166 FT CE W 166 FT CE EN 166, EN 172 EN 166, EN 172 Lens PC grey 23% PC grey 23% PC light green UV400 UV400 UV400 UV400 UV400 ES 25. W1 FTKN CE 2-12. W1 FTKN CE Weight 28 g 28 g 28 g 5 g | uvex suXXeed | | | | clip-in frame |
| sunglare filtersunglare filterself-tinting lensesfor uvex suXXeedStandardEN 166, EN 172EN 166, EN 172EN 166, EN 170Frameanthracite, limeblack, light greyblack, light greyblackW 166 FT CEW 166 FT CEW 166 FT CEULensPC grey 23%PC grey 23%PC light greenUV400UV400UV4005-2.5 W1 FTKN CE5-2.5 W1 FTKN CE2-1.2 W1 FTKN CEWeight28 g28 g28 g5 g | Art. no. | 9181281 | 9181288 | 9181880 | 9181001 |
| Standard EN 166, EN 172 EN 166, EN 172 EN 166, EN 170 Frame anthracite, lime black, light grey black, light grey black, light grey black W 166 FT CE W 166 FT CE W 166 FT CE W 166 FT CE U Ens PC grey 23% PC grey 23% PC light green UV400 UV400 UV400 UV400 Ens Sec. 5W1 FTKN CE 5-2.5 W1 FTKN CE 2-1.2 W1 FTKN CE 5 g Weight 28 g 28 g 28 g 5 g | Version | uvex supravision excellence | uvex supravision excellence | uvex supravision variomatic | clip-in frame |
| Frame anthracite, lime black, light grey black, light grey black, light grey black W 166 FT CE W 166 FT CE W 166 FT CE W 166 FT CE Lens PC grey 23% PC light green UV400 S-2.5 W1 FTKN CE 2-1.2 W1 FTKN CE 5 g S g | | sunglare filter | sunglare filter | self-tinting lenses | for uvex suXXeed |
| W 166 FT CE W 166 FT CE W 166 FT CE Lens PC grey 23% PC grey 23% PC light green UV400 UV400 UV400 5-2.5 W1 FTKN CE 2-1.2 W1 FTKN CE Weight 28 g 28 g 5 g | Standard | EN 166, EN 172 | EN 166, EN 172 | EN 166, EN 170 | |
| Lens PC grey 23% PC grey 23% PC light green UV400 UV400 UV400 5-2.5 W1 FTKN CE 5-2.5 W1 FTKN CE 2-1.2 W1 FTKN CE Weight 28 g 28 g 5 g | Frame | anthracite, lime | black, light grey | black, light grey | black |
| UV400 UV400 UV400 5-2.5 W1 FTKN CE 5-2.5 W1 FTKN CE 2-1.2 W1 FTKN CE Weight 28 g 28 g 5 g | | W 166 FT CE | W 166 FT CE | W 166 FT CE | |
| 5-2.5 W1 FTKN CE 5-2.5 W1 FTKN CE 2-1.2 W1 FTKN CE Weight 28 g 28 g 28 g 5 g | Lens | PC grey 23% | PC grey 23% | PC light green | |
| Weight 28 g 28 g 5 g | | UV400 | UV400 | UV400 | |
| • • • • | | 5-2.5 W1 FTKN CE | 5-2.5 W1 FTKN CE | 2-1.2 W1 FTKN CE | |
| Order quantity multiples 10 PC 10 PC 10 PC 20 PC | Weight | 28 g | 28 g | 28 g | 5 g |
| | Order quantity multiples | 10 PC | 10 PC | 10 PC | 20 PC |

uvex fitting guide

Useful tips for making sure that your uvex safety eyewear fits perfectly

Wearing just any safety eyewear is not enough to protect your eyes. If your safety eyewear fits poorly or incorrectly, you're putting yourself at a higher risk of injury. Head and face shapes vary considerably, so it's impossible to find one pair that works for everyone. When trying on new safety eyewear, use this guide and review the eyewear description and materials.

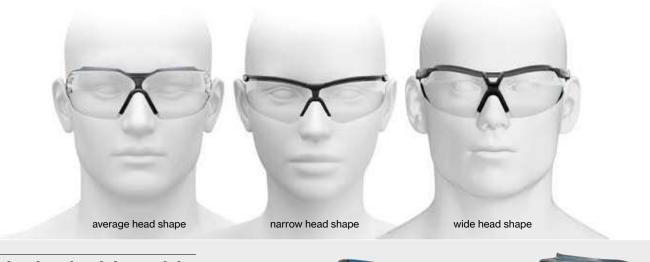

Selecting the right model

Pay attention to:

- excellent fit and eye coverage
- offers a good field of vision
- · adjustable to improve fit



Choose the model that best suits you and your work. The shape and fit of the eyewear have an impact on the view, the protection and the wearer comfort.

Checklist


- No uncomfortable pressure points on the side of the head or behind the ears.
- The nose pad is comfortable and lies on your nose without pinching.
- 3 You should be able to see in all directions without your vision being obstructed.



- The overall weight of the safety eyewear is distributed evenly.
- 5 The eyewear fits close to your face without touching your eyelashes. The gap between the eyewear and your face should not exceed 6 to 8 mm.
- 6 The eyewear stays in place when you move your head forwards or backwards and tilt your head side to side.



uvex i-5 · uvex i-5 guard

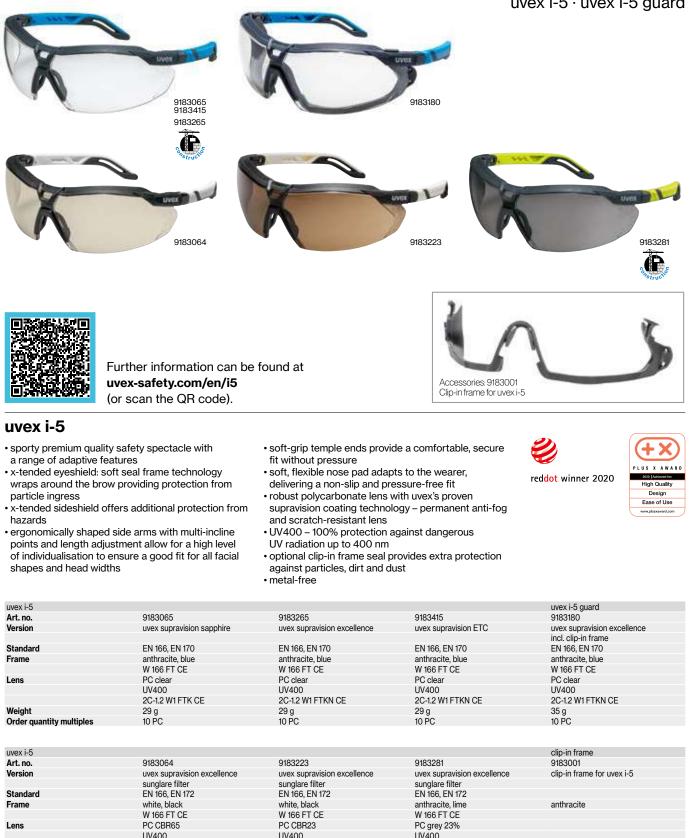

5-2.5 W1 FTKN CE

29 g

10 PC

5-1.4 W1 FTKN CE

29 g

10 PC

Weight

Order quantity multiples

6 g 20 PC

5-2.5 W1 FTKN CE

29 g

10 PC

uvex x-fit pro · uvex x-fit pro guard



uvex x-fit pro

functional, modular safety spectacle with a wide range of accessories
ergonomically shaped side arms with soft-grip temple ends provide

- a comfortable, secure fit without pressure
- adjustment for every head and facial shape with the uvex Comfort Slider a multi-stage temple inclination that allows wearers to achieve their own comfortable wearing position
- modular system allows functional accessories to be attached enhancing the ability to get on with the job
- soft, flexible nose pad adapts to the wearer, delivering a non-slip and pressure-free fit
- robust polycarbonate lens with uvex's proven supravision coating technology permanent anti-fog and scratch-resistant lens
- UV400 100% protection against dangerous UVA and UVB radiation up to 400 nm
- optional clip-in frame seal provides extra protection against particles, dirt and dust
- metal-free

| uvex x-fit pro | | | uvex x-fit pro guard | |
|--------------------------|-----------------------------|-----------------------------|--------------------------------------|----------------------------------|
| Art. no. | 9199247 | 9199245 | 9199680 | 9199277 |
| Version | uvex supravision excellence | uvex supravision excellence | uvex supravision excellence | uvex supravision excellence |
| | without sliders | | without sliders, incl. clip-in frame | sunglare filter, without sliders |
| Standard | EN 166, EN 170 | EN 166, EN 170 | EN 166, EN 170 | EN 166, EN 172 |
| Frame | blue, anthracite | blue, anthracite | blue, anthracite | anthracite, light grey |
| | W 166 FT CE | W 166 FT CE | W 166 FT CE | W 166 FT CE |
| Lens | PC clear | PC clear | PC clear | PC grey 23% |
| | UV400 | UV400 | UV400 | UV400 |
| | 2C-1.2 W1 FTKN CE | 2C-1.2 W1 FTKN CE | 2C-1.2 W1 FTKN CE | 5-2.5 W1 FTKN CE |
| Weight | 24 g | 28 g | 30 g | 24 g |
| Order quantity multiples | 10 PC | 10 PC | 10 PC | 10 PC |



uvex x-fit · uvex x-fit guard



uvex x-fit

- classic, close fitting safety spectacle with extension kit options
- frameless lens design for a wide field of vision
 adjustment for every head and facial shape with the optional uvex Comfort Slider - a multi-stage temple inclination that allows
- wearers to achieve their own comfortable wearing position
 modular system allows functional accessories to be attached enhancing the ability to get on with the job
- nose bridge designed for all-day comfort

- robust polycarbonate lens with uvex's proven supravision coating technology – permanent anti-fog and scratch-resistant lens
- UV400 100% protection against dangerous UVA and UVB radiation up to 400 nm
- optional clip-in frame seal provides extra protection against particles, dirt and dust
- metal-free

| uvex x-fit | | | | | uvex x-fit guard | | |
|-------------------------|------------------|-------------------|-------------------|-------------------|---------------------|--------------------|------------------|
| Art. no. | 9199085 | 9199285 | 9199265 | 9199415 | 9199180 | 9199286 | 9199280 |
| Version | uvex supravision | uvex supravision | uvex supravision | uvex supravision | uvex supravision | uvex supravision | uvex supravision |
| | sapphire | excellence | excellence | ETC | excellence | excellence | excellence |
| | | | | | incl. clip-in frame | contrast-enhancing | sunglare filter |
| Standard | EN 166, EN 170 | EN 166, EN 170 | EN 166, EN 170 | EN 166, EN 170 | EN 166, EN 170 | EN 166, EN 170 | EN 166, EN 172 |
| Frame | grey translucent | grey translucent | blue translucent | blue translucent | grey translucent | grey translucent | grey translucent |
| | W 166 FT CE | W 166 FT CE | W 166 FT CE | W 166 FT CE | W 166 FT CE | W 166 FT CE | W 166 FT CE |
| Lens | PC clear | PC clear | PC clear | PC clear | PC clear | PC amber | PC grey 23% |
| | UV400 | UV400 | UV400 | UV400 | UV400 | UV400 | UV400 |
| | 2C-1.2 W1 FTK CE | 2C-1.2 W1 FTKN CE | 2C-1.2 W1 FTKN CE | 5-2.5 W1 FTKN CE |
| Weight | 23 g | 23 g | 23 g | 23 g | 29 g | 23 g | 23 g |
| Order quantity multiple | s 10 PC | 10 PC | 10 PC | 10 PC | 10 PC | 10 PC | 10 PC |

| | clip-in frame | uvex x-fit pro Headband |
|--------------------------|------------------------------|--------------------------------|
| Art. no. | 9199001 | 9958023 |
| Version | clip-in frame for uvex x-fit | for attaching on uvex x-fit |
| | and uvex x-fit pro | and uvex x-fit pro, metal-free |
| Colour | black | black |
| Order unit/ | | |
| Order quantity multiples | 20 PC | 10 PC |
| | | |

Safety Spectacles

uvex sportstyle · uvex sportstyle planet



uvex sportstyle

 sporty, lightweight safety spectacle with a contoured lens that will fit narrow and wider faces equally well

 the combination of soft padding around the brow with ergonomically shaped side arms and soft-grip temple ends provide a comfortable, secure fit without pressure

- soft, adjustable nose pad allows spectacle to be adapted to the wearer to deliver a comfortable, non-slip and pressure-free fit
- robust polycarbonate lens with uvex's proven supravision coating
- technology permanent anti-fog and scratch-resistant lens • UV400 – 100% protection against dangerous UV radiation up to 400 nm
- a sustainable benefit: lenses can be replaced when required

| Art. no. 9193080 9193265 9193295 9193415 9193376 9193395 Replacement lens - - - 9193255 - uvex supravision plus oil & gas uvex supravision excellence uvex supravision excelle | | | | | | | |
|--|--------------------------|------------------------------|-----------------------------|----------------------------|--------------------------|--------------------------------|-----------------------------|
| Replacement lens9193255-Versionuvex supravision plusuvex supravision excellenceuvex supravision excellenceuvex supravision ETCuvex supravision extremeuvex supravision extremeStandardEN 166, EN 170EN 166, EN 1 | uvex sportstyle | | | uvex sportstyle planet | | | uvex sportstyle planet |
| Versionuvex supravision plus oil & gasuvex supravision excellenceuvex supravision excellenceuvex supravision ETCuvex supravision extremeuvex supravision extremeStandardEN 166, EN 170EN 166, EN 172EN 166, EN 170EN 166, EN 172EN 166, EN 170EN 166, EN 170EN 166, EN 170EN 166, EN 172EN 166 | | 9193080 | 9193265 | 9193295 | 9193415 | | 9193395 |
| oil & gasintervent of the second | | - | - | - | - | | - |
| Standard EN 166, EN 170 Frame black, grey black, lime beige, green black, blue black, petrol anthracite, jade W 166 FT CE Lens PC clear PC clear <th>Version</th> <th>uvex supravision plus</th> <th>uvex supravision excellence</th> <th>uvex supravision excellenc</th> <th>e uvex supravision ETC</th> <th>uvex supravision extreme</th> <th>uvex supravision extreme</th> | Version | uvex supravision plus | uvex supravision excellence | uvex supravision excellenc | e uvex supravision ETC | uvex supravision extreme | uvex supravision extreme |
| Frameblack, greyblack, limebeige, greenblack, blueblack, blueblack, petrolanthracite, jadeLensPC clearPC clear </th <th></th> <th>oil & gas</th> <th></th> <th></th> <th></th> <th></th> <th></th> | | oil & gas | | | | | |
| W 166 FT CE P C clear | Standard | EN 166, EN 170 | EN 166, EN 170 | EN 166, EN 170 | EN 166, EN 170 | EN 166, EN 170 | EN 166, EN 170 |
| LensPC clearPC clear <th>Frame</th> <th>black, grey</th> <th>black, lime</th> <th>beige, green</th> <th>black, blue</th> <th>black, petrol</th> <th>anthracite, jade</th> | Frame | black, grey | black, lime | beige, green | black, blue | black, petrol | anthracite, jade |
| UV400 2C-12 WI FTKN CEUV400UV400UV400UV400UV400UV400Weight 23 g23 g </th <th></th> <th>W 166 FT CE</th> | | W 166 FT CE | W 166 FT CE | W 166 FT CE | W 166 FT CE | W 166 FT CE | W 166 FT CE |
| 2C-1.2 W1 FTKN CE2C-1.2 W1 FTKN CE2C | Lens | PC clear | PC clear | PC clear (mass balanced) | PC clear | PC clear | PC clear (mass balanced) |
| Weight Order quantity multiples23 g23 g< | | UV400 | UV400 | UV400 | UV400 | UV400 | UV400 |
| Order quantity multiples10 PC10 PC10 PC10 PC10 PC10 PC10 PC10 PCuvex sportstyleArt. no.919383891930649193223919328091938889193880Versionuvex supravision ARuvex supravision extremeuvex supravision variomaticStandardEN 166, EN 170EN 166, EN 172EN 166, EN | | 2C-1.2 W1 FTKN CE | 2C-1.2 W1 FTKN CE | 2C-1.2 W1 FTKN CE | 2C-1.2 W1 FTKN CE | 2C-1.2 W1 FTKN CE | 2C-1.2 W1 FTKN CE |
| Art. no.919383891930649193223919328091938889193880Versionuvex supravision AR super anti-reflective lensesuvex supravision extreme sunglare filteruvex supravision extreme sunglare filteranti-fog on the inside sunglare filter, silver mirror self-tinting lensesStandardEN 166, EN 170EN 166, EN 172EN 166, EN 170Frameblack, bluewhite, blackwhite, blackwhite, blackwhite, blackwhite, blackblack, anthraciteUv400UV400UV400UV400UV400UV400UV400UV400UV400Uv400UV400UV400UV400UV400UV400UV400Uv400< | Weight | 23 g | 23 g | 23 g | 23 g | 23 g | 23 g |
| Art. no.919383891930649193223919328091938889193880Versionuvex supravision ARuvex supravision extremesunglare filtersunglare filtersunglar | Order quantity multiples | 10 PC | 10 PC | 10 PC | 10 PC | 10 PC | 10 ST |
| Art. no.919383891930649193223919328091938889193880Versionuvex supravision ARuvex supravision extremesunglare filtersunglare filtersunglar | | | | | | | |
| Versionuvex supravision AR super anti-reflective lensesuvex supravision extreme sunglare filteruvex supravision extreme sunglare filteruvex supravision extreme sunglare filteranti-fog on the inside sunglare filter, silver mirroruvex supravision variomatic sunglare filterStandardEN 166, EN 170EN 166, EN 172EN 166, EN 17 | uvex sportstyle | | | | | | |
| super anti-reflective lensessunglare filtersunglare filtersunglare filtersunglare filtersunglare filtersunglare filter, silver mirrorself-tinting lensesStandardEN 166, EN 170EN 166, EN 172EN 160, EN 172EN 166, EN 172EN 166, EN 172EN 160, E | Art. no. | 9193838 | 9193064 | 9193223 | 9193280 | 9193888 | 9193880 |
| Standard EN 166, EN 170 EN 166, EN 172 EN 160, EN 17 | Version | uvex supravision AR | uvex supravision extreme | uvex supravision extreme | uvex supravision extreme | anti-fog on the inside | uvex supravision variomatic |
| Frame black, blue white, black white, black white, black white, black white, black white, black black, anthracite W 166 FT CE W 160 FT CE UV400 2.12 W1 FTKN CE 5-2.5 W1 FTKN CE 5-2.5 W1 FTKN CE 5-3.1 W1 FTN CE 2.12 W1 FTKN CE 2.12 W1 FTKN CE 2.3 g 2.3 g 2.3 g 2.3 g 2.3 g <th></th> <th>super anti-reflective lenses</th> <th>sunglare filter</th> <th>sunglare filter</th> <th>sunglare filter</th> <th>sunglare filter, silver mirror</th> <th>self-tinting lenses</th> | | super anti-reflective lenses | sunglare filter | sunglare filter | sunglare filter | sunglare filter, silver mirror | self-tinting lenses |
| W 166 FT CE PC light green PC light green PC light green PU 400 UV400 | Standard | EN 166, EN 170 | EN 166, EN 172 | EN 166, EN 172 | EN 166, EN 172 | EN 166, EN 172 | EN 166, EN 170 |
| Lens PC Clear PC CBR65 PC CBR23 PC grey 23% PC silver mirror, grey PC light green UV400 UV400 <th>Frame</th> <th>black, blue</th> <th>white, black</th> <th>white, black</th> <th>white, black</th> <th>white, black</th> <th>black, anthracite</th> | Frame | black, blue | white, black | white, black | white, black | white, black | black, anthracite |
| UV400 UV400 UV400 UV400 UV400 UV400 2C-1.2 W1 FT CE 5-1.4 W1 FTKN CE 5-2.5 W1 FTKN CE 5-2.5 W1 FTKN CE 5-3.1 W1 FTN CE 2-1.2 W1 FT KN CE Weight 23 g 23 g 23 g 23 g 23 g 23 g | | W 166 FT CE | W 166 FT CE | W 166 FT CE | W 166 FT CE | W 166 FT CE | W 166 FT CE |
| 2C-1.2 W1 FT CE 5-1.4 W1 FTKN CE 5-2.5 W1 FTKN CE 5-2.5 W1 FTKN CE 5-3.1 W1 FTN CE 2-1.2 W1 FTKN CE Weight 23 g | Lens | PC clear | PC CBR65 | PC CBR23 | PC grey 23% | PC silver mirror, grey | PC light green |
| Weight 23 g | | UV400 | UV400 | UV400 | UV400 | UV400 | UV400 |
| | | 2C-1.2 W1 FT CE | 5-1.4 W1 FTKN CE | 5-2.5 W1 FTKN CE | 5-2.5 W1 FTKN CE | 5-3.1 W1 FTN CE | 2-1.2 W1 FTKN CE |
| | Weight | 23 g | 23 g | 23 g | 23 g | 23 g | 23 g |
| | Order quantity multiples | 10 PC | 10 PC | | 10 PC | 10 PC | PC |
| | | | | | | | |



ξ

Safety Spectacles



uvex pheos cx2

uvex pheos cx2

- · sporty looking safety spectacle with high wearer acceptance
- x-tended eyeshield: soft seal frame technology wraps around the brow providing protection from particle ingress • ergonomically shaped side arms with soft-grip temple ends
- provide a comfortable, secure fit without pressure
- soft, flexible nose pad adapts to the wearer, delivering a non-slip and pressure-free fit
- robust polycarbonate lens with uvex's proven supravision coat-
- ing technology permanent anti-fog and scratch-resistant lens UV400 100% protection against dangerous UV radiation up
- to 400 nm
- metal-free



| ArtNr. | 9198275 | 9198257 | 9198258 | 9198013 | 9198415 | 9198376 | 9198015 |
|--|--|--|---|--|---|---|------------------|
| /ersion | uvex supravision | uvex supravision | uvex supravision | uvex supravision | uvex supravision | uvex supravision | uvex supravision |
| | sapphire | excellence | excellence | excellence | ETC | extreme | excellence |
| | | | | | | | contrast-enhance |
| Standard | EN 166, EN 170 | EN 166, EN 170 | EN 166, EN 170 | EN 166, EN 170 | EN 166, EN 170 | EN 166, EN 170 | EN 166, EN 170 |
| rame | blue, grey | blue, grey | red, grey | silver, black | anthracite, blue | silver, black | silver, black |
| | W 166 FT CE | W 166 FT CE | W 166 FT CE | W 166 FT CE | W 166 FT CE | W 166 FT CE | W 166 FT CE |
| ens | PC clear | PC clear | PC clear | PC clear | PC clear | PC clear | PC amber |
| | UV400 | UV400 | UV400 | UV400 | UV400 | UV400 | UV400 |
| | 2C-1.2 W1 FTK CE | 2C-1.2 W1 FTKN CE | 2C-1.2 W1 FTKN CE | 2C-1.2 W1 FTKN CE | 2C-1.2 W1 FTKN CE | 2C-1.2 W1 FTKN CE | 2C-1.2 W 1 FTKN |
| Veight | 28 g | 28 g | 28 g | 28 g | 28 g | 28 g | 28 g |
| | | | | | | | |
| Order quantity multiples | 10 PC | 10 PC | 10 PC | 10 PC | 10 PC | 10 PC | 10 PC |
| | 10 PC | 10 PC | 10 PC | 10 PC | 10 PC | 10 PC | 10 PC |
| ivex pheos cx2 | | | | | | | 10 PC |
| ivex pheos cx2 Art. no. | 9198064 | 9198223 | 9198237 | 9198014 | 9198230 | 9198888 | 10 PC |
| ivex pheos cx2 | 9198064 uvex supravision | 9198223 uvex supravision | 9198237 uvex supravision | 9198014 uvex supravision | 9198230 uvex supravision | 9198888 anti-fog on the inside | 10 PC |
| ivex pheos cx2 Art. no. | 9198064 uvex supravision excellence | 9198223 uvex supravision excellence | 9198237 uvex supravision excellence | 9198014 uvex supravision excellence | 9198230 uvex supravision excellence | 9198888 | 10 PC |
| ivex pheos cx2 Art. no. | 9198064 uvex supravision excellence sunglare filter | 9198223 uvex supravision | 9198237 uvex supravision excellence sunglare filter | 9198014 uvex supravision | 9198230 uvex supravision excellence sunglare filter | 9198888 anti-fog on the inside sunglare filter, silver mirror | 10 PC |
| ivex pheos cx2 Art. no. /ersion | 9198064 uvex supravision excellence sunglare filter EN 166, EN 172 | 9198223 uvex supravision excellence sunglare filter | 9198237 uvex supravision excellence | 9198014 uvex supravision excellence sunglare filter | 9198230 uvex supravision excellence sunglare filter EN 166, EN 172 | 9198888 anti-fog on the inside sunglare filter, | 10 PC |
| Ivex pheos cx2 Art. no. /ersion | 9198064 uvex supravision excellence sunglare filter | 9198223 uvex supravision excellence sunglare filter EN 166, EN 172 | 9198237 uvex supravision excellence sunglare filter EN 166, EN 172 | 9198014 uvex supravision excellence sunglare filter EN 166, EN 172 | 9198230 uvex supravision excellence sunglare filter | 9198888 anti-fog on the inside sunglare filter, silver mirror EN 166, EN 172 | 10 PC |
| Ivex pheos cx2 Art. no. /ersion | 9198064 uvex supravision excellence sunglare filter EN 166, EN 172 white, black | 9198223 uvex supravision excellence sunglare filter EN 166, EN 172 white, black | 9198237 uvex supravision excellence sunglare filter EN 166, EN 172 white, black | 9198014 uvex supravision excellence sunglare filter EN 166, EN 172 silver, black | 9198230 uvex supravision excellence sunglare filter EN 166, EN 172 white, black | 9198888 anti-fog on the inside sunglare filter, silver mirror EN 166, EN 172 silver, black | 10 PC |
| ivex pheos cx2 Art. no. fersion Standard frame | 9198064 uvex supravision excellence sunglare filter EN 166, EN 172 white, black W 166 FT CE | 9198223 uvex supravision excellence sunglare filter EN 166, EN 172 white, black W 166 FT CE | 9198237 uvex supravision excellence sunglare filter EN 166, EN 172 white, black W 166 FT CE | 9198014 uvex supravision excellence sunglare filter EN 166, EN 172 silver, black W 166 FT CE | 9198230 uvex supravision excellence sunglare filter EN 166, EN 172 white, black W 166 FT CE | 9198888 anti-fog on the inside sunglare filter, silver mirror EN 166, EN 172 silver, black W 166 FT CE | 10 PC |
| ivex pheos cx2 Art. no. fersion Standard frame | 9198064 uvex supravision excellence sunglare filter EN 166, EN 172 white, black W 166 FT CE PC CBR65 | 9198223 uvex supravision excellence sunglare filter EN 166, EN 172 white, black W 166 FT CE PC CBR23 | 9198237 uvex supravision excellence sunglare filter EN 166, EN 172 white, black W 166 FT CE PC grey 23% | 9198014 uvex supravision excellence sunglare filter EN 166, EN 172 silver, black W 166 FT CE PC grey 23% | 9198230 uvex supravision excellence sunglare filter EN 166, EN 172 white, black W 166 FT CE PC grey 12% | 9198888 anti-fog on the inside sunglare filter, silver mirror EN 166, EN 172 silver, black W 166 FT CE PC silver mirror, grey | 10 PC |
| ivex pheos cx2 Art. no. fersion Standard frame | 9198064 uvex supravision excellence sunglare filter EN 166, EN 172 white, black W 166 FT CE PC CBR65 UV400 | 9198223 uvex supravision excellence sunglare filter EN 166, EN 172 white, black W 166 FT CE PC CBR23 UV400 | 9198237 uvex supravision excellence sunglare filter EN 166, EN 172 white, black W 166 FT CE PC grey 23% UV400 | 9198014 uvex supravision excellence sunglare filter EN 166, EN 172 silver, black W 166 FT CE PC grey 23% UV400 | 9198230 uvex supravision excellence sunglare filter EN 166, EN 172 white, black W 166 FT CE PC grey 12% UV400 | 9198888 anti-fog on the inside sunglare filter, silver mirror EN 166, EN 172 silver, black W 166 FT CE PC silver mirror, grey UV400 | 10 PC |

MADE IN GERMANY

Safety Spectacles

uvex pheos · uvex pheos guard



uvex pheos

• sporty, timeless safety spectacle; frameless design allowing for an extra-large field of vision

9192180

- ergonomically shaped side arms with soft-grip temple ends provide a comfortable, secure fit without pressure
- nose bridge designed for all-day comfort
- robust polycarbonate lens with uvex's proven supravision coating
- technology permanent anti-fog and scratch-resistant lens
- UV400 100% protection against dangerous UV radiation up to 400 nm
- optional clip-in frame seal provides extra protection against particles, dirt and dust
- headband option holds eyewear in place during overhead or work in confined spaces
- available as standard size or narrow version
- fits the uvex IES
- metal-free

| uvex pheos | | | | uvex pheos CB | | |
|--------------------------|-----------------------|-----------------------------|-----------------------------|-----------------------------|----------------------|--------------------------|
| Art. no. | 9192080 | 9192225 | 9192215 | 9192485 | 9192415 | 9192280 |
| Version | uvex supravision plus | uvex supravision excellence | uvex supravision excellence | uvex supravision excellence | uvex supravision ETC | uvex supravision extreme |
| | standard size, | standard size | standard size | standard size | standard size | standard size |
| | oil & gas | | | lower nose bridge, | | |
| | | | | high cheekbone design | | |
| | | | | ISO 18526-4:2020 | | |
| Standard | EN 166, EN 170 | EN 166, EN 170 | EN 166, EN 170 | EN 166, EN 170 | EN 166, EN 170 | EN 166, EN 170 |
| Frame | black, grey | black, green | light grey, grey | black, grey | anthracite, blue | black, grey |
| | W 166 FT CE | W 166 FT CE | W 166 FT CE | W 166 FT CE | W 166 FT CE | W 166 FT CE |
| Lens | PC clear | PC clear | PC clear | PC clear | PC farblos | PC clear |
| | UV400 | UV400 | UV400 | UV400 | UV400 | UV400 |
| | 2C-1.2 W1 FTKN CE | 2C-1.2 W1 FTKN CE | 2C-1.2 W1 FTKN CE | 2C-1.2 W1 FTKN CE | 2C-1.2 W1 FTKN CE | 2C-1.2 W1 FTKN CE |
| Weight | 29 g | 29 g | 29 g | 30 g | 29 g | 29 g |
| Order quantity multiples | 10 PC | 10 PC | 10 PC | 10 PC | 10 PC | 10 PC |
| | | | | | | |

| uvex pheos | | | | | uvex pheos guard |
|--------------------------|-----------------------------|-----------------------------|----------------------------|--------------------------------|----------------------------------|
| Art. no. | 9192385 | 9192285 | 9192281 | 9192881 | 9192180 |
| Version | uvex supravision excellence | uvex supravision excellence | e uvex supravision extreme | anti-fog on the inside | uvex supravision extreme |
| | standard size, | standard size, | standard size, | standard size, | standard size |
| | contrast-enhancing | sunglare filter | sunglare filter | sunglare filter, silver mirror | incl. clip-in frame and headband |
| Standard | EN 166, EN 170 | EN 166, EN 172 | EN 166, EN 172 | EN 166, EN 172 | EN 166, EN 170 |
| Frame | black, yellow | black, grey | black, grey | light grey, grey | black, grey |
| | W 166 FT CE | W 166 FT CE | W 166 FT CE | W 166 FT CE | W 166 FT CE |
| Lens | PC amber | PC grey 23% | PC grey 23% | PC silver mirror grey | PC clear |
| | UV400 | UV400 | UV400 | UV400 | UV400 |
| | 2C-1.2 W1 FTKN CE | 5-2.5 W1 FTKN CE | 5-2.5 W1 FTKN CE | 5-1.7 W1 FTN CE | 2C-1.2 W1 FTKN CE |
| Weight | 29 g | 29 g | 29 g | 29 g | 46 g |
| Order quantity multiples | 10 PC | 10 PC | 10 PC | 10 PC | 10 PC |

ζ





Accessories: 9192001 / 9192002 Clip-in frame uvex pheos / uvex pheos s



Accessories: 9958020 Headband uvex pheos / uvex pheos s

| 146 mm uvex pheos | |
|-----------------------|---|
| 138 mm uvex pheos s | - |
| | |
| | |

| | uvex pheos s | | | | uvex pheos s guard |
|--------------------------|-------------------|-------------------|-------------------|------------------|--------------------------|
| Art. no. | 9192725 | 9192785 | 9192282 | 9192283 | 9192680 |
| Version | uvex supravision | uvex supravision | uvex supravision | uvex supravision | uvex supravision extreme |
| | excellence | excellence | extreme | extreme | narrow version |
| | narrow version | narrow version | narrow version | narrow version, | incl. clip-in frame |
| | | | | sunglare filter | and headband |
| Standard | EN 166, EN 170 | EN 166, EN 170 | EN 166, EN 170 | EN 166, EN 172 | EN 166, EN 170 |
| Frame | white, green | anthracite, grey | anthracite, grey | anthracite, grey | anthracite, grey |
| | W 166 FT CE | W 166 FT CE | W 166 FT CE | W 166 FT CE | W 166 FT CE |
| Lens | PC clear | PC clear | PC clear | PC grey 23% | PC clear |
| | UV400 | UV400 | UV400 | UV400 | UV400 |
| | 2C-1.2 W1 FTKN CE | 2C-1.2 W1 FTKN CE | 2C-1.2 W1 FTKN CE | 5-2.5 W1 FTKN CE | 2C-1.2 W1 FTKN CE |
| Weight | 28 g | 28 g | 28 g | 28 g | 45 g |
| Order quantity multiples | 10 PC | 10 PC | 10 PC | 10 PC | 10 PC |
| | | | | | |
| | | | | | |
| | | | | | |
| Accessories | | | | | |

| ACCESSONES | | | |
|--------------------------|-------------------|-------------------|----------------|
| Art. no. | 9192001 | 9192002 | 9958020 |
| Version | clip-in frame for | clip-in frame for | headband for |
| | uvex pheos | uvex pheos s | uvex pheos and |
| | standard size | narrow version | uvex pheos s |
| Colour | black | black | grey, black |
| Order quantity multiples | 20 PC | 20 PC | 10 PC |
| | | | |

Safety Spectacles

uvex i-3 · uvex i-3 guard



uvex i-3

- adjustable, multi-feature premium quality safety spectacle
- the combination of soft padding around the brow with ergonomically shaped side arms and soft-grip temple ends provide a comfortable, secure fit without pressure
- side arms with multi-incline points allow for a high level of individualisation to ensure a good fit for all facial shapes and head widths
- soft, adjustable nose pad allows spectacle to be adapted to the wearer to deliver a comfortable, non-slip and pressure-free fit
- robust polycarbonate lens with uvex's proven supravision coating technology permanent anti-fog and scratch-resistant lens
- UV400 100% protection against dangerous UV radiation up to 400 nm
 optional clip-in frame seal provides extra protection against particles, dirt and dust
- available as standard size or narrow version
- a sustainable benefit: lenses can be replaced when required
- metal-free

| uvex i-3 | | | | | uvex i-3 guard |
|--------------------------|---|--|--|---|---|
| Art. no. | 9190270 | 9190175 | 9190275 | 9190280 | 9190180 |
| Replacement lens | - | - | 9190258 | 9190258 | 9190258 |
| Version | uvex supravision sapphire | uvex supravision plus | uvex supravision excellence | uvex supravision excellence | uvex supravision excellence |
| | standard size | standard size | standard size | standard size | standard size |
| | | oil & gas | | | incl. clip-in frame |
| Standard | EN 166, EN 170 | EN 166, EN 170 | EN 166, EN 170 | EN 166, EN 170 | EN 166, EN 170 |
| Frame | anthracite, blue | black, light grey | anthracite, blue | black, light grey | anthracite, blue |
| | W 166 FT CE | W 166 FT CE | W 166 FT CE | W 166 FT CE | W 166 FT CE |
| Lens | PC clear | PC clear | PC clear | PC clear | PC clear |
| | UV400 | UV400 | UV400 | UV400 | UV400 |
| | 2C-1.2 W1 FTK CE | 2C-1.2 W1 FTKN CE | 2C-1.2 W1 FTKN CE | 2C-1.2 W1 FTKN CE | 2C-1.2 W1 FTKN CE |
| Weight | 30 g | 30 g | 30 g | 30 g | 36 g |
| Order quantity multiples | 10 PC | 10 PC | 10 PC | 10 PC | 10 PC |
| uvex i-3 | | | | | |
| Art. no. | 9190839 | 9190838 | 9190281 | 9190885 | 9190880 |
| Version | uvex supravision AR | uvex supravision AR | uvex supravision excellence | anti-fog on the inside | |
| | | | | | LIVEX SUBRAVISION VARIOMATIC |
| | standard size | | | | uvex supravision variomatic standard size |
| | standard size | standard size | standard size | standard size | standard size |
| | standard size super anti-reflective lenses | | | | |
| Standard | super anti-reflective | standard size super anti-reflective | standard size | standard size sunglare filter, | standard size |
| | super anti-reflective lenses | standard size super anti-reflective lenses | standard size sunglare filter EN 166, EN 172 | standard size sunglare filter, silver mirror EN 166, EN 172 | standard size self-tinting lenses |
| Standard Frame | super anti-reflective lenses EN 166, EN 170 | standard size super anti-reflective lenses EN 166, EN 170 | standard size sunglare filter | standard size sunglare filter, silver mirror | standard size self-tinting lenses EN 166, EN 170 |
| | super anti-reflective lenses EN 166, EN 170 black, blue | standard size super anti-reflective lenses EN 166, EN 170 black, blue | standard size sunglare filter EN 166, EN 172 black, light grey | standard size sunglare filter, silver mirror EN 166, EN 172 black, light grey | standard size self-tinting lenses EN 166, EN 170 black, anthracite |
| Frame | super anti-reflective lenses EN 166, EN 170 black, blue W 166 FT CE | standard size super anti-reflective lenses EN 166, EN 170 black, blue W 166 FT CE | standard size sunglare filter EN 166, EN 172 black, light grey W 166 FT CE | standard size sunglare filter, silver mirror EN 166, EN 172 black, light grey W 166 FT CE | standard size self-tinting lenses EN 166, EN 170 black, anthracite W 166 FT CE |
| Frame | super anti-reflective lenses EN 166, EN 170 black, blue W 166 FT CE PC clear | standard size super anti-reflective lenses EN 166, EN 170 black, blue W 166 FT CE PC clear | standard size sunglare filter EN 166, EN 172 black, light grey W 166 FT CE PC grey 23% | standard size sunglare filter, silver mirror EN 166, EN 172 black, light grey W 166 FT CE PC silver mirror grey | standard size self-tinting lenses EN 166, EN 170 black, anthracite W 166 FT CE PC light green |
| Frame | super anti-reflective lenses EN 166, EN 170 black, blue W 166 FT CE PC clear UV400 | standard size super anti-reflective lenses EN 166, EN 170 black, blue W 166 FT CE PC clear UV400 | standard size sunglare filter EN 166, EN 172 black, light grey W 166 FT CE PC grey 23% UV400 | standard size sunglare filter, silver mirror EN 166, EN 172 black, light grey W 166 FT CE PC silver mirror grey UV400 | standard size self-tinting lenses EN 166, EN 170 black, anthracite W 166 FT CE PC light green UV400 |
| Frame Lens | super anti-reflective lenses EN 166, EN 170 black, blue W 166 FT CE PC clear UV400 2C-1.2 W1 FT CE | standard size super anti-reflective lenses EN 166, EN 170 black, blue W 166 FT CE PC clear UV400 2C-1.2 W1 FT CE | standard size sunglare filter EN 166, EN 172 black, light grey W 166 FT CE PC grey 23% UV400 5-2.5 W1 FTKN CE | standard size sunglare filter, silver mirror EN 166, EN 172 black, light grey W 166 FT CE PC silver mirror grey UV400 5-3.1 W1 FTN CE | standard size self-tinting lenses EN 166, EN 170 black, anthracite W 166 FT CE PC light green UV400 2-1.2 W1 FTKN CE |



 $\left\{ \right\}$

Safety Spectacles uvex i-3 s · uvex i-3 s guard

9190680

9190288





Accessories: 9190001 Clip-in frame for uvex i-3 and uvex i-3 s

| 144 mm uvex i-3 | |
|-------------------|---|
| 135 mm uvex i-3 s | - |
| | Ì |
| | } |


| uvex i-3 s | | uvex i-3 s guard | | | Accessories |
|--------------------------|-----------------------------|-----------------------------|-----------------------------|-----------------------------|----------------------------|
| Art. no. | 9190265 | 9190680 | 9190085 | 9190288 | 9190001 |
| Replacement lens | 9190257 | 9190257 | - | - | - |
| Version | uvex supravision excellence | uvex supravision excellence | uvex supravision excellence | uvex supravision excellence | clip-in frame for uvex i-3 |
| | narrow version | narrow version | narrow version | narrow version | and uvex i-3 s |
| | | incl. clip-in frame | contrast-enhancing | sunglare filter | |
| Standard | EN 166, EN 170 | EN 166, EN 170 | EN 166, EN 170 | EN 166, EN 172 | |
| Frame | anthracite, lime | anthracite, blue | anthracite, yellow | anthracite, lime | black |
| | W 166 FT CE | |
| Lens | PC clear | PC clear | PC amber | PC grey 23 % | |
| | UV400 | UV400 | UV400 | UV400 | |
| | 2C-1.2 W1 FTKN CE | 2C-1.2 W1 FTKN CE | 2C-1.2 W1 FTKN CE | 5-2.5 W1 FTKN CE | |
| Weight | 29 g | 35 g | 29 g | 29 g | 6 g |
| Order quantity multiples | 10 PC | 10 PC | 10 PC | 10 PC | 20 PC |
| | | | | | |

UVEX Safety eyewear Also ideal for narrow faces

The geometries of our spectacles are as different as the faces of the people who wear them. The products in this range can be worn by anyone, but are particularly suitable for people with narrow faces.

Their optimal fit and the fact that they can be adjusted mean that these safety spectacles fit different head shapes perfectly, providing the wearer with the best possible protection from particles, sparks or dust.

uvex has a range of safety eyewear to meet every need including those with narrower faces.

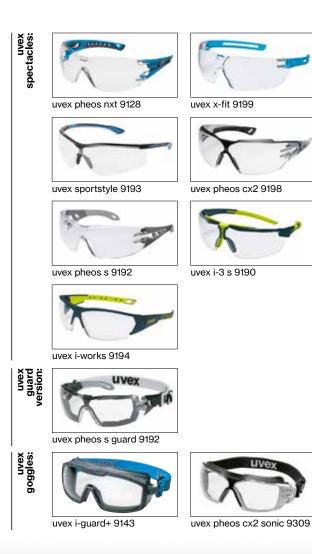





ζ

Safety Spectacles



uvex i-works

- sporty, robust safety spectacle, available in a range of lens shades
 ergonomically shaped side arms with soft-grip temple ends provide a comfortable, secure fit without pressure
- nose bridge designed for all-day comfort
- robust polycarbonate lens with uvex's proven supravision coating technology – permanent anti-fog and scratch-resistant lens
- UV400 100% protection against dangerous UV radiation up to 400 nm
 fits the uvex IES
- a sustainable benefit: lenses can be replaced when required


metal-free

| uvex i-works | | | | | |
|--------------------------|-----------------------------|-----------------------------|-----------------------------|-----------------------------|------------------------|
| Art. no. | 9194171 | 9194265 | 9194365 | 9194270 | 9194885 |
| Replacement lens | 9194255 | 9194255 | - | - | - |
| Version | uvex supravision excellence | uvex supravision excellence | uvex supravision excellence | uvex supravision excellence | anti-fog on the inside |
| | | | contrast-enhancing | sunglare filter | silver mirror |
| Standard | EN 166, EN 170 | EN 166, EN 170 | EN 166, EN 170 | EN 166, EN 172 | EN 166, EN 172 |
| Frame | anthracite, blue | anthracite, lime | black, yellow | anthracite, grey | anthracite, grey |
| | W 166 FT CE | W 166 FT CE |
| Lens | PC clear | PC clear | PC amber | PC grey 23% | PC silver mirror grey |
| | UV400 | UV400 | UV400 | UV400 | UV400 |
| | 2C-1.2 W1 FTKN CE | 2C-1.2 W1 FTKN CE | 2C-1.2 W1 FTKN CE | 5-2.5 W1 FTKN CE | 5-1.7 W1 FTN CE |
| Weight | 26 g | 26 g | 26 g | 26 g | 26 g |
| Order quantity multiples | 10 PC | 10 ST | 10 PC | 10 PC | 10 PC |
| | | | | | |

Safety eyewear – matching your corporate identity Eye protection with "personality"

Give your team an unmistakeable image: uvex safety eyewear offer various options for individual design – from printing your company's logo on the side arms to frames in your company's colours. You can coordinate your protective

equipment perfectly with your corporate identity.

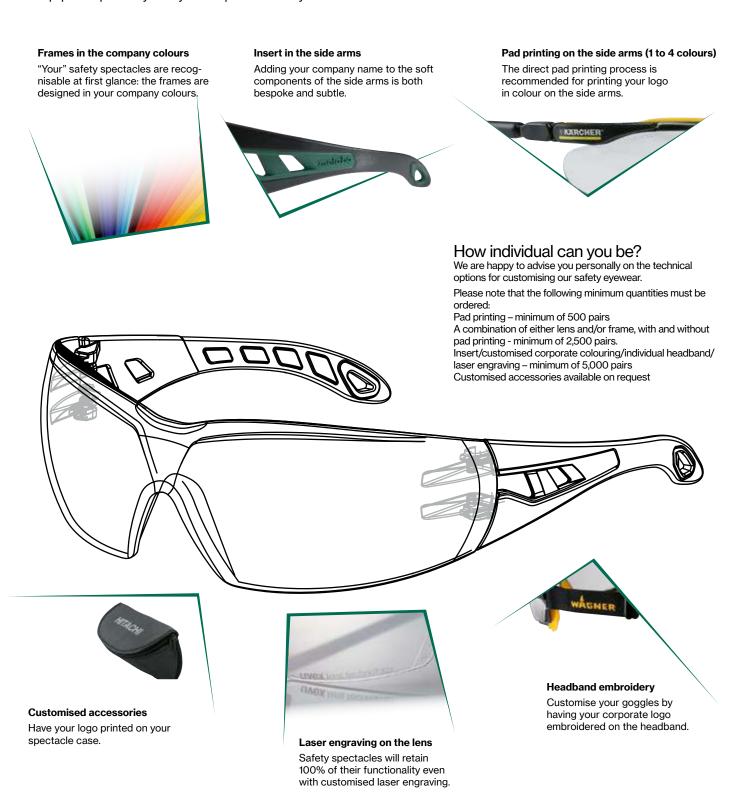



uvex astrospec 2.0





uvex astrospec 2.0

- classic safety spectacle with flat lens for a wide field of vision
- ergonomically shaped side arms with multi-incline points allow for a high level of individualisation to ensure a good fit for all facial shapes and head widths
- side arms with soft-grip temple ends provide a comfortable, secure fit without pressure

nose bridge designed for all-day comfort

- · robust polycarbonate lens with uvex's proven supravision coating technology – permanent anti-fog and scratch-resistant lens • UV400 – 100% protection against dangerous UV radiation up to 400 nm

| uvex astrospec 2.0 | | | | | | Accessories |
|---------------------------|------------------|-------------------|-------------------|--------------------|--------------------|--------------------|
| Art. no. | 9164065 | 9164187 | 9164285 | 9164275 | 9164246 | 6109200 |
| Version | uvex supravision | uvex supravision | uvex supravision | uvex supravision | uvex supravision | RX insert for |
| | sapphire | plus | excellence | extreme | excellence | uvex astrospec 2.0 |
| | | oil & gas | | | sunglare filter | |
| | | | | | | |
| Standard | EN 166, EN 170 | EN 166, EN 170 | EN 166, EN 170 | EN 166, EN 170 | EN 166, EN 172 | |
| Frame | blue, light blue | black, grey | black, lime | anthracite, petrol | neon orange, black | clear |
| | W 166 FT CE | W 166 FT CE | W 166 FT CE | W 166 FT CE | W 166 FT CE | |
| Lens | PC clear | PC clear | PC clear | PC clear | PC grey 23% | |
| | UV400 | UV400 | UV400 | UV400 | UV400 | |
| | 2C-1.2 W1 FTK CE | 2C-1.2 W1 FTKN CE | 2C-1.2 W1 FTKN CE | 2C-1.2 W1 FTKN CE | 5-2.5 W1 FTKN CE | |
| Weight | 42 g | 42 g | 42 g | 42 g | 42 g | 6g |
| Order quantity multiples/ | 10 PC | 10 PC | 10 PC | 10 PC | 10 PC | PC |
| Order unit | | | | | | |

MADE IN GERMANY



Safety Spectacles uvex super g









uvex super g

- sporty, extremely lightweight safety spectacle with innovative temple concept for high levels of comfort
- flexible side arms with soft-grip temple ends provide a comfortable, secure fit without pressure
- soft, flexible nose pad for a non-slip and pressure-free fit
- · robust polycarbonate lens with uvex's proven supravision coating technology – permanent anti-fog and scratch-resistant lens • UV400 – 100% protection against dangerous UV radiation up to 400 nm
- a sustainable benefit: lenses can be replaced when required
- metal-free

| uvex super g | | | | | |
|--------------------------|----------------------|-------------------|-------------------|-------------------|------------------|
| Art. no. | 9172085 | 9172110 | 9172210 | 9172265 | 9172281 |
| Replacement lens | - | - | 9172255 | 9172255 | - |
| Version | uvex supravision | uvex supravision | uvex supravision | uvex supravision | uvex supravision |
| | sapphire | plus | excellence | excellence | excellence |
| | | | | | sunglare filter |
| Standard | EN 166, EN 170 | EN 166, EN 170 | EN 166, EN 170 | EN 166, EN 170 | EN 166, EN 172 |
| Frame | grey metallic, black | clear, grey | clear, grey | navy blue, white | anthracite, lime |
| | W 166 FT CE | W 166 FT CE | W 166 FT CE | W 166 FT CE | W 166 FT CE |
| Lens | PC clear | PC clear | PC clear | PC clear | PC grey 23% |
| | UV400 | UV400 | UV400 | UV400 | UV400 |
| | 2C-1.2 W1 FTK CE | 2C-1.2 W1 FTKN CE | 2C-1.2 W1 FTKN CE | 2C-1.2 W1 FTKN CE | 5-2.5 W1 FTKN CE |
| Weight | 18 g | 18 g | 18 g | 18 g | 18 g |
| Order quantity multiples | 10 PC | 10 PC | 10 PC | 10 PC | 10 PC |



uvex super fit



9178286

uvex super fit

- sporty safety spectacle with slim, flat side arms, making it highly compatible with other PPE
- the combination of soft padding around the brow with ergonomically shaped side arms and soft-grip temple ends provide a comfortable, secure fit without pressure
- soft, adjustable nose pad allows spectacle to be adapted to the wearer to deliver a comfortable, non-slip and pressure-free fit
- · robust polycarbonate lens with uvex's proven supravision coating technology - permanent anti-fog and scratch-resistant lens
- UV400 100% protection against dangerous UV radiation up to 400 nm
- a sustainable benefit: lenses can be replaced when required

| in the sum of Ct | | | | | | |
|--------------------------|---------------------------|-----------------------|-------------------|-------------------|----------------------|------------------|
| uvex super fit | | | | | | |
| Art. no. | 9178065 | 9178185 | 9178265 | 9178315 | 9178415 | 9178286 |
| Replacement lens | - | - | 9172255 | 9172255 | - | - |
| Version | uvex supravision sapphire | uvex supravision plus | uvex supravision | uvex supravision | uvex supravision ETC | uvex supravision |
| | | | excellence | excellence | | excellence |
| | | | | | | sunglare filter |
| Standard | EN 166, EN 170 | EN 166, EN 170 | EN 166, EN 170 | EN 166, EN 170 | EN 166, EN 170 | EN 166, EN 172 |
| Frame | navy blue, white | black, white | navy blue, white | white, lime | white, grey | black, white |
| | W 166 FT CE | W 166 FT CE | W 166 FT CE | W 166 FT CE | W 166 FT CE | W 166 FT CE |
| Lens | PC clear | PC clear | PC clear | PC clear | PC clear | PC grey 23% |
| | UV400 | UV400 | UV400 | UV400 | UV400 | UV400 |
| | 2C-1.2 W1 FTK CE | 2C-1.2 W1 FTKN CE | 2C-1.2 W1 FTKN CE | 2C-1.2 W1 FTKN CE | 2C-1.2 W1 FTN CE | 5-2.5 W1 FTKN CE |
| Weight | 21 g | 21 g | 21 g | 21 g | 21 g | 21 g |
| Order quantity multiples | 10 PC | 10 PC | 10 PC | 10 PC | 10 PC | 10 PC |

MADE IN GERMANY











uvex i-vo

- functional safety spectacle with a wide range of features and adjustment options
- side arms with multi-incline points and length adjustment allow spectacle to be adapted to ensure a good fit for all facial shapes and head widths
- soft-grip temple ends provide a comfortable, secure fit without pressure
- soft, flexible nose pad for a non-slip and pressure-free fit
- robust polycarbonate lens with uvex's proven supravision coating technology permanent anti-fog and scratch-resistant lens
- UV400 100% protection against dangerous UV radiation up to 400 nm

| uvex i-vo | | | | | |
|--------------------------|---------------------------|-----------------------------|-----------------------------|---------------------------|---------------------------|
| Art. no. | 9160065 | 9160265 | 9160275 | 9160520 | 9160076 |
| Version | uvex supravision sapphire | uvex supravision excellence | uvex supravision excellence | uvex supravision sapphire | uvex supravision sapphire |
| | | | | contrast-enhancing | sunglare filter |
| Standard | EN 166, EN 170 | EN 166, EN 170 | EN 166, EN 170 | EN 166, EN 170 | EN 166, EN 172 |
| Frame | blue, orange | blue, orange | black, grey | blue, orange | black, grey |
| | W 166 FT CE | W 166 FT CE | W 166 FT CE | W 166 FT CE | W 166 FT CE |
| Lens | PC clear | PC clear | PC clear | PC amber | PC grey 23% |
| | UV400 | UV400 | UV400 | UV400 | UV400 |
| | 2C-1.2 W1 FTK CE | 2C-1.2 W1 FTKN CE | 2C-1.2 W1 FTKN CE | 2C-1.2 W1 FTK CE | 5-2.5 W1 FTK CE |
| Weight | 33 g | 33 g | 33 g | 33 g | 33 g |
| Order quantity multiples | 10 PC | 10 PC | 10 PC | 10 PC | 10 PC |
| | | | | | |

MADE IN GERMANY







You can find more information at uvex-academy.com







Industrial protective eyewear

A practical introductory seminar on the selection, use and benefits of protective eyewear

- The basic applications of safety eyewear, including which products protect against mechanical dangers, chemical and radiation risks (e.g. welding protection), and products designed for specialised applications
- Demonstration and assessment of the dangers posed by mechanical risks, infrared and ultraviolet radiation (e.g. encountered during welding applications or during the use of chemicals), illustrated by case studies
- Assessment of the risk of eye injury in the workplace
 Explanation of how these risks can be dealt with efficiently in each workplace

- Comprehensive overview of the requirements of industrial safety eyewear, standards, applications, risk assessment and how to care for protective eyewear
- Information on the classification of protection products based on their labelling and the areas of application of the various types of equipment

Target group

Those responsible for the work-related health and safety of employees within a company, e.g. health and safety officers, occupational nurses and specialist purchasers





For more information or to book a place, please visit uvex-academy.de, call +49 (0)911 9736 1710 or email academy@uvex.de



uvex meteor · uvex polavision



uvex meteor

- · classic flat, dual lens safety spectacle with good coverage
- extendable soft-grip side arms offer adaptable, pressure-free comfort and a stable, non-slip fit
- nose bridge designed for all-day comfort
- · robust polycarbonate lens with uvex's proven supravision coating technology - both sides scratch-resistant lens
- UV400 100% protection against dangerous UV radiation up to 400 nm metal-free

| uvex meteor | | |
|--------------------------|---------------------------|--------------------|
| Art. no. | 9134005 | 9134002 |
| Version | uvex supravision sapphire | uncoated |
| | lens 56 mm | lens 56 mm |
| | bridge width 15 mm | bridge width 15 mm |
| Standard | EN 166, EN 170 | EN 166 |
| Frame | grey, transparent | grey transparent |
| | W 166 F CE | W 166 F CE |
| Lens | PC clear | HG clear |
| | UV400 | UV330 |
| | 2C-1.2 W1 FK | W1S |
| Weight | 28 g | 44 g |
| Order quantity multiples | 5 PC | 5 PC |

MADE IN GERMANY



uvex polavision

- · sporty dual lens safety spectacle with polarised filter
- uvex polavision technology protects against reflections and optical irritations outdoors helping to ease eye strain e.g. highly reflective surfaces such as water or glass
- side arms with soft-grip temple ends provide a comfortable, secure fit without pressure
- soft, flexible nose pad for a non-slip and pressure-free fit
 robust polycarbonate lens with UV400 100% protection against dangerous UV radiation up to 400 nm

| uvex polavision | |
|-----------------|---------------------------------|
| Art. no. | 9231960 |
| Version | scratch-resistant on both sides |
| | sunglare filter |
| Standard | EN 166, EN 172 |
| Frame | black, white |
| | W 166 F CE |
| Lens | PC grey 14% |
| | UV400 |
| | 5-3.1 W 1 F CE |
| Weight | 25 g |
| Order unit | PC |
| | |



Safety Spectacles & Overspecs

uvex winner · uvex 9161





uvex winner

- classic, rimless metal safety spectacle
- side arms with soft-grip temple ends provide a secure fit without pressure
- soft, adjustable nose pad for a comfortable, non-slip and pressure-free fit
- robust polycarbonate lens with UV400 100% protection against dangerous UV radiation up to 400 nm

| uvex winner | | | |
|--------------------------|-------------------|--------------------|---------------------------|
| Art. no. | 9159005 | 9159105 | 9159118 |
| Version | scratch-resistant | scratch-resistant, | scratch-resistant, |
| | both sides | anti-fog | anti-fog, sunglare filter |
| Standard | EN 166, EN 170 | EN 166, EN 170 | EN 166, EN 172 |
| Frame | gun | gun | gun |
| | W 166 F CE | W 166 F CE | W 166 F CE |
| Lens | PC clear | PC clear | PC grey 23% |
| | UV400 | UV400 | UV400 |
| | 2-1.2 W1 F CE | 2-1.2 W1 FKN CE | 5-2.5 W1 FKN CE |
| Weight | 29 g | 29 g | 29 g |
| Order quantity multiples | 5 PC | 5 PC | 5 PC |





MADE IN GERMANY

uvex 9161

- robust overspecs for prescription spectacle wearers with flat lens for a wide field of vision
- side arms with multi-incline points and length adjustment allow overspecs to be adapted to ensure a good fit for all facial shapes and head widths (except 9161014)
- soft-grip temple ends provide pressure-free comfort and a stable, non-slip fit (except 9161014)
- nose bridge designed for all-day comfort
- robust polycarbonate lens with uvex's proven supravision coating technology permanent anti-fog and scratch-resistant lens
- UV400 100% protection against dangerous UV radiation up to 400 nm
 metal-free

| uvex 9161 | | | |
|--------------------------|----------------|---------------------------|-----------------------|
| Art. no. | 9161014 | 9161005 | 9161305 |
| Version | uncoated | uvex supravision sapphire | uvex supravision plus |
| Standard | EN 166, EN 170 | EN 166, EN 170 | EN 166, EN 170 |
| Frame | clear | blue, black | blue, black |
| | W 166 F CE | W 166 F CE | W 166 F CE |
| Lens | PC clear | PC clear | PC clear |
| | UV400 | UV400 | UV400 |
| | 2C-1.2 W1 F CE | 2C-1.2 W1 FK CE | 2C-1.2 W1 FKN CE |
| Weight | 51 g | 46 g | 46 g |
| Order quantity multiples | 5 PC | 5 PC | 5 PC |
| | | | |

Overspecs

uvex super OTG · uvex super OTG planet



9169065 9169260



9169295



9169080



9169081

uvex super OTG

• classic overspecs for prescription spectacle wearers with an innovative temple concept and a flat lens that offers a wide field of vision

- flexible side arms with soft-grip temple ends provide a comfortable,
- secure fit without pressure

nose bridge designed for all-day comfort

- robust polycarbonate lens with uvex's proven supravision coating technology permanent anti-fog and scratch-resistant lens
- \bullet UV400 100% protection against dangerous UV radiation up to 400 nm
- $\ensuremath{\cdot}$ a sustainable benefit: lenses can be replaced when required

| metal-free |
|--------------------------------|
|--------------------------------|

| uvex super OTG | | | | uvex super OTG planet | |
|--------------------------|---------------------------|---------------------------|-----------------------------|-----------------------------|---------------------------|
| Art. no. | 9169065 | 9169080 | 9169260 | 9169295 | 9169081 |
| Replacement lens | - | - | 9169255 | - | - |
| Version | uvex supravision sapphire | uvex supravision sapphire | uvex supravision excellence | uvex supravision excellence | uvex supravision sapphire |
| | | | | | sunglare filter |
| Standard | EN 166, EN 170 | EN 166, EN 170 | EN 166, EN 170 | EN 166, EN 170 | EN 166, EN 172 |
| Frame | blue, light grey | black, light grey | blue, light grey | anthracite, jade | black, light grey |
| | W 166 FT CE | W 166 FT CE | W 166 FT CE | W 166 FT CE | W 166 FT CE |
| Lens | PC clear | PC clear | PC clear | PC clear (mass balanced) | PC grey 23% |
| | UV400 | UV400 | UV400 | UV400 | UV400 |
| | 2C-1.2 W1 FTK CE | 2C-1.2 W1 FTK CE | 2C-1.2 W1 FTKN CE | 2C-1.2 W1 FTKN CE | 5-2.5 W1 FTK CE |
| Weight | 37 g | 37 g | 37 g | 37 g | 37 g |
| Order quantity multiples | 8 PC | 8 PC | 8 PC | 8 PC | 8 PC |



Overspecs uvex super f OTG



uvex super f OTG

• classic overspecs for prescription spectacle wearers with a flat lens for a wide field of vision, designed for maximum wearer acceptance

 side arms with soft-grip temple ends provide a comfortable, secure fit without pressure nose bridge designed for all-day comfort

- robust polycarbonate lens with uvex's proven supravision coating technology permanent anti-fog and scratch-resistant lens
- UV400 100 % protection against dangerous UV radiation up to 400 nm • a sustainable benefit: lenses can be replaced when required

| uvex super f OIG | | | | | | | | |
|------------------|------------------|-------------------|-------------------|-------------------|------------------|------------------|------------------|-------------------|
| Art. no. | 9169585 | 9169261 | 9169415 | 9169500 | 9169164 | 9169586 | 9169850 | 9169615 |
| Replacement lens | - | 9169255 | - | - | - | - | - | - |
| Version | uvex supravision | uvex supravision | uvex supravision | uvex supravision | uvex supravision | uvex supravision | uvex supravision | uvex supravision |
| | sapphire | excellence | ETC | clean | excellence | sapphire | variomatic | sapphire |
| | | | | autoclavable | sunglare filter | sunglare filter | | blocks blue light |
| | | | | (20 cycles) | | | | to 525 nm |
| Standard | EN 166, EN 170 | EN 166, EN 170 | EN 166, EN 170 | EN 166, EN 170 | EN 166, EN 172 | EN 166, EN 172 | EN 166, EN 170 | EN 166, EN 170 |
| Frame | black, clear | black, clear | white, light blue | white, light blue | black, clear | black, clear | black, clear | black, clear |
| | W 166 FT CE | W 166 FT CE | W 166 FT CE | W 166 FT CE | W 166 FT CE | W 166 FT CE | W 166 FT CE | W 166 FT CE |
| Lens | PC clear | PC clear | PC clear | PC clear | PC CBR65 | PC grey 23% | PC light green | PC orange |
| | UV400 | UV400 | UV400 | UV400 | UV400 | UV400 | UV400 | UV525 |
| | 2C-1.2 W1 FTK CE | 2C-1.2 W1 FTKN CE | 2C-1.2 W1 FTKN CE | 2C-1.2 1 FTKN CE | 5-1.4 W1 FTKN CE | 5-2.5 W1 FTK CE | 2-1.2 W1 FTKN CE | 2-1.4 W1 FTK CE |
| Weight | 39 g | 39 g | 39 g | 39 g | 39 g | 39 g | 39 g | 39 g |
| Order quantity | 8 PC | 8 PC | 8 PC | 8 PC | 8 PC | 8 PC | PC | 8 PC |
| multiples/ | | | | | | | | |



Safety Goggles

uvex megasonic · uvex megasonic planet



uvex megasonic

- functional safety goggle in ski goggle design with a truly panoramic field of vision
- unique frameless lens design for edge-to-edge optical clarity and increased safety
- · soft, adaptive face seal providing a universal fit for different head and facial shapes as well as a tight fit without pressure points
- generous internal volume to accommodate prescription spectacles and frame recesses to locate the side arms ensuring a comfortable fit
- · indirect ventilation system increases air circulation
- length-adjustable 30 mm wide textile headband for optimal low pressure hold and individual adaptability
- robust polycarbonate lens with uvex's proven supravision coating technology - permanent anti-fog and scratch-resistant lens
- UV400 100% protection against dangerous UV radiation up to 400 nm
- · a sustainable benefit: lenses and headbands
- can be replaced when required
- metal-free





Further information can at uvex-safety.

| 148 4 6 | |
|----------------|----------|
| | be found |
| | com/en/ |
| | (or scan |

Bije

争

ł

/megasonic the QR code).

| uvex megasonic | | uvex megasonic planet | | | | | | |
|--------------------------|-------------------|-----------------------|-------------------|-------------------|--------------------|--------------------|------------------|------------------|
| Art. no. | 9320265 | 9320295 | 9320415 | 9320470 | 9320475 | 9320500 | 9320223 | 9320281 |
| Replacement lens | 9320255 | - | 9320455 | 9320255 | - | 9320259 | - | 9320257 |
| Replacement headband | 9320011 | - | 9320011 | 9320011 | - | - | - | - |
| Version | uvex supravision | uvex supravision | uvex supravision | uvex supravision | uvex supravision | uvex supravision | uvex supravision | uvex supravision |
| | excellence | excellence | ETC | extreme, | extreme, | clean | excellence | excellence |
| | | | | reduced | closed ventilation | autoclavable | sunglare filter | sunglare filter |
| | | | | ventilation | (gas-proof) | (20 cycles) | | |
| Standard | EN 166, EN 170 | EN 166, EN 170 | EN 166, EN 170 | EN 166, EN 170 | EN 166, EN 170 | EN 166, EN 170 | EN 166, EN 172 | EN 166, EN 172 |
| Frame | anthracite, blue | anthracite, jade | anthracite, blue | anthracite, blue | anthracite, lime | transparent, white | black, grey | anthracite, lime |
| | W 166 34 BT CE | W 166 34 BT CE | W 166 34 BT CE | W 166 34 BT CE | W 166 345 BT CE | W 166 34 F CE | W 166 34 BT CE | W 166 34 BT CE |
| Lens | PC clear | PC clear | PC clear | PC clear | PC clear | PC clear | PC CBR23 | PC grey 23% |
| | | (mass balanced) | | | | | | |
| | UV400 | UV400 | UV400 | UV400 | UV400 | UV400 | UV400 | UV400 |
| | 2C-1.2 W1 BTKN CE | 2C-1.2 W1 BTKN CE | 2C-1.2 W1 BTKN CE | 2C-1.2 W1 BTKN CE | 2C-1.2 W1 BTKN CE | 2C-1.2 W1 FKN CE | 5-2.5 W1 BTKN CE | 5-2.5 W1 BTKN CE |
| Weight | 96 g | 96 g | 96 g | 98 g | 100 g | 107 g | 96 g | 96 g |
| Order quantity multiples | 4 PC | 4 PC | 4 PC | 4 ST | 4 PC | 4 PC | 4 PC | 4 PC |



Safety Goggles uvex pheos cx2 sonic · uvex u-sonic



uvex pheos cx2 sonic

- sporty, compact and extremely lightweight safety goggle
- very soft and flexible, ergonomic face seal for a custom fit and ultimate comfort
- · indirect ventilation system increases air circulation
- very light, length-adjustable textile headband for a secure fit and individual adaptability
- · robust polycarbonate lens with uvex's proven supravision coating technology - permanent anti-fog and scratch-resistant lens
- UV400 100% protection against dangerous UV radiation up to 400 nm • metal-free

| uvex pheos cx2 sonic | | | |
|--------------------------|--------------------------|--------------------------|--------------------------|
| Art. no. | 9309275 | 9309064 | 9309286 |
| Version | uvex supravision extreme | uvex supravision extreme | uvex supravision extreme |
| | | sunglare filter | sunglare filter |
| Standard | EN 166, EN 170 | EN 166, EN 172 | EN 166, EN 172 |
| Frame | white, black | white, black | white, black |
| | W 166 34 BT CE | W 166 34 BT CE | W 166 34 BT CE |
| Lens | PC clear | PC CBR65 | PC grey 23% |
| | UV400 | UV400 | UV400 |
| | 2C-1.2 W1 BTKN CE | 5-1.4 W1 BTKN CE | 5-2.5 W1 BTKN CE |
| Weight | 34 g | 34 g | 34 g |
| Order quantity multiples | 10 PC | 10 PC | 10 PC |



uvex u-sonic

- sporty, compact and lightweight goggles
- soft, flexible face seal naturally moulds to any facial shape
- indirect ventilation system increases air circulation · length-adjustable textile headband for a secure fit and
- individual adaptability
- robust polycarbonate lens with uvex's proven supravision coating tech-
- nology permanent anti-fog and scratch-resistant lens UV400 100% protection against dangerous UV radiation up to 400 nm • metal-free

| 9308145 | 9308245 |
|-----------------------|---|
| uvex supravision plus | uvex supravision excellence |
| EN 166, EN 170 | EN 166, EN 170 |
| grey, green | grey, green |
| W 166 34 B CE | W 166 34 B CE |
| 2C-1.2 W1 BKN CE | 2C-1.2 W1 BKN CE |
| PC clear | PC clear |
| UV400 | UV400 |
| 72g | 72g |
| 5 PC | 5 PC |
| | uvex supravision plus EN 166, EN 170 grey, green W 166 34 B CE 2C-1.2 W1 BKN CE PC clear UV400 72g |

uvex CR Autoclave safety evewear that goes further

Innovative coating technology the first autoclavable safety eyewear with anti-fog performance

uvex has developed the first autoclavable safety eyewear with anti-fog coating for specialist requirements in laboratories, clinics, cleanrooms and food manufacturing. From ultra-light safety spectacles and goggles with a panoramic lens, the uvex CR is the ideal safety eyewear for all areas of application and specifically have been designed for repeated autoclave sterilisation (20 times for 20 minutes each at a max. of 121°C).

uvex CR - professional safety eyewear that compliments hygiene standards.



uvex super f OTG CR

- · classic overspecs for prescription spectacle wearers with a flat lens for wide field of vision, designed for maximum wearer acceptance
- side arms with soft-grip temple ends provide a comfortable, secure fit without pressure
- · nose bridge designed for all-day comfort



uvex megasonic CR

- · functional safety goggles in ski goggle design with a truly panoramic field of vision
- · unique frameless lens design for edge-to-edge optical clarity and increased safety
- · soft, adaptive face seal providing a universal fit for different head and facial shapes as well as a tight fit without pressure points
- · generous internal volume to accommodate prescription spectacles and frame recesses to locate the side arms ensuring a comfortable fit
- · indirect ventilation system increases air circulation
- · length-adjustable 30 mm wide silicone headband for optimal low pressure hold and individual adaptability
- · robust polycarbonate lens with uvex's proven supravision coating technology - permanent anti-fog and scratch-resistant lens
- UV400 100% protection against dangerous UV radiation up to 400 nm
- · a sustainable benefit: lenses can be replaced when required
- metal-free

- robust polycarbonate lens with uvex's proven infradur coating technology - permanent anti-fog and scratch-resistant lens
- UV400 100% protection against dangerous UV radiation up to 400 nm



uvex ultrasonic CR

- · functional safety goggle with panoramic lens suitable for a wide range of applications
- · soft, flexible face seal naturally moulds to any facial shape
- · generous internal volume to accommodate prescription spectacles and ensure a comfortable fit
- · indirect ventilation system increases air circulation
- length-adjustable silicone headband for a secure fit and individual adaptability
- · robust polycarbonate lens with uvex's proven supravision coating technology - permanent anti-fog and scratch-resistant lens
- UV400 100% protection against dangerous UV radiation up to 400 nm
- a sustainable benefit: lenses can be replaced when required
- metal-free



Safety Goggles

uvex ultrasonic · uvex ultrasonic planet



uvex ultrasonic

• functional safety goggle with panoramic lens suitable for a wide range of applications

9302286

- soft, flexible face seal naturally moulds to any facial shape
- generous internal volume to accommodate prescription spectacles and ensure a comfortable fit
- indirect ventilation system increases air circulation
 length-adjustable textile or silicone headband for a secure fit and individual adaptability
- · robust polycarbonate lens with uvex's proven supravision coating technology – permanent anti-fog and scratch-resistant lens • UV400 – 100% protection against dangerous UV radiation up to 400 nm
- a sustainable benefit: lenses can be replaced when required
- metal-free

| uvex ultrasonic | | | uvex ultrasonic planet | |
|--------------------------|-----------------------------|-----------------------------|-----------------------------|--------------------------|
| Art. no. | 9302245 | 9302285 | 9302290 | 9302805 |
| Replacement lens | 9302255 | 9302255 | - | - |
| Version | uvex supravision excellence | uvex supravision excellence | uvex supravision excellence | uvex supravision extreme |
| Standard | EN 166, EN 170 | EN 166, EN 170 | EN 166, EN 170 | EN 166, EN 170 |
| Frame | grey, orange | black, grey | anthracite, jade | grey, orange |
| | W 166 34 B CE | W 166 34 B CE | W 166 34 B CE | W 166 34 B CE |
| Lens | PC clear | PC clear | PC clear (mass balanced) | PC clear |
| | UV400 | UV400 | UV400 | UV400 |
| | 2C-1.2 W1 BKN CE | 2C-1.2 W1 BKN CE | 2C-1.2 W1 BKN CE | 2C-1,2 W1 BKN CE |
| Weight | 83 g | 83 g | 83 g | 83 g |
| Order quantity multiples | 4 PC | 4 PC | 4 PC | 4 PC |
| | | | | |

| ultrasonic | | | | |
|-------------------------|---------------------|--------------------------|--------------------------|-----------------------------|
| ill asonic | | | | |
| o. 93026 | 601 9 | 9302600 | 9302500 | 9302286 |
| cement lens – | - | - | 9302259 | 9302256 |
| on uvex s | supravision extreme | uvex supravision extreme | uvex supravision clean | uvex supravision excellence |
| reduce | ed ventilation | reduced ventilation | autoclavable (20 cycles) | sunglare filter |
| lard EN 166 | 6, EN 170 | EN 166, EN 170 | EN 166, EN 170 | EN 166, EN 172 |
| e black, | red | blue, grey | transparent, white | black, grey |
| W 166 | 34 B CE | W 166 34 B CE | W 166 34 B CE | W 166 34 B CE |
| PC cle | ear | PC clear | PC clear | PC grey 23% |
| UV400 | 0 1 | UV400 | UV400 | UV400 |
| 2C-1.2 | 2 W1 BKN CE | 2C-1.2 W1 BKN CE | 2C-1.2 W1 BKN CE | 5-2.5 W1 BKN CE |
| nt 95 g | 9 | 95 g | 95 g | 83 g |
| quantity multiples 4 PC | 4 | 4 PC | 4 PC | 4 PC |



Safety Goggles

uvex ultravision



uvex ultravision

- classic safety goggle suitable for a wide range of applications
 flexible face seal naturally moulds to any facial shape
- · generous internal volume accommodating prescription spectacles and frame recesses to locate the side arms ensuring a comfortable fit
- indirect ventilation system increases air circulation
- length-adjustable textile or neoprene headband for a secure fit and individual adaptability
- robust polycarbonate lens with uvex's proven supravision coating tech-
- nology permanent anti-fog and scratch-resistant lens UV400 100% protection against dangerous UV radiation up to 400 nm · also available with a cellulose acetate lens featuring anti-fog perfor-
- mance on the inside and UV380 protection • a sustainable benefit: lenses can be replaced when required
- metal-free

| uvex ultravision | | | |
|--------------------------|------------------------|---|------------------------|
| Art. no. | 9301714 | 9301906 | 9301716 |
| Replacement lens | 9300517 | 9300956 | 9300517 |
| Version | anti-fog on the inside | anti-fog on the inside | anti-fog on the inside |
| | | wide nose piece, particularly well suited | with foam layer |
| | | in combination with dust masks | |
| Standard | EN 166, EN 170 | EN 166, EN 170 | EN 166, EN 170 |
| Frame | transparent grey | transparent grey | transparent grey |
| | W 166 34 F CE | W 166 3 F CE | W 166 34 F CE |
| Lens | CA clear | CA clear | CA clear |
| | UV380 | UV380 | UV380 |
| | 2C-1.2 W1 FN CE | 2C-1.2 W1 FN CE | 2C-1.2 W1 FN CE |
| Weight | 116 g | 130 g | 118 g |
| Order quantity multiples | 4 PC | 4 PC | 4 PC |



 $\left| \right\rangle$

Safety Goggles

















| uvex ultravision | | | | |
|--------------------------|-----------------------|-----------------------|-----------------------------|-----------------------------|
| Art. no. | 9301605 | 9301116 | 9301105 | 9301626 |
| Replacement lens | - | - | 9301255 | 9301255 |
| Tear-off films | - | - | - | - |
| Version | uvex supravision plus | uvex supravision plus | uvex supravision excellence | uvex supravision excellence |
| | | with foam layer | | with foam layer |
| | | oil & gas | | |
| Standard | EN 166, EN 170 | EN 166, EN 170 | EN 166, EN 170 | EN 166, EN 170 |
| Frame | transparent grey | transparent grey | transparent grey | transparent grey |
| | W 166 34 BT CE | W 166 34 BT CE | W 166 34 BT CE | W 166 34 BT CE |
| Lens | PC clear | PC clear | PC clear | PC clear |
| | UV400 | UV400 | UV400 | UV400 |
| | 2C-1.2 W1 BTKN CE | 2C-1.2 W1 BTKN CE | 2C-1.2 W1 BTKN CE | 2C-1.2 W1 BTKN CE |
| Weight | 131 g | 134 g | 131 g | 134 g |
| Order quantity multiples | 4 PC | 4 PC | 4 PC | 4 PC |

| uvex ultravision | | | | |
|--------------------------|------------------------------|-----------------------------|--------------------------------|--------------------------------|
| Art. no. | 9301813 | 9301815 | 9301613 | 9301633 |
| Replacement lens | 9301255 | 9301255 | 9301255 | 9301255 |
| Tear-off films | 9300316 | - | - | - |
| Version | uvex supravision excellence | uvex supravision excellence | uvex supravision excellence | uvex supravision excellence |
| | with tear-off films, 2 units | top ventilation closed | closed ventilation (gas-proof) | closed ventilation (gas-proof) |
| | | | | heat-resistant frame material |
| Standard | EN 166, EN 170 | EN 166, EN 170 | EN 166, EN 170 | EN 166, EN 170 |
| Frame | transparent grey | transparent grey | yellow | red |
| | W 166 34 BT CE | W 166 34 BT CE | W 166 345 BT CE | W 166 345 BT CE |
| Lens | PC clear | PC clear | PC clear | PC clear |
| | UV400 | UV400 | UV400 | UV400 |
| | 2C-1.2 W1 BTKN CE | 2C-1.2 W1 BTKN CE | 2C-1.2 W1 BTKN CE | 2C-1.2 W1 BTKN CE |
| Weight | 126 g | 131 g | 133 g | 133 g |
| Order quantity multiples | 4 PC | 4 PC | 4 PC | 4 PC |
| | | | | |
| | | | | |

MADE IN GERMANY

Safety Goggles

uvex ultravision faceguard · uvex ultravision faceguard



uvex ultravision faceguard

- combination of safety goggle with face guard
- protection for eyes and face
- lifting mechanism allows flexible handling during use e.g. communication, drinking, etc.

| uvex ultravision | Goggles with face protection |
|--------------------------------------|----------------------------------|
| Art. no. | 9301555 |
| Version | Goggles with mit uvex |
| | supravision excellence (9301105) |
| | with faceguard (9301318) |
| Standard | EN 166, EN 170 |
| Frame | transparent grey |
| | W 166 34 BT CE |
| Lens | PC clear |
| | UV400 |
| | 2C-1.2 W1 BTKN CE |
| Weight | 212 g |
| Order quantity multiples/ Order unit | 4 PC |



9301317



9301318

Faceguard for uvex ultravision

- additional face protection
- 9301318: lifting mechanism allows flexible handling during use e.g.
- communication, drinking, etc.
- can be mounted to all uvex ultravision models with a PC lens

| uvex ultravision faceguard | | |
|----------------------------|--------------------------|--------------------------|
| Art. no. | 9301317 | 9301318 |
| Version | for all models 9301 with | for all models 9301 with |
| | PC lens | PC lens |
| | without spectacles | without spectacles |
| | uncoated | uncoated |
| Standard | - | - |
| Frame | transparent | transparent |
| | CE | CE |
| Weight | 64 g | 81 g |
| Order quantity multiples | PC | PC |
| | | |









9305514

9305714

uvex 9305

- classic safety goggle
- flexible face seal naturally moulds to any facial shape
- · internal volume comfortably accommodates prescription spectacles
- indirect ventilation system increases air circulation
- length-adjustable textile or rubber headband for a secure fit and individual adaptability
- cellulose acetate lens with anti-fog performance on the inside and UV380 protection
- metal-free

| uvex 9305 | | |
|--------------------------|------------------------|------------------------|
| Art. no. | 9305514 | 9305714 |
| Version | anti-fog on the inside | anti-fog on the inside |
| | with rubber headband | with textile headband |
| Standard | EN 166, EN 170 | EN 166, EN 170 |
| Frame | transparent grey | transparent grey |
| | W 166 34 F CE | W 166 34 F CE |
| Lens | CA clear | CA clear |
| | UV380 | UV380 |
| | 2C-1.2 W1 FN CE | 2C-1.2 W1 FN CE |
| Weight | 95 g | 91 g |
| Order quantity multiples | 4 PC | 4 PC |
| | | |



9405714

uvex 9405

- classic safety goggle
- flexible face seal naturally moulds to any facial shape
- internal volume comfortably accommodates prescription spectacles
- indirect ventilation system increases air circulation
- length-adjustable textile headband for a secure fit and individual adaptability
- \bullet cellulose acetate lens with anti-fog performance on the inside and UV380 protection
- metal-free

| uvex 9405 | |
|--------------------------|------------------------|
| Art. no. | 9405714 |
| Version | anti-fog on the inside |
| Standard | EN 166, EN 170 |
| Frame | transparent grey |
| | W 166 34 F CE |
| Lens | CA clear |
| | UV380 |
| | 2C-1.2 W1 FN CE |
| Weight | 84 g |
| Order quantity multiples | 4 PC |
| | |

The invisible danger

harmful.

cataracts.


Infrared protection

uvex IR-ex safety spectacles


Preventive protection against infrared radiation

Infrared radiation (IR radiation) is also referred to as heat radiation, as it is perceived as such.

Strictly speaking, heat radiation ranges from infrared to visible light (VIS) up to ultraviolet (UV) - depending on the temperature.



The effect of infrared radiation on human tissue can be

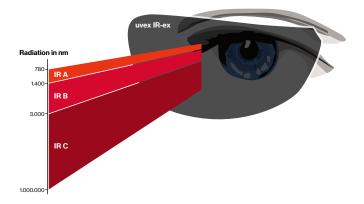

IR radiation cannot be perceived by the human eye. It extends over the electromagnetic spectrum from 780 nm to 1 mm (1,000,000 nm).

IR radiation is divided into three spectra:

- IR A (780 nm-1400 nm)
- IB B (1400 nm-3000 nm)
- IR C (3000 nm-1 mm)

Principle: The greater the wavelength, the lower the penetration depth into the tissue.

Since it is not immediately noticeable, infrared radiation Caution: For applications requiring prolonged or repeated viewing of can increase the risk of permanent eye damage, such as glowing objects, it is essential that suitable safety eyewear be worn.



Levels of infrared protection and recommendations for use according to EN 171

| Level of protection | Recommended use in accordance with EN 171 |
|---------------------|--|
| 4-1.7 | average temperature of the radiation source up to $1090^{\circ}C^{*}$ |
| 4-2 | average temperature of the radiation source up to 1110°C (forges) |
| 4-3 | average temperature of the radiation source $1190^{\circ}C$ (glass blowing)* |
| 4-4 | average temperature of the radiation source 1290°C (foundries) |
| 4-5 | average temperature of the radiation source $1390^{\circ}C$ (steel foundries)* |
| 4-6 | average temperature of the radiation source 1510°C (iron foundries) |
| | |



You can find more information at uvex-safety.com/ir-ex

* available in the uvex portfolio



Infrared protection



uvex pheos cx2

• sporty-looking safety spectacles with high wearer acceptance

- x-tended eyeshield: soft seal frame technology wraps around the brow providing protection from particle ingress
- ergonomically shaped side arms with soft-grip temple ends provide a comfortable, secure fit without pressure
- soft, flexible nose pad adapts to the wearer, delivering a non-slip and pressure-free fit
- robust polycarbonate lens with uvex's proven infradur coating technology – permanent anti-fog and scratch-resistant lens
- IR protection according to EN 171 and welding protection according to EN 169 with perfect colour recognition
- UV400 100% protection against dangerous UV radiation up to 400 nm
- metal-free

| uvex pheos cx2 | | | |
|--------------------------|--------------------------------|--------------------------------|--------------------------------|
| Art. no. | 9198171 | 9198173 | 9198175 |
| Version | uvex infradur plus | uvex infradur plus | uvex infradur plus |
| | Infrared protection level 1.7 | Infrared protection level 3 | Infrared protection level 5 |
| Standard | EN 166, EN 171, EN 169, EN 170 | EN 166, EN 171, EN 169, EN 170 | EN 166, EN 171, EN 169, EN 170 |
| Frame | black, red | black, red | black, red |
| | W 166 FT CE | W 166 FT CE | W 166 FT CE |
| Lens | PC grey IR-ex 1.7 | PC grey IR-ex 3 | PC grey IR-ex 5 |
| | UV400 + IR | UV400 + IR | UV400 + IR |
| | 4C-1.7 W1 FTKN CE | 4C-3 W1 FTKN CE | 4C-5 W1 FTKN CE |
| | 1.7 W1 FTKN CE | 3 W1 FTKN CE | 5 W1 FTKN CE |
| | 2C-1.7 W1 FTKN CE | 2C-3 W1 FTKN CE | 2C-5 W1 FTKN CE |
| Weight | 28 g | 28 g | 28 g |
| Order quantity multiples | 10 PC | 10 PC | 10 PC |
| | | | |
| | | | |



uvex super f OTG

- classic overspecs for prescription spectacle wearers with a flat lens for a wide field of vision, designed for maximum wearer acceptance
- side arms with soft-grip temple ends provide a comfortable, secure fit without pressure
- nose bridge designed for all-day comfort

- robust polycarbonate lens with uvex's proven infradur coating techno-
- logy permanent anti-fog and scratch-resistant lens

 IR protection according to EN 171 and welding protection according to
- EN 169 with perfect colour recognition • UV400 – 100% protection against dangerous UV radiation up to 400 nm

| uvex super f OTG | | | |
|--------------------------|--------------------------------|--------------------------------|--------------------------------|
| Art. no. | 9169171 | 9169173 | 9169175 |
| Version | uvex infradur plus | uvex infradur plus | uvex infradur plus |
| | Infrared protection level 1.7 | Infrared protection level 3 | Infrared protection level 5 |
| Standard | EN 166, EN 171, EN 169, EN 170 | EN 166, EN 171, EN 169, EN 170 | EN 166, EN 171, EN 169, EN 170 |
| Frame | black, red | black, red | black, red |
| | W 166 FT CE | W 166 FT CE | W 166 FT CE |
| Lens | PC grey IR-ex 1.7 | PC grey IR-ex 3 | PC grey IR-ex 5 |
| | UV400 + IR | UV400 + IR | UV400 + IR |
| | 4C-1.7 W1 FTKN CE | 4C-3 W1 FTKN CE | 4C-5 W1 FTKN CE |
| | 1.7 W1 FTKN CE | 3 W1 FTKN CE | 5 W1 FTKN CE |
| | 2C-1.7 W1 FTKN CE | 2C-3 W1 FTKN CE | 2C-5 W1 FTKN CE |
| Weight | 39 g | 39 g | 39 g |
| Order quantity multiples | 8 PC | 8 PC | 8 PC |
| | | | |

Welding Protection

A new generation of welding protection eyewear available with different grey-tint lenses and protection classes. The innovative technology affords protection from UV and infrared light while maintaining perfect colour recognition in line with uvex sunglare filters.

The special uvex infradur plus coating has anti-fog properties which prevents the inside of the lenses misting up and the extreme scratch-resistance on the outside keeps damage from welding sparks to an absolute minimum.

With various welding safety spectacles and goggle solutions, there is something for everyone – enhancing comfort and the wearer experience.

N.B.: Do not use for electric welding.

All welding products have polycarbonate lenses providing protection against impact as well as UV rays, IR rays and visible glare.

The products do not provide protection against laser beams!

For expert advice on safety and in selecting the right laser protection eyewear, talk to our specialists

laservision

Call them on +49 (0)911 9736 8100.

uvex-laservision.com





Levels of welding protection and recommendations for use according to EN 169

| Level of protection | Use |
|---------------------|---|
| 1.7 | For welding assistants, protection against UV radiation and bright scattered light |
| 2 | Lightweight oxyacetylene cutting |
| 3 | Flame derusting, flame cutting, lightweight oxyacetylene cutting |
| 4 | Welding and hard soldering with up to 70 l/h of acetylene, flame cutting with up to 900 l/h of oxygen, steel and grey cast iron welding, lightweight oxyacetylene cutting |
| 5 | Welding and hard soldering with 70 to 200 I/h of acetylene, flame cutting with 2000 to 4000 I/h of oxygen |
| 6 | Welding and hard soldering with 200 to 800 l/h of acetylene, flame cutting with 2000 to 4000 l/h of oxygen |

Welding Protection

uvex i-5 · uvex astrospec 2.0 · uvex 9161



uvex i-5

- sporty premium quality welding safety spectacle with a range of adaptive features
- x-tended eyeshield: soft seal frame technology wraps around the brow providing protection from particle ingress
- x-tended sideshield offers additional protection from hazards
- ergonomically shaped side arms with multi-incline points and length adjustment allow a high level of individualisation to ensure a good fit for all facial shapes and head widths
- soft-grip temple ends provide a comfortable, secure fit without pressure
- soft, flexible nose pad adapts to the wearer, delivering a non-slip and pressure-free fit
- robust polycarbonate lens with uvex's proven infradur coating
- technology permanent anti-fog and scratch-resistant lens • IR protection according to EN 169 with perfect colour recognition according to EN 172
- UV400 100% protection against dangerous UV radiation up to 400 nm
- optional clip-in frame seal provides extra protection against particles, dirt and dust
- metal-free

| uvex i-5 | | | |
|--------------------------|------------------------------|----------------------------|----------------------------|
| Art. no. | 9183041 | 9183043 | 9183045 |
| Version | uvex infradur plus | uvex infradur plus | uvex infradur plus |
| | welding protection level 1.7 | welding protection level 3 | welding protection level 5 |
| Standard | EN 166, EN 169 | EN 166, EN 169 | EN 166, EN 169 |
| Frame | black, green | black, green | black, green |
| | W 166 FT CE | W 166 FT CE | W 166 FT CE |
| Lens | PC grey | PC grey | PC grey |
| | UV400 + IR | UV400 + IR | UV400 + IR |
| | 1.7 W1 FTKN CE | 3 W1 FTKN CE | 5 W1 FTKN CE |
| Weight | 29 g | 29 g | 29 g |
| Order quantity multiples | 10 PC | 10 PC | 10 PC |
| | | | |



uvex astrospec 2.0

- · classic welding safety spectacle with flat lens for a wide field of vision
- ergonomically shaped side arms with multi-incline points allow for a
- high level of individualisation to ensure a good fit for all facial shapes and head widths
- side arms with soft-grip temple ends provide a comfortable, secure fit without pressure
- nose bridge designed for all-day comfort
- robust polycarbonate lens with uvex's proven infradur coating technology – permanent anti-fog and scratch-resistant lens
- IR protection according to EN 169 with perfect colour recognition
- according to EN 172
- UV400 100% protection against dangerous UV radiation up to 400 nm

| uvex strospec 2.0 | |
|--------------------------|----------------------------|
| Art. no. | 9164145 |
| Version | uvex infradur plus |
| | welding protection level 5 |
| Standard | EN 166, EN 169 |
| Frame | black, green |
| | W 166 FT CE |
| Lens | PC grey |
| | UV400 + IR |
| | 5 W1 FTKN CE |
| Weight | 42 g |
| Order quantity multiples | 10 PC |
| | |



uvex 9161

- robust welding overspecs for prescription spectacle wearers with a flat lens for a wide field of vision
- side arms with multi-incline points and length adjustment allow spectacle to be adapted to ensure a good fit for all facial shapes and head widths
- side arms with soft-grip temple ends provide a comfortable, secure fit without pressure
- nose bridge designed for all-day comfort
- robust polycarbonate lens with uvex's proven infradur coating technology – permanent anti-fog and scratch-resistant lens
- IR protection according to EN 169 with perfect colour recognition according to EN 172
- UV400 100% protection against dangerous UV radiation up to 400 nm
 metal-free

| uvex 9161 | |
|--------------------------|----------------------------|
| Art. no. | 9161145 |
| Version | uvex infradur |
| | welding protection level 5 |
| Standard | EN 166, EN 169 |
| Frame | black, green |
| | W 166 F CE |
| Lens | PC grey |
| | UV400 + IR |
| | 5 W1 FK CE |
| Weight | 46 g |
| Order quantity multiples | 5 PC |
| | |

MADE IN GERMANY

Welding Protection

uvex super f OTG · uvex megasonic · uvex ultrasonic



uvex super f OTG

- classic welding overspecs for prescription spectacle wearers with a flat lens for wide field of vision, designed for maximum wearer acceptance
- side arms with soft-grip temple ends provide a comfortable, secure fit without pressure
- nose bridge designed for all-day comfort
- robust polycarbonate lens with uvex's proven infradur coating technology
 permanent anti-fog and scratch-resistant lens
- IR protection according to EN 169 with perfect colour recognition according to EN 172

functional welding safety goggle in a ski goggle design and a truly

• unique frameless lens design for edge-to-edge optical clarity and

face shapes as well as a tight fit without pressure points

· indirect ventilation system increases air circulation

· length-adjustable 30 mm wide textile headband

· soft, adaptive face seal providing a universal fit for different head and

· generous internal volume to accommodate prescription eyewear and

frame recesses to locate the side arms ensuring a comfortable fit

• robust polycarbonate lens with uvex's proven infradur coating

technology - permanent anti-fog and scratch-resistant lens

• IR protection according to EN 169 with perfect colour recognition

UV400 – 100% protection against dangerous UV radiation up to 400 nm

• UV400 – 100% protection against dangerous UV radiation up to 400 nm

| plus |
|---------------|
| ction level 5 |
| 69 |
| |
| |
| |
| |
| CE |
| |
| |
| |
| |



uvex megasonic

panoramic field of vision

increased safety

according to EN 172

metal-free



9302045

uvex ultrasonic

- functional welding safety goggle with panoramic and flip-up lens for an increased use of applications
- soft, flexible face seal naturally moulds to any facial shape
 generous internal volume to accommodate prescription spectacles
- and ensure a comfortable fit indirect ventilation system increases air circulation
- elength-adjustable textile headband for a secure fit and individual adaptability
- robust polycarbonate lens with uvex's proven supravision and infradur coating technology – permanent anti-fog and scratch-resistant lens
- IR protection according to EN 169 with perfect colour recognition according to EN 172
- UV400 100% protection against dangerous UV radiation up to 400 nm
- a sustainable benefit: lenses can be replaced when required
- metal-free
- uvex megasonic Art. no. 9320045 Replacement lens 9320055 uvex infradur plus Version welding protection level 5 EN 166, EN 169 Standard Frame black W 166 34 BT CE Lens PC arev UV400 + IR 5 W1 BTKN CE 96 g 4 PC Weight Order quantity multiples

| uvex ultrasonic | |
|--------------------------|--|
| Art. no. | 9302045 |
| Replacement lens flip-up | 9302085 |
| Version | uvex supravision excellence |
| | with flip-up and easily replaceable filter |
| Standard | EN 166, EN 169, EN 170 |
| Frame | black, green |
| Lens | W 166 34 B CE |
| | PC clear, UV400 |
| Additional lens | 2C-1.2 W1 BKN CE |
| | PC grey, UV400 + IR |
| | uvex infradur, 5 W1 CE |
| | welding protection level 5 |
| Weight | 123 g |
| Order quantity multiples | 4 PC |
| | |



Accessories

uvex cleaning accessories · Presentation



uvex eyewear cleaning station

including
 2 x 9971000
 1 x 9972103
 1 x 9973101

| uvex eyewear | cleaning station |
|--------------|------------------|
| Art. no. | 9970005 |
| Order unit | PC |

| i unit | FU | |
|---------|----|--|
| | | |
| | | |
| | | |
| | | |
| io numn | | |

Plastic pump • for uvex cleaning fluid 9972103

uvex cleaning fluid

500 ml cleaning fluid

suitable for all uvex lenses

Cleaning paper

- replacement pack silicone-free
- paper
- approx. 760 sheets • antistatic
- suitable for all uvex lenses

Magnetic wall bracket

• for easy mounting of the uvex cleaning station (9970005)

| Plastic pump | |
|---------------------|---------|
| Art. no. | 9973101 |
| Order unit | PC |
| | |
| | |
| uvex cleaning fluid | |
| Art. no. | 9972103 |
| Content | 500 ml |
| Order unit | PC |
| | |
| | |
| Cleaning papers | |
| Art. no. | 9971000 |
| Order unit | PC |
| | |
| | |

Magnetic wall bracketArt. no.9963004Order unitPC



9972101

uvex cleaning fluid

- 500 ml cleaning fluid
- suitable for all uvex lenses

• Note: does not fit in the cleaning stations (9970005 and 9970002).

| uvex cleaning fluid | |
|---------------------|---------|
| Art. no. | 9972101 |
| Content | 500 ml |
| Order unit | PC |
| | |



uvex lens cleaning towelettes

- 100 towelettes per box
- individually packed
- silicone-free
- not antistatic
- suitable for all uvex lenses

| lettes | |
|---------|---------|
| 9963005 | |
| PC | |
| | 9963005 |



9972130

uvex microfibre cloth

• suitable for cleaning all uvex lenses

| uvex microfibre cloth | |
|-----------------------|---------|
| Art. no. | 9972130 |
| Order unit | BG |
| Content | 5 PC |
| | |

uvex display

- with integrated mirror
- for four safety spectacles and one safety goggle

uvex Display Art. no. Order unit

9957503 PC







9954600

uvex eyewear case

- · extremely robust hard case for protection against external influences
- soft embedded inside
- with belt loop
- practical snap hook
- · especially suitable for curved safety eyewear (e.g. uvex i-vo)

| aver cycwcar case | |
|--------------------------|---------|
| Art. no. | 9954600 |
| Order quantity multiples | 10 PC |
| | |



9954500

uvex eyewear case

- robust case
- · additional space for spare lens
- reinforced zipper
- with belt loop

9954500

10 PC

suitable for all uvex safety spectacles



uvex eyewear case

- · large and robust case
- additional space for spare lens
- with belt loop
- · suitable for all uvex safety spectacles and goggles



uvex microfibre bag

- · elegant microfibre bag
- suitable for all uvex safety spectacles
- and safety overspecs



9954550

uvex eyewear case

- flexible case made of robust nylon material
- · Velcro fastener individually adjustable
- · suitable for all uvex safety spectacles

| uvex eyewear case | | |
|-------------------|---------|--|
| Art. no. | 9954550 | |
| Order unit | 10 PC | |
| | | |



uvex microfibre bag

- elegant microfibre bag
- made from 100% recycled PET bottles

10 PC



uvex microfibre bag

- elegant microfibre bag
- suitable for all uvex safety overspecs and safety goggles


9954360 4 PC



uvex SECU box

- storage box for wall mounting
 - · for spectacles and goggles: 2 safety goggles
- or 3 safety spectacles
- or 1 safety goggles and 2 safety spectacles

| uvex SECU box | |
|---------------|---------|
| Art. no. | 9957502 |
| Order unit | PC |
| | |



and safety overspecs

uvex planet microfibre bag 9954395

9954514

Order unit

uvex eyewear case

- extremely robust hard case for protection against external influences
- soft embedded inside
- practical snap hook
- · ideal for storing goggles
- suitable for all uvex safety goggles

uvex eyewear case Art. no. 9954514

4 PC



Accessories

uvex hang-cords \cdot uvex headband



uvex eyewear cord

- individual length adjustment
- for compatibility with uvex models please see overview on p. 76



uvex eyewear cord


- individual length adjustment
- for compatibility with uvex models please see overview on p. 76
- made from 100% recycled PET bottles



uvex eyewear cord

• suitable for all uvex safety spectacles

| uvex eyewear cord | | uvex planet eyewear cord | |
|--------------------------|---------|--------------------------|---------|
| Art. no. | 9958017 | 9958030 | 9959002 |
| Order quantity multiples | 10 PC | 10 PC | 10 PC |
| | | | |





uvex eyewear cord

9959003

- individual length adjustment
- for compatibility with uvex models please see overview





uvex pheos headband

- headband for uvex pheos and uvex pheos s (see p. 45, 76)
- individual length adjustment
- metal-free
- uvex pheos headband

Art. no. Order quantity multiples 9958020 10 PC

uvex eyewear cord

- individual length adjustment
- metal-free
- for compatibility with uvex models please see overview on p. 76

9959004 10 PC



9958023

uvex x-fit headband

- headband for uvex x-fit und uvex x-fit pro (see p. 41, 76)
- individual length adjustment
- metal-free

uvex x-fit / uvex x-fit pro headband Art. no. Order quantity multiples

9958023 10 PC

Cord/case matrix

| | | | | Co | rds/stra | ips | | | | | | | Case | 5 | | | |
|-------|----------------------|---------|---------|-----------------------------|----------|---------|---------|---------------------------|---------|---------|---------|---------|---------|---------|---------|---------|--|
| Model | Name | fV | N | | N. | N | Ø | ζ | Ď | | 1 | Ĩ | Te a | Í | | 0 | |
| | | 9958017 | 9958030 | 9958020 (pheos/ pheos s) | 9959003 | 9959004 | 9959002 | 9958023 (x-fit family) | 9954600 | 9954500 | 9954501 | 9954355 | 9954395 | 9954360 | 9954550 | 9954514 | 9957502 SECU-Box |
| 9128 | uvex pheos nxt | | | | | • | | | • | | | • | | | | | |
| 9134 | uvex meteor | | | | | • | | | | | | | | | | | |
| 9143 | uvex i-lite | | | | • | • | | | | • | • | • | | | | | |
| 9143 | uvex i-guard | | | | | • | | | | | | | | | | | |
| 9143 | uvex i-guard+ | | | | | | | | | | • | | | | | | |
| 9145 | uvex pure-fit | | | | | | | | | | | | | | | | |
| 9159 | uvex winner | | | | | | | | | | | | | | | | |
| 9160 | uvex i-vo | | | | | • | | | | | | | | | | | |
| 9161 | uvex 9161 | | | | | | | | | | | | | | | | |
| 9164 | uvex astrospec 2.0 | | | | | • | | | | | | | | | | | |
| 9169 | uvex super OTG | | . • | | | | | | | | | | | | | | |
| 9169 | uvex super f OTG | | | | | | | | | | | | | | | | |
| 9172 | uvex super g | | | | | | | | | | | | | | | | |
| 9178 | uvex super fit | | | | | | | | | | | | | | | | acles |
| 9181 | uvex suXXeed | | | | | | | | | | | | | | | | oecta ecta |
| 9183 | uvex i-5 | | | | | | | | | | | | | | | | 2 Sp |
| 9190 | uvex i-3 / i-3 s | | | | | | | | | | | | | | | | or 3 les + |
| 9192 | uvex pheos / pheos s | | | | | • | | | | | | | | | | | 2 goggles or 3-4 spectacles or 1 goggles + 2 spectacles |
| 9192 | uvex pheos guard / s | | | | | | | | | | | | | | | | 2 gog or 1 g |
| 9193 | uvex sportstyle | | | | | | | | | | | | | | | | |
| 9194 | uvex i-works | | | | • | | | | | | | | | | | | |
| 9198 | uvex pheos cx2 | | | | | | | | | | | | | | | | |
| 9199 | uvex x-fit | | | | | | | | | | | | | | | | |
| 9199 | uvex x-fit pro | | | | | • | | | | | | | | | | | |
| 9231 | uvex polavision | | | | | | | | | | | | | | | | |
| 9301 | uvex ultravision | | | | | | | | | | | | | | | | |
| 9302 | uvex ultrasonic | | | | | | | | | | | | | | | | |
| 9305 | uvex 9305 | | | | | | | | | | | | | | | | |
| 9308 | uvex u-sonic | | | | | | | | | | | | | | | | |
| 9309 | uvex pheos cx2 sonic | | | | | | | | • | | | | | | | | |
| 9320 | uvex megasonic | | | | | | | | | | | | | | | | |
| 9405 | uvex 9405 | | | | | | | | | | | | | • | | | |

compatible



ξ

Applications Always the perfect solution

| Mechanical risk | Chemical risk | | Optical risk | |
|---|------------------------------------|---------------|--------------------------------|--|
| Working conditions | Eyewear model | Lens material | Lens tint | Lens coating |
| Light and precision engineering | Spectacles | PC | clear | uvex supravision AR (anti-reflet) uvex supravision excellence |
| Assembly, maintenance | Spectacles | PC | clear | uvex supravision excellence |
| Grinding, angle grinding | Spectacles Goggles | PC | clear | uvex supravision excellence uvex supravision extreme |
| Turning, milling | Spectacles | PC | clear | uvex supravision excellence |
| Dusty environments | Goggles | PC | clear | uvex supravision excellence uvex supravision extreme |
| Foundry cleaning | Goggles | PC | clear | uvex supravision excellence uvex supravision extreme |
| Forestry and agriculture | Spectacles | PC | clear amber grey 23 % | uvex supravision excellence uvex supravision extreme |
| Laboratory | Spectacles Goggles | PC CA | clear | uvex supravision sapphire uvex supravision excellence |
| Working with acids and galvanic media | Goggles | PC CA | clear | uvex supravision excellence uvex supravision extreme |
| Mixed lighting | Spectacles | PC | clear | uvex supravision AR (anti-reflet) |
| Strong lighting, glare | Spectacles | PC | CBR65 silver mirror 53 % | uvex supravision excellence uvex supravision extreme |
| Outdoors – sunglare | Spectacles | PC | grey CBR23 silver mirror | uvex supravision excellence uvex supravision extreme |
| Offshoring / maritime | Spectacles | PC | variomatic polavision | uvex supravision variomatic uvex polavision |
| Spot welding, soldering oxygene cutting gas welding, braze welding Welders assistant foundries furnaces | Spectacles Goggles | PC | welding shade | uvex infradur uvex infradur plus |
| Forging Glass blowing Metal melting Working with red-hot media Working with industrial infrared drying Short-term use at a medium distance | Spectacles Overspecs | PC | Infrared protection | uvex infradur plus |
| Sterile working conditions | Spectacles Overspecs | PC | clear | uvex supravision CR |
| Oil and gas | Spectacles Overspecs Goggles | PC | clear | uvex supravision plus |
| Plant visitors | Spectacles Overspecs | PC | clear | uvex supravision excellence uvex supravision sapphire uncoated |

Safety Eyewear _{Overview}

| Model | Name | Product | Order quantity multiples/ Order unit | uvex supravision sapphire | uvex supravision plus | uvex supravision excellence | uvex supravision extreme | uvex supravision ETC | uvex supravision clean | uvex supravision AR | Silver mirror, inside anti-fog | uvex supravision variomatic | uvex infradur | uvex infradur plus | CA uncoated | CA anti-fog on the inside | Scratch-resistant on both sides | Scratch-resistant + anti-fog | Uncoated | Page |
|--------------|--|--|---|---------------------------|-----------------------|-----------------------------|--------------------------|----------------------|------------------------|---------------------|--------------------------------|-----------------------------|---------------|--------------------|-------------|---------------------------|---------------------------------|------------------------------|----------|----------|
| 9128 | uvex pheos nxt | Plastic safety spectacles | 10 PC | | | | | | | | | | | | | | | | | 31 |
| 9134 | uvex meteor | Plastic safety spectacles | 5 PC | | | | | | | | | | | | | | | | | 56 |
| 9143 | uvex i-lite | Plastic safety spectacles | 10 PC | | | | | | | | | | | | | | | | | 33 |
| 9143 | uvex i-guard | Plastic safety spectacles | 8 PC | | | | | | | | | | | | | | | | | 33 |
| 9143 | uvex i-guard+ | Safety goggles | 8 PC | | | | | | | | | | | | | | | | | 33 |
| 9143 | uvex i-range | Replacement lenses | 15 PC | | | | | | | | | | | | | | | | | 33 |
| 9143 | uvex i-range | Headband | 8 PC | | | | | | | | | | | | | | | | | 33 |
| 9145 | uvex pure-fit | Plastic safety spectacles | 75 PC | | | | | | | | | | | | | | | | | 35 |
| 9159 | uvex winner | Metal safety spectacles | 5 PC | | | | | | | | | | | | | | | | | 57 |
| 9160 | uvex i-vo | Plastic safety spectacles | 10 PC | | | | | | | | | | | | | | | | | 54 |
| 9161 | uvex 9161 | Plastic safety spectacles | 5 PC | | а. | | | | | | | | | | | | | | | 57 |
| 9161 | uvex 9161 | Safety spectacles - welding protection | 5 PC | | | | | | | | | | | | | | | | | 71 |
| 9164 | uvex astrospec 2.0 | Plastic safety spectacles | 10 PC | | | | | | | | | | | | | | | | | 51 |
| 9164 | uvex astrospec 2.0 | Safety spectacles - welding protection | 10 PC | | | | | | | | | | | | | | | | | 71 |
| 9169 | uvex super OTG | Plastic safety spectacles | 8 PC | | | | | | | | | | | | | | | | | 58 |
| 9169 | uvex super f OTG | Plastic safety spectacles | 8 PC | | | | | | | | | | | | | | | | | 59 |
| 9169 | uvex super f OTG CR | Plastic safety spectacles | 8 PC | | | | | | | | | | | | | | | | | 59 |
| 9169 | uvex super f OTG | Plastic safety spectacles | PC | | | | | | | | | | | | | | | | | 59 |
| 9169 | uvex super f OTG | Plastic safety spectacles UV525 | 8 PC | | | | | | | | | | | | | | | | | 59 |
| 9169 | uvex super f OTG | Infrared protection spectacles | 8 PC | | | | | | | | | | | | | | | | | 69 |
| 9169 | uvex super f OTG | Safety spectacles - welding protection | 8 PC | | | х. | | | | | | | | | | | | | | 72 |
| 9169 | uvex super OTG/super f OTG | Replacement lenses | 10 PC | | | | | | | | | | | _ | | | | | | 58/59 |
| 9172 | uvex super g | Plastic safety spectacles | 10 PC | | | | | | | | | | | | | | | | | 52 |
| 9172 | uvex super g | Replacement lenses | 20 PC | | | | | | | | | | | | | | | | | 52 |
| 9178 | uvex super fit | Plastic safety spectacles | 10 PC | | | | | | | | | | | | | | | | | 53 |
| 9178 | uvex super fit | Replacement lenses | 20 PC | _ | _ | | | _ | | | | | | | | | | | | 53 |
| 9181 | uvex suXXeed | Plastic safety spectacles | 10 PC | | | | | | | | | | | | | | | | | 37 |
| 9181 | uvex suXXeed | Plastic safety spectacles | PC | | | _ | | _ | | | | | | | | | | | | 37 |
| 9181 | uvex suXXeed | Replacement lenses | 20 PC | | | | | | | | | _ | | | | | | | | 37 |
| 9181 | uvex suXXeed | Clip-in frame | 20 PC | | | - | | | | | | | | | | | | | | 37 |
| 9183 | uvex i-5 | Plastic safety spectacles | 10 PC | | | | | | | | | | | | | | | | | 39 |
| 9183 | uvex i-5 | Clip-in frame | 20 PC | - | | - | | - | | | | | | | | | | | | 39 |
| 9183 | uvex i-5 | Safety spectacles - welding protection | 10 PC | | | | | | | | | | | | | | | | | 71 |
| 9190 | uvex i-3/uvex i-3s | Plastic safety spectacles | 10 PC | | | | | | | | | | | - | | | | | | 46/47 |
| 9190 | uvex i-3 | Plastic safety spectacles | PC | - | - | - | | | | | - | | | | | | | | | 46 |
| 9190 | uvex i-3/uvex i-3s | Replacement lenses | 20 PC | | | | | | | - | | - | | | | | | | | 46/47 |
| 9190 | uvex i-3/uvex i-3s | Clip-in frame | 20 PC | | | | | | | | | | | | | | | | | 46/47 |
| 9190 | uvex pheos/uvex pheos CB/uvex pheos s | Plastic safety spectacles | 10 PC | | | | | | | | | | | | | | | | | 40/47 |
| 9192 | uvex pheos/uvex pheos CB/uvex pheos s uvex pheos guard/uvex pheos s guard | | 10 PC | | - | | | - | | | - | | | | | | | | | 44/45 |
| | | uvex pheos headband version Clip-in frame | 20 PC | | | | | | | | | | | | | | | | | 45 45 |
| 9192 9193 | uvex pheos/uvex pheos s | | 20 PC 10 PC | | | | | | | | | | | | | | | | | 45 42 |
| | uvex sportstyle | Plastic safety spectacles | | | | | | | | | | | | | | | | | | |
| 9193 9193 | uvex sportstyle | Plastic safety spectacles | PC 20 PC | | | | | | | | | | | | | | | | | 42 |
| 3192 | uvex sportstyle | Replacement lenses | 20 00 | | | | | | | | | | | | | | | | | 42 |

 $\left\{ \right\}$


| Model | Name | Product | Order quantity multiples/ Order unit | uvex supravision sapphire | uvex supravision plus | uvex supravision excellence | uvex supravision extreme | uvex supravision ETC | uvex supravision clean | uvex supravision AR | Silver mirror, inside anti-fog | uvex supravision variomatic | uvex infradur | uvex infradur plus | CA uncoated | CA anti-fog on the inside | Scratch-resistant on both sides | Scratch-resistant + anti-fog | Uncoated | Page |
|-------|----------------------------------|-------------------------------------|---|---------------------------|-----------------------|-----------------------------|--------------------------|----------------------|------------------------|---------------------|--------------------------------|-----------------------------|---------------|--------------------|-------------|---------------------------|---------------------------------|------------------------------|----------|-------|
| 9194 | uvex i-works | Plastic safety spectacles | 10 PC | | | | | | | | | | | | | | | | | 49 |
| 9194 | uvex i-works | Replacement lenses | 20 PC | | | | | | | | | | | | | | | | | 49 |
| 9198 | uvex pheos cx2 | Plastic safety spectacles | 10 PC | | | | | • | | | | | | | | | | | | 43 |
| 9198 | uvex pheos cx2 | Infrared protection spectacles | 10 PC | | | | | | | | | | | • | | | | | | 69 |
| 9199 | uvex x-fit | Plastic safety spectacles | 10 PC | | | | | | | | | | | | | | | | | 41 |
| 9199 | uvex x-fit pro | Plastic safety spectacles | 10 PC | | | • | | | | | | | | | | | | | | 40 |
| 9199 | uvex x-fit pro (without sliders) | Plastic safety spectacles | 10 PC | | | | | | | | | | | | | | | | | 40 |
| 9199 | uvex x-fit/uvex x-fit pro | Clip-in frame | 20 PC | | | | | | | | | | | | | | | | | 41 |
| 9231 | uvex polavision | Plastic safety spectacles | PC | | | | | | | | | | | | | | • | | | 56 |
| 9301 | uvex ultravision | Safety goggles | 4 PC | | | | | | | | | | | | | | | | | 64/66 |
| 9301 | uvex ultravision | Replacement lenses | 30/50 PC | | | | | | | | | | | | | | | | | 64/66 |
| 9300 | uvex ultravision | Tear-off films | 10 PC | | | | | | | | | | | | | | | | | 65 |
| 9301 | uvex ultravision faceguard | Safety goggles | 18 PC | | | | | | | | | | | | | | | | | 66 |
| 9301 | uvex ultravision | Mouth shield | PC | | | | | | | | | | | | | | | | | 66 |
| 9302 | uvex ultrasonic | Safety goggles | 4 PC | | | | | | | | | | | | | | | | | 63 |
| 9302 | uvex ultrasonic CR | Safety goggles | 4 PC | | | | | | | | | | | | | | | | | 62/63 |
| 9302 | uvex ultrasonic | Replacement lenses | 15 PC | | | | | | | | | | | | | | | | | 63 |
| 9302 | uvex ultrasonic flip-up | Safety goggles - welding protection | 4 PC | | | | | | | | | | | | | | | | | 72 |
| 9302 | uvex ultrasonic flip-up | Replacement lenses | 15 PC | | | | | | | | | | | | | | | | | 72 |
| 9305 | uvex 9305 | Safety goggles | 4 PC | | | | | | | | | | | | | | | | | 67 |
| 9308 | uvex u-sonic | Safety goggles | 5 PC | | | | | | | | | | | | | | | | | 61 |
| 9309 | uvex pheos cx2 sonic | Safety goggles | 10 PC | | | | | | | | | | | | | | | | | 61 |
| 9320 | uvex megasonic | Safety goggles | 4 PC | | | | | | | | | | | | | | | | | 60 |
| 9320 | uvex megasonic CR | Safety goggles | 4 PC | | | | | | | | | | | | | | | | | 60/62 |
| 9320 | uvex megasonic | Safety goggles - welding protection | 4 PC | | | | | | | | | | | | | | | | | 72 |
| 9320 | uvex megasonic | Replacement lenses | 15 PC | | | | | | | | | | | | | | | | | 60/72 |
| 9320 | uvex megasonic | Headband | 4 PC | | | | | | | | | | | | | | | | | 60 |
| 9405 | uvex 9405 | Safety goggles | 4 PC | | | | | | | | | | | | | | | | | 67 |
| 6109 | | RX insert astrospec 2.0 | PC | | | | | | | | | | | | | | | | | 51 |
| 9972 | | Microfibre cloth | 10 PC | | | | | | | | | | | | | | | | | 73 |
| 9954 | | Eyewear case | 10/4 PC | | | | | | | | | | | | | | | | | 74 |
| 9954 | | Microfibre bag | 10/4 PC | | | | | | | | | | | | | | | | | 74 |
| 9957 | | Display | PC | | | | | | | | | | | | | | | | | 73 |
| 9957 | | SECU-Box | PC | | | | | | | | | | | | | | | | | 74 |
| 9958 | | Neck hang cords | 10 PC | | | | | | | | | | | | | | | | | 75 |
| 9958 | uvex pheos/uvex pheos s | Headband | 10 PC | | | | | | | | | | | | | | | | | 75 |
| 9958 | uvex x-fit/x-fit pro | Headband | 10 PC | | | | | | | | | | | | | | | | | 75 |
| 9959 | | Neck hang cord | 10 PC | | | | | | | | | | | | | | | | | 75 |
| 9963 | | Cleaning towelettes | PC | | | | | | | | | | | | | | | | | 73 |
| 9970 | | Cleaning station | PC | | | | | | | | | | | | | | | | | 73 |
| 9971 | | Replacement cleaning papers | PC | | | | | | | | | | | | | | | | | 73 |
| 9972 | | Cleaning fluid | PC | | | | | | | | | | | | | | | | | 73 |
| 9973 | | Plastic pump | PC | | | | | | | | | | | | | | | | | 73 |



Innovative laser protection products

At laservision, an integral part of uvex, we protect one of the most sensitive organs from laser beams: the eye.

For more than 35 years, we have been committed worldwide to protecting eyes with customeroriented, innovative products. Whether in industry, research and development or in the medical sector – laservision laser protection products stand for standards-compliant quality and safety. We offer a diverse portfolio: Our eyewear, windows, curtains/blinds and screens provide optimal protection because our products are in line with the uvex safety group's DNA and motto: **protecting people.**

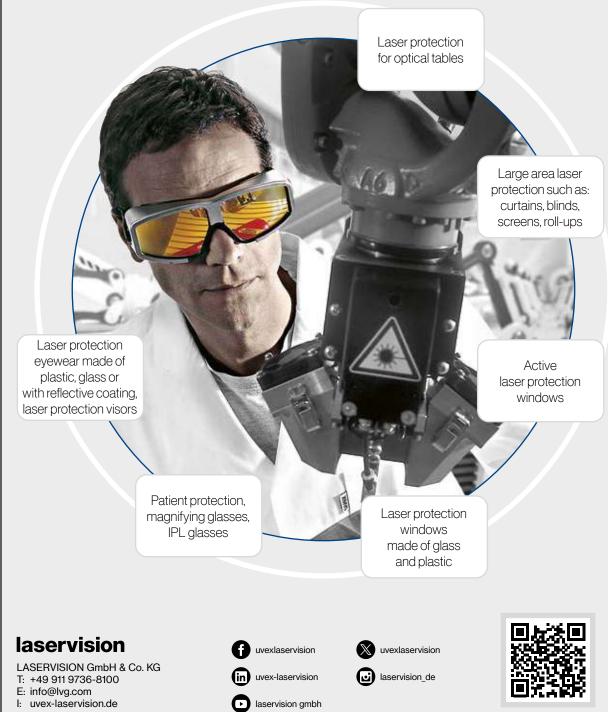

Hearing Protection

•

Product system planet series - Hearing Protection

uvex has developed the **protecting planet** icon, to help raise awareness of its commitment to achieving increased sustainability. Based on the brand claim, **protecting people**, our sustainable approach integrates three core interlinked pillars – **ecology, economy** and **social responsibility**, that are incorporated throughout the business to improve our sustainability performance.

This explains the comprehensive audit, measurement and evaluation management process uvex undertakes along the entire value chain to ensure its products are as sustainable as possible.

uvex xact-fit planet



MADE IN SWEDEN



protecting planet

by using recycled material // by maximum reduction of pollutants


Ergonomically shaped stems

, 100 percent recycled polypropylene (PP)

Oval-shaped foam earplugs

> production is subject to strict controls

· contain as few harmful substances as possible

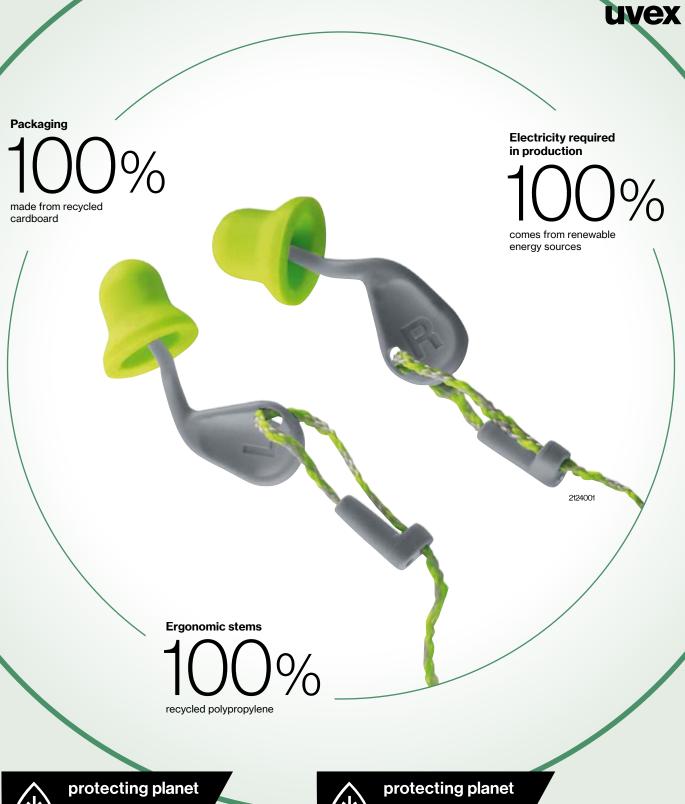

by using environmentally-friendly packaging

Packaging

, made from 100 percent recycled cardboard

by reducing CO₂ emissions

Production at SwedSafe, Sweden

- SwedSafe is part of the uvex group
- · leaves only a small carbon footprint
- no consumption of fossil fuels
- > electricity comes from 100 percent renewable energy sources
- > certified in accordance with Environmental Management ISO 14001 > promoting biodiversity at the site: creation of insect habitats by planting natural grass landscapes and
- sowing additional flowering plants

Hearing Protection

All ears when it comes to safety

Noise-induced hearing loss is still one of the most common occupational hazards of all.

It develops painlessly, is progressive and generally goes unnoticed. It is the fact that it's irreversible which makes it so serious. The risk to hearing and the importance of hearing protection are often recognised too late. Only those who suffer from hearing loss really understand just how essential a good sense of hearing is and that protecting it should be a top priority.

What is noise?

Loud sounds which comprise noise not only pose a risk to hearing but can also be distracting and debilitating.

Persistent low-grade sounds such as a clock ticking or a dripping tap can also affect concentration levels.

What are the consequences of noise?

We use our hearing continuously, it never gets a break and cannot be "switched off". We are exposed to noise every day, all day, from multiple sources so our hearing is under constant stress.

These daily demands on our ears can lead to irreversible noise-induced hearing loss. But, it's not just our hearing that is affected; noise means stress for the entire body. Noise affects us subconsciously and can lead to difficulty concentrating, gastrointestinal illness, elevated blood pressure and increased risk of a heart attack.

Adverse health effects caused by harmful noise levels

Listed below are the maximum periods of time a person should be exposed to harmful noise per day without wearing hearing protection.

| 85 dB | 8 hours | 103 dB | 7.5 minutes |
|--------|------------|--------|-------------|
| 88 dB | 4 hours | 106 dB | 4 minutes |
| 91 dB | 2 hours | 109 dB | 2 minutes |
| 94 dB | 1 hour | 112 dB | 1 minute |
| 97 dB | 30 minutes | 115 dB | 30 seconds |
| 100 dB | 15 minutes | | |





Tests and standards

All uvex hearing protection products comply with the requirements of current EU legislation, including the PPE regulation (EU) 2016/425, which ensures CE conformity. The products have been tested in accordance with the applicable European standards and additional international standards. As category III products, they are subject to Module D inspections by a notified body, as indicated by the code printed on the product after the CE mark.

Continuous quality assurance with ISO 9001/2015, I ISO 14001:2015 ISO 45001.

Applicable DIN EN norms are:

- EN 352: Part 1 Earmuffs
- EN 352: Part 2 Ear plugs
- EN 352: Part 3 Earmuffs attached to a safety helmet
- EN 352: Part 4 Level-dependent hearing protection earmuffs
- EN 352: Part 6 Earmuffs with communication equipment
- EN 352: Part 8 Audio earmuffs for entertainment

Abbreviations for protection values with explanations

| SNR | Single Number Rating/average protection capacity |
|--------------------------------|--|
| f/Hz | Frequency given as a unit of Hertz |
| (MA) Mean Attenuation | Mean attenuation |
| (SD) | Standard Deviation |
| (APV) Assumed Protection Value | Assumed protection value |
| HML value | H: Attenuation value at high frequencies |
| | M: Attenuation value at medium frequencies |
| | L: Attenuation value at low frequencies |

Hearing protection

Size and fit


Everyone's ear canal is unique – much like a fingerprint. Which is why it's all the more important that you choose adequate and suitable hearing protection that is the correct size to achieve a good fit. uvex offers a complete range of hearing protection to ensure all wearers are able to achieve a fit that's right for them.

Choosing the wrong size can severely reduce the protection value, exposing wearers to harmful noise, and makes the ear plugs uncomfortable to wear.

Only way to find out is to meassure your personal a ttenuation (PAR) with a fit test system, we introduce uvex xact-fit test.

This will secure you choose the right protection based on your need.

It is best to try different sizes to find the one that gives you the best protection and fit. With the uvex com4-fit and uvex x-fit, we offer something for the majority of ear canal shapes.

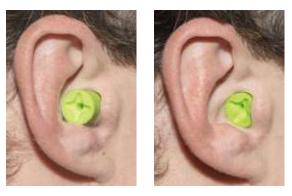

Just wearing earplugs is not a guarantee for proper hearing protection. Without measure we don't know. xact-fit test measure the Personal Attenuation Rating for any user, with unmodified earplugs.

uvex xact-fit test

Hearing Protection Fit-Testing System

uvex xact-fit delivers one of the most robust and efficient fit-testing systems on the market – helping you understand exactly how much protection you're receiving from your Hearing Protection Device, regardless of brand or model. This innovative portable kit comes with Bluetooth headphones and tablet for a cordless, quick set-up that can be used anywhere, complete with a carrying case.





Pre-installed software and cloud storage on the tablet allow for automatic upload of information and results, easy access to files on multiple devices, and increased security. Fit-testing workers for proper hearing protection has never been so easy.

How uvex xact-fit works

The uvex xact-fit System was created with the user's experience in mind – as the most portable and easy-to-use system on the market.

Using the Real Ear Attenuation at Threshold (REAT), users undergo a series of tests where they must determine their Hearing Threshold score, both with and without hearing protection.

This is the lowest volume at which a sound can be detected, and it is different for every person.

The difference between the two scores determines their Personal Attenuation Rating (PAR), which represents the amount of protection they are receiving based on how they fit their earplug.

Hearing Protection Different situations, different ears

Look out for the different sizes



Anyone can get used to wearing hearing protection; you just need to choose the right type of protection for you.

wearing time

- noise levels
- · choose earplugs according to the size of your ear canal
- · earmuffs are not recommended for hot workplaces
- fitting accuracy (glasses wearers)

- for earmuff wearers, the weight should be taken into consideration
- · handling (dirty hands, gloves, disabilities)
- · compatibility with other PPE (helmet, glasses, respiratory protection)







The cross-section of an ear canal is oval shaped



Hearing protection

The uvex xact-fit family

Using earplugs has never been easier

Easy, fast and accurate insertion

Medium protection capacity for excellent speech and signal recognition for easy communication

Replacement earplugs are available, for a cost-effective and environmentally conscious choice No rolling required, so they can be used with dirty hands or while wearing gloves

> Ergonomically shaped stems make fitting easy, hygienic, accurate and achieves a high level of wearer comfort

Thumb indentations with left and right marking ensures correct insertion and easy fitting

> The shape means it fits most ear canals securely and comfortably

The uvex xact-fit family



uvex xact-fit planet

Catalogue page 94



uvex xact-fit detec

Catalogue page 96



uvex xact-fit multi reusable Catalogue page 94



uvex xact-band

Catalogue page 98

nd)

Hearing protection The uvex xact-fit family

uvex xact-fit - intelligent ergonomics

A new dimension of wearer comfort




The cross-section of an ear canal is oval shaped


The stem is ergonomically shaped to fit either the left or right ear to increase wearer comfort and make the earplugs easier to insert and remove.

The design is easily identifiable from a distance, making it easier to monitor usage in accordance with your company's regulations.





Perfect fit Oval-shaped foam earplugs mimic the natural shape of the ear canal for low pressure fit and enhanced comfort



Ergonomic thumb indentations The ergonomic thumb indentations with left and right marking ensures correct insertion and easy fitting




Adjustable cord

Hearing Protection

Disposable ear plugs

uvex hi-com A unique design - even on the inside

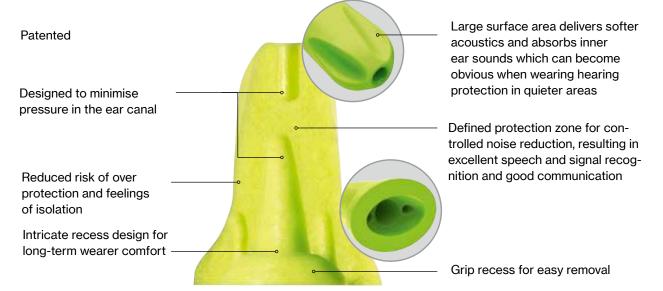





uvex hi-com

• delivers low, flat attenuation allowing for excellent speech and sound recognition

• large surface area delivers softer acoustics and absorbs inner ear sounds which can become obvious when wearing hearing protection in quieter areas

· available in two colours

| uvex hi-com | | |
|-------------|-------------------------------|-------------------------------|
| Art. no. | 2112100 | 2112101 |
| Design | without cord | with cord |
| Standard | EN 352-2:2020 | EN 352-2:2020 |
| Colour | lime | lime |
| Order unit | CT | CT |
| Content | 200 PR, packed in pairs in CT | 100 PR, packed in pairs in CT |

| uvex hi-com | | |
|-------------|-------------------------------|-------------------------------|
| Art. no. | 2112095 | 2112106 |
| Design | without cord | without cord |
| Standard | EN 352-2:2020 | EN 352-2:2020 |
| Colour | lime | beige |
| Order unit | CT | CT |
| Content | 100 PR, packed in pairs in CT | 200 PR, packed in pairs in CT |
| | | |

| f/Hz | 125 | 250 | 500 | 1000 | 2000 | 4000 | 8000 | SNR | 26 dB | Н | 30 dB | М | 23 dB | L | 18 dB |
|--------|------|------|------|------|------|------|------|------|---------|----|---------|----|---------|----|---------|
| MA dB | 17.6 | 19.0 | 25.4 | 29.6 | 34.5 | 39.0 | 43.8 | SNRm | 30.1 dB | Hm | 34.4 dB | Mm | 27.3 dB | Lm | 21.9 dB |
| SD dB | 4.2 | 3.7 | 5.0 | 5.2 | 3.8 | 5.5 | 4.1 | SNRs | 3.7 dB | Hs | 3.9 dB | Ms | 3.9 dB | Ls | 3.7 dB |
| APV dB | 13.5 | 15.3 | 20.3 | 24.5 | 30.6 | 33.5 | 39.6 | | | | | | | | |





2112101

Table-top dispenser box

Refill boxes for uvex "one2click" dispenser on page 92

MADE IN SWEDEN



þ

Hearing Protection Disposable ear plugs











2112060 2112093

uvex com4-fit

· disposable earplugs with a compact, ergonomic design

- perfect for narrow and smaller ear canals
- suitable for use in high noise environments
- patented x-grip technology reduces pressure on the ear canal and aids easy, hygienic removal
- · increased wearing comfort, when worn for extended periods

| uvex com4-fit | | | | | | | | | | | | | | | |
|---------------|----------|-----------|------|------|------------|-------|------|-------|------------|------------|---------------|-------|---------|------|---------|
| Art. no. | 211200 |)4 | | 2 | 112096 | | | 21121 | 31 | | 21120 | 12 | | | |
| Design | withou | t cord | | v | ithout co | ord | | witho | out cord | | with cord | | | | |
| Standard | EN 35 | | | | N 352-2 | 2020 | | EN 3 | 52-2:2020 | 1 | EN 352-2:2020 | | | | |
| Colour | light or | ange | | li | ght orang | ge | | light | orange | | light o | orang | je | | |
| Order unit | CT | | | C | T | | | CT | | | CT | | | | |
| Content | 200 P | R, packed | ł | 1 | 00 PR, p | acked | | 15 PF | λ , | | 100 F | R, pa | acked | | |
| | in pairs | s in CT | | ir | n pairs in | CT | | loose | e in CT | | in pai | rs in | CT | | |
| | | | | | | | | | | | | | | | |
| f/Hz | 63 | 125 | 250 | 500 | 1000 | 2000 | 4000 | 8000 | SNR | 33 dB H | 34 dB | М | 31 dB | L | 29 dB |
| MA dB | 28.9 | 31.0 | 33.6 | 33.8 | 33.6 | 36.2 | 40.6 | 44.3 | SNRm | 36.3 dB Hm | 36.6 dB | Mm | 33.9 dB | Lm (| 33.1 dB |
| SD dB | 3.4 | 5.2 | 5.4 | 5.4 | 4.0 | 4.2 | 3.7 | 2.9 | SNRs | 2.9 dB Hs | 2.8 dB | Ms | 3.3 dB | Ls | 4.2 dB |
| APV dB | 25.5 | 25.8 | 28.2 | 28.4 | 29.6 | 32.0 | 36.9 | 41.4 | | | | | | | |

uvex x-fit

• tapered plug shape ensures natural, pressure free fit - maximising comfort and protection levels

- suitable for use in high noise environments
- patented x-grip technology reduces pressure on the ear canal and aids easy, hygienic removal

| uvex x-fit | | | | | | | | | | | | | | | | |
|------------|----------|---------------|------|---------------|------|---------------|------|--------------|----------|---------------|---------|---------------|-------------|------------|----------|-------|
| Art. no. | 211200 | 01 | 211 | 2094 | | 2112013 | | 211213 | 33 | 2112010 |) | 1 | 2112087 | | | |
| Design | withou | t cord | wit | without cord | | without cord | | without cord | | with cor | ď | 1 | ord | | | |
| Standard | EN 35 | EN 352-2:2020 | | EN 352-2:2020 | | EN 352-2:2020 | | EN 35 | 2-2:2020 | EN 352-2:2020 | | EN 352-2:2020 | | I | EN 352-2 | :2020 |
| Colour | lime | | lime | е | | lime | | lime | | lime | | I | lime | | | |
| Order unit | CT | | CT | | | CT | | CT | | CT | | (| СТ | | | |
| Content | 200 PI | R, packed | 100 |) PR, pac | ked | 50 PR, | | 15 PR, | | 100 PR, | packed | | 100 PR, p | acked | | |
| | in pairs | s in CT | in p | airs in C | Т | loose in | CT | loose | in CT | in pairs | in CT | i | in pairs in | CT | | |
| | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | |
| f/Hz | 63 | 125 | 250 | 500 | 1000 | 2000 | 4000 | 8000 | SNR | 37 dB H | 36 dB | М | 35 dB I | _ 34 dB | | |
| MA dB | 35.3 | 38.4 | 39.3 | 40.8 | 38.9 | 37.8 | 45.9 | 45.1 | SNRm | 40.0 dB Hm | 39.1 dB | Mm | 38.1 dB I | _m 38.0 dB | | |
| SD dB | 4.2 | 6.3 | 5.3 | 5.5 | 5.5 | 4.3 | 3.9 | 4.6 | SNRs | 2.8 dB Hs | 3.1 dB | Ms | 3.2 dB I | _s 3.6 dB | | |
| APV dB | 31.1 | 32.1 | 34.0 | 35.3 | 33.4 | 33.5 | 42.0 | 40.5 | | | | | | | | |

uvex xtra-fit

• disposable earplugs ideal for larger ear canals

· adapts to the shape and size of the ear canal, thereby optimising fit and protection

• very soft and comfortable to wear

| uvex xtra-fit | | | | | | | | | | | | | | |
|---------------|------|-----------|-----------|-----------|------|------|------|------|-------------|------------------|---------|----|------------|-----------|
| | 0.44 | | | | | | | | | | | | | |
| Art. no. | | 2060 | | | | | | | 2093 | | | | | |
| Design | with | nout cord | | | | | | wit | hout cord | | | | | |
| Standard | EN | 352-2:20 | 20 | | | | | EN | 352-2:202 | 0 | | | | |
| Colour | orar | nge | | | | | | ora | ange | | | | | |
| Order unit | BG | | | | | | | CT | | | | | | |
| Content | 200 | PR, pac | ked in pa | irs in BG | | | | 100 |) PR, packe | ed in pairs in (| CT | | | |
| | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | |
| f/Hz | 63 | 125 | 250 | 500 | 1000 | 2000 | 4000 | 8000 | SNR | 35 dB H | 34 dB | М | 33 dB L | 32 dB |
| MA dB | 32.7 | 34.8 | 36.8 | 38.9 | 36.9 | 36.2 | 44.0 | 41.5 | SNRm | 38.1 dB Hm | 37.1 dB | Mm | 36.5 dB Ln | n 36.4 dB |
| SD dB | 4.6 | 4.4 | 5.6 | 5.2 | 4.7 | 3.7 | 4.0 | 5.0 | SNRs | 2.9 dB Hs | 2.7 dB | Ms | 3.2 dB Ls | 3.9 dB |
| APV dB | 28.1 | 30.4 | 31.2 | 33.7 | 32.2 | 32.5 | 40.0 | 36.5 | | | | | | |
| | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | |

Refill boxes for uvex "one2click" dispenser on page 92

MADE IN SWEDEN

Hearing Protection

Disposable ear plugs · Earplug dispenser · Refill packs









uvex dispenser "one2click"

- easy-to-use and robust hearing protection
- dispenser with two different mounting options
- earplugs available to hand with just one click
- ensures hygienic dispensing whenever it's needed
- magnetic wall mount requires no drilling
- · can be refilled even if the container is not empty
- · collecting tray prevents earplugs from falling on the floor
- suitable for all uvex disposable earplugs
- quantities: 600 pairs (xtra-fit 500 pairs)
- magnetic variant for flexible use on all magnetic surfaces (2112988)
- stationary wall mounting using screws (2112000)
- magnetic wall mount can be retrofitted individually (2112989)

| | " 0 !' ! " | |
|---------------|----------------|-------------------|
| uvex dispense | r "one2click" | |
| Art. no. | 2112000 | 2111988 |
| Mounting | empty, | empty, |
| | screw mounting | magnetic mounting |
| Order unit | CT | CT |
| | | |

| uvex magnetic | uvex magnetic bracket for dispenser | | | | | | | |
|---------------|-------------------------------------|--|--|--|--|--|--|--|
| Art. no. | 2111989 | | | | | | | |
| Mounting | retrofit kit for dispenser | | | | | | | |
| | for magnetic mounting | | | | | | | |
| Material | polished steel | | | | | | | |
| Order unit | CT | | | | | | | |
| | | | | | | | | |

| uvex dispense | r "one2click" | | |
|---------------|------------------------|------------------------|------------------------|
| Art. no. | 2111990 | 2111991 | 2111992 |
| Туре | ready to use (filled), | ready to use (filled), | ready to use (filled), |
| | screw mounting | screw mounting | screw mounting |
| | 600 pairs of x-fit | 600 pairs of com4-fit | 600 pairs of hi-com |
| Order unit | CT | CT | CT |

For the ready-to-use magnetic version, the magnetic plate (2112989) must be ordered separately

2111990

2111991

2111992

uvex dispenser "one2click" – Refill packs

| | uvex x-fit | uvex com4-fit | uvex xact-fit |
|------------|---------------------|---------------------|----------------------|
| Art. no. | 2112022 | 2112023 | 2124003 |
| Design | without cord | without cord | replacement earplugs |
| Standard | EN 352-2:2020 | EN 352-2:2020 | EN 352-2:2020 |
| SNR | 37 dB (see page 91) | 33 dB (see page 91) | 26 dB (see page 94) |
| Colour | lime | light orange | lime |
| Size | Μ | S | Μ |
| Order unit | CT | CT | CT |
| Content | 300 PR, | 300 PR, | 400 PR, |
| | loose in CT | loose in CT | loose in CT |
| | | | |

| | uvex hi-com | uvex hi-com | uvex xtra-fit |
|------------|---------------------|---------------------|---------------------|
| Art. no. | 2112118 | 2112119 | 2112061 |
| Design | without cord | without cord | without cord |
| Standard | EN 352-2:2020 | EN 352-2:2020 | EN 352-2:2020 |
| SNR | 26 dB (see page 90) | 26 dB (see page 90) | 35 dB (see page 91) |
| Colour | lime | beige | orange |
| Size | M | M | L |
| Order unit | CT | CT | BG |
| Content | 300 PR, | 300 PR, | 250 PR, |
| | loose in CT | loose in CT | loose in BG |
| | | | |

MADE IN SWEDEN **F**



þ

Hearing protection

uvex xact-fit test








2124097

2124098



uvex xact-fit test Art. no. 2124099 Type Order unit uvex xact-fit test system PC



uvex hygiene kit for xact-fit test earmuffs 2124098 Art. no. Туре accessories for uvex xact-fit test earmuffs Colour black Order unit PC



uvex xact-fit test

- · Bluetooth-capable headphones allows for mobile, cordless testing
- · earmuff design allows all kinds of earplugs to fit underneath and be tested
- Cloud storage use for easy access to files on multiple devices
 automatic upload of information and test results
- open system gives the ability to test any brand of earplug
- · provides full report of the test to help user choose earplug
- portable, cordless tablet for ease of use
- pre-installed software with quick set-up process · fast and easy set-up compared to competitive systems

Hearing Protection

Disposable earplugs · Reusable earplugs · uvex xact-fit









uvex xact-fit planet

- ergonomically shaped pins made from 100% recycled material
- · left/right pod carriers simplify fitting and ensure accurate fit everytime
- tapered plug shape ensures natural, pressure free fit maximizing comfort and protections level · adjustable neck cord can be altered to wearers for increased safety
- all packaging is made of recycled cardboard

| uvex xact-fit | planet | | | | | | | | | uvex xact | -fit plane | t rep | lacement | earpl | ugs |
|---------------|--------|-----------------------------|-------------|---------|------|----------|-----------|------------|----------|------------|------------|--------|------------|-------|--------|
| Art. no. | 21240 | 001 | | | | 212402 | 6 | | | 2124002 | | | | | |
| Design | with r | eusable | e pin, in i | ninibox | | with reu | isable pi | in in ear | olug box | replacem | ent earpl | ugs, i | in minibo> | (| |
| Standard | EN 38 | 52-2:20 | 20 | | | EN 352 | -2:2020 | | - | EN 352-2 | :2020 | | | | |
| Colour | lime | | | | | lime | | | | lime | | | | | |
| Order unit | CT | | | | | СТ | | | | CT | | | | | |
| Content | 50 PF | PR, packed in pairs in CT | | | | 50 PR, j | oacked i | in pairs i | n CT | 250 PR, C | CT of 5 pa | airs | | | |
| | | 0 PR, packed in pairs in CT | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | |
| f/Hz | 63 | 125 | 250 | 500 | 1000 | 2000 | 4000 | 8000 | SNR | 26 dB H | 28 dB | М | 23 dB I | _ 2 | 20 dB |
| MA dB | 16.6 | 19.4 | 22.0 | 25.6 | 27.5 | 31.8 | 34.4 | 36.9 | SNRm | 29.7 dB Hm | 31.3 dB | Mm | 27.2 dB I | Lm 23 | 3.9 dB |
| SD dB | 5.4 | 4.9 | 4.2 | 4.9 | 4.7 | 3.8 | 4.4 | 6.0 | SNRs | 3.6 dB Hs | 3.2 dB | Ms | 3.9 dB I | _s 4 | .0 dB |
| APV dB | 11.2 | 14.5 | 17.8 | 20.7 | 22.8 | 28.0 | 30.0 | 30.9 | | | | | | | |

uvex xact-fit multi reusable

- reusable earplugs with thumb indentations
- oval-shaped earplugs mimics the natural shape of the ear canal for optimum fit and comfort
- interchangeable replacement earplugs · can be handled with dirty hands or while wearing gloves
- available in two sizes
- uvex xact-fit multi reusable S Art. no. 2124019 2124017 with oval-shaped reusable earplugs, in minibox EN 352-2:2020 with oval-shaped reusable earplugs, in earplug box EN 352-2:2020 Design Standard Colour grey, transparent grey, transparent Size CT Order unit CT 50 PR, packed in pairs in CT 50 PR, packed in pairs in CT Content

| uvex xact-fit m | nulti reusable M/L | |
|-----------------|--|--|
| Art. no. | 2124020 | 2124018 |
| Design | with oval-shaped reusable earplugs, in minibox | with oval-shaped reusable earplugs, in earplug box |
| Standard | EN 352-2:2020 | EN 352-2:2020 |
| Colour | grey, transparent | grey, transparent |
| Size | M/L | M/L |
| Order unit | CT | CT |
| Content | 50 PR, packed in pairs in CT | 50 PR, packed in pairs in CT |
| | | |

| f/Hz | 125 | 250 | 500 | 1000 | 2000 | 4000 | 8000 | SNR | 26 dB H | 26 dB | М | 24 dB | L | 22 dB |
|--------|------|------|------|------|------|------|------|------|------------|---------|----|---------|----|---------|
| MA. dB | 26.9 | 25.4 | 26.1 | 28.3 | 31.9 | 32.8 | 37.2 | SNRm | 29.6 dB Hm | 30.6 dB | Mm | 27.5 dB | Lm | 26.3 dB |
| SD dB | 4.4 | 4.5 | 5.4 | 5.5 | 4 | 6.9 | 6.7 | SNRs | 3.7 dB Hs | 4.4 dB | Ms | 3.8 dB | Ls | 3.9 dB |
| APV dB | 22.5 | 20.9 | 20.7 | 22.8 | 27.9 | 25.9 | 30.5 | | | | | | | |

Hearing Protection

Reusable ear plugs







minibox 2111201



2111237

2111212



- easy-to-clean reusable corded earplugs
- smooth, dirt-repellent surface can be easily cleaned using soap and water
- earplug box for hygienic storage when not in use
- with the cord, the earplugs are conveniently to hand in low-noise areas, the earplugs can be worn comfortably around the neck

| uvex whisper | | | | | | | | | | | | | | | |
|-----------------|--------|------------|---------|--------------------------|-----------------------|------|------|------|------------|--------------|---------|------|---------|------|---------|
| Art. no. | 211120 |)1 | | | | | | 21 | 11237 | | | | | | |
| Design | with c | ord, in n | ninibox | | | | | wi | th cord, i | n earplug bo | (| | | | |
| Standard | EN 35 | 2-2:202 | 20 | | | | | Eľ | V 352-2:2 | 2020 | | | | | |
| Colour | orang | е | | | | | | or | ange | | | | | | |
| Order unit | CT | | | | | | | C | Г | | | | | | |
| Content | 50 PR | , in pairs | s in CT | CT 50 PR, in pairs in CT | | | | | | | | | | | |
| | | | | | 50 PR, in pairs in CT | | | | | | | | | | |
| <i>t /</i> 1_ | 00 | 405 | 050 | 500 | 1000 | 0000 | 4000 | 0000 | ONID | | | | | | 47 .0 |
| f/Hz | 63 | 125 | 250 | 500 | 1000 | 2000 | 4000 | 8000 | SNR | 22 dB H | 23 dB | IVI | 19 dB | L | 17 dB |
| MA dB | 23.7 | 23.2 | 21.1 | 22.6 | 24.8 | 31.7 | 33.4 | 39.4 | SNRm | 27.1 dB Hm | 29.6 dB | Mm 2 | 24.3 dB | Lm 2 | 22.4 dB |
| SD dB | 5.6 | 5.8 | 6.8 | 5.2 | 5.7 | 6.0 | 9.5 | 8.2 | SNRs | 5.6 dB Hs | 6.3 dB | Ms | 5.2 dB | Ls | 5.7 dB |
| APV dB | 18.1 | 17.4 | 14.3 | 17.4 | 19.1 | 25.7 | 23.9 | 31.2 | | | | | | | |

uvex whisper+

- easy-to-clean reusable corded earplugs
- smooth, dirt-repellent surface can be easily cleaned using soap and water
- · earplug box for hygienic storage when not in use
- with the cord, the earplugs are conveniently to hand in low-noise areas, the earplugs can be worn comfortably around the neck

| uvex whisper | | | | | | | | | | | | | | |
|--------------|--------|--|---------|------|------|------|------|------|----------|----------------|---------|----|------------|----------|
| | | | | | | | | | | | | | | |
| Art. no. | 211121 | - | | | | | | | 11238 | | | | | |
| Design | with c | ord, in r | ninibox | | | | | wi | th cord, | in earplug bo> | (| | | |
| Standard | EN 35 | 52-2:202 | 20 | | | | | Eľ | 352-2: | 2020 | | | | |
| Colour | lime | | | | | | | lin | ne | | | | | |
| Order unit | CT | | | | | | | C | Г | | | | | |
| Content | 50 PF | PR, in pairs in CT 50 PR, in pairs in CT | | | | | | | | | | | | |
| | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | |
| f/Hz | 63 | 125 | 250 | 500 | 1000 | 2000 | 4000 | 8000 | SNR | 27 dB H | 27 dB | М | 24 dB L | 22 dB |
| MA dB | 26.6 | 26.9 | 24.3 | 26.1 | 28.8 | 32.8 | 32.6 | 38.1 | SNRm | 30.3 dB Hm | 31.4 dB | Mm | 28.0 dB Lm | 126.0 dB |
| SD dB | 6.1 | 6.1 | 4.1 | 5.1 | 5.1 | 5.0 | 6.5 | 5.3 | SNRs | 3.8 dB Hs | 4.0 dB | Ms | 4.1 dB Ls | 4.0 dB |
| APV dB | 20.5 | 20.8 | 20.2 | 21.0 | 23.7 | 27.8 | 26.1 | 32.8 | | | | | | |

uvex whisper supreme

- easy-to-clean reusable corded earplugs
- smooth, dirt-repellent surface can be easily cleaned using soap and water
- · earplug box for hygienic storage when not in use
- with the cord, the earplugs are conveniently to hand in low-noise areas, the earplugs can be worn comfortably around the neck



2111235

| | | | | | | | | | | | | | | _ |
|----------------|-------------|------------|-------|------|------|------|------|------|------------|---------|----|-----------|-----------|---|
| uvex whisper s | upreme | | | | | | | | | | | | | |
| Art. no. | 2111235 | | | | | | | | | | | | | |
| Design | with cord, | in earplu | g box | | | | | | | | | | | |
| Standard | EN 352-2: | 2020 | | | | | | | | | | | | |
| Colour | yellow | | | | | | | | | | | | | |
| Order unit | CT | | | | | | | | | | | | | |
| Content | 50 PR, in p | bairs in C | Т | | | | | | | | | | | |
| | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | |
| f/Hz | 125 | 250 | 500 | 1000 | 2000 | 4000 | 8000 | SNR | 30 dB H | 31 dB | М | 27 dB | L 27 d | В |
| MA dB | 33.8 | 29.2 | 32.7 | 30.0 | 36.0 | 34.3 | 41.0 | SNRm | 33.4 dB Hm | 33.9 dB | Mm | 31.0 dB I | Lm 30.4 d | В |
| SD dB | 5.1 | 4.6 | 4.9 | 5.0 | 4.0 | 3.6 | 4.4 | SNRs | 2.9 dB Hs | 2.7 dB | Ms | 3.6 dB I | Ls 3.6 d | В |
| APV dB | 28.7 | 24.5 | 27.8 | 25.0 | 32.0 | 30.6 | 36.6 | | | | | | | |

MADE IN SWEDEN

Hearing Protection

Detectable ear plugs









minibox

uvex hi-com detec

- metal powder in cord allows full detection even if the cord is shredded, coloured blue for easy recognition
- oval pods match the shape of the outer ear ensuring pressure free, comfortable fit
- delivers low, flat attenuation allowing for excellent speech and sound recognition
 large surface area delivers softer acoustics and absorbs inner ear sounds which can become obvious when wearing hearing protection in quieter areas

| uvex hi-com de | tec | | | | | | | | | | | | |
|----------------|------------|------------|------|------|------|------|------|------|------------|---------|----|-----------|------------|
| Art. no. | 2112114 | | | | | | | | | | | | |
| | | | | | | | | | | | | | |
| Design | with cord | , detecta | able | | | | | | | | | | |
| Standard | EN 352-2 | 2:2020 | | | | | | | | | | | |
| Colour | blue | | | | | | | | | | | | |
| Order unit | CT | | | | | | | | | | | | |
| Content | 100 PR, ir | n pairs in | CT | | | | | | | | | | |
| | | | | | | | | | | | | | |
| f/Hz | 125 | 250 | 500 | 1000 | 2000 | 4000 | 8000 | SNR | 26 dB H | 30 dB | М | 23 dB L | . 18 dB |
| MA dB | 17.6 | 19.0 | 25.4 | 29.6 | 34.5 | 39 | 43.8 | SNRm | 30.1 dB Hm | 34.4 dB | Mm | 27.3 dB L | .m 21.9 dB |
| SD dB | 4.2 | 3.7 | 5.0 | 5.2 | 3.8 | 5.5 | 4.1 | SNRs | 3.7 dB Hs | 3.9 dB | Ms | 3.9 dB L | .s 3.7 dB |
| APV dB | 13.5 | 15.3 | 20.3 | 24.5 | 30.6 | 33.5 | 39.6 | | | | | | |

uvex x-fit detec

- · disposable earplugs coloured blue with metal component for easy detection
- suitable for use in high noise environments
- tapered shape matches the ear canal anatomy for comfortable and secure fit
- patented x-grip technology reduces pressure on the ear canal and aids easy, hygienic removal
- sealed PU foam reduces the potential for contamination

| C 1 1 1 | | | | | | | | | | | | | | | |
|----------------|------|-----------|-----------|------|------|------|------|------|------|------------|---------|----|---------|----|---------|
| uvex x-fit det | | | | | | | | | | | | | | | |
| Art. no. | 2112 | 011 | | | | | | | | | | | | | |
| Design | with | cord, de | etectabl | е | | | | | | | | | | | |
| Standard | EN 3 | 352-2:20 |)20 | | | | | | | | | | | | |
| Colour | blue | | | | | | | | | | | | | | |
| Order unit | CT | | | | | | | | | | | | | | |
| Content | 100 | PR, in pa | airs in C | Т | | | | | | | | | | | |
| | | | | | | | | | | | | | | | |
| f/Hz | 63 | 125 | 250 | 500 | 1000 | 2000 | 4000 | 8000 | SNR | 37 dB H | 36 dB | М | 35 dB | L | 34 dB |
| MA dB | 35.3 | 38.4 | 39.3 | 40.8 | 38.9 | 37.8 | 45.9 | 45.1 | SNRm | 40.0 dB Hm | 39.1 dB | Mm | 38.1 dB | Lm | 38.0 dB |
| SD dB | 4.2 | 6.3 | 5.3 | 5.5 | 5.5 | 4.3 | 3.9 | 4.6 | SNRs | 2.8 dB Hs | 3.1 dB | Ms | 3.2 dB | Ls | 3.6 dB |
| APV dB | 31.1 | 32.1 | 34.0 | 35.3 | 33.4 | 33.5 | 42.0 | 40.5 | | | | | | | |
| | | | | | | | | | | | | | | | |

uvex xact-fit detec

- disposable plugs with integrated metal elements makes both earplugs and cord detectable
 tapered plug shape ensures natural, pressure free fit maximising comfort and protection
- levels
 - · left / right pod carriers simplify fitting and ensure accurate fit every-time
 - adjustable neck cord can be altered to wearers requirements
 - sealed PU foam reduces the potential for contamination for increased hygiene
 - replacement pods prolong the life of the product

| uvex xact-fit | detec | | | | | | | | | | | | | | |
|---------------|-------|-----------|-----------|----------|------|------|------|------|----------|--------------|---------|----|---------|----|---------|
| Art. no. | 2124 | 011 | | | | | | | 2124013 | | | | | | |
| Design | with | reusable | e pin, de | tectable | э | | | | replacem | ent earplugs | | | | | |
| Standard | EN 3 | 52-2:20 | 20 | | | | | | EN 352-2 | 2:2020 | | | | | |
| Colour | blue | | | | | | | | blue | | | | | | |
| Order unit | CT | | | | | | | | CT | | | | | | |
| Content | 50 P | R, in pai | rs in CT | | | | | | 400 PR, | loose in CT | | | | | |
| | | | | | | | | | | | | | | | |
| f/Hz | 63 | 125 | 250 | 500 | 1000 | 2000 | 4000 | 8000 | SNR | 26 dB H | 28 dB | М | 23 dB | L | 20 dB |
| MA dB | 16.6 | 19.4 | 22.0 | 25.6 | 27.5 | 31.8 | 34.4 | 36.9 | SNRm | 29.7 dB Hm | 31.3 dB | Mm | 27.2 dB | Lm | 23.9 dB |
| SD dB | 5.4 | 4.9 | 4.2 | 4.9 | 4.7 | 3.8 | 4.4 | 6.0 | SNRs | 3.6 dB Hs | 3.2 dB | Ms | 3.9 dB | Ls | 4.0 dB |
| APV dB | 11.2 | 14.5 | 17.8 | 20.7 | 22.8 | 28.0 | 30.0 | 30.9 | | | | | | | |

MADE IN SWEDEN

96

h

Hearing Protection

Detectable ear plugs



uvex xact-fit multi detec

detectable reusable earplugs with thumb indentations

- $\ensuremath{\cdot}$ metal clip and the blue colour ensure the earplugs can be detected in
- a production environment • oval-shaped earplugs mimics the natural shape of the ear canal for optimum fit and comfort
- ninbox 2224030 Reference in the second seco
- interchangeable replacement earplugs
- · can be handled with dirty hands or while wearing gloves

available in two sizes

| • | | | | | | | | | | | | | | | |
|------------|-----------------|---------------|-------------|------|--------------|---------------|-------------|--------|---------------------|-----------|---------|-----------|----------------|-----------|---------|
| | uvex xact-fit n | nulti detec S | 5 | | | | | uvex | xact-fit multi dete | c M/L | | | | | |
| Art. no. | 2224029 | | | 22 | 24027 | | | 2224 | 030 | | | 2224028 | 3 | | |
| Design | with oval-shap | ped reusable | e earplugs, | wi | th oval-shap | oed reusable | e earplugs, | with | oval-shaped reusa | able earp | lugs, | with oval | -shaped reus | able earp | lugs, |
| | in minibox | | | in | earplug box | (| | in mir | nibox | | | in earplu | g box | | |
| Standard | EN 352-2:202 | 20 | | EN | 352-2:202 | 20 | | EN 3 | 52-2:2020 | | | EN 352-2 | 2:2020 | | |
| Colour | blue | | | bli | ue | | | blue | | | | blue | | | |
| Size | S | | | S | | | | M/L | | | | M/L | | | |
| Order unit | CT | | | C | Г | | | CT | | | | CT | | | |
| Content | 50 PR, packed | d in pairs in | CT | 50 |) PR, packe | d in pairs in | CT | 50 PI | R, packed in pairs | in CT | | 50 PR, p | acked in pairs | s in CT | |
| | | | | | | | | | | | | | | | |
| f/Hz | 125 | 250 | 500 | 1000 | 2000 | 4000 | 8000 | SNR | 26 dB | Н | 26 dB | М | 24 dB | L | 22 dB |
| MA. dB | 26.9 | 25.4 | 26.1 | 28.3 | 31.9 | 32.8 | 37.2 | SNRm | 29.6 dB | Hm | 30.6 dB | Mm | 27.5 dB | Lm | 26.3 dB |
| SD dB | 4.4 | 4.5 | 5.4 | 5.5 | 4 | 6.9 | 6.7 | SNRs | 3.7 dB | Hs | 4.4 dB | Ms | 3.8 dB | Ls | 3.9 dB |
| APV dB | 22.5 | 20.9 | 20.7 | 22.8 | 27.9 | 25.9 | 30.5 | | | | | | | | |



uvex whisper detec

- easy-to-clean reusable corded earplugs
- smooth, dirt-repellent surface can be easily cleaned using mild soap
 and water
- earplug box for hygienic storage when not in use
- integrated metal parts and the blue colour ensure the earplugs can be detected in a production environment
- thanks to the cord, the earplugs are always conveniently to hand in low-noise areas, the earplugs can be worn around the neck

| uvex whisper d | letec | | | | | | | | | | |
|----------------|--------------|------------|------------|------|--------------------------------------|------|------|---------|--|--|--|
| Art. no. | 2111261 | | | 1 | 2111262 | | | | | | |
| Design | with cord d | etectable, | in minibox | , | with cord detectable, in earplug box | | | | | | |
| Standard | EN 352-2:2 | 020 | | | EN 352-2:2020 | | | | | | |
| Colour | blue | | | | blue | | | | | | |
| Order unit | CT | | | | СТ | | | | | | |
| Content | 50 PR, in pa | airs in CT | | : | 50 PR, in pairs in CT | | | | | | |
| | | | | | | | | | | | |
| f/Hz | 63 | 125 | 250 | 500 | 1000 | 2000 | 4000 | 8000 | | | |
| MA dB | 23.7 | 23.2 | 21.1 | 22.6 | 24.8 | 31.7 | 33.4 | 39.4 | | | |
| SD dB | 5.6 | 5.8 | 6.8 | 5.2 | 5.7 | 6.0 | 9.5 | 5 8.2 | | | |
| APV dB | 18.1 | 17.4 | 14.3 | 17.4 | 19.1 | 25.7 | 23.9 | 31.2 | | | |
| SNR | 22 dB | Н | 23 dB | М | 19 | dB | L | 17 dB | | | |
| SNRm | 27.1 dB | Hm | 29.6 dB | Mr | n 24.3 | dB | Lm | 22.4 dB | | | |
| SNRs | 5.6 dB | Hs | 6.3 dB | Ms | 5.2 | dB | Ls | 5.7 dB | | | |
| | | | | | | | | | | | |



uvex whisper+ detec

- easy-to-clean reusable corded earplugs
- smooth, dirt-repellent surface can be easily cleaned using mild soap and water
- earplug box for hygienic storage when not in use
- integrated metal parts and the blue colour ensure the earplugs can be detected in a production environment
- thanks to the cord, the earplugs are always conveniently to hand in low-noise areas, the earplugs can be worn around the neck

| e, in earplug box | | | | | | |
|-----------------------|--|--|--|--|--|--|
| e, in earplug box | | | | | | |
| e, in earplug box | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| 50 PR, in pairs in CT | | | | | | |
| | | | | | | |
| 4000 8000 | | | | | | |
| 32.6 38.1 | | | | | | |
| 6.5 5.3 | | | | | | |
| 26.1 32.8 | | | | | | |
| L 22 dB | | | | | | |
| Lm 26.0 dB | | | | | | |
| Ls 4.0 dB | | | | | | |
| | | | | | | |

MADE IN SWEDEN 🔳

Hearing Protection

Banded hearing protection



uvex x-cap

• ergonomically shaped banded ear protector for optimal positioning in front of the chin • ergonomically shaped earplugs provide a high level of wearer comfort

• replaceable earplugs

• seal forms at the opening of the ear canal meaning there is no pressure in the ear

| uvex x-cap | | | | | | | | | | | | | | |
|------------|----------------------|----------------------------------|------|------|------|------|------|---------|----------------|--------------|---------|----|------------|-----------|
| Art. no. | 2125 | 361 | | | | | | 2125351 | | | | | | |
| Design | with | with band r | | | | | | | | ent earplugs | | | | |
| Standard | EN 3 | EN 352-2:2020 | | | | | | | | | | | | |
| Colour | grey, sky blue, lime | | | | | | | | sky blue, lime | | | | | |
| Order unit | CT | CT | | | | | | | CT | | | | | |
| Content | 15 PC | 15 PC, individually packed in CT | | | | | | 6 | 60 PR, C | T of 5 pairs | | | | |
| | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | |
| f/Hz | 63 | 125 | 250 | 500 | 1000 | 2000 | 4000 | 8000 | SNR | 23 dB H | 27 dB | М | 20 dB L | 18 dB |
| MA dB | 23.7 | 22.0 | 21.6 | 19.0 | 23.8 | 31.9 | 39.6 | 39.6 | SNRm | 26.7 dB Hm | 30.4 dB | Mm | 23.1 dB Lr | n 21.4 dB |
| SD dB | 4.0 | 2.9 | 4.7 | 4.3 | 3.6 | 4.0 | 2.7 | 3.7 | SNRs | 3.4 dB Hs | 3.0 dB | Ms | 3.5 dB Ls | 3.8 dB |
| APV dB | 19.7 | 19.1 | 16.9 | 14.7 | 20.2 | 27.9 | 36.9 | 35.9 | | | | | | |

uvex x-fold

• ergonomically shaped banded ear protector for optimal positioning in front of the chin which eliminates noise transfer on contact

- ergonomically shaped replacement earplugs for optimal wearer comfort
 - foldable banded ear protectors make storage easy

| uvex x-fold | | | | | | | | | | | | | | |
|-------------|------------|-----------|----------|---------|--------------|------|----------------|----------|--------------|---------|----|---------|------|---------|
| Art. no. | 2125344 | | | 2 | 2125351 | | | | | | | | | |
| Design | with folda | able ban | d | eplacem | ent earplugs | | | | | | | | | |
| Standard | EN 352-2 | 2:2020 | | | | | | | | | | | | |
| Colour | grey, sky | blue, lim | е | | | 5 | sky blue, lime | | | | | | | |
| Order unit | CT | | | | | | | CT T | | | | | | |
| Content | 5 PC, ind | ividually | packed i | n CT | | | 6 | 60 PR, C | T of 5 pairs | | | | | |
| | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | |
| f/Hz | 125 | 250 | 500 | 1000 | 2000 | 4000 | 8000 | SNR | 26 dB H | 30 dB | М | 23 dB | L | 21 dB |
| MA dB | 27.1 | 23.0 | 24.1 | 26.2 | 35.1 | 39.6 | 40.4 | SNRm | 30.1 dB Hm | 33.1 dB | Mm | 26.7 dB | Lm 2 | 24.7 dB |
| SD dB | 5.1 | 4.2 | 4.3 | 4.2 | 3.1 | 3.4 | 4.4 | SNRs | 3.6 dB Hs | 3.0 dB | Ms | 3.8 dB | Ls | 3.8 dB |
| APV dB | 22.0 | 18.8 | 19.8 | 22.0 | 31.9 | 36.2 | 36.0 | | | | | | | |

uvex xact-band

• extremely low weight - just 4 grams

• seal forms inside the ear canal, just like disposable plugs

- integrated sound absorbers reduce noise transmission through the band
- replacement earplugs can be dispensed through the standard uvex wall mounted dispenser unit
 banded ear protector

• thumb indentations on the stems for quick and easy fitting

| uvex xact-ban | d | | | | | | | | | | | | | | |
|---------------|----------------------|-----------|----------|------|----------------------|---------------|------|-------|----------------------|------------|---------|----|---------|------|---------|
| Art. no. | 21253 | 372 | | | | 2124002 | | | 2124 | 2124003 | | | | | |
| Design | with band | | | | replacement earplugs | | | repla | replacement earplugs | | | | | | |
| Standard | EN 352-2:2020 | | | | | | | | | | | - | | | |
| Colour | grey, sky-blue, lime | | | | lime | | | | | lime | | | | | |
| Order unit | ČT | | | | CT | | | | CT | CT | | | | | |
| Content | 5 PC, | | | | 250 F | PR, | | | 400 | PR, | | | | | |
| | individ | dually pa | acked in | CT | | CT of 5 pairs | | | | loos | e in CT | | | | |
| | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | |
| f/Hz | 63 | 125 | 250 | 500 | 1000 | 2000 | 4000 | 8000 | SNR | 26 dB H | 29 dB | М | 22 dB | L | 21 dB |
| MA dB | 21.5 | 23.3 | 24.7 | 25.3 | 27.1 | 33.0 | 37.3 | 38.5 | SNRm | 30.4 dB Hm | 32.4 dB | Mm | 27.4 dB | Lm : | 25.5 dB |
| SD dB | 3.6 | 3.6 | 4.7 | 6.0 | 5.5 | 2.7 | 4.3 | 4.9 | SNRs | 4.5 dB Hs | 3.6 dB | Ms | 5.1 dB | Ls | 4.6 dB |
| APV dB | 17.9 | 19.7 | 20.0 | 19.3 | 21.5 | 30.3 | 33.0 | 33.6 | | | | | | | |





Earmuffs

UVEX aXess one safe. active. connected.

RAL – real active listening

Active listening function with the ability to individually adjust the volume of ambient noise. Safe application thanks to integrated sound level limiter. <u>No over-protection or isolation from the working environment.</u>

Bluetooth[®] 5.2

Good sound quality, fast data transfer and a large range with optimised energy consumption.

Dual connection mode

The hearing protection can be paired with two Bluetooth devices at the same time.

Certified hearing protection Attenuation value with SNR 31 dB

Bluetooth[®]

IP 54 Protection class

Suitable for outdoor use or dusty and damp working areas thanks to sealing caps.

Hands-free telephony Make calls without interrupting your work thanks to Bluetooth

connectivity.



LED display

Signals your current work mode, e.g. whether you are making a phone call or are available.

Unique function keys

Can be felt easily and can also be operated even when wearing gloves.

Audio streaming Ideal for monotonous work.

Two surround-sound microphones For reliable transmission of

For reliable transmission of ambient noise.

Voice microphone Ensures optimal voice quality.

Status messages

The audio assistant provides you information through voice prompts ("Bluetooth connected"), so there's no need to remove the hearing protection in hazardous areas.

External audio input

Connects wireless devices or media players via a cable. Charging socket USB Type-C

Fast charging time thanks to higher performance. Easy handling thanks to rotationally symmetrical connectors.



•

Hear what's important

The smart hearing protection for greater occupational safety

Outdoor microphones for secure communication

uvex aXess one are active electronic earmuffs with RAL function (real active listening). This function gives the user the feeling of not wearing hearing protection and of actively participating in the environment with hearing protection. This makes communication possible and warning signals can be perceived better. The volume of the ambient sounds can be set individually.

For safe hearing protection, the maximum output level is limited. The level gain below the sound level limiter is very helpful, for example when adjusting machines or performing diagnostic work.

Conveniently answer calls via Bluetooth®

uvex aXess one connects to your smartphone via Bluetooth 5.2, meaning you no longer miss important calls and can make them without interrupting your work. Dual mode allows you to add another device if needed.

Calls can be answered quickly and easily using the function keys on the earmuffs, so both hands are free when you make calls. The large radio range ensures that paired devices can remain in a protected location rather than at the workplace.



Protection against dust and moisture Closure caps seal connector sockets.



uvex aXess one

- active Bluetooth[®] earmuffs with foldable headband
- communication, telephony and streaming
- attenuation of harmful impulse noise
- real active listening function for clear perception
 of ambient noise
- buttons with a shape that corresponds to their function
- IP54 water and dust protected ideal for outdoor applications
 battery status indicator and battery warning message
- continuous length adjustment for the perfect positioning
- padded headband for a comfortable fit
- microphone covers can be used to minimise wind noise or provide additional protection

uvex aXess one Art. no. Design SNR protection value H-M-L value Weight Colour Order unit

2640001 Active earmuffs with Bluetooth 31 dB H: 37 dB, M: 29 dB, L: 21 dB 360 g matt black, grey PC



uvex aXess



Hearing Protection Earmuffs – Tested in accordance with DIN EN 352-1







- earmuffs with foldable headband
 variable length adjustment for easy positioning
- optimal earmuff shape for pressure-free protection of
- the outer ear
- padded headband for wearer comfort

- wearer comfort guaranteed thanks to extra-soft memory foam earmuff cushions, even when worn for long periods
- replaceable earmuff cushions for high hygiene requirements

| | uvex K10 | uvex K20 | uvex K30 | uvex earmuff bag |
|----------------------|------------------------------|------------------------------|------------------------------|---|
| Art. no. | 2630010 | 2630020 | 2630030 | 2000002 |
| Design | with foldable headband | with foldable headband | with foldable headband | with belt loop and hook-and-loop fastener |
| SNR protection value | 30 dB | 33 dB | 36 dB | |
| H-M-L value | H: 35 dB, M: 28 dB, L: 19 dB | H: 36 dB, M: 32 dB, L: 22 dB | H: 37 dB, M: 34 dB, L: 26 dB | |
| Weight | 185 g | 230 g | 385 g | |
| Colour | black, green | black, yellow | black, red | |
| Order unit | PC | PC | PC | PC |
| | | | | |

Hearing Protection Earmuffs – Tested in accordance with DIN EN 352-1



uvex KX10

- earmuffs with rubberised surface
- · increased grip and secure fit, ideal for oily or damp environments
- foldable headband
- variable length adjustment for easy positioning
- optimal earmuff shape for pressure-free protection of the outer ear
- padded headband for wearer comfort
- comfortable fit guaranteed thanks to extra-soft memory foam earmuff cushions, even when worn for long periods
- replaceable earmuff cushions for high hygiene requirements

| uvex KX10 | |
|----------------------|---|
| Art. no. | 2630011 |
| Design | Hearing protection earmuffs with rubberised surface |
| SNR protection value | 30 dB |
| H-M-L value | H: 35 dB, M: 28 dB, L: 19 dB |
| Weight | 185 g |
| Colour | matt black, green |
| Order unit | PC |
| | |



2630021

uvex K20 hi-viz

- earmuffs in fluorescent colours thanks to the high-visibility design
- foldable headband

LIVE

- · variable length adjustment for easy positioning
- optimal earmuff shape for pressure-free protection of the outer ear
- padded headband for wearer comfort
- · comfortable fit guaranteed thanks to extra-soft memory foam earmuff cushions, even when worn for long periods
- replaceable earmuff cushions for high hygiene requirements

| uvex K20 hi-viz | |
|----------------------|------------------------------|
| Art. no. | 2630021 |
| Design | with foldable headband |
| SNR protection value | 33 dB |
| H-M-L value | H: 36 dB, M: 32 dB, L: 22 dB |
| Weight | 230 g |
| Colour | hi-viz |
| Order unit | PC |

Hearing Protection Earmuffs – Tested in accordance with DIN EN 352-1



uvex K1 \cdot uvex K2 \cdot uvex K3 \cdot uvex K4

- earmuffs with length adjustment
- lightweight with a small cup
- easily adjustable for a perfect fit

| | uve |
|----------------------|-----|
| Art. no. | 26 |
| Design | wit |
| SNR protection value | 28 |
| H-M-L value | H: |
| Weight | 180 |
| Colour | bla |
| Order unit | PC |
| | |

vex K1 600001 /ith headband 8 dB I: 35 dB; M: 24 dB; L: 17 dB 80 g lack, green C

uvex K2 2600002 with headband 32 dB H: 37 dB; M: 29 dB; L: 21 dB 217 g black, yellow PC

- · padded headband for optimum wearer comfort
- wearer comfort guaranteed thanks to extra-soft memory foam ear cushions, even when worn for long periods (excluding uvex K1)
 - uvex K3 2600003 with headband 33 dB H: 36 dB; M: 30 dB; L: 22 dB 297 g black, red PC

uvex K4 2600004 with headband 35 dB H: 38 dB; M: 33 dB; L: 24 dB 356 g neon lime PC

Hearing Protection Earmuffs – Tested in accordance with DIN EN 352-1



uvex K2 foldable

dielectric earmuffs with length adjustment and foldable headband
 lightweight with a small cup

• extra-soft memory foam ear cushions for wearer comfort

hi-vis design for improved wearer visibility



uvex K200

- dielectric ear muffs with length adjustment
- suitable for use in workplace environments with exposure to electrical voltage
- adjustable headband for a perfect fit and optimum protection
- easily adjustable for a customised fit
- range of positions possible with 360° capsule rotation

| uvex K2 foldable | | uvex K200 | |
|----------------------|------------------------------|----------------------|------------------------------|
| Art. no. | 2600012 | Art. no. | 2600200 |
| Design | with foldable headband | Design | with 360° headband rotatable |
| SNR protection value | 31 dB | SNR protection value | 28 dB |
| H-M-L value | H: 35 dB, M: 29 dB, L: 21 dB | H-M-L value | H: 33 dB, M: 25 dB, L: 18 dB |
| Weight | 229 g | Weight | 173 g |
| Colour | neon lime | Colour | black, ochre |
| Order unit | PC | Order unit | PC |



uvex K Junior

• earmuffs with shorter headband

suitable for head widths up to 145 mm, equivalent to sizes S/M

· padded headband and soft cushions for optimum wearer comfort

| uvex K Junior | | | | |
|----------------------|------------------------------|------------------------------|------------------------------|------------------------------|
| Art. no. | 2600000 | 2600010 | 2600011 | 2600013 |
| Design | with shorter headband | with shorter headband | with shorter headband | with shorter headband |
| SNR protection value | 28 dB | 28 dB | 28 dB | 28 dB |
| H-M-L value | H: 34 dB, M: 26 dB, L: 18 dB | H: 34 dB, M: 26 dB, L: 18 dB | H: 34 dB, M: 26 dB, L: 18 dB | H: 34 dB, M: 26 dB, L: 18 dB |
| Weight | 167 g | 167 g | 167 g | 167 g |
| Colour | yellow | blue | lime | pink |
| Order unit | PC | PC | PC | PC |
| | | | | |

Hearing Protection

Helmet earmuffs for 30-mm Euroslot - Tested in accordance with DIN EN 352-3



uvex K10H · uvex K20H · uvex K30H

- hearing protection earmuffs that can be attached to a safety helmet using the 30-mm Euroslot
- dielectric design
- soft, variable length adjustment
- sound isolation thanks to the rubber-cushioned earmuffs
- length is easily adjustable for a perfect fit on the helmet
- 360° rotation for standby and resting positions
- wearer comfort guaranteed thanks to extra-soft memory foam earmuff cushions, even when worn for long periods
- not compatible with the uvex pheos visor system

| | uvex K10H | uvex K20H | uvex K30H |
|----------------------|---|---|---|
| Art. no. | 2630210 | 2630220 | 2630230 |
| Design | dielectric helmet earmuffs for 30-mm Euroslot | dielectric helmet earmuffs for 30-mm Euroslot | dielectric helmet earmuffs for 30-mm Euroslot |
| SNR protection value | 28 dB | 30 dB | 34 dB |
| H-M-L value | H: 34 dB; M: 26 dB; L: 18 dB | H: 34 dB; M: 28 dB; L: 20 dB | H: 36 dB; M: 32 dB; L: 24 dB |
| Weight | 216 g | 263 g | 420 g |
| Colour | black, green | black, yellow | black, red |
| Order unit | PR | PR | PR |
| | | | |

þ

Hearing Protection

Helmet earmuffs for 30-mm Euroslot - Tested in accordance with DIN EN 352-3



uvex K1H · uvex K2H

- not compatible with the uvex pheos visor system
- · length is easily adjustable for a perfect fit on the helmet
- 360° rotation for standby and resting positions
- soft ear cushions adapt to surface and head shape to ensure optimum wearer comfort (uvex K1H)
- wearer comfort guaranteed thanks to extra-soft memory foam ear cushions, even when worn for long periods (uvex K2H)

| | uvex K1H | uvex K2H |
|----------------------|------------------------------------|------------------------------------|
| Art. no. | 2600201 | 2600202 |
| Design | helmet earmuffs for 30-mm Euroslot | helmet earmuffs for 30-mm Euroslot |
| SNR protection value | 27 dB | 30 dB |
| H-M-L value | H: 32 dB; M: 24 dB; L: 17 dB | H: 35 dB, M: 27 dB, L: 20 dB |
| Weight | 210 g | 251 g |
| Colour | black, green | black, yellow |
| Order unit | PR | PR |

Customisation

All uvex earmuffs can be printed with your company logo and can also be colour-coded to suit your needs. Minimum order quantities apply.



uvex aXess one

Active Bluetooth helmet earmuffs

Tested in accordance with DIN EN 352-3, EN 352-4, EN 352-6, EN 352-8

Status messages

The audio assistant provides information via voice announcement ("Bluetooth connected")

Hands-free telephony Make calls without interrupting your work



Flexible spiral cable Earmuffs can be moved to the resting position, regardless of the width of the helmet





uvex aXess hygiene kit 2592641

LED display Indicates the current work mode

Unique function keys Easy to use, even when wearing gloves

IP54 protection class (dust-tight and waterproof) Suitable for use in dusty and damp working conditions thanks to sealing

uve)

axess one



caps. **External microphones**

for reliable communication uvex aXess one are active electronic earmuffs with RAL function (real active listening). This function makes the user feel like they are not wearing hearing protection, which in turn allows them to actively participate in the environment despite wearing earmuffs. Users are still able to communicate with others and can react effectively to warning signals. The volume of the transmitted ambient noise can be individually adjusted in 5 increments. This means that there is no over-protection, even in low-noise environments from 85 dB. Low noise levels below 82 dB can even be amplified. To ensure safe hearing protection, the maximum output level is limited.



Conveniently answer calls via Bluetooth®

uvex aXess one connects to your smartphone via Bluetooth 5.2, meaning you no longer miss important calls and can make them without interrupting your work. Dual mode allows you to add another device if needed.

Calls can be answered quickly and easily using the function keys on the earmuffs, leaving both hands free when you make calls.



Bluetooth®

RAL - real active listening

Active listening function with the ability to individually adjust the volume of ambient noise, no over-protection and no isolation from the environment



Bluetooth[®] 5.2 Good sound quality, fast data transfer and a large range

Dual connection mode Pair with 2 Bluetooth devices at the same time



Two surround-sound microphones For reliable transmission of ambient noise

> Voice microphone Ensures optimal voice quality

Audio streaming Ideal for monotonous work



USB Type-C charging socket Fast charging time, easy handling, flexible charging options






ØØ

uvex aXess one — system combinations

Perceive ambient noise while still being protected

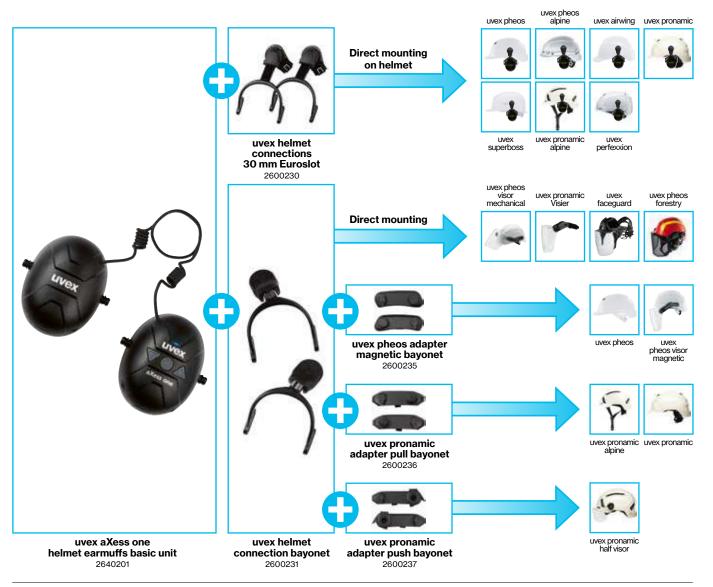

uvex aXess one helmet earmuffs

- active Bluetooth[®] earmuffs for attaching to the helmet
- two helmet connections available, uvex bayonet/30 mm Euroslot
- noise insulation thanks to the rubber-cushioned earmuffs
- communication, telephony and audio streaming
- attenuation of harmful impulse noise
- no over-protection, can be used from 80 dB
- real active listening function for clear perception of ambient noise. Low noise levels can be amplified

- buttons with a shape that corresponds to their function
- IP54 water and dust protection, ideal for outdoor applications
- battery status indicator and battery warning message
- continuous length adjustment for perfect positioning
 microphone covers can be used to minimise wind noise or provide additional protection

| | uvex aXess one helmet | Earmuffs Helmet connection | Earmuffs | uvex pheos adapter | uvex pronamic adapter | uvex pronamic adapter |
|------------|------------------------|----------------------------|---------------------------|---------------------|-----------------------|-----------------------|
| | earmuffs Basic unit | 30 mm Euroslot | Helmet connection bayonet | Magnetic bayonet | Pull bayonet | Push bayonet |
| Art. no. | 2640201 | 2600230 | 2600231 | 2600235 | 2600236 | 2600237 |
| Design | Active helmet earmuffs | 30 mm Euroslot | uvex bayonet | For use with the | Helmet connection for | Helmet connection for |
| | basic unit | helmet connection | helmet connection | magnetic pheos | use with full visors | use with half visors |
| | | | | visors and the uvex | and the uvex earmuffs | and the uvex earmuffs |
| | | | | earmuffs with | with bayonet | with bayonet |
| | | | | bayonet connection | connection | connection |
| Weight | 309 g | 99 g | 69 g | | | |
| Colour | black, grey | | | | | |
| Order unit | PC | PR | PR | PR | PR | PR |
| | | | | | | |

Hearing Protection

uvex helmet earmuffs for uvex system combinations - Tested in accordance with DIN EN 352-3



uvex K1P · uvex K2P

- for use only with uvex helmets in combination with uvex helmet adapters or a pre-mounted visor system
- the soft foam ear cushion of the K1P adapts to the wearer's head shape to ensure optimum wearer comfort
- the K2P guarantees a comfortable fit thanks to extra-soft memory foam earmuff cushions, even when worn for long periods
- 360° rotation for standby and resting positions

- both variants are available in a bayonet version and can be attached and removed quickly and easily without tools
- ${\scriptstyle \bullet}$ K2P available as a magnetic variant so the earmuffs can be quickly
- and easily attached and removed without having to take off the helmet • easy, convenient height adjustment of earmuffs
- easy, convenie
 dielectric

| | uvex K1P bayonet | uvex K2P bayonet | uvex K2P magnetic |
|----------------------|------------------------------|------------------------------|------------------------------|
| Art. no. | 2600216 | 2600214 | 2600215 |
| Design | bayonet connection | bayonet connection | magnetic connection |
| SNR protection value | 27 dB | 30 dB | 30 dB |
| H-M-L value | H: 33 dB, M: 25 dB, L: 18 dB | H: 35 dB, M: 27 dB, L: 20 dB | H: 35 dB, M: 27 dB, L: 20 dB |
| Weight | 191 g | 235 g | 240 g |
| Colour | black, grey | black, yellow | black, yellow |
| Order unit | PR | PR | PR |



uvex magnetic connection system

The unique magnetic locking system allows the earnuffs and visor to be attached or removed without tools. This allows the helmet to conveniently stay on your head and means you remain protected. Easily and quickly adjust your system to your requirements.

uvex bayonet connection system

The bayonet connection allows the earmuffs to be attached or removed without tools. Easily and quickly adjust your system to your requirements.

Hearing Protection Helmet earmuffs – Assembly matrix

| | - | F | P | L, | | | P | | | ~ | F., | | 1 |
|--|------------------|---|------------------------------|---------------|--|---------------------------|--------------------|---|--------------------|---|--|-----------------------------------|----------------------------------|
| | uvex pronamic | uvex pronamic alpine | uvex pronamic alpine E | uvex pheos | uvex pheos E | uvex pheos alpine | uvex perfexxion | uvex airwing B | uvex super boss | uvex pronamic visor system | uvex pheos visor magnetic | uvex pheos visor mechanical | uvex faceguard |
| uvex K1H (2600201) | • | • | _*(1) | • | _*(1) | • | • | • | • | - | - | - | - |
| uvex K2H (2600202) | • | | _*(1) | | _*(1) | | | • | • | - | - | - | - |
| uvex K10H (2630210) | • | • | • | | • | • | • | • | • | - | - | - | - |
| UVEX K20H (2630220) | • | | | | | • | • | • | • | - | - | - | - |
| UVEX K30H (2630230) | • | | | | | | • | • | • | - | - | - | - |
| Uvex K1P bayonet (2600216) | | With nic adapter pull b 2600236 or pronamic viso | | | With dapter magnetic 2600235 or mechanical viso | - | - | _ | _ | - | - | | • |
| uvex K2P bayonet (2600214) | | With nic adapter pull b 2600236 or pronamic viso | | | With dapter magnetic 2600235 or mechanical vis | - | _ | _ | _ | - | _ | | |
| Livex K2P magnet (2600215) | _ | - | - | pheos | With helmet adapter m 9790078 | agnetic | - | - | - | _ | | - | - |
| aXess one Helmet earmuff (2640201) | | With helmet connection 30 mm slot 2600230 | n | F | With nelmet connectio 30 mm slot 2600230 | n | • | With nelmet connectio 30 mm slot 2600230 | n | With helmet connection bayonet 2600231 and pronamic adapter pull bayonet 2600236 or pronamic visor | With helmet connection bayonet 2600231 and pheos adapter magnetic bayonet 2600235 | helmet co bay | ith onnection onet 0231 |
| non-dielectric | | | | | | | | | | | | | |
| 9790078 | uvex pheos ad | | | | Examp | le: | | | | | | 1 | - |
| 2600235 2600236 | uvex pheos ad | | | | | | + | | + | | - | - | |
| 2600236 | Earmuffs helm | | | | | - | | | | 2 | _ | U. | |
| 2600230 | Earmuffs helm | | | _ 3 | uve> | pronamic B-\ (9731030) | WR u | vex K2P bayo (2600214) | net | uvex pronamic r (991610 | nesh visor | uvex pronan | nic system |

Hearing Protection

Earplug accessories



uvex clear otoplastics

 silicone-free towelettes for quick and easy cleaning of reusable ear plugs

| uvex clear otoplastics | | | | | | |
|------------------------|---------------------|--|--|--|--|--|
| Art. no. | 6177116 | | | | | |
| Content | 30 towlettes per PC | | | | | |
| Order unit | PC | | | | | |
| | | | | | | |



uvex earplug box

- box for hygienic earplug storage
- compact and dirt-resistant design
- · for one pair of reusable earplugs with cord
- or two pairs of reusable earplugs without cord
- uvex earplug box

 Art. no.
 2111404

 Design
 earplugs not included

 Colour
 transparent

 Content
 50 PC per Box

 Order unit
 CT



Wall bracket for dispenser box

 plexiglas wall-mounted dispenser, suitable for uvex x-fit (2112001, 2112010, 2112011), uvex com4-fit (2112004, 2112012), uvex onefit (2112045), uvex xtra-fit (2112060), uvex hi-com (2112100, 2112101, 2112106, 2112114).

| Wall bracket for dispenser box | | | | | | |
|--------------------------------|-------------|--|--|--|--|--|
| Art. no. | 2134000 | | | | | |
| Material | PMMA | | | | | |
| Colour | transparent | | | | | |
| Order unit | PC | | | | | |
| | | | | | | |



Hearing protection tester box

- Find the perfect hearing protection for you:
- box containing selection of uvex disposable/ reusable and detectable
- hearing protection earplugs plus uvex xactband banded ear protectors
- article number: 1000929



Usage poster

Article numbers

- 1001.165 (German)
- 1001.166 (English)
- Size: A2



Hearing protection guide

- 25 pages
- with Euro holes
- includes all essential information
- about hearing protection
- art. no.: 1001.214 (German) • art. no.: 1001.215 (English)



Þ

Hearing protection

Earmuff accessories



uvex aXess series hygiene kit

| uvex aXess series hygiene kit | | | | | | |
|-------------------------------|--|--|--|--|--|--|
| Art. no. | 2592641 | | | | | |
| Design | for uvex aXess earmuff series | | | | | |
| Order unit | BG | | | | | |
| Content | 2 earmuff cushions, 2 absorber cushions, | | | | | |
| | 2 inner cushions 3 microphone covers | | | | | |



uvex K series comfort pads "uvex dry pads"

accessories for all models in the uvex K series
the comfort pads can be attached to the sealing cushions to absorb moisture and sweat

| uvex K series c | omfort pads "uvex dry pads" |
|-----------------|--|
| Art. no. | 2599978 |
| Design | self-adhesive, suitable for all models |
| | in the uvex K series |
| Content | 10 Pads in BG |
| Order unit | BG |
| | |



uvex K series · Hygiene kits

| | uvex K series | uvex K series |
|------------|----------------------|----------------------------|
| | hygienekit standard | hygienekit-premium |
| Art. no. | 2599971 | 2599972 |
| Design | accessories for | accessories for uvex K2, |
| | uvex K1, uvex K1H, | uvex K2 foldable, uvex K3, |
| | uvex K1P, uvex K200, | uvex K4, uvex K10, |
| | uvex K junior | uvex KX10, uvex K20, |
| | | uvex K30, uvex K2H |
| | | uvex K2P, uvex K10H, |
| | | uvex K20H, uvex K30H, |
| | | uvex aXess one |
| Content | 2 ear pads and 2 muf | fling pads |
| | in BG | in BG |
| Order unit | BG | BG |



uvex microphone cover

| uvex microph | one cover |
|--------------|--|
| Art. no. | 2599978 |
| Design | Set of nine, self-adhesive, suitable for the |
| | uvex aXess series |
| Order unit | BG |



uvex earmuff bag

uvex earmuff bag Art. no. 2000002 Design with belt loop and hook-and-loop fastener Size 150x120x120 mm Order unit PC



Storage box for earmuffs

| Storage box for earmuffs | | | | | | |
|--------------------------|--|--|--|--|--|--|
| 2000000 | | | | | | |
| Plastic storage box | | | | | | |
| 236x225x125 mm | | | | | | |
| PC | | | | | | |
| | | | | | | |

Hearing Protection

| Art. no. | Name | Product | Colour | Content | Page |
|---|--|--|--|--|--|
| 2000000 | | Storage box | blue | PC | 113 |
| 2000002 | 1 | Earmuff bag | | PC | 102/113 |
| 2111201 | uvex whisper | Reusable earplugs with cord in a mini box | orange | 50 PR, in pairs in CT | 95 |
| 2111212 2111235 | uvex whisper+ uvex whisper supreme | Reusable earplugs with cord in a mini box Reusable earplugs with cord in earplug box | lime yellow | 50 PR, in pairs in CT 50 PR, in pairs in CT | 95 95 |
| 2111237 | uvex whisper | Reusable earplugs with cord in earplug box | orange | 50 PR, in pairs in CT | 95 |
| 2111238 | uvex whisper+ | Reusable earplugs with cord in earplug box | lime | 50 PR, in pairs in CT | 95 |
| 2111239 | uvex whisper+ detec | Detectable reusable earplugs with cord in earplug box | blue | 50 PR, in pairs in CT | 97 |
| 2111260 2111261 | uvex whisper+ detec | Reusable earplugs with cord in a mini box | blue blue | 50 PR, in pairs in CT 50 PR, in pairs in CT | 97 97 |
| 2111262 | uvex whisper detec uvex whisper detec | Reusable earplugs with cord in a mini box Reusable earplugs with cord in a mini box | blue | 50 PR, in pairs in CT | 97 |
| 2111404 | | uvex earplug box | transparent | CT | 112 |
| 2111988 | one 2 click | dispenser, empty, magnetic | | CT | 92 |
| 2111989 | ana Qaliak | Magnetic wall bracket for dispenser | | CT | 92 |
| 2111990 2111991 | one 2 click one 2 click | Dispenser filled with 600 pairs of x-fit earplugs Dispenser filled with 600 pairs of com4-fit earplugs | | 600 PR, x-fit 600 PR, xcom4-fit | 92 92 |
| 2111992 | one 2 click | Dispenser filled with 600 pairs of hi-com earplugs | | 600 PR, hi-com | 92 |
| 2112000 | one 2 click | Dispenser for 600 pairs of earplugs, empty | | CT | 92 |
| 2112001 | uvex x-fit | Disposable earplugs without cord | lime | 200 PR, packed in pairs in CT | 91 |
| 2112004 2112010 | uvex com4-fit uvex x-fit | Disposable earplugs without cord Disposable earplugs with cord | light orange lime | 200 PR, packed in pairs in CT 100 PR, packed in pairs in CT | 91 91 |
| 2112010 | uvex x-fit detec | Detectable disposable earplugs with cord | blue | 100 PR, in pairs in CT | 96 |
| 2112012 | uvex com4-fit | Disposable earplugs with cord | light orange | 100 PR, packed in pairs in CT | 91 |
| 2112013 | | Disposable earplugs without cord | | 50 PR, loose in CT | 91 |
| 2112022 | | Refill box | lime | 300 PR, loose in CT | 92 |
| 2112023 | uvex com4-fit uvex xtra-fit | Refill box Disposable earplugs without cord | light orange | 300 PR, loose in CT | 92 91 |
| 2112060 | | Refill box | orange orange | 200 PR, packed in pairs in BG 250 PR, loose in BG | 92 |
| 2112087 | uvex x-fit | Disposable earplugs without cord | lime | 100 PR, packed in pairs in CT | 91 |
| 2112093 | uvex xtra-fit | Minidispenser Box | orange | 100 PR, packed in pairs in CT | 91 |
| 2112094 | | Minidispenser Box | lime | 100 PR, packed in pairs in CT | 91 |
| 2112095 | uvex hi-com uvex com4-fit | Minidispenser Box Minidispenser Box | lime light orange | 100 PR, packed in pairs in CT 100 PR, packed in pairs in CT | 90 91 |
| 2112096 | uvex hi-com | Disposable earplugs without cord | lime | 200 PR, packed in pairs in CT | 90 |
| 2112101 | uvex hi-com | Disposable earplugs with cord | lime | 100 PR, packed in pairs in CT | 90 |
| 2112106 | uvex hi-com | Disposable earplugs without cord | beige | 200 PR, packed in pairs in CT | 90 |
| 2112114 2112118 | uvex hi-com detec | Detectable disposable earplugs with cord | blue | 100 PR, in pairs in CT | 96 |
| 2112118 2112119 | uvex hi-com uvex hi-com | Refill box Refill box | lime beige | 300 PR, loose in CT 300 PR, loose in CT | 92 92 |
| 2112131 | uvex com4-fit | Disposable earplugs without cord | light orange | 15 PR, loose in CT | 91 |
| 2112133 | uvex x-fit | Disposable earplugs without cord | light of all go | 15 PR, loose in CT | 91 |
| | uvex xact-fit | Earplugs with cord and pin | lime, grey | 50 PR, packed in pairs in CT | 83/94 |
| | uvex xact-fit | Replacement earplugs | lime | 250 PR, CT of 5 pairs | 94/98 |
| 2124003 2124003 | uvex xact-fit uvex xact-fit detec | Refill box Detectable earplugs with pin | lime blue | 400 PR, loose in CT 50 PR, in pairs in CT | 92/98 96 |
| 2124013 | | Replacement earplugs | blue | 400 PR, loose in CT | 96 |
| 2124017 | uvex xact-fit multi reusable S | Reusable earplugs with oval-shaped reusable plugs | grey, transparent | 50 PR, packed in pairs in CT | 94 |
| | uvex xact-fit multi reusable M/L | Reusable earplugs with oval-shaped reusable plugs | grey, transparent | 50 PR, packed in pairs in CT | 94 |
| 2124019 | | Reusable earplugs with oval-shaped reusable plugs | grey, transparent | 50 PR, packed in pairs in CT | 94 |
| | uvex xact-fit multi reusable M/L uvex xact-fit planet | Reusable earplugs with oval-shaped reusable plugs Earplugs with pin | grey, transparent lime | 50 PR, packed in pairs in CT 50 PR, packed in pairs in CT | 94 94 |
| 2124020 | | accessories for uvex xact-fit test | iiiiie | PC | 93 |
| 2124098 | | accessories for uvex xact-fit test earmuffs | | PC | 93 |
| 2124099 | | Bluetooth-capable headphones | | PC | 93 |
| 2125344 | uvex x-fold | Folding banded ear protector | grey, sky blue, lime | 5 PC, individually packed in CT | 98 |
| 2125351 2125361 | uvex x-cap | Replacement earplugs for uvex x-cap and uvex x-fold Banded ear protector | sky blue, lime grey, sky blue, lime | 60 PR, CT of 5 pairs 15 PC, individually packed in CT | 98 98 |
| | uvex xact-band | Banded ear protector | grey, sky blue, lime | 5 PC, individually packed in CT | 98 |
| 2134000 | 1 | Wall-mounted dispenser | 3), , | PC | 112 |
| 2224027 | | Reusable earplugs with oval-shaped reusable plugs | blue | 50 PR, packed in pairs in CT | 97 |
| 2224028 2224029 | uvex xact-fit multi detec S uvex xact-fit multi detec M/L | Reusable earplugs with oval-shaped reusable plugs | blue blue | 50 PR, packed in pairs in CT 50 PR, packed in pairs in CT | 97 97 |
| 2224029 | | Reusable earplugs with oval-shaped reusable plugs Reusable earplugs with oval-shaped reusable plugs | blue | 50 PR, packed in pairs in CT | 97 |
| 2592640 | | Microphone cover | black | BG | 113 |
| 2592641 | | Hygiene kit uvex aXess series | | 2 earmuff cushions, 2 absorber cushions, 2 inner cushions, 3 microphone covers | 113 |
| 2599971 | | Hygiene kit uvex K series standard | | 2 inner cushions, 3 microphone covers 2 ear pads and 2 muffling pads in BG | 113 |
| 2599972 | 1 | Hygiene kit uvex K series premium | | 2 ear pads and 2 muffling pads in BG | 113 |
| 2599978 | | Comfort pads | | 10 Pads in BTL | |
| 2600000 | | | | | 113 |
| | 0 uvex K junior yellow | Passive earmuffs | yellow, black | PC | 105 |
| 2600001 | l uvex K1 | Passive earmuffs | black, green | PC | 105 104 |
| 2600002 | I uvex K1 2 uvex K2 | Passive earmuffs Passive earmuffs | black, green black, yellow | PC PC | 105 104 104 |
| 2600002 2600003 2600004 | Luvex K1 2 uvex K2 3 uvex K3 4 uvex K4 | Passive earmuffs Passive earmuffs Passive earmuffs Passive earmuffs | black, green | PC PC PC PC | 105 104 104 104 104 |
| 2600002 2600003 2600004 2600010 | l uvex K1 2 uvex K2 3 uvex K3 4 uvex K4 uvex K junior blue | Passive earmuffs Passive earmuffs Passive earmuffs Passive earmuffs Passive earmuffs | black, green black, yellow black, red neon lime blue | PC PC PC PC PC | 105 104 104 104 104 104 |
| 2600002 2600002 2600002 2600010 2600011 | I uvex K1 2 uvex K2 3 uvex K3 4 uvex K4 uvex K junior blue uvex K junior green | Passive earmuffs Passive earmuffs Passive earmuffs Passive earmuffs Passive earmuffs Passive earmuffs | black, green black, yellow black, red neon lime blue lime | PC PC PC PC PC PC | 105 104 104 104 104 105 105 |
| 2600002 2600003 2600004 2600010 2600011 2600012 | I uvex K1 2 uvex K2 3 uvex K3 4 uvex K4 uvex K junior blue uvex K junior green uvex K2 foldable | Passive earmuffs Passive earmuffs Passive earmuffs Passive earmuffs Passive earmuffs Passive earmuffs Passive earmuffs | black, green black, yellow black, red neon lime blue lime neon lime | PC PC PC PC PC PC PC | 105 104 104 104 104 105 105 105 |
| 2600002 2600002 2600004 2600010 2600011 2600012 2600013 | I uvex K1 2 uvex K2 3 uvex K3 4 uvex K4 uvex K junior blue uvex K junior green uvex K2 foldable uvex K junior pink | Passive earmuffs Passive earmuffs Passive earmuffs Passive earmuffs Passive earmuffs Passive earmuffs | black, green black, yellow black, red neon lime blue lime neon lime pink | PC PC PC PC PC PC | 105 104 104 104 104 105 105 105 105 |
| 2600002 2600003 2600004 2600010 2600011 2600012 2600013 2600200 2600201 | I uvex K1 2 uvex K2 3 uvex K3 4 uvex K4 uvex K junior blue uvex K junior green uvex K2 foldable i uvex K junior pink 0 uvex K20 uvex K1H | Passive earmuffs Passiv | black, green black, yellow black, red neon lime blue lime neon lime pink black, ochre black, green | PC PC PC PC PC PC PC PC PC PC PR | 105 104 104 104 105 105 105 105 105 105 105 |
| 2600002 2600003 2600004 2600010 2600011 2600012 2600013 2600200 2600201 2600202 | I uvex K1 2 uvex K2 3 uvex K3 4 uvex K4 uvex K junior blue uvex K junior green uvex K2 foldable uvex K100ro pink 0 uvex K200 uvex K1H 2 uvex K2H | Passive earmuffs Passive earmuffs Passive earmuffs Passive earmuffs Passive earmuffs Passive earmuffs Passive earmuffs Passive earmuffs Passive earmuffs Passive earmuffs Earmuffs with helmet attachment Earmuffs with helmet attachment | black, green black, yellow black, red neon lime blue lime neon lime pink black, ochre black, green black, yellow | PC PC PC PC PC PC PC PC PC PC PR PR | 105 104 104 104 105 105 105 105 105 105 107 107 |
| 2600002 2600003 2600004 2600010 2600011 2600012 2600013 2600200 2600201 2600202 2600201 | I uvex K1 2 uvex K2 3 uvex K3 4 uvex K4 uvex K junior green uvex K junior green uvex K junior pink uvex K2 foldable uvex K2 foldable | Passive earmuffs Passive earmuffs Passive earmuffs Passive earmuffs Passive earmuffs Passive earmuffs Passive earmuffs Passive earmuffs Passive earmuffs Earmuffs with helmet attachment Earmuffs with helmet attachment Earmuffs with helmet attachment | black, green black, yellow black, red neon lime blue lime neon lime pink black, ochre black, green black, yellow black, yellow | PC PC PC PC PC PC PC PC PC PR PR PR | 105 104 104 104 105 105 105 105 105 105 107 107 110 |
| 2600002 2600003 2600004 2600010 2600011 2600012 2600013 2600200 2600201 2600202 2600214 2600215 | uvex K1 uvex K2 uvex K3 uvex K4 uvex K4 uvex K junior blue uvex K junior green uvex K2 foldable uvex K2 foldable uvex K200 uvex K200 uvex K1H uvex K2H uvex K2P uvex M2H | Passive earmuffs Passive earmuffs Passiv | black, green black, yellow black, red neon lime blue lime pink black, ochre black, green black, yellow black, yellow black, yellow | PC PC PC PC PC PC PC PC PC PC PR PR PR PR PR | 105 104 104 104 105 105 105 105 105 107 107 107 110 110 |
| 2600002 2600003 2600004 2600010 2600011 2600012 2600010 2600200 2600201 2600202 2600214 2600215 2600216 | I uvex K1 2 uvex K2 3 uvex K3 4 uvex K4 uvex K junior green uvex K junior green uvex K junior pink uvex K2 foldable uvex K2 foldable | Passive earmuffs Passive earmuffs Passive earmuffs Passive earmuffs Passive earmuffs Passive earmuffs Passive earmuffs Passive earmuffs Passive earmuffs Earmuffs with helmet attachment Earmuffs with helmet attachment Earmuffs with helmet attachment | black, green black, yellow black, red neon lime blue lime neon lime pink black, ochre black, green black, yellow black, yellow | PC PC PC PC PC PC PC PC PC PR PR PR | 105 104 104 104 105 105 105 105 105 105 107 107 110 |
| 2600002 2600003 2600001 2600010 2600010 2600012 2600020 2600201 2600202 2600215 2600215 2600216 2600213 2600213 | I uvex K1 2 uvex K2 3 uvex K3 4 uvex K4 uvex K junior blue uvex K junior green uvex K2 foldable uvex K2 foldable uvex K200 uvex K10 2 uvex K200 uvex K1H 2 uvex K2P uvex K2P bayonet uvex K1P bayonet uvex K1P bayonet Uvex K1P bayonet Helmet connection 30 mm slot | Passive earmuffs Earmuffs with helmet attachment Earmuffs with helmet belreft connection Earmuffs with helmet | black, green black, yellow black, red neon lime blue lime pink black, ochre black, green black, yellow black, yellow black, yellow | PC PC PC PC PC PC PC PC PC PR PR PR PR PR PR PR PR PR PR PR PR | 105 104 104 104 105 105 105 105 105 107 107 107 110 110 110 110 109 109 |
| 2600002 2600000 26000010 26000012 26000012 26000002 2600200 26002002 26002015 26002015 26002016 26002016 26002016 26002012 26000012 26000020 26000020 26000202 26000202 26000202 26000202 26000202 26000202 26000202 26000202 26000202 26000202 26000202 26000202 2600200000000 | I uvex K1 2 uvex K2 3 uvex K3 4 uvex K4 uvex K junior green uvex K junior green uvex K2 foldable uvex K100 uvex K200 uvex K1H uvex K2P uvex K2H uvex K2P bayonet uvex K1P bayonet | Passive earmuffs Earmuffs with helmet attachment Earmuffs with helmet attachment Earmuffs with helmet attachment Earmuffs with helmet attachment a0 mm Euroslot helmet connection uvex bayonet helmet connection uvex dayter magnetic bayonet | black, green black, yellow black, red neon lime blue lime pink black, ochre black, green black, yellow black, yellow black, yellow | PC PC PC PC PC PC PC PC PC PC PR PR PR PR PR PR PR PR PR PR PR PR PR | 105 104 104 104 105 105 105 105 105 107 107 110 110 110 110 109 109 |
| 2600002 2600000 2600001 2600010 2600011 2600012 2600001 2600200 2600201 2600201 2600201 2600201 2600202 2600230 2600233 2600233 2600236 | I uvex K1 2 uvex K2 3 uvex K3 4 uvex K4 1 uvex K junior blue 1 uvex K junior green 1 uvex K2 foldable 1 uvex K2 foldable 1 uvex K20 1 uvex K20 1 uvex K20 1 uvex K20 1 uvex K2P magnet 1 uvex K2P magnet 1 uvex K1P bayonet 1 uvex K1P bayonet 1 Helmet connection 30 mm slot 1 Helmet connection bayonet 5 uvex pheos adapter 1 uvex K1P | Passive earmuffs Earmuffs with helmet attachment uex values to connection uvex values public bayonet uex values public bayonet | black, green black, yellow black, red neon lime blue lime pink black, ochre black, green black, yellow black, yellow black, yellow | PC PC PC PC PC PC PC PC PC PC PR PR PR PR PR PR PR PR PR PR PR PR PR | 105 104 104 104 105 105 105 105 105 107 107 107 110 110 110 110 109 109 109 |
| 2600002 2600000 2600000 2600010 2600011 2600012 2600020 2600200 2600201 2600202 2600216 2600215 2600230 2600231 2600235 2600235 2600237 | I uvex K1 2 uvex K2 3 uvex K3 4 uvex K4 uvex K junior blue uvex K junior blue uvex K junior pink 0 uvex K2 foldable uvex K2 foldable uvex K2 foldable uvex K2 foldable uvex K2 foldable uvex K1H 2 uvex K2P uvex K2P uvex K2P bayonet uvex K1P bayonet 0 Helmet connection 30 mm slot Helmet connection bayonet 5 uvex pheos adapter 0 uvex pronamic adapter | Passive earmuffs Earmuffs with helmet attachment User adopter helmet connection Uvex adapter publ bayonet Uvex adapter publ bayonet Uvex adapter publ bayonet | black, green black, yellow black, red neon lime blue lime neon lime pink black, ochre black, green black, yellow black, yellow black, yellow black, grey | PC PC PC PC PC PC PC PC PC PC PR PR PR PR PR PR PR PR PR PR PR PR PR | 105 104 104 104 105 105 105 105 105 107 107 107 110 110 110 109 109 109 109 |
| 2600002 2600000 2600000 2600010 2600010 2600010 26000200 2600200 2600200 2600200 2600205 2600203 2600230 260000000000 | I uvex K1 2 uvex K2 3 uvex K3 4 uvex K4 uvex K junior green uvex K junior green uvex K junior green uvex K2 foldable uvex K200 uvex K200 uvex K1H uvex K2P uvex K2P uvex K2P bayonet uvex K2P magnet uvex K2P magnet uvex K2P magnet uvex K2P magnet uvex K2P magnet uvex K2P magnet uvex K1P bayonet uvex K1P bayonet u | Passive earmuffs Earmuffs with helmet attachment Earmuffs with helmet attachment Earmuffs with helmet attachment S0 mm Euroslot helmet connection uvex dapter magnetic bayonet uvex adapter puls bayonet uvex adapter puls bayonet Earmuffs with helmet attachment Earmuffs with helmet attachment Earmuffs with helmet connection uvex adapter puls bayonet uvex adapter puls bayonet Earmuffs with helmet attachment Earmuffs with helmet attachment Earmuffs with helmet connection uvex adapter puls bayonet uvex adapter puls bayonet Earmuffs with helmet attachment | black, green black, yellow black, red neon lime blue lime pink black, ochre black, ochre black, yellow black, yellow black, yellow black, grey | PC PC PC PC PC PC PC PC PC PC PR PR PR PR PR PR PR PR PR PR PR PR PR | 105 104 104 104 105 105 105 105 105 107 107 107 110 110 110 109 109 109 109 109 109 |
| 2600002 2600002 2600001 2600012 2600012 2600013 2600201 2600201 2600202 2600216 2600235 2600235 2600235 2600235 2600233 2600237 2630010 2630011 2630011 | I uvex K1 2 uvex K2 3 uvex K3 4 uvex K4 uvex K junior blue uvex K junior blue uvex K junior pink 0 uvex K2 foldable uvex K2 foldable uvex K20 uvex K20 uvex K20 uvex K2H uvex K2P bayonet uvex K1H uvex K2P bayonet uvex K1P bayonet Helmet connection 30 mm slot Helmet connection bayonet uvex pheos adapter uvex pheos adapter uvex k10 uvex K10 uvex K20 uvex K20 uvex K20 uvex K20 uvex K20 uvex K20 | Passive earmuffs Passive earmuff Passive earmuffs Passive earmuff Passive earmuffs Passive earmuff Passiv | black, green black, yellow black, red neon lime blue lime neon lime pink black, ochre black, green black, yellow black, yellow black, yellow black, grey | PC PC PC PC PC PC PC PC PC PC PR PR PR PR PR PR PR PR PR PR PR PR PR | 105 104 104 104 105 105 105 105 105 107 107 107 110 110 109 109 109 109 109 109 109 109 |
| 2600002 2600002 2600001 2600011 2600012 2600012 2600202 2600202 2600202 2600201 2600203 2600231 2600235 2600233 2600233 2600233 2600233 2600233 2600232 26002020 260023 26002002020200002020000000 | I uvex K1 2 uvex K2 3 uvex K3 4 uvex K4 1 uvex K junior blue 1 uvex K junior green 1 uvex K2 foldable 1 uvex K2 foldable 1 uvex K20 D 1 uvex K20 1 uvex K20 1 uvex K21 1 uvex K21 1 uvex K2P magnet 1 uvex K20 magnet 1 uvex k10 bayonet 1 uvex phosa dalpter 1 uvex pronamic adapter 1 uvex K10 1 uvex K20 1 uvex K20 | Passive earmuffs Earmuffs with helmet attachment Earmuffs with helmet attachment Earmuffs with helmet attachment attachment attachment 30 mm Euroslot helmet connection uvex dapter magnetic bayonet uvex adapter puls bayonet uvex adapter puls bayonet Earmuffs with helmet attachment Earmuffs with helmet attachment Earmuffs with helmet attachment Earmuffs with helmet attachment attachment attachment Earmuffs with helmet attachment | black, green black, yellow black, red neon lime blue lime pink black, ochre black, ochre black, yellow black, yellow black, yellow black, yellow black, green matt black, green matt black, green black, yellow black, green matt black, green black, yellow | PC PC PC PC PC PC PC PC PC PR PR PR PR PR PR PR PR PR PR PR PR PR | 105 104 104 104 105 105 105 105 105 105 107 107 107 110 110 110 109 109 109 109 109 109 109 |
| 2600002 2600003 2600001 2600010 2600012 2600012 2600020 2600201 2600202 2600214 2600215 260023 260023 260023 260023 260023 260023 260023 260023 260023 260023 2630010 2630021 2630021 2630021 | I uvex K1 2 uvex K2 3 uvex K3 4 uvex K4 1 uvex K junior blue uvex K junior blue uvex K junior plink 1 uvex K2 foldable 1 uvex K200 uvex K10 1 uvex K200 uvex K1H 2 uvex K2P bayonet 1 uvex K1P bayonet 1 uvex K1P bayonet 1 Helmet connection 30 mm slot 1 Uvex k20 met sloper 1 uvex k10 1 uvex k10 1 uvex k20 1 u | Passive earmuffs Earmuffs with helmet attachment | black, green black, yellow black, red neon lime blue lime neon lime pink black, orre black, green black, yellow black, yellow black, yellow black, grey black, grey black, green matt black, green black, yellow hi-viz black, red | PC PC PC PC PC PC PC PC PC PR PR PR PR PR PR PR PR PR PR PR PR PR | 105 104 104 104 105 105 105 105 105 107 107 107 107 107 107 109 109 109 109 109 109 109 109 109 102 103 102 |
| 2600002 2600003 2600000 2600010 2600010 2600013 2600020 2600201 2600202 2600214 2600215 2600215 2600235 2600235 2600237 26300210 2630010 26300210 26300210 26300210 | I uvex K1 2 uvex K2 3 uvex K3 4 uvex K4 uvex K junior blue uvex K junior green uvex K2 foldable i uvex Kinor pink 0 uvex K200 uvex K200 uvex K1H uvex K2P bayonet uvex K1H uvex K2P bayonet uvex K1H bayonet uvex K1P bayonet i uvex pronamic adapter i uvex pronamic adapter i uvex k10 uvex K20 uvex K30 uvex K30 uvex K30 uvex K30 | Passive earmuffs Passive helmet tatachment Parmuffs Passive helmet attachment Parmuffs Passive helmet attachment Parmuffs Passive helmet attachment Parmuffs Pastive helmet attachment Parmuffs Pastive helmet attachment Parmuffs Pastive helmet eattachment Parmu | black, green black, yellow black, red neon lime blue lime pink black, ochre black, ochre black, yellow black, yellow black, yellow black, yellow black, green matt black, green black, green black, yellow black, green | PC PC PC PC PC PC PC PC PC PR PR PR PR PR PR PR PR PR PR PR PR PR | 105 104 104 104 105 105 105 105 105 107 107 107 107 110 109 109 109 109 109 109 109 109 109 |
| 2600002 2600003 2600010 2600010 2600012 2600012 2600202 2600201 2600202 2600215 2600215 2600215 2600235 2600235 2600235 2600236 2600233 2600236 2600231 2600235 2600236 2600232 2600236 2600232 2600235 2600236 2630210 26300210 26300210 26300210 26300210 26300210 26300210 26300210 26302210 | I uvex K1 2 uvex K2 3 uvex K3 4 uvex K4 1 uvex K junior blue 1 uvex K junior green 1 uvex K2 foldable 1 uvex K2 foldable 1 uvex K2 foldable 1 uvex K20 1 uvex K20 1 uvex K20 1 uvex K20 1 uvex K2P magnet 1 uvex k20 magnet 1 uvex k10 1 uvex K20 1 u | Passive earmuffs Passive helmet eardchment Parmuffs Passive helmet Passive helmet Parmuffs Passive helmet Passive Pas | black, green black, yellow black, red neon lime blue lime neon lime pink black, oren black, green black, yellow black, yellow black, yellow black, grey black, grey black, grey black, green black, green black, green black, green black, red black, green black, green | PC PC PC PC PC PC PC PC PC PR PR PR PR PR PR PR PR PR PR PR PR PR | 105 104 104 104 105 105 105 105 105 107 107 107 107 107 107 109 109 109 109 109 109 109 109 109 109 |
| 2600002 2600002 2600000 2600011 2600012 2600011 2600020 2600200 2600200 2600202 2600216 2600230 2600235 2600235 2600235 2600236 2600236 2600236 2600236 2600236 26300210 26300210 26300210 2630020 2630210 2630220 2630230 264000010 264000010 264000010 26400000000000000000000000000000000000 | I uvex K1 2 uvex K2 3 uvex K3 4 uvex K4 1 uvex K junior blue 1 uvex K junior green 1 uvex K2 foldable 1 uvex K2 foldable 1 uvex K10 1 uvex K20 1 uvex K20 1 uvex K2H 1 uvex K2H 1 uvex K2P magnet 1 uvex K1H 1 Helmet connection 30 mm slot 1 Helmet connection bayonet 1 uvex phosa dapter 1 uvex pronamic adapter 1 uvex pronamic adapter 1 uvex K10 1 uvex K20 1 uvex K20 1 uvex K20 1 uvex K30 1 uvex K30H 1 uvex K30H 1 uvex K30H | Passive earmuffs Passive helmet tachment Parmuffs Passive helmet attachment Parmuffs Passive helmet attachment Parmuffs Passive helmet attachment Parmuffs Passive helmet attachment Parmuffs Passive helmet eartachment Parmuffs Passive helmet Passive earter Passive Passive Passive earter Passive | black, yellow black, yellow black, red neon lime blue iime pink black, ochre black, ochre black, yellow black, yellow black, yellow black, yellow black, yellow black, yellow black, green black, yellow hi-viz black, green black, yellow black, green black, yellow black, green black, green black, green black, green | PC PC PC PC PC PC PC PC PC PR PR PR PR PR PR PR PR PR PR PR PR PR | 105 104 104 104 105 105 105 105 105 107 107 107 107 110 110 109 109 109 109 109 109 109 109 |
| 2600002 2600002 2600001 2600011 2600012 2600011 2600020 2600201 2600201 2600202 2600215 2600231 2600235 2600235 2600235 2600235 2600235 2600230 2630010 2630010 2630010 26300210 26400210 26400210 | I uvex K1 2 uvex K2 3 uvex K3 4 uvex K4 1 uvex K junior blue uvex K junior green uvex K2 foldable 1 uvex K2 foldable 1 uvex K2 foldable 1 uvex K2 foldable 1 uvex K2 M 1 uvex K2 M 1 uvex K2 M 1 uvex K2 M 1 wex K10 1 uvex K20 1 uvex K20 1 uvex K20 1 uvex K20 1 uvex K20 1 uvex K30 1 uvex | Passive earmuffs Earmuffs with helmet attachment Earmuffs with helmet attachment Earmuffs with helmet attachment attachment Earmuffs with helmet attachment Earmuff | black, yeelow black, yellow black, red neon lime blue lime neon lime pink black, oren black, yellow black, yellow black, yellow black, yellow black, yellow black, yellow black, yellow black, yellow hi-viz black, red black, yellow black, red | PC PC PC PC PC PC PC PC PC PR PR PR PR PR PR PR PR PR PR PR PR PR | 105 104 104 104 105 105 105 105 105 105 107 107 107 107 107 107 109 109 109 109 109 109 109 109 102 103 102 103 102 103 102 106 106 106 106 106 |
| 2600002 2600002 2600010 2600011 2600012 2600012 2600201 2600202 2600202 2600202 2600202 260023 260023 260023 260023 260023 260023 260023 260023 260023 260023 260023 2630021 26300021 26300021 26300021 26300021 2630002000000000000000000000000000000 | I uvex K1 2 uvex K2 3 uvex K3 4 uvex K4 1 uvex K junior blue 1 uvex K junior green 1 uvex K2 foldable 1 uvex K2 foldable 1 uvex K10 1 uvex K20 1 uvex K20 1 uvex K2H 1 uvex K2H 1 uvex K2P magnet 1 uvex K1H 1 Helmet connection 30 mm slot 1 Helmet connection bayonet 1 uvex phosa dapter 1 uvex pronamic adapter 1 uvex pronamic adapter 1 uvex K10 1 uvex K20 1 uvex K20 1 uvex K20 1 uvex K30 1 uvex K30H 1 uvex K30H 1 uvex K30H | Passive earmuffs Passive helmet tachment Parmuffs Passive helmet attachment Parmuffs Passive helmet attachment Parmuffs Passive helmet attachment Parmuffs Passive helmet attachment Parmuffs Passive helmet eartachment Parmuffs Passive helmet Passive earter Passive Passive Passive earter Passive | black, yellow black, yellow black, red neon lime blue iime pink black, ochre black, ochre black, yellow black, yellow black, yellow black, yellow black, yellow black, yellow black, green black, yellow hi-viz black, green black, yellow black, green black, yellow black, green black, green black, green black, green | PC PC PC PC PC PC PC PC PC PR PR PR PR PR PR PR PR PR PR PR PR PR | 105 104 104 104 105 105 105 105 105 107 107 110 110 109 109 109 109 109 109 109 109 |



Safety Helmets

Product system planet series , Visors

uvex has developed the **protecting planet** icon, to help raise awareness of its commitment to achieving increased sustainability. Based on the brand claim, **protecting people**, our sustainable approach integrates three core interlinked pillars – **ecology, economy** and **social responsibility**, that are incorporated throughout the business to improve our sustainability performance.

This explains the comprehensive audit, measurement and evaluation management process uvex undertakes along the entire value chain to ensure its products are as sustainable as possible.



MADE IN GERMANY





Visor system

- visor lens made of up to 100 percent mass-balanced** polycarbonate
- reduction in CO₂ emissions by over 13 percent



protecting planet

by using environmentallyfriendly packaging

Instructions for use > made from waste paper

Packaging

- > CO₂-offset polybag
- clean disposal and return to the recycling process possible



** Mass balancing is a bookkeeping method that is used to record and track the mass flows of plastics, for example, along the entire value creation chain. In the manufacturing process, some fossil-based raw materials are replaced by more sustainable alternatives, for example through the use of biomass or recycled raw materials. The mass balancing approach enables manufacturers to verify the use of bio-based raw materials or recycled content to a proportion of the plastics produced, resulting in a material with a significantly lower CO₂ footprint. However, the exact proportion of bio-based or recycled material in the end product can no longer be precisely determined. At uvex, mass-balanced material is used in the lenses of the planet models, enabling a significant reduction in their CO₂ footprint. By purchasing mass-balanced polycarbonate, uvex is helping to replace fossil-based raw materials with bio-based materials.

Innovative safety helmets — made in Germany

uvex head protection centre of expertise

Premium head protection for a wide variety of applications

At its centre of expertise in Lederdorn, Germany, uvex develops and manufactures innovative safety helmets for both the workplace and sports and leisure activities. State-of-the-art technologies, specialist expertise in injection moulding and highly qualified employees ensure the most stringent safety and quality standards are met.

A German production site and team expertise ensure premium uvex quality.



From an idea to a finished product

uvex Lederdorn is synonymous with first-class development and production expertise. The site encompasses the entire value creation chain: from the initial idea for a product, to intensive research and development, right through to manufacturing using state-of-the-art production methods. Our production site boasts equipment such as an automated coating line, granulate silo systems and three new injection moulding machines.

Automated precision, hand-finished perfection

Although many of the processes at the site are automated, the experience of our employees is absolutely indispensable, especially when it comes to the 200 required routine manual interventions, for example when assembling the uvex forestry set and inserting the suspension harness into the helmets.

Focus on sustainability

Manufacturing the helmets in Germany ensures sustainable, resource-saving production and short transport distances. We are continually optimising our materials and production processes so that we can further improve our energy efficiency and therefore pursue our goal of having a green footprint.

Optimal quality guaranteed

Our Lederdorn site has its own test laboratory that works in close collaboration with our laboratory in Fürth to ensure all national and international standards are met – or even far exceeded.

Comprehensive production controls

- ISO 9001-certified quality management system
- ISO 50001-certified energy management system
- OHRIS-certified occupational safety management system

R

Customised head protection

uvex safety helmets - fit like they were made for you

Perfectly designed for your workplace

Alongside other uvex products, our Lederdorn site manufactures almost the entire proven uvex pheos safety helmets product family — the uvex forestry set is also fully assembled here. Implementing specific customer requirements is one of this site's strengths: We offer the option to customise the design of our helmets to ensure your team have a uniform appearance, allowing customers to recognise who they are dealing with instantly.

Safety helmets that fit perfectly – including into your corporate identity:

delivered promptly with customised printed designs



Logos printed directly at the production machine



Multicoloured logos with up to six colours



Can be ordered in small quantities: from 25 pieces, special colours from 600 pieces

Standards at a glance

EN 397 · EN 50365

EN 397 – Industrial safety helmets


Protection against falling objects and the consequences thereof, such as brain damage and skull fracture

Binding requirements: all helmets certified according to

- EN 397 must meet these requirements.
- shock absorption, vertical
- penetration resistance (against sharp and pointed objects)
- flame resistance
- \cdot chin strap attachment: chin strap releases at minimum 150 N and maximum 250 N

Optional requirements: a helmet certified in accordance with EN 397 may meet these requirements; they are, however, not mandatory requirements.

- very low temperatures (-20°C or -30°C)
- very high temperatures (+150°C)
- electrical insulation (440 V)
- molten metal (MM)
- lateral deformation (LD)

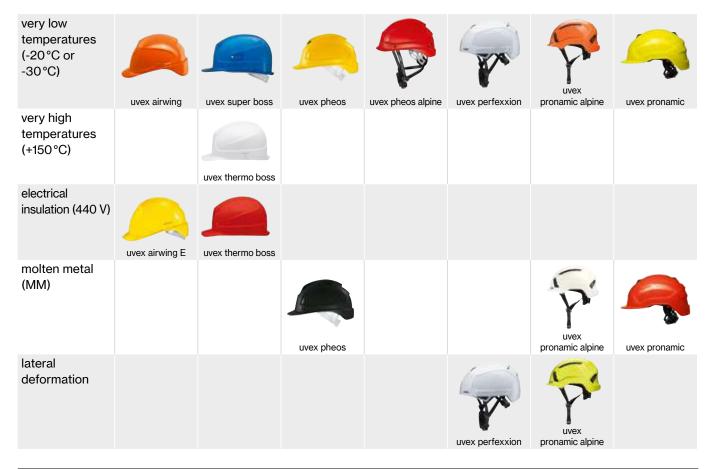

EN 50365 - Insulating helmets for use on low voltage installations

Protection against electric shocks and prevention of dangerous electric current passing through the head

Requirements:

- All helmets must also meet the requirements in accordance with EN 397.
- Protection against alternating voltage of up to 1000 V (AC) or direct voltage up to 1500 V (DC)
- Insulating helmets must not contain any conductive parts.



uvex pheos E

uvex pronamic E

uvex pronamic alpine E



Overview of standards EN 12492 · EN 1078

EN 12492 – Helmets for mountaineers

Protection against hazards that may occur during activities undertaken by mountaineers

Requirements:

- Shock absorption, vertical, frontal, lateral, dorsal
- Penetration resistance
- Carrier element (chin strap releases at min. 500 N)
- Strength of carrier element: Chin strap may exhibit maximum elongation of 25 mm
- Carrier element effectiveness: Helmet must not slide from the head



uvex pheos alpine

uvex perfexxion

uvex pronamic alpine

EN 1078: Cycling helmet

Helmets for pedal cyclists and for users of skateboards and roller skates

Requirements:

- · absorbs impact from vertical force
- the effectiveness of the retention system must be ensured via a retention test
- the mechanical strength of the chin strap must be ensured
- the maximum permissible elongation is 35 mm




uvex perfexxion



UVEX Pronamic The innovative multi-functional helmet

Perfect interplay of protection and dynamic

The modern, sporty uvex pronamic has a unique, innovative helmet structure. Taking inspiration from bionics (namely, the lily pad), a completely new helmet design has been brought to life – for increased performance, better ergonomics and a more sustainable use of materials. The uvex pronamic offers maximum proetction: It meets both the requirements of necessary standards (shock absorption, penetration, flammability) and optional requirements ("-30°C", MM).



Positioning closer to head

The optimised shape of the uvex pronamic helmet shell means that it rests closer to the head. This makes the helmet feel lighter because its centre of gravity is now closer to the centre of the head. The enlarged neck area at the back of the head also provides greater protection.

Maximum ventilation

The fully integrated ventilation sliders are easy to operate even when wearing gloves.



brim short

Optimal vision The long brim protects against sunlight, while the short brim expands the field of vision.

IES system – Now as standard Safety spectacles can be conveniently stored in the resting position in the helmet – now integrated as standard. Spectacle clip (9772002) required.



Integrated neck piece The ergonomic spiderneck neck piece enlarges the contact surface at the back of the head and provides increased wearer comfort, especially when carrying out work above head height.



Robust, lightweight structure The newly developed design of the inside of the helmet saves material without sacrificing stability.

Space for accessories

There is a wide range of accessories available for the uvex pronamic, such as a half visor.



Integrated neck piece

The ergonomic spiderneck neck piece enlarges the contact surface at the back of the head and provides increased wearer comfort, especially when carrying out work above head height.

Extended size range Variable size adjustment from 51 to 65 cm.

R

uvex pronamic uvex pronamic B-WR · pronamic B-S-WR · pronamic S-KR









uvex pronamic B-WR

- side Euroslot adapters (30 mm) for attaching earmuffs and visor
- additional elements allow a wide range of accessories to be attached to the helmet
- · adjustable air vents for maximum ventilation
- suspension harness (9790310) fitted with wheel ratchet system for variable width adjustment
- fitted with sweatband (9790311)
- · six-point textile band attachment ensures an optimal fit and maximum comfort
- adapter for the IES spectacle clip (9772002) included as standard





- shorter brim for a wider field of vision
- · side Euroslot adapters (30 mm) for attaching earmuffs and visor
- additional elements allow a wide range of accessories to be attached to
- the helmet adjustable air vents for maximum ventilation
- suspension harness (9790310) fitted with wheel ratchet system for variable width adjustment
- fitted with sweatband (9790311)
- six-point textile band attachment ensures an optimal
- fit and maximum comfort
- adapter for the IES spectacle clip (9772002) included as standard



9731131



uvex pronamic S-KR

- pre-mounted four-point forked chin strap (9790021)
- attachment clip (9790022) for positioning the forked chin strap
- in the resting position
- · shorter brim for a wider field of vision
- side Euroslot adapters (30 mm) for attaching earmuffs and visor
- · additional elements allow a wide range of accessories to be attached to the helmet
- adjustable air vents for maximum ventilation.
- suspension harness (9790310) fitted with wheel ratchet system for variable width adjustment
- fitted with sweatband (9790311)
- six-point textile band attachment ensures an optimal
- fit and maximum comfort
- adapter for the IES spectacle clip (9772002) included as standard

| uvex pronamic B-WR | | | | |
|--------------------|----------------|--------------|--------------|--------------|
| Art. no. | 9731030 | 9731130 | 9731330 | 9731530 |
| Colour | white | yellow | red | blue |
| Version | with long brim | | | |
| Material | HDPE | HDPE | HDPE | HDPE |
| Standard | EN 397 | EN 397 | EN 397 | EN 397 |
| | -30 °C, MM | -30 °C, MM | -30 °C, MM | -30 °C, MM |
| Sizes | 51 to 65 cm | 51 to 65 cm | 51 to 65 cm | 51 to 65 cm |
| Order unit | PC | PC | PC | PC |
| Outer packaging | 25 PC per CT | 25 PC per CT | 25 PC per CT | 25 PC per CT |
| | | | | |





| uvex pronamic B-S-W | 'R | | | |
|---------------------|-----------------|--------------|--------------|--------------|
| Art. no. | 9731031 | 9731131 | 9731331 | 9731531 |
| Colour | white | yellow | red | blue |
| Version | with short brin | n | | |
| Material | HDPE | HDPE | HDPE | HDPE |
| Standard | EN 397 | EN 397 | EN 397 | EN 397 |
| | -30 °C, MM | -30 °C, MM | -30 °C, MM | -30 °C, MM |
| Sizes | 51 to 65 cm | 51 to 65 cm | 51 to 65 cm | 51 to 65 cm |
| Order unit | PC | PC | PC | PC |
| Outer packaging | 25 PC per CT | 25 PC per CT | 25 PC per CT | 25 PC per CT |
| | | | | |



| uvex pronamic S-KR | | | | |
|--------------------|-----------------|--------------|--------------|--------------|
| Art. no. | 9731033 | 9731133 | 9731333 | 9731533 |
| Colour | white | yellow | red | blue |
| Version | with short brin | n | | |
| Material | HDPE | HDPE | HDPE | HDPE |
| Standard | EN 397 | EN 397 | EN 397 | EN 397 |
| | -30 °C, MM | -30 °C, MM | -30 °C, MM | -30 °C, MM |
| Sizes | 51 to 65 cm | 51 to 65 cm | 51 to 65 cm | 51 to 65 cm |
| Order unit | PC | PC | PC | PC |
| Outer packaging | 25 PC per CT | 25 PC per CT | 25 PC per CT | 25 PC per CT |
| | | | | |

MADE IN GERMANY





uvex pronamic E



Fully closed helmet shell

Protection against electrical hazards when working with current-carrying components in the low voltage range up to 1000 V (AC) or 1500 V (DC).

2

9730031 uvex pronamic E-S-WR white Jrsich

9916003 uvex pronamic visor supravision excellence SLB 2



Safety Helmets



uvex pronamic E-WR

- Euroslot interfaces on the side (30 mm) for attaching earmuffs and the pronamic visor system
- additional elements allow a wide range of accessories to be attached to the helmet
- fully closed helmet shell suitable for use by electricians
- suspension harness (9790310) fitted with wheel ratchet system for variable width adjustment with a sweatband (9790311)
- six-point textile band attachment guarantees an optimal fit and maximum comfort
- interface for the IES spectacle clip (9772002) included as standard

| uvex pronamic E-WF | 2 | | | |
|--------------------|----------------|----------------|----------------|----------------|
| Art. no. | 9730030 | 9730130 | 9730330 | 9730530 |
| Colour | white | yellow | red | blue |
| Version | with long brim | with long brim | with long brim | with long brim |
| Material | HDPE | HDPE | HDPE | HDPE |
| Standard | EN 397 | EN 397 | EN 397 | EN 397 |
| | -30 °C, MM | -30 °C, MM | -30 °C, MM | -30 °C, MM |
| | EN 50365 | EN 50365 | EN 50365 | EN 50365 |
| Sizes | 51 to 65 cm |
| Order unit | PC | PC | PC | PC |
| Outer packaging | 25 PC per CT |
| | | | | |



uvex pronamic E-S-WR

- shorter brim for a wider field of vision
- Euroslot interfaces on the side (30 mm) for attaching earmuffs and the pronamic visor system
- additional elements allow a wide range of accessories to be attached to the helmet
- fully closed helmet shell suitable for use by electricians
- suspension harness (9790310) fitted with wheel ratchet system for variable width adjustment with a sweatband (9790311)
- six-point textile band attachment guarantees an optimal fit and maximum comfort
- interface for the IES spectacle clip (9772002) included as standard

| uvex pronamic E-S-WR | | | | | | | |
|----------------------|-----------------|-----------------|-----------------|-----------------|--|--|--|
| Art. no. | 9730031 | 9730131 | 9730331 | 9730531 | | | |
| Colour | white | yellow | red | blue | | | |
| Version | with short brim | with short brim | with short brim | with short brim | | | |
| Material | HDPE | HDPE | HDPE | HDPE | | | |
| Standard | EN 397 | EN 397 | EN 397 | EN 397 | | | |
| | -30 °C, MM | -30 °C, MM | -30 °C, MM | -30 °C, MM | | | |
| | EN 50365 | EN 50365 | EN 50365 | EN 50365 | | | |
| Sizes | 51 to 65 cm | | | |
| Order unit | PC | PC | PC | PC | | | |
| Outer packaging | 25 PC per CT | | | |
| | | | | | | | |





9790311

uvex pronamic accessoires

| | Suspension harness | Sweatband |
|------------|------------------------------|-------------------|
| | for uvex pronamic | for uvex pronamic |
| Art. no. | 9790310 | 9790311 |
| Version | six-point textile attachment | synthetic leather |
| | with sweatband | |
| Order unit | PC | PC |
| | | |

MADE IN GERMANY







Generous ventilation

The side air vents significantly improve the temperature inside



Closed version

This version also offers optimal protection for work in low-voltage areas. It fully complies with EN 397, EN 50365 and EN 12492 except point 4.1.4 (ventilation).



Optimal adjustment

The wheel ratchet system provides plenty of scope for adjustments and the suspension harness inside the helmet can be adjusted as desired to provide the perfect fit for the wearer's head shape



EN 12492 and EN 397

The best equipment for various applications. Whether used while working at height or as an industrial safety helmet, the helmet's chin strap system is quick and easy to change, enabling the helmet to fulfil the safety standards for both applications and offer optimum protection at all times

Further information can be found at uvex-safety.com/en/uvex-pronamic-alpine (or scan the QR code).



Mips[®] included

An additional low-friction layer can be optionally integrated to absorb rotational energy, reducing the force transferred to the wearer's head. A detailed description of how the Mips® safety system works can be found on page 129.



Accessories can be fitted easily and quickly

The four stylistic retaining clips guarantee an optimal fit of the helmet accessories This ensures that the user has access to any necessary application-related products, such as helmet torches or goggles, and that these are in the perfect position at all times.

Safety Helmets

uvex pronamic alpine · pronamic alpine E



uvex pronamic alpine

- \bullet multi-standard helmet that meets the requirements of EN 397 and EN 12492
- optionally with Mips® brain protection system
- side Euroslot adapters (30 mm) for attaching earmuffs and visor
- four retaining clips for fitting head torches or goggles
- additional elements allow our wide range of accessories to be attached to the helmet
- air vents for maximum ventilation

- versatile and adjustable suspension harness with variable wheel ratchet system
- EPS inner shell ensures excellent fit and comfort
 EN 12492 forked chin strap (art. no. 9790351) included in the standard scope of delivery, EN 397 version
- (art. no. 9790021) sold separately as an accessory • replaceable hygiene kits 9790350 and 9790352 (Mips®)



R

uvex pronamic alpine 9735030 9735130 9735134 97353 9735430 Art. no. Colour white hi-viz yellow yellow hi-viz orange red areen Material ABS ABS ABS ABS ABS ABS EN 12492, EN 397 -30°C, MM, LD EN 12492, EN 397 -30°C, MM, LD EN 12492, EN 397 EN 12492, EN 397 EN 12492, EN 397 -30°C, MM, LD EN 12492, EN 397 Standard -30°C. MM. LD -30°C MM I D -30°C MM I D 51 to 63 cm 51 to 63 cm Sizes 51 to 63 cm 51 to 63 cm 51 to 63 cm 51 to 63 cm Order unit PC PC PC PC PC PC Outer packaging 8 PC per CT 8 PC per CT

| uvex pronamic alpine | | | | | |
|----------------------|------------------|------------------|-------------------|-------------------|------------------|
| Art. no. | 9735530 | 9735930 | 9735031 | 9735131 | 9735231 |
| Colour | blue | black | white | hi-viz yellow | hi-viz orange |
| Version | | | Mips [®] | Mips [®] | Mips® |
| Material | ABS | ABS | ABS | ABS | ABS |
| Standard | EN 12492, EN 397 | EN 12492, EN 397 | EN 12492, EN 397 | EN 12492, EN 397 | EN 12492, EN 397 |
| | -30°C, MM, LD | -30°C, MM, LD | -30°C, MM, LD | -30°C, MM, LD | -30°C, MM, LD |
| Sizes | 51 to 63 cm | 51 to 63 cm | 51 to 63 cm | 51 to 63 cm | 51 to 63 cm |
| Order unit | PC | PC | PC | PC | PC |
| Outer packaging | 8 PC per CT | 8 PC per CT | 8 PC per CT | 8 PC per CT | 8 PC per CT |



uvex pronamic alpine E

- multi-standard helmet that meets the requirements of EN 397,
- EN 50365 and EN 12492 (except ventilation 4.1.4)
- optionally with Mips® brain protection system
- side Euroslot adapters (30 mm) for attaching earmuffs and visor
- four retaining clips for fitting head torches or goggles
- additional elements allow our wide range of accessories to be attached to the helmet
- fully closed helmet shell suitable for use by electricians
- versatile and adjustable suspension harness with variable wheel ratchet system
- · EPS inner shell ensures excellent fit and comfort
- forked chin strap EN 12492 (art. no. 9790351) included in the standard scope of delivery, EN 397 version (art. no. 9790021) sold separately as an accessory
- replaceable hygiene kits 9790350 and 9790352 (Mips[®])

| uvex pronamic alpine E | | | | | | |
|------------------------|-------------------------|-------------------------|-------------------------|-------------------------|-------------------------|-------------------------|
| Art. no. | 9736030 | 9736130 | 9736230 | 9736031 | 9736131 | 9736231 |
| Colour | white | hi-viz yellow | hi-viz orange | white | hi-viz yellow | hi-viz orange |
| Version | | | | Mips® | Mips® | Mips® |
| Material | ABS | ABS | ABS | ABS | ABS | ABS |
| Standard | EN 50365 |
| | EN 12492 (except 4.1.4) |
| | EN 397 |
| | -30 °C, MM, LD |
| Sizes | 51 to 63 cm |
| Order unit | PC | PC | PC | PC | PC | PC |
| Outer packaging | 8 PC per CT |



Safety Helmets uvex pheos S-KR Mips®





Mips[®] inner shell

The additional Mips[®] brain protection system is integrated into the suspension harness.



Large neck piece

The additional neck piece increases the contact surface, reducing pressure on the back of the wearer's head. This improves the wearing comfort.



Pre-mounted forked chin strap

The comfortable forked chin strap secures the helmet and guarantees optimum protection, especially when carrying out overhead work



Safety Helmets uvex pheos S-KR Mips®

Mips® brain protection system for industrial safety helmets

- designed to reduce the rotational energy acting on the head during certain oblique and off-centre impacts
- such rotational movements can stretch or damage the brain tissue
- multi-directional movement of the safety system in all directions

Linear impacts

Conventional safety helmets are designed for straight and central impacts (DIN EN 397).

- the low-friction layer of the helmet increases wearer comfort
- improved helmet weight distribution when accessories are attached



Angled impacts

In most cases, however, the impact is lateral or results in an oblique-acting force. The Mips® brain protection system complements the impact absorption of a conventional helmet with its ability to also deflect rotational forces away from the head.



Further information can be found at **uvex-safety.com/en/mips/** (or scan the QR code).



uvex pheos S-KR Mips®

- safety helmet with slots for uvex visors, helmet earmuffs and helmet torches
- Mips[®] inner shell absorbs rotational forces
- three adjustable air vents for maximum ventilation
- suspension harness with wheel ratchet system for variable width adjustment
- six-point textile band attachment ensures excellent fit and comfort
- pre-mounted forked chin strap (9790021)
- · large neck piece (9790149) increases wearing comfort
- fitted with a sweatband (9760260)
- also available as a planet version, see page 135
- products that are eligible for grants according to BG-Bau (German employer's liability insurance association for the construction industry) are available on request

| uvex pheos S-KR Mips | 8 | | | |
|----------------------|-----------------|-----------------|-----------------|--|
| Art. no. | 9772090 | 9772190 | 9772260 | |
| Colour | white | yellow | hi-viz orange | |
| Version | with short brim | with short brim | with short brim | |
| Material | HDPE | HDPE | HDPE | |
| Standard | EN 397 | EN 397 | EN 397 | |
| | -30°C, MM | -30°C, MM | -30°C, MM | |
| Sizes | 52 to 61 cm | 52 to 61 cm | 52 to 61 cm | |
| Order unit | PC | PC | PC | |
| Outer packaging | 20 PC per CT | 20 PC per CT | 20 PC per CT | |
| | | | | |

Safety Helmets

uvex airwing B · uvex airwing B-WR · uvex super boss



uvex airwing B · uvex airwing B-WR

- safety helmet with slots for uvex visors and earmuffs
- side Euroslot adapters (30 mm) for attaching earmuffs
- meets standard EN 397 and additional requirement for very low temperatures (-30 $^\circ \text{C}$)
- · three variable air vents for maximum ventilation

- conventional suspension harness for comfortable adjustable fit (uvex airwing B)
- suspension harness with wheel ratchet for variable width adjustment (uvex airwing B-WR)
- fitted with the 9760005 sweatband
- six-point textile band attachment ensures optimal fit and comfort

| uvex airwing B with o | uvex airwing B with conventional suspension harness | | | | | | | |
|-----------------------|---|----------------|----------------|----------------|----------------|----------------|----------------|--|
| Art. no. | 9762020 | 9762120 | 9762220 | 9762320 | 9762420 | 9762520 | 9762920 | |
| Colour | white | yellow | orange | red | green | blue | black | |
| Version | with long brim | with long brim | with long brim | with long brim | with long brim | with long brim | with long brim | |
| Material | HDPE | HDPE | HDPE | HDPE | HDPE | HDPE | HDPE | |
| Standard | EN 397, -30 °C | EN 397, -30 °C | EN 397, -30 °C | EN 397, -30 °C | EN 397, -30 °C | EN 397, -30 °C | EN 397, -30 °C | |
| Sizes | 51 to 61 cm | 51 to 61 cm | 51 to 61 cm | 51 to 61 cm | 51 to 61 cm | 51 to 61 cm | 51 to 61 cm | |
| Order unit | PC | PC | PC | PC | PC | PC | PC | |
| Outer packaging | 25 PC per CT | 25 PC per CT | 25 PC per CT | 25 PC per CT | 25 PC per CT | 25 PC per CT | 25 PC per CT | |

| uvex airwing B-WR v | vith wheel ratchet system | | | | | |
|---------------------|---------------------------|----------------|----------------|----------------|----------------|----------------|
| Art. no. | 9762030 | 9762130 | 9762230 | 9762330 | 9762430 | 9762530 |
| Colour | white | yellow | orange | red | green | blue |
| Version | with long brim | with long brim | with long brim | with long brim | with long brim | with long brim |
| Material | HDPE | HDPE | HDPE | HDPE | HDPE | HDPE |
| Standard | EN 397, -30 °C | EN 397, -30 °C | EN 397, -30 °C | EN 397, -30 °C | EN 397, -30 °C | EN 397, -30 °C |
| Sizes | 52 to 61 cm | 52 to 61 cm | 52 to 61 cm | 52 to 61 cm | 52 to 61 cm | 52 to 61 cm |
| Order unit | PC | PC | PC | PC | PC | PC |
| Outer packaging | 25 PC per CT | 25 PC per CT | 25 PC per CT | 25 PC per CT | 25 PC per CT | 25 PC per CT |



uvex super boss

- · safety helmet with slots for uvex visors and earmuffs
- side Euroslot adapters (30 mm) for attaching earmuffs
- meets standard EN 397 and additional requirement for very low
- temperatures (-20 °C)
- conventional suspension harness for comfortable adjustable fit
- fitted with the 9790004 sweatband
- adjustable side ventilation slits
- six-point textile band attachment ensures optimal fit and comfort

| uvex super boss with conventional suspension harness | | | | | | | |
|--|----------------|----------------|----------------|--|--|--|--|
| Art. no. | 9750020 | 9750120 | 9750520 | | | | |
| Colour | white | yellow | blue | | | | |
| Version | with long brim | with long brim | with long brim | | | | |
| Material | HDPE | HDPE | HDPE | | | | |
| Standard | EN 397, -20 °C | EN 397, -20 °C | EN 397, -20 °C | | | | |
| Sizes | 52 to 61 cm | 52 to 61 cm | 52 to 61 cm | | | | |
| Order unit | PC | PC | PC | | | | |
| Outer packaging | 25 PC per CT | 25 PC per CT | 25 PC per CT | | | | |



Safety Helmets

uvex airwing B-S · uvex airwing B-S-WR · uvex thermo boss



uvex airwing B-S · uvex airwing B-S-WR

- · safety helmet with slots for uvex visors and earmuffs
- side Euroslot adapters (30 mm) for attaching earmuffs
- meets standard EN 397 and additional requirement for very low temperatures (-30 $^\circ \text{C}$)
- three variable air vents for maximum ventilation
- conventional suspension harness for comfortable adjustable fit (uvex airwing B-S)
- suspension harness with wheel ratchet for variable width adjustment (uvex airwing B-S-WR)
- fitted with the 9760005 sweatband
- shorter brim for a wider field of upward vision
- six-point textile band attachment ensures optimal fit and comfort

| uvex airwing B-S with conventional suspension harness | | | | | | | | |
|---|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|--|--|
| Art. no. | 9762021 | 9762121 | 9762221 | 9762321 | 9762421 | 9762521 | | |
| Colour | white | yellow | orange | red | green | blue | | |
| Version | with short brim | | |
| Material | HDPE | HDPE | HDPE | HDPE | HDPE | HDPE | | |
| Standard | EN 397, -30 °C | | |
| Sizes | 51 to 61 cm | | |
| Order unit | PC | PC | PC | PC | PC | PC | | |
| Outer packaging | 25 PC per CT | | |
| | | | | | | | | |

| uvex airwing B-S-WR with wheel ratchet system | | | | | | | | |
|---|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|--|--|
| Art. no. | 9762031 | 9762131 | 9762231 | 9762331 | 9762431 | 9762531 | | |
| Colour | white | yellow | orange | red | green | blue | | |
| Version | with short brim | | |
| Material | HDPE | HDPE | HDPE | HDPE | HDPE | HDPE | | |
| Standard E | EN 397, -30 °C | | |
| Sizes | 52 to 61 cm | | |
| Order unit | PC | PC | PC | PC | PC | PC | | |
| Outer packaging 2 | 25 PC per CT | | |



uvex thermo boss

- safety helmet with slots for uvex visors and earmuffs
- the helmet shell is made from heat-resistant polycarbonate and is suitable for use in high ambient temperatures.
- side Euroslot adapters (30 mm) for attaching earmuffs
- meets standard EN 397 and additional requirement (440 V AC) +150°C
- conventional suspension harness for comfortable adjustable fit
- fitted with the 9790004 sweatband
- six-point textile band attachment ensures optimal fit and comfort

| 9754000 | 9754100 | 9754300 |
|--------------------------|---|---|
| white | yellow | red |
| with long brim | with long brim | with long brim |
| PC reinforced with fibre | glass | |
| EN 397 | EN 397 | EN 397 |
| +150 °C, 440 V AC | +150 °C, 440 V AC | +150 °C, 440 V AC |
| 52 to 61 cm | 52 to 61 cm | 52 to 61 cm |
| PC | PC | PC |
| 25 PC per CT | 25 PC per CT | 25 PC per CT |
| | white with long brim PC reinforced with fibre EN 397 +150 °C, 440 V AC 52 to 61 cm PC | white yellow with long brim with long brim PC reinforced with fibreglass EN 397 EN 397 EN 397 +150 °C, 440 V AC +150 °C, 440 V AC 52 to 61 cm 52 to 61 cm PC PC |

MADE IN GERMANY





Safety Helmets

uvex pheos alpine



uvex pheos alpine

- multifunctional helmet for working at heights and rescue operations
- combines the features of an industrial protection helmet (EN 397) with the requirements for a climbing helmet (EN 12492)
- light ABS helmet shell offers a high level of protection and durability
- shorter brim for a wider field of upward vision
- side Euroslot adapters (30 mm) for attaching earmuffs and visor
- · options for attaching head torches and goggles
- permanently opened air vents
- meets standard EN 397 and additional requirements for very low temperatures (-30°C)
- firmly riveted chin strap for use in accordance with EN 12492

- six-point textile band attachment ensures ideal fit and great comfort
- suspension harness with wheel ratchet system for variable width adjustment
- the helmet is delivered as standard with a black PU sweatband(art. no. 9760009); there is also an option of a light sweatband made of synthetic leather (art. no. 9760005)





2013

uvex pheos alpine with wheel ratchet system 9773150 9773050 9773450 9773950 Art. no. 97 977355 Colour white vellow red blue orange green black with short brim Version Material ABS ABS ABS ABS ABS ABS ABS EN 397 -30 °C Standard EN 12492 Sizes 52 to 61 cm Order unit PC. PC, PC, PC. PC. PC. PC. individually packed in C - individually packed in CT Outer packaging 6 PC per CT 6 PC per CT



uvex perfexxion

- unique combination of the standards EN 397 (meets partly), EN 12492 and EN 1078 $\,$
- side Euroslot adapters (30 mm) for attaching earmuffs
- additional slots allow for a wide variety of accessories to be attached
 complies with the following standards:
- EN 397 (in part) Industrial safety helmet standard
 optional requirements: LD, -30°C
- EN 12492 Mountaineering helmet standard
- EN 1078 Cycling helmet standard

- increased resistance to lateral deformation (LD) provides additional protection
- adjustable and convenient air vents for maximum ventilation
- suspension harness with wheel ratchet system for variable width adjustment and height adjustment
- suspension harness with convenient inner mesh for added wearer comfort
- optimal fit thanks to two different sizes (M and L)
- additional clip-on brim included in the scope of delivery

| uvex perfexxion | | | | |
|-----------------|--------------------|--------------------|--------------------|--------------------|
| Art. no. | 9720940 | 9720950 | 9720040 | 9720050 |
| Colour | black | black | white | white |
| Version | with short brim | with short brim | with short brim | with short brim |
| Material | ABS | ABS | ABS | ABS |
| Standard | EN 397, -30 °C, LD |
| | EN 12492, EN 1078 |
| Sizes | M (52 to 58 cm) | L (59 to 63 cm) | M (52 to 58 cm) | L (59 to 63 cm) |
| Order unit | PC | PC | PC | PC |
| Outer packaging | 6 PC per CT |

Safety Helmets

uvex pheos forestry \cdot uvex pheos ABS



Further information can be found at **uvex-safety.com/ en/forestryset** (or scan the QR code).

uvex pheos forestry

- set specially developed to meet the needs of forestry workers, consisting of the uvex pheos ABS B-S-WR, uvex pheos forestry visor and uvex pheos K2P mechanical
- labelled with label set, including pre-attached chin strap and signal whistle
 meets standards EN 166, 1731, 352-1 and 397 and additional requirement
- for very low temperatures (-30 °C)
 fully integrated metal mesh visor with high transmission (transparency) protects against foreign objects and ensures a clear view
- high-insulation earmuffs (SNR: 30 dB) round off the system perfectly and
- reliably protect against noise produced by chainsaws and brush cutters • three variable air vents for maximum ventilation, offering ventilation in the
- direction of movement
- suspension harness with wheel ratchet system enables the width to be variably adjusted with just one hand



| uvex pheos forestry - pre-assembled set | | | | | | | |
|---|--------------------|--------------------|--------------------|--|--|--|--|
| Art. no. | 9774236 | 9774237 | 9774238 | | | | |
| Colour | yellow | orange | red | | | | |
| Version | with short brim | with short brim | with short brim | | | | |
| Material | ABS | ABS | ABS | | | | |
| Standard | EN 397, -30 °C, MM | EN 397, -30 °C, MM | EN 397, -30 °C, MM | | | | |
| | EN 1731:2006-F | EN 1731:2006-F | EN 1731:2006-F | | | | |
| | EN 352-3 | EN 352-3 | EN 352-3 | | | | |
| Sizes | 52 to 61 cm | 52 to 61 cm | 52 to 61 cm | | | | |
| Order unit | PC | PC | PC | | | | |
| Outer packaging | 15 PC per CT | 15 PC per CT | 15 PC per CT | | | | |
| | | | | | | | |

uvex pheos forestry - spare parts

| Art. no. | | Order unit |
|----------|--|------------|
| 9790210 | Replacement visor (metal) | PC |
| 2600214 | uvex K2P mechanical | PR |
| 9760106 | Replacement suspension harness pheos ABS | PC |
| 9760009 | Sweatband pheos ABS | PC |
| 9790021 | Four-point chin strap | PC |
| 9790146 | Signal whistle | PC |
| 9790219 | uvex pheos mesh visor with adapter | PC |









uvex pheos ABS

- ABS safety helmet with slots for uvex visors, earmuffs and helmet lamps
- side Euroslot adapters (30 mm) for attaching earmuffs
- meets EN 397 standards and additional requirements for very low
- temperatures (-30°C)
- high lateral rigidity
- three variable air vents for maximum ventilation
- conventional suspension harness for comfortable adjustable fit (uvex pheos B)
- suspension harness with wheel ratchet system (9760106) and sweatband (9760009)
- · six-point textile band attachment ensures optimum fit and comfort

| uvex pheos ABS B-S-WR with wheel ratchet system | | | | | | | | |
|---|-----------------|-----------------|-----------------|-----------------|--|--|--|--|
| Art. no. | 9772071 | 9772171 | 9772271 | 9772371 | | | | |
| Colour | white | yellow | orange | red | | | | |
| Version | with short brim | with short brim | with short brim | with short brim | | | | |
| Material | ABS | ABS | ABS | ABS | | | | |
| Standard | EN 397 | EN 397 | EN 397 | EN 397 | | | | |
| | -30 °C, MM | -30 °C, MM | -30 °C, MM | -30 °C, MM | | | | |
| Sizes | 52 to 61 cm | | | | |
| Order unit | PC | PC | PC | PC | | | | |
| Outer packagin | g 24 PC per CT | 24 PC per CT | 24 PC per CT | 24 PC per CT | | | | |

MADE IN GERMANY



Safety Helmets

uvex pheos E · uvex pheos E-WR · uvex pheos E-S-WR



uvex pheos B · uvex pheos B-WR

· safety helmet with slots for uvex visors, earmuffs and lamps

- side Euroslot adapters (30 mm) for attaching earmuffs
 meets standard EN 397 and additional requirements for very low
- temperatures (-30 °C) and molten metal (MM) splash
- three variable air vents for maximum ventilation
- · conventional suspension harness for comfortable adjustable fit (uvex pheos B)
- · suspension harness with wheel ratchet for variable width adjustment (uvex pheos B-WR)
- fitted with the 9760005 sweatband
- · six-point textile band attachment ensures optimal fit and comfort

| wey phase B with conventional avenancian horness | | | | | | | | | |
|---|---------------|----------------|--------------|--------------|--------------|--------------|--|--|--|
| uvex pheos B with conventional suspension harness | | | | | | | | | |
| Art. no. | 9772020 | 9772120 | 9772220 | 9772320 | 9772520 | 9772920 | | | |
| Colour | white | yellow | orange | red | blue | black | | | |
| Version | with long bri | with long brim | | | | | | | |
| Material | HDPE | HDPE | HDPE | HDPE | HDPE | HDPE | | | |
| Standard | EN 397 | EN 397 | EN 397 | EN 397 | EN 397 | EN 397 | | | |
| | -30 °C, MM | -30 °C, MM | -30 °C, MM | -30 °C, MM | -30 °C, MM | -30 °C, MM | | | |
| Sizes | 51 to 61 cm | 51 to 61 cm | 51 to 61 cm | 51 to 61 cm | 51 to 61 cm | 51 to 61 cm | | | |
| Order unit | PC | PC | PC | PC | PC | PC | | | |
| Outor pookogin | DE DC por CT | DE DC por CT | DE DC por CI | DE DC por CT | DE DC por CT | DE DC por CT | | | |

kaging 25 PC per CT 25 PC per CT

| uvex pheos B-WR with wheel ratchet system | | | | | | | | |
|---|----------------|----------------|----------------|----------------|----------------|----------------|----------------|--|
| Art. no. | 9772030 | 9772130 | 9772230 | 9772330 | 9772430 | 9772530 | 9772930 | |
| Colour | white | yellow | orange | red | green | blue | black | |
| Version | with long brim | |
| Material | HDPE | |
| Standard | EN 397 | |
| | -30 °C, MM | |
| Sizes | 52 to 61 cm | |
| Order unit | PC | |
| Outer packaging | 25 PC per CT | |



uvex pheos **B-S-WR**

· safety helmet with slots for uvex visors, earmuffs and lamps

- side Euroslot adapters (30 mm) for attaching earmuffs
- meets standard EN 397 and additional requirements for very low
- temperatures (-30 °C) and molten metal (MM) splash
- · three variable air vents for maximum ventilation
- · suspension harness with wheel ratchet for variable width adjustment

• fitted with the 9760005 sweatband

- shorter brim for a wider field of upward vision
- six-point textile band attachment ensures optimal fit and comfort

| uvex pheos B-S-WR with wheel ratchet system | | | | | | | | | |
|---|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|--|
| Art. no. | 9772031 | 9772131 | 9772231 | 9772332 | 9772431 | 9772531 | 9772832 | 9772932 | |
| Colour | white | yellow | orange | red | green | blue | dark grey | black | |
| Version | with short brim | |
| Material | HDPE | |
| Standard | EN 397 | |
| | -30 °C, MM | |
| Sizes | 52 to 61 cm | |
| Order unit | PC | |
| Outer packaging | 25 PC per CT | |



protecting planet

To help raise awareness of its commitment to achieving increased sustainability, uvex has developed the **protecting planet** icon.

For uvex, **protecting planet** is more than a label. Based on the brand claim, **protecting people**, our sustainable approach integrates three core interlinked pillars – **ecology**, **economy** and **social responsibility**, that are incorporated throughout the business to improve our sustainability performance.

This explains the comprehensive audit, measurement and evaluation management process uvex undertakes along the entire value chain to ensure its products are as sustainable as possible.



The uvex pheos planet

is an example of the **planet series** product system.



protecting planet

by using recycled material // by using bio-based material

The helmet shell is made of up to 30 percent bioplastic. The organic raw material, sugar cane, is converted using a process that complies with the strictest quality requirements and achieves high stability and strength. 50 percent of the material for the headband is made of helmet shells. This significantly reduces process-related waste during production.



protecting planet

by using environmentallyfriendly packaging

All individual packaging is made of regranulated material and has been taken from the recycling economy. The packaging is single-grade and can be returned to the recycling chain after use. This also saves fossil resources. The user instructions are printed on 100 percent recycled paper.

uvex pheos planet B-WR · pheos planet B-S-WR · pheos planet S-KR Mips®

safety helmet with slots for uvex visors, helmet earmuffs and helmet torches

- helmet shell partially made of bio-based plastic
- head rings made of regranulated helmet shells
- Mips® inner shell absorbs rotational forces on the
- uvex pheos planet S-KR Mips®
- three adjustable air vents for maximum ventilation
- suspension harness with wheel ratchet system for variable width adjustment
- six-point textile band attachment ensures excellent fit and comfort
 pre-assembled four-point forked chin strap (9790021) for uvex pheos planet S-KR Mips[®]
- large neck piece (9790149) increases the wearer comfort of the uvex pheos planet S-KR Mips®
- equipped with sweatband 9760005 or 9760260 in the case of uvex pheos planet S-KR Mips[®]

| UVE | ex pheos planet B-WR | uvex pheos planet B-S-WR | uvex pheos planet S-KR Mips® |
|--------------------|----------------------|--------------------------|---|
| Art. no. 97 | 72042 | 9772043 | 9772092 |
| Colour wh | nite | white | white |
| Version wit | th long brim | with short brim | with short brim and Mips [®] brain protection system |
| Material HD | DPE | HDPE | HDPE |
| Standard EN | N 397 | EN 397 | EN 397 |
| -30 | 0 °C, MM | -30 °C, MM | -30°C, MM |
| Sizes 52 | 2 to 61 cm | 52 to 61 cm | 52 to 61cm |
| Order unit PC | 2 | PC | PC |
| Outer packaging 25 | i PC per CT | 25 PC per CT | 25 PC per CT |

Safety Helmets

uvex pheos E · uvex pheos E-WR · uvex pheos E-S-WR



uvex pheos E · uvex pheos E-WR

- · safety helmet with slots for uvex visors, earmuffs and lamps
- side Euroslot adapters (30 mm) for attaching earmuffs
- suitable for use by electricians as helmet shell is fully enclosed
- meets standard EN 397 and additional requirements for very low temperatures (-30 °C) and molten metal (MM) splash and is approved in accordance with EN 50365 (1000 V AC)
- conventional suspension harness for comfortable adjustable fit (uvex pheos E)
- suspension harness with wheel ratchet for variable width adjustment (uvex pheos E-WR)
- fitted with the 9760005 (uvex pheos E) or 9760009 (uvex pheos E-WR) sweatband
- · six-point textile band attachment ensures optimal fit and comfort

| uvex pheos E with conventional suspension harness | | | | | | | |
|---|---------------------|---------------------|--|--|--|--|--|
| Art. no. | 9770020 | 9770120 | | | | | |
| Colour | white | yellow | | | | | |
| Version | with long brim | with long brim | | | | | |
| Material | HDPE | HDPE | | | | | |
| Standard | EN 397 | EN 397 | | | | | |
| | -30 °C, MM | -30 °C, MM | | | | | |
| | EN 50365, 1000 V AC | EN 50365, 1000 V AC | | | | | |
| Sizes | 51 to 61 cm | 51 to 61 cm | | | | | |
| Order unit | PC | PC | | | | | |
| Outer packaging | 25 PC per CT | 25 PC per CT | | | | | |

| uvex pheos E-WR with wheel ratchet system | | | | | | | | |
|---|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|--|
| Art. no. | 9770030 | 9770130 | 9770230 | 9770330 | 9770430 | 9770530 | 9770830 | |
| Colour | white | yellow | orange | red | green | blue | dark grey | |
| Version | with long brim | |
| Material | HDPE | |
| Standard | EN 397 | |
| | -30 °C, MM | |
| | EN 50365, 1000 V AC | |
| Sizes | 52 to 61 cm | |
| Order unit | PC | |
| Outer packaging | 25 PC per CT | |



uvex pheos E-S-WR

- · safety helmet with slots for uvex visors, earmuffs and lamps
- side Euroslot adapters (30 mm) for attaching earmuffs
- suitable for use by electricians as helmet shell is fully enclosed
- meets standard EN 397 and additional requirements for very low temperatures (-30 °C) and molten metal (MM) splash and is approved in accordance with EN 50365 (1000 V AC)
- suspension harness with wheel ratchet for variable width adjustment
- fitted with the 9760009 sweatband
- shorter brim for a wider field of upward vision
- six-point textile band attachment ensures optimal fit and comfort

| uvex pheos E-S-WR with wheel ratchet system | | | | | | | | |
|---|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|
| Art. no. | 9770031 | 9770131 | 9770231 | 9770331 | 9770431 | 9770531 | 9770832 | 9770931 |
| Colour | white | yellow | orange | red | green | blue | dark grey | black |
| Version | with short brim |
| Material | HDPE |
| Standard | EN 397 |
| | -30 °C, MM |
| | EN 50365 |
| | 1000 V AC |
| Sizes | 52 to 61 cm |
| Order unit | PC |
| Outer packaging | 25 PC per CT |

MADE IN GERMANY





uvex pheos IES

- · safety helmet with slots for uvex visors, earmuffs, lamps and Integrated Eyewear System (IES)
- side Euroslot adapters (30 mm) for attaching earmuffs
- meets standard EN 397 and additional requirements for very low
- temperatures (-30 °C) and molten metal (MM) splash
- three variable air vents for maximum ventilation
- suspension harness with wheel ratchet for variable width adjustment also has the option to mount uvex pheos, uvex pheos or uvex i-works safety spectacles
- fitted with the 9760007 sweatband
- · six-point textile band attachment ensures optimal fit and comfort

| uvex pheos IES with wheel ratchet system | | | | | | |
|--|----------------|--------------|--------------|--------------|--------------|--|
| Art. no. | 9772040 | 9772140 | 9772240 | 9772340 | 9772540 | |
| Colour | white | yellow | orange | red | blue | |
| Version | with long brim | | | | | |
| Material | HDPE | HDPE | HDPE | HDPE | HDPE | |
| Standard | EN 397 | EN 397 | EN 397 | EN 397 | EN 397 | |
| | -30 °C, MM | -30 °C, MM | -30 °C, MM | -30 °C, MM | -30 °C, MM | |
| Sizes | 55 to 61 cm | 55 to 61 cm | 55 to 61 cm | 55 to 61 cm | 55 to 61 cm | |
| Order unit | PC | PC | PC | PC | PC | |
| Outer packaging | 25 PC per CT | 25 PC per CT | 25 PC per CT | 25 PC per CT | 25 PC per CT | |

MADE IN GERMANY

9772034 9772134 9772234 9772335 9772534

uvex pheos S-KR

- safety helmet with slots for uvex visors, helmet earmuffs and helmet torches
- side Euroslot adapters (30 mm) for attaching earmuffs
- · three adjustable air vents for maximum ventilation
- fitted with the sweatband 9760005
- suspension harness with wheel ratchet system for variable width adjustment
- · six-point textile band attachment ensures excellent fit and comfort
- · pre-fitted four-point forked chin strap
- attachment clip (9790022) for positioning the forked chin strap in the resting position or as a holder for goggles
- products that are eligible according to BG-Bau (German employer's liability insurance association for the construction industry) are available on request

| uvex pheos S-KR | | | | | |
|-----------------|-----------------|--------------|--------------|--------------|--------------|
| Art. no. | 9772034 | 9772134 | 9772234 | 9772335 | 9772534 |
| Colour | white | yellow | orange | red | blue |
| Version | with short brin | า | | | |
| Material | HDPE | HDPE | HDPE | HDPE | HDPE |
| Standard | EN 397 | EN 397 | EN 397 | EN 397 | EN 397 |
| | -30 °C, MM | -30 °C, MM | -30 °C, MM | -30 °C, MM | -30 °C, MM |
| Sizes | 52 to 61 cm | 52 to 61 cm | 52 to 61 cm | 52 to 61 cm | 52 to 61 cm |
| Order unit | PC | PC | PC | PC | PC |
| Outer packaging | 25 PC per CT | 25 PC per CT | 25 PC per CT | 25 PC per CT | 25 PC per CT |
| | | | | | |

Colour blue

white vellow orange

green blue black white yellow

red green blue black

MADE IN GERMANY



R



uvex pheos reflex set L (select preferred helmet colour)

Please contact our service hotline on +49 911 9736-0.

uvex pheos reflex set L

· safety helmet with highly reflective sticker set

| uvex pheos re | eflex set L | | |
|----------------|--------------|---|----------|
| Art. no. | Colour | Version | Art. no. |
| 9770026 | white | uvex pheos E with reflective sticker | 9772526 |
| 9770126 | yellow | uvex pheos E with reflective sticker | 9772035 |
| 9770036 | white | uvex pheos E-WR with reflective sticker | 9772138 |
| 9770136 | yellow | uvex pheos E-WR with reflective sticker | 9772236 |
| 9770536 | blue | uvex pheos E-WR with reflective sticker | 9772437 |
| 9772045 | white | uvex pheos IES with reflective sticker | 9772538 |
| 9772246 | orange | uvex pheos IES with reflective sticker | 9772936 |
| 9772343 | red | uvex pheos IES with reflective sticker | 9772038 |
| 9772046 | white | uvex pheos S-KR with reflective sticker | 9772137 |
| 9772541 | blue | uvex pheos S-KR with reflective sticker | 9772334 |
| 9772026 | white | uvex pheos B with reflective sticker | 9772433 |
| 9772126 | yellow | uvex pheos B with reflective sticker | 9772537 |
| 9772226 | orange | uvex pheos B with reflective sticker | 9772937 |
| 9772326 | red | uvex pheos B with reflective sticker | |
| Order quantity | y multiples/ | Order unit 25 PC | |

· helmets are delivered with the stickers already applied

| Version |
|---|
| uvex pheos B with reflective sticker |
| uvex pheos B-WR with reflective sticker |
| uvex pheos B-WR with reflective sticker |
| uvex pheos B-WR with reflective sticker |
| uvex pheos B-WR with reflective sticker |
| uvex pheos B-WR with reflective sticker |
| uvex pheos B-WR with reflective sticker |
| uvex pheos B-S-WR with reflective sticker |
| uvex pheos B-S-WR with reflective sticker |
| uvex pheos B-S-WR with reflective sticker |
| uvex pheos B-S-WR with reflective sticker |
| uvex pheos B-S-WR with reflective sticker |
| uvex pheos B-S-WR with reflective sticker |
| |

Safety Helmets Accessories



uvex winter cap

- winter cap for use in all uvex helmets
- windproof and waterproof outer material
- all-around reflective strip
- · side mesh to increase the wearer's attention to environmental influences (ear area)
- warming fleece lining

uvex balaclava

• uvex balaclava is the ideal addition to the winter cap - with continuous size adjustment through hinged Velcro fastening

uvex neck protection

- uvex neck protection for protection against rain, dust, splinters and solar radiation
- for use with all uvex helmets
- fitted with mount 9790022 to attach the neck protection in the uvex pheos helmet shell

uvex cooling neck protection

• with unique cooling function – up to 8 hours cooling effect, protection from sunlight

| | uvex winter cap | | uvex balaclava | uvex neck protection | | uvex cooling neck protection |
|------------|-----------------|----------------|----------------|----------------------|----------------|------------------------------|
| Art. no. | 9790065 | 9790068 | 9790066 | 9790075 | 9790076 | 9790086 |
| Version | 100% polyester | 100% polyester | 100% polyester | 100% polyester | 100% polyester | 100% polyester |
| Colour | hi-viz yellow | hi-viz orange | black | orange | yellow | yellow |
| Sizes | unisize | unisize | unisize | unisize | unisize | unisize |
| Order unit | PC | PC | PC | PC | PC | PC |



Hygienic caps · Winter caps

| | Hygienic cap | Winter caps | | | |
|--------------------------|--------------|-------------|-------------------------|-----------------|-------------------------|
| Art. no. | 9790006 | 9790010 | 9790012 | 9790015 | 9790016 |
| | | | | | |
| Version | 100% fleece | 50% cotton | 60% polyester, 30% wool | 50% cotton | 60% polyester, 30% wool |
| | | 50% wool | 8% nylon, 2% elastane | 50% virgin wool | 8% nylon, 2% elastane |
| Colour | white | navy blue | navy blue | black | black |
| Sizes | unisize | unisize | unisize | S to M | L to XL |
| Order unit | 80 PC | PC | PC | PC | PC |
| Order quantity multiples | 80 PC | 10 PC | 10 PC | 10 PC | 10 PC |
| | | | | | |



Safety Helmets

9760007

Accessories

P



Sweatband for uvex super boss

Artificial leather (leatherette)

and uvex thermo boss

9790004

10 PC

Accessories for uvex super boss and

Suspension harness for uvex

Six-point textile attachment

super boss and uvex thermo boss

uvex thermo boss

9790000

PC

with sweatband

Art. no.

Version

Order unit





9772001

Accessories for uvex pheos IES

| | Suspension harness for IES | Sweatband for |
|------------|-----------------------------------|-----------------------|
| | For uvex pheos | pheos IES |
| | (Not pheos E and pheos alpine) | |
| Art. no. | 9772001 | 9760007 |
| Version | Six-point textile suspension with | textile/foam material |
| | textile sweatband with | |
| | uvex pheos glasses clip | |
| Order unit | PC | 10 PC |



Accessories for uvex pheos and uvex airwing

| | Conventional suspension harness | Suspension harness for uvex |
|------------|-------------------------------------|----------------------------------|
| | for uvex pheos and uvex airwing | pheos and uvex airwing (not for |
| | | uvex pheos E) with wheel ratchet |
| Art. no. | 9760000 | 9760001 |
| Version | Six-point textile attachment | Six-point textile attachment |
| | with sweatband | with sweatband |
| Order unit | PC | PC |
| | | |
| | Sweatband for uvex pheos, uvex airw | ing and uvex pheos alpine |
| Art. no. | 9760005 | |
| Version | Artificial leather (leatherette) | |
| | with sweatband | |
| Order unit | 10 PC | |
| | | |

9790153

uvex pheos helmet sticker

- ideal for identifying different trades
- durable and weather-resistant high-performance PVC film

| uvex pheos helm | et sticker | | | | | | |
|-----------------|------------|----------|----------|----------|----------|----------|----------|
| Art. no. | 9790150 | 9790151 | 9790152 | 9790153 | 9790154 | 9790155 | 9790156 |
| Colour | silver | yellow | orange | red | green | blue | black |
| Material | PVC film | PVC film | PVC film | PVC film | PVC film | PVC film | PVC film |
| Order unit | PC | PC | PC | PC | PC | PC | PC |
| | | | | | | | |

Accessories for uvex pheos E-WR and uvex pheos alpine

| | Suspension harness | Suspension harness |
|------------|---------------------------------|------------------------------|
| | | |
| | for uvex pheos E-WR | for uvex pheos alpine |
| Art. no. | 9760012 | 9760011 |
| Version | Six-point textile attachment | Six-point textile attachment |
| | with sweatband | with sweatband |
| Order unit | PC | PC |
| | | |
| | Sweatband for uvex pheos alpine | Wheel ratchet padding |
| | and uvex pheos E-WR | |
| Art. no. | 9760009 | 9760014 |
| Version | PU, leather | polyester |
| Order unit | 10 PC | 10 PC |



uvex pheos reflex set M


- highly reflective sticker set
- extremely high brightness with prism film
- easy to affix
- suitable for all uvex pheos and uvex pheos alpine safety helmets

| uvex pheos ref | flex set M | |
|----------------|------------|--|
| Art. no. | 9790018 | |
| Order unit | PC | |



Safety Helmets

Accessories

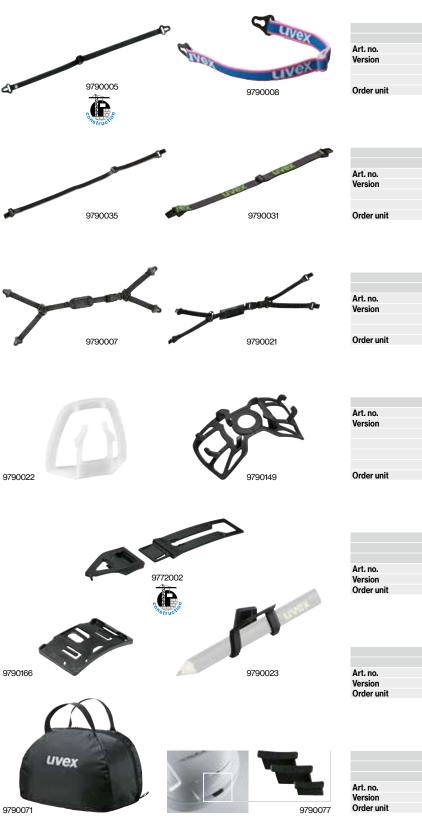

Additional helmet accessories*

| Art. no. | Leather chin strap for attaching to the suspension harness 9790005 | Elasticated chin strap for attaching to the suspension harness 9790008 |
|------------|--|--|
| Version | | |
| version | robust leather design with | elasticated strap with |
| | plastic eyelets with metal rivets, | plastic eyelets, |
| Order unit | adjustable length PC | adjustable length PC |
| | 10 | ru |
| | Leather chin strap for | Elasticated chin strap for |
| | attaching to the helmet shell | attaching to the helmet shell |
| Art. no. | 9790035 | 9790031 |
| Version | robust leather design with | elasticated strap with |
| | plastic hooks with metal rivets, | plastic hooks, |
| | adjustable length | adjustable length |
| Order unit | PC | PC |
| | Forked chin strap for attaching | Forked chin strap for attaching |
| | to the suspension harness | to the helmet shell |
| Art. no. | 9790007 | 9790021 |
| Version | textile strap with press clip quick- | textile strap with press clip quick- |
| | release fastener, plastic eyelets | release fastener, plastic hooks |
| | and chin pad, adjustable length | and chin pad, adjustable length |
| Order unit | PC | PC |
| | | |
| | Goggles clip/chin strap clip | uvex spiderneck neck support |
| Art. no. | 9790022 | 9790149 |
| Version | plastic clip for attaching | Increased contact area on |
| | the goggles strap or | neck, increased comfort, |
| | the chin strap to the helmet | improved weight distribution |
| | | a falle a la alta a fa cara da fal |

| | plastic olip for attaching | |
|------------|------------------------------|-------------------------------|
| | the goggles strap or | neck, increased comfort, |
| | the chin strap to the helmet | improved weight distribution |
| | | of the helmet. Easy to fit: |
| | | Thread over the wheel ratchet |
| Order unit | PC | PC |
| | | |
| | | |

| | slider for attaching | IES spectacle clip with slider for attaching uvex pheos s spectacles | slider for attaching |
|------------|----------------------|--|----------------------|
| Art. no. | 9772002 | | 9790085 |
| Version | plastic | plastic | plastic |
| Order unit | 10 PC | 10 PC | 10 PC |

| | Dural and a south states | Dave balder |
|------------|--------------------------------|--------------------------------------|
| | Business card holder | Pen holder |
| | for mounting in the front slot | for mounting in the 30 mm front slot |
| Art. no. | 9790166 | 9790023 |
| Version | 10 holders + 20 PVC cards | plastic |
| Order unit | 10 PC | PC |

| | uvex helmet bag | Helmet slot sealing plug set |
|------------|------------------------------|------------------------------|
| | for storing and transporting | |
| | the uvex safety helmet | |
| Art. no. | 9790071 | 9790077 |
| Version | polyester | plastic |
| Order unit | PC | PC |
| | | |

* Detailed information on compatibility can be found on pages 142-144 (accessories table)



Safety Helmets Accessories: Head torchs



All torches fit in the front slot of 9790062 9790063 our uvex helmets.

uvex head torch pheos Lights · pheos Lights EX

- · LED helmet torch with two separate reflectors for distance and area lighting
- compact design, very low weight (80 g), extremely robust
- power source: 1.7 Ah-Li-Ion battery
- illuminance: max. 6500 lux
- operating temperature: -20 °C to + 60 °C
- charge adapter and micro-USB charger included
- protection class IP 67 (dust-tight and waterproof)
- 9790063: ATEX certification II 2G Ex ib IIC T4

| Press switch | Modes | Lumen | Range | Light duration |
|----------------|--------------------|-----------|-------------------|----------------|
| Avec links | low | 55 | 5 m | 11 h |
| Area light | high | 115 | 10 m | 5.5 h |
| Distance light | low | 55 | 50 m | 11 h |
| | high | 115 | 100 m | 5.5 h |
| | | | | |
| | LED head torch phe | os Lights | LED head torch ph | neos Lights EX |

| | LED head torch pheos Lights | LED nead torch pheos Lights EX |
|------------|-----------------------------|--------------------------------|
| Art. no. | 9790062 | 9790063 |
| Version | for uvex pheos helmets | for uvex pheos helmets – ATEX |
| Order unit | PC | PC |





LED head torch u-cap sport · uvex pheos helmet adapter

- · LED head torch with two separate reflectors for distance and area lighting · sturdy design, with very low weight
- (55 g without batteries)
- power source: 3 x AAA batteries (not included)
- illuminance: approx. 4000 lux
- operating temperature: -20 °C to +45 °C
- protection class IP 66 (complete protection against dust and powerful water jets)
- · Adapter for the LED head torch u-cap sport for combining with the uvex pheos and uvex pheos alpine helmets

| Press switch for 1 s | Modes | Lumen | Range | Light duration |
|----------------------|--------|-------|-------|----------------|
| Area light | high | 30 | 7 m | 80 h |
| | low | 10 | 3 m | 150 h |
| Distance light | medium | 40 | 80 m | 70 h |
| | high | 100 | 110 m | 30 h |
| | low | 5 | 10 m | 150 h |

| | LED head torch uvex u-cap sport | uvex pheos helmet adapter |
|------------|---------------------------------|-------------------------------------|
| Art. no. | 9790064 | 9790069 |
| Version | for uvex u-cap sport | for LED head torch uvex u-cap sport |
| | | for combining with the uvex pheos |
| | | and uvex pheos alpine helmets |
| Order unit | PC | PC |
| | | |



KS-6003-DUO

- · LED helmet torch with two separate precision lenses for distance and area lighting
- boost mode (420 lumen) by pressing and holding the button for 5 seconds
- compact design
- · Beam can be infinitely adjusted to suit the area to be lit
- power source: lithium-lon battery, 3.7 V, 1.7 Ah
- operating temperature: -20°C to +60°C
- protection class: IP 68 (dust-tight and waterproof)
- charger included
- · charging time: approx. 3 hours

| Press switch | Modes | Lumen | Range | Light duratior |
|----------------|--------|-------|-------|----------------|
| Area light | normal | 70 | 5 m | 10 h |
| | strong | 260 | 10 m | 2.5 h |
| Distance light | normal | 130 | 100 m | 10 h |
| | strong | 260 | 200 m | 2.5 h |

```
LED head torch KS-6003-DUO
                9790029
Art. no.
                for uvex pheos helmets
Version
                PC
```





KS-7630-MCII

compact design

- protection class IP 67 (dust-tight and waterproof)
- operating temperature -15 °C to 50 °C
- power source: lithium-ion battery
- charging time: approx. 9 hours
- >80% capacity after 500 charging cycles
- ATEX approval (Directive 2014/34/EU)

| Mode | Lumen | Strength** | Range | Light duration |
|-----------------|--------|------------|-------|----------------|
| Emergency light | 70 lm | ≥ 3000 lx | 80 m | ≥ 30 h |
| Work light | 180 lm | ≥ 5500 lx | 140 m | ≥ 14 h |
| Strong light* | 230 lm | ≥ 10000 lx | 190 m | ≥6 h |

** measured at distance of 1 m

| | KS-7630-MCII |
|------------|------------------------|
| Art. no. | 9790028 |
| Version | for uvex pheos helmets |
| | |
| | |
| Order unit | PC |
| | |



Accessories

uvex pronamic \cdot uvex perfexxion

| | | | | | D | | | A | | 4 | A | |
|-------------------------------|--|--------------------------------|---------------------------------|------------------|--------------------|------------------------|---|-------------------|-------------------------------|-------------------------|-----------------|------|
| | | | 73) | | | 73 | | | 1 | 1 | °Sq. | 4-00 |
| | | 5m | ^{UVEY DIONAMICE, S.WD} | r Ş | 5m | UVex DI CONAMICE S. UP | ^{uve, br} on _{amic} abine | wet bought ablien | ^{UV6X DIONANICADINO} | 3 a. Juneroral territor | W 3. | / |
| | | ^{urex} oronanic B.W.A | amic B. | werbonanic S. 49 | uver pronamic E.W. | amic E. | amica | thic ab. | amic a, | amic al | uver Deneration | |
| | | st oron | at prov | at prov | at Dron | st oron | at prov | torout | NOJO TO | * Dron | st Der | |
| | , | M 3 | M 7 | M / | 1. | 15 / | ** * | Elle All | 1 | | 14 15 | |
| 9790310 | Suspension harness for pronamic | | | | | | - | - | _ | - | _ | |
| 9790311 | Sweatband for pronamic | | - - - | | | | - | - | - | - | - | |
| 9790350 | Hygiene kit for pronamic alpine | - | - | - | - | - | | - | - - | - | - | |
| 9790352 | Mips® hygiene kit for pronamic alpine | - | - | - | - | - | - | | | | | |
| 9790109 | Hygiene kit for perfexxion | - | - | - | - | - | - | - | - | - | | |
| 9790021 | Forked chin strap | | | 1.1 | | | | | | | - | |
| 9790351 | Forked chin strap EN 12492 for pronamic alpine | - | - | - | - | - | | | | | - | |
| 9790035 | Leather chin strap IES | | | | - | - | | | | - - - | - | |
| 9772002 | IES spectacle clip | | | | | | - | - | - | - | - | |
| 9790084 | IES spectacle clip for uvex pheos s spectacles | | | | | | - | - | - | - | - | |
| 9790085 | IES spectacle clip for uvex i-works spectacles | | | | | | - | - | - | - | - | |
| 9790022 | Goggle clip | | | | | | | | | | - | |
| 9790065 | Winter cap, yellow | | | | | | - | - | - | - | - | |
| 9790068 | Winter cap, orange | | | | • | | - | - | - | - | - | |
| 9790066 | Balaclava | | | | • | • | | - | • | | • | _ |
| 9790075 | Neck protection, orange | | | | | | | | | | - | |
| 9790076 | Neck protection, yellow | | | | | | | | | | - | |
| 9790086 | Cooling neck protection | | | | | | - | - | - | - | - | |
| 9790166 | Business card holder | | | | • | • | • | • | • | - - - | | |
| 2600201 2600202 | Earmuffs K1H/K2H | • | • | • | 1.1 | • | • | • | • | • | • | |
| 2630210 2630220 2630230 | Earmuffs K10H/K20H/K30H | | • | • | • | | | | | | | |
| 2600214 2600216 | Earmuffs K1P/K2P bayonet (in combination with 2600236 or pronamic visor) | | | | | | | | | | - | |
| 9916000 | uvex pronamic visor clear sv exc | | | | | | | | - | - | - | |
| 9916001 | uvex pronamic visor with chin guard | | | | | | | | - | - | - | |
| 9916002 | uvex pronamic visor clear sv exc. SLB 1 | - | - | - | | | | - | | | - | |
| 9916003 | uvex pronamic visor sv exc. SLB 2 | - | - | - | • | | | | • | - - - | - | |
| 9916100 | uvex pronamic mesh visor | | | | | | | - | | | - | |
| 9916200 | uvex pronamic half visor clear | - | | | - | | | - | | - | - | |
| 9916201 | uvex pronamic half visor grey | - | | | - | | | - | | - | - | |
| 9920001 | uvex vimox visor | | | | | | - | - | - | - | - | |
| 9790062 | LED head torch pheos Lights | | | | | | | | | | | |
| 9790063 | LED head torch pheos Lights EX | | | | | | | | • | | | |
| 9790028 | KS 7630 MC II | | | | | | | | | | | |
| 9790029 | LED head torch KS-6003 Duo | | | | | | | | | | | |
| 9790064 | LED head torch for u-cap sport | | | | | | | | | | | |
| 9790069 | uvex pheos helmet adapter for u-cap LED | | | | | | | | | | | |
| | | | supplied as standard | | compatible | | - not compatible | | | | | 1 |



Accessories

| | | | | | / 🎺 | | | | | | | | | |
|--|---|--------------|-----------------|--------------------|-------------|-----------------|-------------------|------------------------------------|----------------|-----------------------|--|---|--|--|
| | | Wet Diedes B | wer nhoos B.W.R | urei Dieas B.S. Mp | wet niegs E | wer Dheos E. WA | wer niege E.S. WA | wet pheas ES | uver obes Sity | uner theos Stratilios | ^{oli} de so ^o ha tou | | | |
| | | werk | werk | Werk | werk | Wetc | wer | wet | uver, | Werg | uver | | | |
| 0720000 | O succession hormoon | (| | (<u> </u> | (<u> </u> | (| (| (| | (| 1 | 4 | | |
| 9760000 9760001 | Suspension harness with rotating | | | | | | | | | | | | | |
| 9760001 9760011 | size adjusters Suspension harness for pheos alpine | _ | _ | _ | _ | _ | _ | _ | | _ | - | | | |
| 9760012 | Suspension harness for | - | - | - | - | - | | | | | | | | |
| 9760012 | uvex pheos E-WR Suspension harness IES | | | | | | | | | | | | | |
| 9760009 | Sweatband uvex pheos alpine | | | | | | - | | | | | | | |
| 9760007 | and uvex pheos E-WR | - | - | - | - | - | _ | | _ | _ | - | 1 | | |
| 9760005 | Sweatband, synthetic leather | | | | | | | | | _ | | | | |
| 9760260 | Sweatband pheos S-KR Mips® | _ | _ | _ | _ | _ | _ | _ | _ | | _ | | | |
| 9790035 | Leather chin straps IES | | | | | | | | | - / | | | | |
| 9790005 | Leather chin straps | | | | _ | - | | | | - / | | | | |
| 9790021 | Forked chin straps | | | | | | | | | | _ | | | |
| 9790023 | Pen holder | | | | | | | | | | | 1 | | |
| 9772002 | IES spectacle clip for uvex pheos spectacles | - | - | - | - | - | - | | - | - | - | | | |
| 9790084 | IES spectacles clip for uvex pheos s spectacles | - | - | - | - | - | - | | - | - | - | | | |
| 9790085 | IES spectacles spectacles spectacles | - | - | - | - | - | | | | | | | | |
| 9790022 | spectacles Goggles clip, chin strap clip | | | | | | | | | | | | | |
| 9790065 | Winter cap, hi-viz yellow | | | | | | | | | | | | | |
| 9790068 | Winter cap, hi-viz orange | | | | | | | | | | | | | |
| 9790066 | Balaclava | | | | | | | | | | | | | |
| 9790075 | Neck protection, orange | | | | | | | | | | | | | |
| 9790076 | Neck protection, yellow | | | | | | | | | | | | | |
| 9790086 | uvex cooling neck protection | | | | | | | | | | | | | |
| 9790166 | Business card holder | | | | | | | | | | | | | |
| 9790018 | uvex pheos reflex set M | | | | | | | | | • | | 1 | | |
| 9790151- 9790156 | uvex pheos helmet sticker | • | | | | | | | • | | - | | | |
| 9906002 9906003 | uvex pheos visor | _ | - | | - | - | | - | | | | | | |
| 9906005 9906006 9906007 9906008 | uvex pheos visor SLB1 | - | - | - | - | - | | / | - | - 7 | - / | | | |
| 9906007 9906008 | uvex pheos visor SLB2 | - | - | - | - | - | | - | - | - / | - / | | | |
| 9790219 | uvex pheos mesh visor | - | - | | - | - | | | | | | | | |
| 9920001 | uvex vimox visor | • | | • | • | | • | • | • | | - | | | |
| 2600201 2600202 2630210 | Earmuffs K1H/K2H | • | | • | - | - | | • | • | • | • | | | |
| 2630210 2630220 2630230 | Earmuffs K10H/K20H/K30H | | | | | | | | • | | | | | |
| 2600214 2600216 | Earmuffs K1P/K2P, bayonet (in combination with 2600235 or mech. uvex pheos visor) | | | | | | | | | | | | | |
| 2600215 | Earmuffs K2P, magnetic (in combination with 9790078 or mag. uvex pheos visor) | | | | | | | | | | | | | |
| 9790062 | LED head torch pheos Lights | | | | | | | | | | | | | |
| 9790063 | LED head torch pheos Lights EX | | | | | | | | | | | | | |
| 9790028 | LED head torch KS-7630MCII | • | - - | • | | | | | • | | • | | | |
| 9790029 | LED head torch KS-6003 DUO | | | • | | | | | | | | | | |
| 9790064 | LED head torch u-cap sport | | | | | | | | | | | | | |
| 9790069 | uvex pheos helmet adapter | | | | | | | | | | | | | |
| | | | supplied as s | standard | / | compatible | _ | not compatible | | | | 1 | | |
| | | | | laliuaiu | / | Companne | / | | | | | - | | |

Accessories

uvex airwing \cdot uvex super boss \cdot uvex thermo boss

| uvex a | irwing · uvex super boss · uvex ther | mo boss | tres anuio & Ma | Viet aiming BS | uer aiming 85 Mp | tret suberbos | rier riterio do do | |
|-------------------------------|---|--------------|-----------------|----------------|------------------|---------------|--------------------|--|
| 9760000 | Conventional suspension harness | | | | | - | - | |
| 9760001 | Suspension harness with rotating size adjusters | | | • | | - | - | |
| 9790000 | Suspension harness for uvex super boss / uvex thermo boss | - | - | - | - | • | | |
| 9760005 | Sweatband | - - - | | | | - | - | |
| 9790004 | Sweatband for uvex super boss / uvex thermo boss | - | - | - | - | | | |
| 9790005 | Leather chin straps | | | | | | | |
| 9790007 | Forked chin straps | | | | | | | |
| 9790065 | Winter cap, yellow | | | | | | | |
| 9790068 | Winter cap, orange | | | | | • | | |
| 9790066 | Balaclava | | | | | | | |
| 9790075 | Neck protection, orange | | | | | | | |
| 9790076 | Neck protection, yellow | | | | | | | |
| 9790086 | uvex cooling neck protection | | | | | | | |
| 9920001 | uvex vimox visor | 1 A 4 | | | | | - | |
| 2600201 2600202 | uvex K1H/ uvex K2H | | | | • | | 1.1 | |
| 2630210 2630220 2630230 | uvex K10H/ uvex K20H/ uvex K30H | | | | | | | |
| | / | / | / | / | | | | |

compatible

supplied as standard



- not compatible



Visors and Face Protection

Visor lenses, certification and norms

The right solution for every requirement



Polycarbonate lenses with uvex supravision excellence coating

Polycarbonate has a high mechanical impact strength. Coated lenses are anti-fog on the inside, and scratch- and chemical-resistant on the outside. The anti-fogging properties are permanent even after repeated cleaning. The lenses are especially easy to clean and less susceptible to dirt due to the non-stick nanotechnology.

Cellulose acetate lenses

Face protection visors made of cellulose acetate are ideally suited for protection against chemicals.

Stainless steel mesh


is robust and has excellent stability and long life. Stainless steel mesh visors offer a higher light transmission than nylon mesh visors and are used for more rugged work in agriculture and forestry.


Standards at a glance

EN 166 - Personal eye protection

The European standard EN166 applies to all types of eye protection. EN 166 visors are made of frames and lenses.

Certification according to DIN EN 166

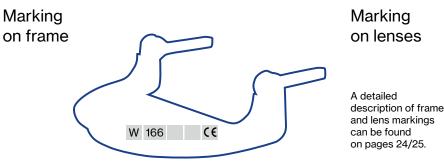



Labelling and norms

EN 170 - Ultraviolet protection filters

In the standards for special product requirements, the standard EN 170 sets out levels of protection and transmission requirements for ultraviolet protection filters. Excessive exposure to ultraviolet light can cause the lens of the eye to lose its transparency, which may cause

EN 1731 – Mesh face protection

The European standard EN 1731 describes all requirements for personal eye and face protection made of mesh material. EN 1731 visors consist of frames and lenses.

Technical information on the frame and the lens are specified according to EN 1731 in the following order:

- Identification of the manufacturer
- Number of European standard
- Symbol for mechanical strength

GS-ET 29

When working on energised electrical systems and equipment, the risk of a short circuit electric arc must be assessed. Short circuit electric arcs are usually caused by a short circuit between the electrical lines. The GS-ET 29 test principle is an additional requirement for the testing and certification of electrician face protection. These visors are a category 3 product, which means there is a risk of physical injury and


| | Mechanical strength |
|------|---|
| none | without mechanical strength (filters only) |
| S | increased strength (filters only) |
| F | low energy impact (45 m/s) |
| В | medium energy impact (120 m/s) |
| A | high energy impact (190 m/s) |
| Т | tested at extreme temperatures (-5°C and +55°C) |
| | |

death. With regards to different intensities of short circuit electric arcs, the certified products must be assessed for their suitability for the respective application. Here, there are distinctions between two classes, Class 1 - up to 4 kA - and Class 2, up to 7 kA.

visual impairment or loss of vision. Visor lenses in accordance with EN

170 therefore meet performance requirements to protect the eye from

ultraviolet radiation during hazardous work.

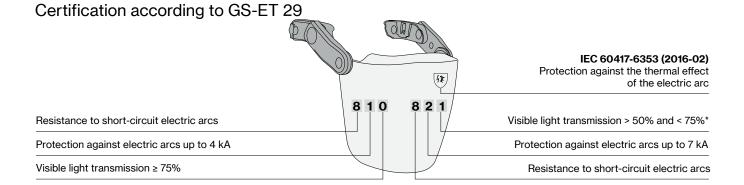



Previously




According to 7 kA short circuit electric arc

Visors and face protection

uvex pronamic visor system

uvex pronamic – the sustainable visor system. We use a mass-balanced polycarbonate for our visor lens. The result: a reduction in CO_2 emissions by over 13% for 100% protection.

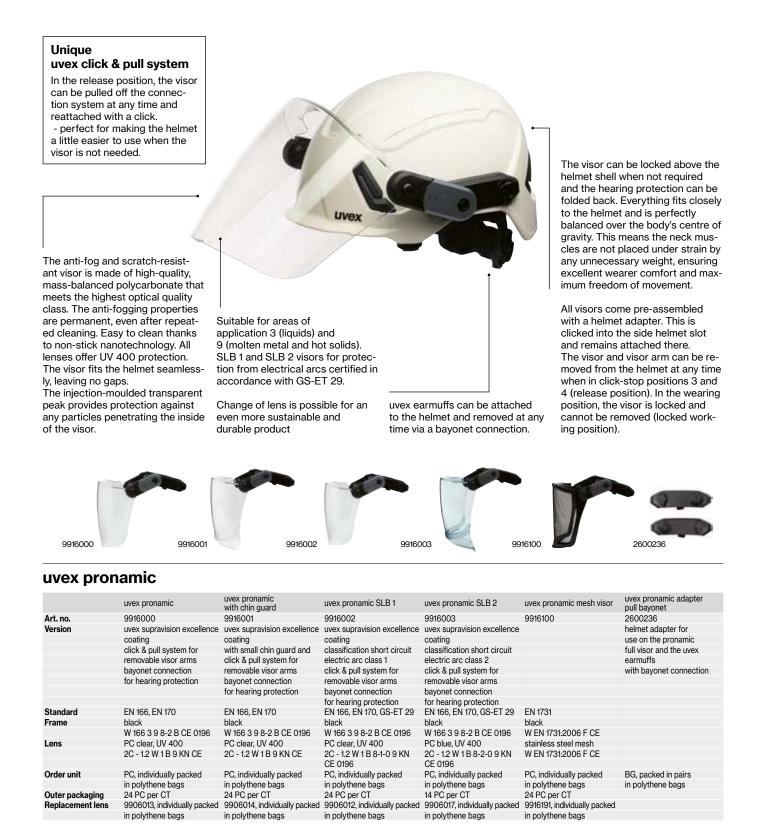

Visors and face protection

uvex pronamic visor system

The uvex pronamic half visor completes the pronamic visor family. With two different lens tints, it offers optimum protection and, because of its design, it allows prescription spectacles to be worn at the same time.

If the visor is not needed, it can be locked above the helmet shell, ensuring excellent wearer comfort and maximum freedom of movement.

The polycarbonate half visor has an anti-fog and scratch-resistant coating. Thanks to its design, it offers enough room to wear prescription spectacles as well. The injection-moulded transparent peak fits the helmet seamlessly and provides protection against any particles penetrating the inside of the visor.



Visor is anti-fog on the inside and scratch-resistant on the outside. It also offers UV 400 protection.

9916201

Comes pre-assembled with helmet adapter, visor can be removed from the helmet via push button. Suitable for area of application 3

2600237

The Euroslot remains free for the use of earmuffs or other accessories.

All visors are pre-assembled with a helmet adapter. This is clicked into the front side helmet slot and remains attached there. The visor can be removed from the helmet at any time thanks to a push button.



uvex pronamic half visor

| | uvex pronamic half visor | uvex pronamic half visor | uvex pronamic adapter push bayonet |
|-----------------|---|---|--|
| Art. no. | 9916200 | 9916201 | 2600237 |
| Version | anti-fog and scratch-resistant coating | anti-fog and scratch-resistant coating | helmet adapter for use with the half visor and the |
| | removable visor via push button | removable visor via push button | uvex earmuffs with bayonet connection |
| | | sun protection | |
| Standard | EN 166, EN 170 | EN 166, EN 172 | |
| Frame | black | black | |
| | W 166 3 F CE | W 166 3 F CE | |
| Lens | PC clear, UV 400 | PC grey 23%, UV 400 | |
| | 2C - 1.2 W 1 F KN CE | 5-2.5 W 1 F KN CE | |
| Order unit | PC, individually packed in polythene bags | PC, individually packed in polythene bags | BG, packed in pairs in polythene bags |
| Outer packaging | 50 PC per CT | 50 PC per CT | |
| | | | |

Combination options

| | pronamic visor 9916000 | pronamic visor with chin guard 9916001 | pronamic visor SLB 1 9916002 | pronamic visor SLB 2 9916003 | pronamic mesh visor 9916100 | pronamic half visor clear 9916200 | pronamic half visor grey 9916201 |
|------------------------------|------------------------------|--|------------------------------------|------------------------------------|-----------------------------------|---|--|
| uvex pronamic B-WR | | | - | - | | - | - |
| uvex pronamic B-S-WR | | | - | - | | | |
| uvex pronamic S-KR | | | - | - | | | |
| uvex pronamic alpine | | | - | - | | | |
| uvex pronamic alpine Mips® | | | - | - | | - | - |
| uvex pronamic alpine E | - | - | | | - | - | - |
| uvex pronamic alpine E Mips® | - compatible | – – not compatible | • | | _ | _ | _ |

Visors and face protection

uvex vimox visor system

One for all - uvex comfort for a wide variety of helmet models

Don't use a uvex helmet, but still want our unique lens technology? Then uvex vimox is the solution for you. Because we're bringing the most popular features of our visors to (almost) all common helmet models on the market.

Outstanding ergonomics are at the heart of every single product we develop. A comfortable fit should provide the wearer with relief. That's why we integrated a key feature of our pheos visor range into the uvex vimox visor system - the resting position.

If the visor is not actively in use, it can either be removed completely using the uvex click & pull system or alternatively pushed into the resting position - no matter which helmet the vimox is used with. The optimal centre of gravity is located in the middle of the head to support the natural posture of the neck and significantly reduce strain.

Unique uvex click & In the release position, the visor can be pulled off the connection system at any time and reattached with Extra clarity Our extra-large visor lens offers maximum all-round visibility and

connection system The uvex vimox's unique connection system optimally adapts to a wide range of helmets and is easy to fit. Simply snap it onto the front brim of your helmet, secure it and you're on your way.

pull system

a click.

Intelligent

is even scratch-resistant on the outside and anti-fog on the inside thanks to the uvex supravision excellence coating. UV 400 protection and the highest optical class are included as standard.

Additional protection

Every helmet is different. The additional soft sealing lip means that the vimox always seals completely on a variety of helmets - so nothing can come between the helmet and visor.

Secure hold

The durable non-slip elastic strap provides a secure fit on any helmet and can be easily adjusted in size.



Ready to try one for all?

Over 20 helmets are compatible with the uvex vimox. Find out here if your current helmet is among them.



R

Visors and face protection

uvex vimox visor system



Click & pull system

The visor and visor arm can be removed from the helmet at any time when in click-stop positions 3 and 4 (release position). In the wearing position, the visor is locked and cannot be removed (locked working position). Ideal for making the helmet a little easier to use when the visor is not needed.



Ergonomic relief

If the visor is not needed, it can be pushed out of the field of vision into a resting position. The visor then rests in a well-balanced and ergonomically secure position on the helmet.



Smart lens changing system

If the visor is damaged or has been in use for too long, it can be removed from the connection system by means of a screw and replaced.



| uvex vimox | |
|------------------|--|
| Art. no. | 9920001 |
| Version | universal visor system for a wide range of helmets |
| | uvex supravision excellence coating |
| | click & pull system for visor arms |
| Standard | EN 166, EN 170 |
| Frame | black |
| | W 166 3 9 B CE |
| Lens | PC clear, UV 400 |
| | 2C - 1.2 W 1 B 9 KN CE |
| Order unit | PC, individually packed in polythene bags |
| Outer packaging | 16 PC per CT |
| Replacement lens | 9921001, individually packed in polythene bags |
| | |

Visors and face protection

uvex pheos visor system

uvex pheos visor

- polycarbonate visors with uvex supravision excellence coating technology
- visor is anti-fog on the inside and exceptionally scratch- and chemical-resistant on the outside. The anti-fogging properties are permanent, even after repeated cleaning
- easy to clean thanks to non-stick nanotechnology
- available with two mounting options: mechanical levers or automatic magnetic locks
- visors 9906002, 9906003 and 9906009 can be combined with the industrial protection helmets:
- uvex pheos B-S-WR
- Helmet for working at height uvex pheos alpine (visor adapter art. no. 9790067 required)
- visors uvex pheos SLB 1 (9906005 and 9906006) and uvex pheos SLB 2 (9906007 and 9906008) can be combined with the uvex pheos E-S-WR industrial safety helmet
- lenses can be changed

pheos

helmet system

conventional helmet system

- fulfils standards EN 166 and EN 170
- certified for areas of application 3 (liquids) and 9 (molten metal and hot solids)
- uvex pheos SLB 1 visors are certified in accordance with GS-ET 29 as Class 1 visors for protection from electrical arcs (4kA)
- uvex pheos SLB 2 visors are certified in accordance with GS-ET 29 as Class 2 visors for protection from electrical arcs (7kA)
- you can find the combination options on the next page (on page 154)

Perfect 'resting position' for the visor and hearing protection

The visor can be locked above the helmet shell when not required and the hearing protection can be folded back. Everything fits closely to the helmet and is perfectly balanced over the body's centre of gravity. This means the neck muscles are not placed under strain by any unnecessary weight, ensuring excellent wearer comfort and maximum freedom of movement.

Reliable face protection

The anti-fog and scratch-resistant visor is made of high-quality polycarbonate that meet the highest optical quality class. The visor fits the helmet seamlessly, leaving no gaps. The injection-moulded transparent peak provides protection against any particles penetrating the inside of the visor.

Magnetic and mechanical locking system

All visors are pre-assembled with a helmet adapter. This is clicked into the side helmet slot and remains permanently attached there.

With the magnetic locking system, the attachment parts, visor and earmuffs can be removed easily at any time without having to remove the helmet. The visor is released with a click of the lateral locking system. When reassembled, the parts automatically snap back into place. This allows the helmet to remain comfortably on your head.

If the product is equipped with a mechanical locking system, the earmuffs can be removed at any time via a bayonet connection. The mechanical visor remains permanently attached to the helmet.



Magnetic locking system for visors and earmuffs with a magnetic connection



Mechanical locking system for visors and earmuffs with a bayonet connection



Visors and face protection uvex pheos visor system



| | uvex pheos | uvex pheos SLB 1 | uvex pheos SLB 2 | |
|------------------|------------------------------|---|---|---|
| Art. no. | 9906002 | 9906005 | 9906007 | |
| Version | uvex supravision excellence | uvex supravision excellence | uvex supravision excellence | |
| | with mechanical levers | certified as Class 1 visor for protection | certified as Class 2 visor for protection | |
| | and bayonet connection | from electrical arcs, with mechanical | from electrical arcs with mechanical levers | |
| | for hearing protection | levers and bayonet connection | and chin protection and bayonet | |
| | | for hearing protection | connection for hearing protection | |
| Standard | EN 166, EN 170 | EN 166, EN 170 | EN 166, EN 170 | |
| Frame | black | black | black | |
| | W 166 3 8-2 9 B CE 0196 | W 166 3 8-2 9 B CE 0196 | W 166 3 8-2 9 B CE 0196 | |
| Lens | PC clear | PC clear | PC blue | |
| | UV 400 | UV 400 | UV 400 | |
| | 2C-1.2 W 1 B 9 KN CE 0196 | 2C-1.2 W 1 B 8-1-0 9 KN CE 0196 | 2C-1.2 W 1 B 8-2-0 9 KN CE 0196 | |
| Order unit | | PC, individually packed in polythene bags | | |
| Outer packaging | 24 PC per CT | 24 PC per CT | 14 PC per CT | |
| Replacement lens | 9906013, individually packed | 9906012, individually packed | 9906017, individually packed | |
| | in polythene bags | in polythene bags | in polythene bags | |
| | | | | |
| | | | | |
| | uvex pheos magnetic | uvex pheos SLB 1 magnetic | uvex pheos SLB 2 magnetic | uvex pheos magnetic with chin guard |
| Art. no. | 9906003 | 9906006 | 9906008 | 9906009 |
| Version | uvex supravision excellence | uvex supravision excellence | uvex supravision excellence | uvex supravision excellence |
| | with magnetic levers | certified as Class 1 visor for protection | certified as Class 2 visor for protection | with small chin guard and |
| | | from electrical arcs, | from electrical arcs | magnetic lever arms |
| | | with magnetic levers | with magnetic levers and chin protection | |
| Standard | EN 166, EN 170 | EN 166, EN 170 | EN 166, EN 170 | EN 166, EN 170 |
| Frame | black | black | black | black |
| | W 166 3 8-2 9 B CE 0196 | W 166 3 8-2 9 B CE 0196 | W 166 3 8-2 9 B CE 0196 | W 166 3 9 8-2 B CE 0196 |
| Lens | PC clear | PC clear | PC blue | PC clear |
| | UV 400 | UV 400 | UV 400 | UV 400 |
| | 2C-1.2 W 1 B 9 KN CE 0196 | 2C-1.2 W 1 B 8-1-0 9 KN CE 0196 | 2C-1.2 W 1 B 8-2-0 9 KN CE 0196 | 2C - 1.2 W 1 B 9 KN CE |
| Order unit | | PC, individually packed in polythene bags | PC, individually packed in polythene bags | PC, individually packed in polythene bags |
| Outer packaging | 20 PC per CT | 20 PC per CT | 14 PC per CT | 20 PC per CT |
| Replacement lens | 9906013, individually packed | 9906012, individually packed | 9906017, individually packed | 9906014, individually packed |
| | in polythene bags | in polythene bags | in polythene bags | in polythene bags |
| | - | | | |

Visors and face protection Combination options and accessories

Combination options uvex pheos visors

| | Art. no. | Visor frame | Visor | Protection | Suitable helmets | Earmuffs | |
|-----|----------|-------------|---|--|------------------|----------|---------------------|
| | 9906002 | mechanical | polycarbonate, clear | | ences | 2600214 | 10 |
| P, | 9906003 | magnetic | polycarbonate, clear | against mechanical influences (e.g. sparks, splinters) | | | 6 |
| 1 m | 9906009 | magnetic | polycarbonate, clear with chin guard | | | 2600215 | a . . |
| | 9906005 | mechanical | polycarbonate, clear with UV absorber | against electrical arcs up to 4 kA (kilo- | | 2600214 | |
| F, | 9906006 | magnetic | polycarbonate, clear with UV absorber | amperes) | uvex pheos | 2600215 | |
| · A | 9906007 | mechanical | polycarbonate, blue with UV absorber and chin section | against electrical arcs | E-S-WR | 2600214 | |
| 100 | 9906008 | magnetic | polycarbonate, blue with UV absorber and chin section | up to 7 kA (kilo- amperes) | | | |



uvex pheos visor system accessories

| | Visor adapter |
|------------|--|
| Art. no. | 9790067 |
| Version | for combining with the helmet for working at height uvex pheos alpine |
| | for inserting on the inside of the visor's face cover (visor not included) |
| Order unit | PC. individually packed in polythene bags |
| | |
| | Helmet adapter |
| Art. no. | 9790078 |
| Version | helmet adapter for use with uvex pheos K2P magnet earmuffs |
| | (2600215) without visor, is only required if no visor is used |
| Order unit | PR, individually packed in polythene bags |
| | |
| | Sunglare filter/rain cover |
| Art. no. | 9790074 |
| Version | to protect against sun and rain, for insertion on the inside |
| | of the face cover of the visor, cannot be combined with the visors |
| <u></u> | uvex pheos SLB 1 and uvex pheos SLB 2 |
| Order unit | PC, individually packed in polythene bags |
| | Microfibre case |
| Art. no. | 9954362 |
| Version | cloth bag to store and transport uvex visors and uvex helmets, black |
| Order unit | PC, loose |
| | uvex pheos Adapter Magnet-Bajonett |
| Art. no. | 2600235 |
| Version | helmet adapter for use with uvex earmuffs |
| | with bayonet connection and magnetic pheos visor |
| Order unit | PR, packed in pairs in polythene bags |





2600235

Visors and face protection

uvex pheos forestry worker visor \cdot uvex pheos mesh visor \cdot 9725 \cdot 9726



uvex pheos forestry worker visor

- metal mesh visor for forestry work
- suitable for helmet uvex pheos ABS
 lens certification: W EN 1731:2006-F

Further information can be found on page 133.



uvex pheos mesh visor

• suitable for uvex pheos industrial safety helmet B-S-WR, uvex pheos ABS and uvex pheos alpine (visor adapter 9790067 required when the visor is combined with the uvex pheos alpine helmet)

• with mechanical levers and bayonet connection for hearing protection

| uvex pheos mesh v | visor |
|-------------------|--|
| Art. no. | 9790219 |
| Version | Stainless steel mesh with high level of light transmission and adapter |
| Standard | EN 1731 |
| Frame | W EN 1731:2006 F CE |
| Lens | Stainless steel mesh visor, light transmission > 60% |
| | W EN 1731:2006 F CE |
| Order unit | PC, individually packed in polythene bags |
| Outer packaging | 20 PC per CT |
| | |



· polycarbonate and cellulose acetate visors with

- adapters for attaching on the side helmet slots
- easy to change lenses
- not combinable with earmuffs
- suitable for helmets uvex airwing and uvex superboss

Helmet not included!

| | 9725 | 9726 |
|------------------|--|--------------------------|
| Art. no. | 9725514 | 9726014 |
| Replacement lens | 9050517 | 9723017 |
| Version | anti-fog on the inside | uncoated |
| | Material thickness: 1 mm | Material thickness: 1 mm |
| Standard | EN 166, EN 170 | EN 166, EN 170 |
| Frame | black | black |
| | W 166 3-F CE | W 166 3-B CE |
| Lens | CA clear, UV 380 | PC clear, UV 400 |
| | 2C-1.2 W 1 FN CE | 2C-1.2 W 1 B CE |
| Order unit | PC, individually packed in polythene bag | gs |
| Outer packaging | 20 PC per CT | 20 PC per CT |



9725514 9726014

UVEX pheos faceguard Face protection system

This innovative face protection system consists of a height- and width-adjustable head strap and a choice of two different visor lenses. The high-quality polycarbonate visor features uvex coating technology to ensure that the wearer's field of vision remains fog-free for a long period of time and that the outside of the visor is scratch-resistant. The mesh visor is made of robust stainless steel and provides reliable protection when working outdoors. The earmuffs can be attached and removed quickly using a rotating mechanism. The system can be expanded with a wide range of accessories and adapted to suit the application.

The uvex multi-system in detail

Cooling sun and neck protection, ideal for working outdoors

Additional bump cap (EN812) can be clipped into the system Unique combination: visor and bump cap Removable K1P earmuffs and hygiene kit

Wheel ratchet system with wide neck piece, single-handed width adjustment with wheel ratchet system for a customised, comfortable fit. Suitable for head sizes 52–64. Replaceable suspension harness and sweatband.

Two-point chin strap

Visor made from robust polycarbonate Scratch-resistant outside, anti-fog inside, UV400 protection

The benefits of the uvex pheos faceguard at a glance: • fully pre-assembled face protection system — ready to • expandable system with high modularity

fully pre-assembled face protection system — ready to use at any time
wide field of vision with the highest optical quality

· robust polycarbonate visor with anti-fog and

or stainless steel mesh visor

- unique combination: visor and bump cap
 replaceable individual parts
 - replaceable individual parts
 comfortable fit over with classes and
 - comfortable fit even with glasses and respirators



Stainless steel mesh visor with a high level of light transmission

Sun visor

Further information can be found at **uvex-safety.com/ en/pheosfaceguard** (or scan the QR code).

 low weight and balanced centre of gravity to relieve the spine

scratch-resistant uvex supravision excellence coating

UVEX pheos faceguard Face protection system

9790215

Designed to protect the face and neck

The uvex pheos faceguard has been ergonomically designed. The face protection system has been designed to evenly distribute the weight across the body's centre of gravity. The low weight and ergonomic centre of gravity supports a natural head posture, minimising strain on the neck and back. The narrow design and wide field of vision help to support the natural posture of the head and neck.





9790211

| | uvex pheos faceguard | uvex pheos faceguard with hearing protection | uvex pheos faceguard mesh visor with hearing protection |
|------------|--|--|---|
| Art. no. | 9790211 | 9790212 | 9790215 |
| Version | Pre-assembled system for head sizes 52–64 cm, | Pre-assembled system for head sizes 52–64 cm, | Pre-assembled system for head sizes 52–64 cm |
| | Polycarbonate lens, uvex supravision excellence coating, | Polycarbonate lens, uvex supravision excellence coating, | stainless steel mesh visor with high light transmission |
| | Without hearing protection | With earmuffs K1P (SNR: 28 dB), | with hearing protectors K1P (SNR: 28 dB), |
| | | further information can be found on page 110 | further information can be found on page 110 |
| Standard | EN 166, EN 170 | EN 166, EN 170, EN 352 | EN 1731, EN 352 |
| Frame | W 166 39B CE | W 166 39B CE | W EN 1731:2006 F CE |
| Lens | PC, clear, UV 400 | PC, clear, UV 400 | Stainless steel mesh visor, light transmission > 60% |
| | 2C-1.2 W 1 B 9 KN CE 0196 | 2C-1.2 W 1 B 9 KN CE 0196 | W EN 1731:2006 F CE |
| Order unit | PC, individually packed in CT | PC, individually packed in CT | PC, individually packed in CT |
| | | | |

Accessories

| ٩ | | | | | 10 | | 6 | |
|------------|---------------------|---------------------|---------------------|----------------------|----------------------|----------------------|-----------------------|----------------------|
| | 9760107 | 9760108 | 9906013 | 9790074 | 2600216 | 9790159 | 9790160 | 9790170 |
| | replacement | replacement | replacement | sun protection | hearing protection | uvex pheos faceguard | Replacement lens | Sun/ |
| | suspension harness | sweatband | lens visor | | earplugs K1P | bump cap | Mesh visor | Neck protection |
| Art. no. | 9760107 | 9760108 | 9906013 | 9790074 | 2600216 | 9790159 | 9790160 | 9790170 |
| Version | Plastic suspension | Textile | Polycarbonate lens | Protects against sun | Earmuffs for | Bump cap for the | replacement lens | Textile with cooling |
| | harness for | | uvex supravision | and rain is inserted | uvex pheos faceguard | uvex pheos faceguard | stainless steel mesh | function to |
| | head sizes | | excellence coating | on the visor | SNR 28 dB | system, hard shell | visior for uvex pheos | protect against |
| | 52–64 cm | | | | | ABS, black, | faceguard | sunlight |
| | | | | | | 52-64 cm | | |
| | | | | | | EN 812 | | |
| Order unit | PC, | PC, | PC, | PC, | PR, in pairs in CT | PC, | PC, | PC, |
| | individually packed | individually packed | individually packed | individually packed | | individually packed | individually packed | individually packed |
| | in polythene bags | in polythene bags | in polythene bags | in polythene bags | | in polythene bags | in polythene bags | in polythene bags |
| | | | | | | | | |



Safety Helmets

uvex Visors · safety Goggles



uvex 9705 · uvex 9706

- cellulose acetate visor with integrated forehead cover
- easy to change lenses
- · cannot be combined with safety helmets
- flip-up mechanism with continuous adjustment
- head size can be easily adjusted using a twist lock

uvex 9707 · uvex 9708

- cellulose acetate visor with integrated fore-head cover and additional protective cap made from impact-resistant polystyrene
- easy to change lenses
- flip-up mechanism with continuous adjustment
- head size can be easily adjusted using a twist lock

| | visor 9705 | visor 9706 | visor 9707 | visor 9708 |
|------------------|------------------------------------|------------------------|----------------------|------------------------|
| Art. no. | 9705014 | 9706514 | 9707014 | 9708514 |
| Version | uncoated | anti-fog on the inside | uncoated | anti-fog on the inside |
| Standard | EN 166, EN 170 | EN 166, EN 170 | EN 166, EN 170 | EN 166, EN 170 |
| Frame | black | black | black | black |
| | W166 3-F DIN CE 0196 | W166 3-F DIN CE 0196 | W166 3 F DIN CE 0196 | W 166 3 F DIN CE 0196 |
| Lens | CA clear, UV 380 | CA clear, UV 380 | CA clear, UV 380 | CA clear, UV 380 |
| | W 1 F DIN CE | W 1 FN DIN CE | W 1 F DIN CE | W 1 F DIN CE |
| Order unit | PC, individually packed in polythe | ne bags | | |
| Outer packaging | 15 PC per CT | 15 PC per CT | 10 PC per CT | 10 PC per CT |
| Replacement lens | 9060017 | 9050517 | 9060017 | 9050517 |
| | | | | |



Bump Caps

uvex u-cap sport

A wide range for many applications



uvex u-cap sport

| uvex u-cap sport | | | |
|------------------|-----------------------------|-------------------------------|--------------------|
| Art. no. | 9794409 | 9794403 | 9794404 |
| Version | with short brim (4 cm), ha | rd case made of ABS, textile | cap made of cotton |
| | | | |
| Standard | EN 812 | EN 812 | EN 812 |
| Colour | black | black | black |
| Sizes | 52 to 54 cm | 55 to 59 cm | 60 to 63 cm |
| Order unit | PC | PC | PC |
| Outer packaging | 60 PC per CT | 60 PC per CT | 60 PC per CT |
| | | | |
| Art. no. | 9794400 | 9794401 | 9794402 |
| Version | with long brim (7 cm), hard | d case made of ABS, textile c | ap made of cotton |
| | | | |
| Standard | EN 812 | EN 812 | EN 812 |
| Colour | black | black | black |
| Sizes | 52 to 54 cm | 55 to 59 cm | 60 to 63 cm |
| Order unit | PC | PC | PC |
| Outer packaging | 60 PC per CT | 60 PC per CT | 60 PC per CT |
| | | | |

| 9794442 | 9794422 | 9794424 |
|-----------------------------|-----------------------------|--------------|
| with short brim (4 cm) and | mesh webbing suspension ha | arness, |
| hard case made of ABS, te | xtile cap made of cotton | |
| EN 812 | EN 812 | EN 812 |
| black | black | black |
| 52 to 54 cm | 55 to 59 cm | 60 to 63 cm |
| PC | PC | PC |
| 60 PC per CT | 60 PC per CT | 60 PC per CT |
| | | |
| 9794443 | 9794423 | 9794425 |
| with long brim (7 cm) and n | nesh webbing suspension har | ness |
| hard case made of ABS, te | xtile cap made of cotton | |
| EN 812 | EN 812 | EN 812 |
| black | black | black |
| 52 to 54 cm | 55 to 59 cm | 60 to 63 cm |
| PC | PC | PC |
| 60 PC per CT | 60 PC per CT | 60 PC per CT |

uvex u-cap sport suspension harness

| uvex u-cap sport suspe | nsion harness |
|------------------------|--|
| Art. no. | 9794415 |
| Version | soft, comfortable mesh webbing suspension harness |
| | increased wearer comfort in uvex u-cap sport bump caps |
| Standard | EN 812 |
| Colour | black |
| Sizes | unisize |
| Order unit | PC |
| Outer packaging | 60 PC per CT |
| | • |

Baseball cap

| Baseball cap | | |
|-----------------|----------------------------|----------------------------|
| Art. no. | 9794110 | 9794111 |
| Version | with long brim (7 cm) | with short brim (4 cm) |
| | without hard shell element | without hard shell element |
| Colour | black | black |
| Sizes | 55 to 63 cm | 55 to 63 cm |
| Order unit | PC | PC |
| Outer packaging | 60 PC per CT | 60 PC per CT |
| | | |

R

uvex u-cap

uvex u-cap sport \cdot uvex u-cap sport vent \cdot uvex u-cap sport hi-viz



uvex u-cap sport

| uvex u-cap sport | | |
|------------------|------------------------|------------------------------|
| Art. no. | 9794407 | 9794408 |
| Version | with long brim (7 cm), | |
| | hard case made of ABS | , textile cap made of cotton |
| Standard | EN 812 | EN 812 |
| Colour | navy blue | navy blue |
| Sizes | 55 to 59 cm | 60 to 63 cm |
| Order unit | PC | PC |
| Outer packaging | 60 PC per CT | 60 PC per CT |
| | | |

uvex u-cap sport vent

| uvex u-cap sport vent | | | |
|-----------------------|-------------------------------|-------------------------------|----------------|
| Art. no. | 9794430 | 9794420 | 9794421 |
| Version | with short brim (4 cm), hard | case made of ABS, | |
| | textile cap made of cotton a | ind mesh fibre | |
| Standard | EN 812 | EN 812 | EN 812 |
| Colour | black | black | black |
| Sizes | 52 to 54 cm | 55 to 59 cm | 60 to 63 cm |
| Order unit | PC | PC | PC |
| Outer packaging | 60 PC per CT | 60 PC per CT | 60 PC per CT |
| | | | |
| Art. no. | 9794444 | 9794416 | 9794417 |
| Version | with short brim (4 cm) and n | nesh webbing and mesh web | bing interior, |
| | ABS hard shell, textile cap n | nade of cotton and mesh fibro | e |
| Standard | EN 812 | EN 812 | EN 812 |
| Colour | black | black | black |
| Sizes | 52 to 54 cm | 55 to 59 cm | 60 to 63 cm |
| Order unit | PC | PC | PC |
| Outer packaging | 60 PC per CT | 60 PC per CT | 60 PC per CT |
| | | | |

uvex u-cap sport hi-viz


| uvex u-cap sport hi-viz | | | | | | |
|-------------------------|------------------------------|------------------------------|--------------------------------|-------------------------------|-----------------|---------------|
| Art. no. | 9794482 | 9794480 | 9794481 | 9794492 | 9794490 | 9794491 |
| Version | with short brim (4 cm), ABS | hard shell, textile cap made | of cotton in fluorescent colou | rs, according to requirements | s with EN 471 – | |
| | increased visibility and sec | urity for the user | | | | |
| Standard | EN 812 | EN 812 | EN 812 | EN 812 | EN 812 | EN 812 |
| Colour | hi-viz yellow | hi-viz yellow | hi-viz yellow | hi-viz orange | hi-viz orange | hi-viz orange |
| Sizes | 52 to 54 cm | 55 to 59 cm | 60 to 63 cm | 52 to 54 cm | 55 to 59 cm | 60 to 63 cm |
| Order unit | PC | PC | PC | PC | PC | PC |
| Outer packaging | 60 PC per CT | 60 PC per CT | 60 PC per CT | 60 PC per CT | 60 PC per CT | 60 PC per CT |

Safety helmets to match your corporate identity

Individual safety helmets

uvex gives you the option to customise all uvex helmets and bump caps so that your employees' equipment matches your corporate identity specifications.

Please contact the uvex service centre with your requests at any time. Tel. +49 911 9736-0 · Email: Individualisierung@uvex.de

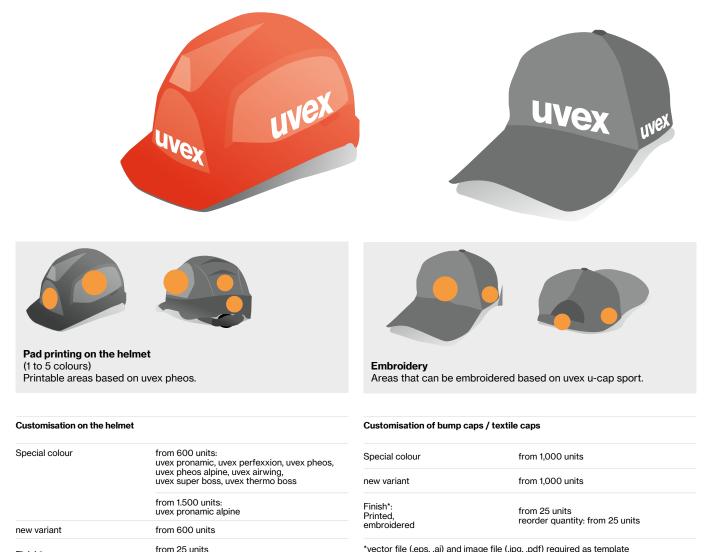

*vector file (.eps, .ai) and image file (.jpg, .pdf) required as template

*vector file (.eps, .ai) and image file (.jpg, .pdf) required as template

How individual can you be?

reorder quantity: from 25 units

except uvex pronamic alpine, uvex perfexxion, uvex pheos alpine from 24 units respectively

We will be happy to advise you on the technical options for customising our safety helmets.

Finish*: Printed,

reflex set

P

Safety Helmets _{Overview}

| Art. no. | Name | Description | Colour | Page | Art. no. | Name | Description | Colour | Page |
|--------------------|--|--|------------------------|------------|--------------------|---------------------------------------|---------------------------------------|----------------|------------|
| | Accessories | uvex pheos Adapter Magnet-Bajonett | black | 154 | 9762031 | uvex airwing B-S-WR | Safety helmet | white | 131 |
| | Accessories | uvex pronamic Adapter Pull-Bajonett | clear | 148 | 9762120 | uvex airwing B | Safety helmet | yellow | 130 |
| | Accessories | uvex pronamic Adapter Push-Bajonett | clear | 149 | 9762121 | uvex airwing B-S | Safety helmet | yellow | 131 |
| | Accessories | Replacement lens, CA, non-fogging | clear | 155/158 | 9762130 | uvex airwing B-WR | Safety helmet | yellow | 130 |
| 9060017 | Accessories | Replacement lens, CA | clear | 158 | 9762131 | uvex airwing B-S-WR | Safety helmet | yellow | 131 |
| 9705014 | Accessories | Cellulose acetate protective visor | clear | 158 | 9762220 | uvex airwing B | Safety helmet | orange | 130 |
| 9706514 | Accessories | Antifog cellulose acetate protective visor | clear | 158 | 9762221 | uvex airwing B-S | Safety helmet | orange | 131 |
| 9707014 | Accessories | Cellulose acetate protective visor | clear | 158 | 9762230 | uvex airwing B-WR | Safety helmet | orange | 130 |
| 9708514 | Accessories uvex perfexxion | Antifog cellulose acetate protective visor | clear | 158 | 9762231 | uvex airwing B-S-WR uvex airwing B | Safety helmet | orange | 131 |
| | uvex perfexxion | Safety helmet | white white | 132 132 | 9762320 9762321 | uvex airwing B-S | Safety helmet | red red | 130 131 |
| | uvex perfexxion | Safety helmet | black | 132 | 9762321 | uvex airwing B-WR | Safety helmet | red | 130 |
| | uvex perfexxion | Safety helmet | black | 132 | 9762331 | uvex airwing B-S-WR | Safety helmet | red | 131 |
| 9723017 | Accessories | Replacement lens, PC | clear | 155 | 9762420 | uvex airwing B | Safety helmet | green | 130 |
| 9725514 | Accessories | Antifog cellulose acetate visor | clear | 155 | 9762421 | uvex airwing B-S | Safety helmet | green | 131 |
| 9726014 | Accessories | Polycarbonate visor | clear | 155 | 9762430 | uvex airwing B-WR | Safety helmet | green | 130 |
| | uvex pronamic E-WR | Safety helmet | weiß | 125 | 9762431 | uvex airwing B-S-WR | Safety helmet | green | 131 |
| 9730031 | uvex pronamic E-S-WR | Safety helmet | weiß | 125 | 9762520 | uvex airwing B | Safety helmet | blue | 130 |
| 9730130 | uvex pronamic E-WR | Safety helmet | gelb | 125 | 9762521 | uvex airwing B-S | Safety helmet | blue | 131 |
| 9730131 | uvex pronamic E-S-WR | Safety helmet | gelb | 125 | 9762530 | uvex airwing B-WR | Safety helmet | blue | 130 |
| 9730330 | | Safety helmet | rot | 125 | 9762531 | uvex airwing B-S-WR | Safety helmet | blue | 131 |
| 9730331 | uvex pronamic E-S-WR | Safety helmet | rot | 125 | 9762920 | uvex airwing B | Safety helmet | black | 130 |
| 9730530 | | Safety helmet | blau | 125 | | uvex pheos E | Safety helmet | white | 136 |
| 9730531 | uvex pronamic E-S-WR | Safety helmet | blau | 125 | | uvex pheos E | Safety helmet with reflective sticker | white | 137 |
| 9731030 | uvex pronamic B-WR | Safety helmet | white | 123 | | uvex pheos E-WR | Safety helmet | white | 136 |
| 9731130 | uvex pronamic B-WR | Safety helmet | yellow | 123 | 9770031 | uvex pheos E-S-WR | Safety helmet | white | 136 |
| 9731330 | uvex pronamic B-WR | Safety helmet | red | 123 | 9770036 | uvex pheos E-WR | Safety helmet with reflective sticker | white | 137 |
| 9731530 | uvex pronamic B-WR | Safety helmet | blue | 123 | 9770120 | uvex pheos E | Safety helmet | yellow | 136 |
| 9731031 | uvex pronamic B-S-WR | Safety helmet | white | 123 | 9770126 | uvex pheos E | Safety helmet with reflective sticker | yellow | 137 |
| 9731131 | uvex pronamic B-S-WR | Safety helmet | yellow | 123 | 9770130 | uvex pheos E-WR | Safety helmet | yellow | 136 |
| 9731331 | uvex pronamic B-S-WR | Safety helmet | red | 123 | 9770131 | uvex pheos E-S-WR | Safety helmet | yellow | 136 |
| 9731531 | uvex pronamic B-S-WR | Safety helmet | blue | 123 | 9770136 | uvex pheos E-WR | Safety helmet with reflective sticker | yellow | 137 |
| 9731033 | uvex pronamic S-KR | Safety helmet | white | 123 | 9770230 | uvex pheos E-WR | Safety helmet | orange | 136 |
| 9731133 | uvex pronamic S-KR | Safety helmet | yellow | 123 | 9770231 | uvex pheos E-S-WR | Safety helmet | orange | 136 |
| 9731333 | uvex pronamic S-KR | Safety helmet | red | 123 | 9770330 | uvex pheos E-WR | Safety helmet | red | 136 |
| 9731533 | uvex pronamic S-KR | Safety helmet | blue | 123 | 9770331 | uvex pheos E-S-WR | Safety helmet | red | 136 |
| 9735030 | | Safety helmet | white | 127 | | uvex pheos E-WR | Safety helmet | green | 136 |
| 9735031 | uvex pronamic alpine Mips® | • | white | 127 | 9770431 | uvex pheos E-S-WR | Safety helmet | green | 136 |
| 9735130 | uvex pronamic alpine | Safety helmet | hi-viz yellow | 127 | 9770530 | uvex pheos E-WR | Safety helmet | blue | 136 |
| 9735131 | uvex pronamic alpine Mips® | • | hi-viz yellow | 127 | 9770531 | uvex pheos E-S-WR | Safety helmet | blue | 136 |
| 9735134 | uvex pronamic alpine | Safety helmet | gelb | 127 | 9770536 | uvex pheos E-WR | Safety helmet with reflective sticker | blue | 137 |
| 9735230 | uvex pronamic alpine | Safety helmet | hi-viz orange | 127 | 9770830 | uvex pheos E-WR | Safety helmet | dark grey | 136 |
| 9735231 | uvex pronamic alpine Mips® | • | hi-viz orange | 127 | 9770832 | uvex pheos E-S-WR | Safety helmet | dark grey | 136 |
| 9735330 | uvex pronamic alpine | Safety helmet | rot | 127 | 9770931 | uvex pheos E-S-WR | Safety helmet | black | 136 |
| 9735430 | | Safety helmet | grün | 127 | 9772001 | Accessories | Suspension harness IES | | 139 |
| 9735530 | uvex pronamic alpine | Safety helmet | blau | 127 | | Accessories | Mount | | 140 |
| 9735930 | uvex pronamic alpine | Safety helmet | schwarz white | 127 | 9772020 | uvex pheos B | Safety helmet | white | 134 |
| 9736030 9736031 | uvex pronamic alpine E uvex pronamic alpine E | Safety helmet Safety helmet | hi-viz yellow | 127 127 | 9772026 9772030 | uvex pheos B | Safety helmet with reflective sticker | white white | 137 134 |
| 9736130 | | • | - | 127 | | uvex pheos B-WR | Safety helmet | | 134 |
| 9736130 | uvex pronamic alpine E uvex pronamic alpine E | Safety helmet Safety helmet | hi-viz orange white | 127 | 9772031 | uvex pheos B-S-WR uvex pheos S-KR | Safety helmet | white white | 134 |
| | uvex pronamic alpine E | Safety helmet | hi-viz yellow | 127 | | uvex pheos B-WR | Safety helmet with reflective sticker | white | 137 |
| 9736231 | uvex pronamic alpine E | Safety helmet | hi-viz orange | 127 | 9772038 | uvex pheos B-WR | Safety helmet with reflective sticker | white | 137 |
| | uvex super boss | Safety helmet | white | 130 | | uvex pheos IES | Safety helmet | white | 137 |
| 9750120 | uvex super boss | Safety helmet | yellow | 130 | | uvex pheos planet B-WR | | white | 135 |
| | uvex super boss | Safety helmet | blue | 130 | | uvex pheos planet B-S-WR | - | white | 135 |
| | uvex super boss uvex thermo boss | Safety helmet | white | 130 | 9772045 | uvex pheos IES | Safety helmet with reflective sticker | white | 137 |
| | uvex thermo boss | Safety helmet | yellow | 131 | 9772045 | uvex pheos S-KR | Safety helmet with reflective sticker | white | 137 |
| | uvex thermo boss | Safety helmet | red | 131 | 9772071 | uvex pheos ABS B-S-WR | - | white | 133 |
| | Accessories | Conventional suspension harness | | 139 | 9772090 | uvex pheos S-KR Mips® | Safety helmet | white | 129 |
| | Accessories | Suspension harness with rotating size a | diusters | 139 | 9772092 | uvex pheos planet S-KR Mips® | - | white | 135 |
| | Accessories | Sweatband, synthetic leather | | 139 | 9772120 | uvex pheos B | Safety helmet | yellow | 134 |
| | Accessories | Sweatband, textile/foam material | | 139 | 9772126 | uvex pheos B | Safety helmet with reflective sticker | yellow | 137 |
| | Accessories | Sweatband pheos alpine and pheos E-W | /R | 133/139 | 9772130 | uvex pheos B-WR | Safety helmet | yellow | 134 |
| 9760011 | Accessories | Suspension harness | | 139 | 9772131 | uvex pheos B-S-WR | Safety helmet | yellow | 134 |
| | Accessories | Suspension harness | | 139 | 9772134 | uvex pheos S-KR | Safety helmet | yellow | 137 |
| | Accessories | Wheel ratchet padding | | 139 | 9772137 | uvex pheos B-S-WR | Safety helmet with reflective sticker | yellow | 137 |
| | Accessories | Replacement suspension harness pheos | s ABS | 133 | 9772138 | uvex pheos B-WR | Safety helmet with reflective sticker | yellow | 137 |
| | Accessories | Suspension harness pheos faceguard | | 157 | 9772140 | uvex pheos IES | Safety helmet | yellow | 137 |
| | Accessories | Sweatband for suspension harness | | 157 | 9772171 | uvex pheos ABS B-S-WR | - | yellow | 133 |
| | uvex airwing B | Safety helmet | white | 130 | 9772190 | uvex pheos S-KR Mips® | Safety helmet | yellow | 129 |
| OTOLOLO | | - | | | 9772220 | uvex pheos B | Safety helmet | orange | 134 |
| 9762021 | uvex airwing B-S | Safety helmet | white | 131 | 3112220 | aron prices b | ould y heimet | orunge | |

Safety Helmets _{Overview}

| Art. no. | Name | Description | Colour | Page | Art. no. | Name | Description | Colour | Page |
|----------|----------------------------|--|----------------|------------|----------|--|--|--------------------------------|---------|
| 9772230 | uvex pheos B-WR | Safety helmet | orange | 134 | 9790075 | Accessories | Neck protection | orange | 138 |
| 9772231 | uvex pheos B-S-WR | Safety helmet | orange | 134 | 9790076 | Accessories | Neck protection | yellow | 138 |
| 9772234 | uvex pheos S-KR | Safety helmet | orange | 137 | 9790077 | Accessories | Helmet slot sealing plug set | | 140 |
| 9772236 | uvex pheos B-WR | Safety helmet with reflective sticker | orange | 137 | 9790078 | Accessories | Helmet adapter | | 154 |
| 9772240 | uvex pheos IES | Safety helmet | orange | 137 | 9790086 | Accessories | cooling neck protection | | 138 |
| 9772246 | uvex pheos IES | Safety helmet with reflective sticker | orange | 137 | 9790146 | Accessories | Signal whistle | | 133 |
| 9772260 | uvex pheos S-KR Mips® | Safety helmet | hi-viz orange | 129 | 9790149 | Accessories | Neck support | | 140 |
| 9772271 | uvex pheos ABS B-S-WR | Safety helmet | orange | 133 | 9790150 | Accessories | uvex pheos helmet sticker | silver | 139 |
| 9772320 | uvex pheos B | Safety helmet | red | 134 | 9790151 | Accessories | uvex pheos helmet sticker | yellow | 139 |
| 9772326 | uvex pheos B | Safety helmet with reflective sticker | red | 137 | 9790152 | Accessories | uvex pheos helmet sticker | orange | 139 |
| 9772330 | uvex pheos B-WR | Safety helmet | red | 134 | 9790153 | Accessories | uvex pheos helmet sticker | red | 139 |
| 9772332 | uvex pheos B-S-WR | Safety helmet | red | 134 | 9790154 | Accessories | uvex pheos helmet sticker | green | 139 |
| 9772334 | uvex pheos B-S-WR | Safety helmet with reflective sticker | red | 137 | 9790155 | Accessories | uvex pheos helmet sticker | blue | 139 |
| 9772335 | uvex pheos S-KR | Safety helmet | red | 137 | 9790156 | Accessories | uvex pheos helmet sticker | black | 139 |
| 9772340 | uvex pheos IES | Safety helmet | red | 137 | 9790159 | Accessories | uvex pheos faceguard bump cap | black | 157 |
| 9772343 | uvex pheos IES | Safety helmet with reflective sticker | red | 137 | 9790160 | Accessories | Replacement lens mesh visor | | 157 |
| 9772371 | uvex pheos ABS B-S-WR | Safety helmet | red | 133 | 9790166 | Accessories | Business card holder | | 140 |
| 9772430 | uvex pheos B-WR | Safety helmet | green | 134 | 9790170 | Accessories | Sun/Neck protection | | 157 |
| 9772431 | uvex pheos B-S-WR | Safety helmet | grün | 134 | 9790210 | Accessories | Replacement visor (metal) | | 133 |
| 9772433 | uvex pheos B-S-WR | Safety helmet with reflective sticker | green | 137 | 9790211 | uvex pheos faceguard | uvex pheos faceguard face protection s | system | 157 |
| 9772437 | uvex pheos B-WR | Safety helmet with reflective sticker | green | 137 | 9790212 | uvex pheos faceguard | uvex pheos faceguard face protection system w | ith hearing protection | ion 157 |
| 9772520 | uvex pheos B | Safety helmet | blue | 134 | 9790215 | uvex pheos faceguard | uvex pheos faceguard mesh visor with I | | |
| | uvex pheos B | Safety helmet with reflective sticker | red | 137 | 9790219 | Accessories | uvex pheos mesh visor | | 133 |
| 9772530 | uvex pheos B-WR | Safety helmet | blue | 134 | 9790310 | Accessories | Suspension harness for uvex pronamic | | 125 |
| 9772531 | uvex pheos B-S-WR | Safety helmet | blue | 134 | 9790311 | Accessories | Synthetic leather sweatband for uvex p | ronamic | 125 |
| 9772534 | uvex pheos S-KR | Safety helmet | blue | 137 | 9794110 | Baseball cap | with long brim, size 55 – 63 cm | black | 160 |
| 9772537 | uvex pheos B-S-WR | Safety helmet with reflective sticker | blue | 137 | 9794111 | Baseball cap | with short brim, size 55 – 63 cm | black | 160 |
| 9772538 | uvex pheos B-WR | Safety helmet with reflective sticker | blue | 137 | 9794400 | uvex u-cap sport | Impact cap, size 52 – 54 cm | black | 160 |
| 9772540 | uvex pheos IES | Safety helmet | blue | 137 | 9794401 | uvex u-cap sport | Impact cap, size 55 – 59 cm | black | 160 |
| 9772541 | uvex pheos S-KR | Safety helmet with reflective sticker | blue | 137 | | uvex u-cap sport | Impact cap, size 60 – 63 cm | black | 160 |
| | uvex pheos B-S-WR | Safety helmet | dark grey | 134 | | uvex u-cap sport | Impact cap, size 55 – 59 cm | black | 160 |
| | uvex pheos B | Safety helmet | black | 134 | | uvex u-cap sport | Impact cap, size 60 – 63 cm | black | 160 |
| 9772930 | uvex pheos B-WR | Safety helmet | black | 134 | | uvex u-cap sport | Impact cap, size 55 – 59 cm | navy blue | 161 |
| 9772932 | uvex pheos B-S-WR | Safety helmet | black | 134 | | uvex u-cap sport | Impact cap, size 60 – 63 cm | navy blue | 161 |
| | uvex pheos B-WR | Safety helmet with reflective sticker | black | 137 | | uvex u-cap sport | Impact cap, size 52 – 54 cm | black | 160 |
| 9772937 | uvex pheos B-S-WR | Safety helmet with reflective sticker | black | 137 | | uvex u-cap sport | Suspension harness | black | 160 |
| 9773050 | uvex pheos alpine | Safety helmet | white | 132 | 9794416 | uvex u-cap sport vent | Impact cap, size 55 – 59 cm | black | 161 |
| 9773150 | uvex pheos alpine | Safety helmet | yellow | 132 | 9794417 | uvex u-cap sport vent | Impact cap, size 60 – 63 cm | black | 161 |
| 9773250 | uvex pheos alpine | Safety helmet | orange | 132 | 9794420 | uvex u-cap sport vent | Impact cap, size 55 – 59 cm | black | 161 |
| 9773350 | uvex pheos alpine | Safety helmet | red | 132 | 9794421 | uvex u-cap sport vent | Impact cap, size 60 – 63 cm | black | 161 |
| 9773450 | uvex pheos alpine | Safety helmet | green | 132 | | | Impact cap, size 55 – 59 cm | black | 160 |
| 9773550 | uvex pheos alpine | Safety helmet | blue | 132 | | uvex u-cap sport | Impact cap, size 55 – 59 cm | black | 160 |
| | uvex pheos alpine | Safety helmet | black | 132 | | uvex u-cap sport | Impact cap, size 60 – 63 cm | black | 160 |
| 9774236 | uvex pheos forestry | Forestryset | yellow | 133 | | uvex u-cap sport | Impact cap, size 60 – 60 cm | black | 160 |
| 9774237 | uvex pheos forestry | Forestryset | orange | 133 | | uvex u-cap sport vent | Impact cap, size 52 – 54 cm | black | 161 |
| 9774238 | uvex pheos forestry | Forestryset | red | 133 | | uvex u-cap sport vent | Impact cap, size 52 – 54 cm | black | 160 |
| | Accessories | Suspension harness thermo boss, super | | 139 | | uvex u-cap sport | Impact cap, size 52 – 54 cm | black | 160 |
| | Accessories | Sweatband artificial leather for thermo bo | | 139 | | uvex u-cap sport vent | Impact cap, size 52 – 54 cm | black | 161 |
| | Accessories | | 33, Super D033 | 140 | | | 1 17 | | 161 |
| | Accessories | Leather chin straps Hygienic cap | white | 138 | | uvex u-cap sport hi-viz uvex u-cap sport hi-viz | Impact cap, size 55 – 59 cm Impact cap, size 60 – 63 cm | hi-viz yellow hi-viz yellow | 161 |
| 070007 | | | write | | | | | | |
| | Accessories | Forked chin straps | | 140 | | uvex u-cap sport hi-viz | Impact cap, size 52 – 54 cm | hi-viz yellow | 161 |
| | Accessories Accessories | Elasticated chin strap | black | 140 138 | | uvex u-cap sport hi-viz uvex u-cap sport hi-viz | Impact cap, size 55 – 59 cm Impact cap, size 60 – 63 cm | hi-viz orange | 161 |
| | | Winter cap | | | | uvex u-cap sport hi-viz | 1 17 | hi-viz orange | 161 |
| | Accessories | Winter cap Winter cap | black | 138 | | | Impact cap, size 52 – 54 cm uvex pheos Visor | hi-viz orange | 161 |
| | Accessories | | black | 138 | | Accessories | • | clear | 153 |
| | Accessories | Winter cap | black | 138 | | Accessories | uvex pheos magnetic Visor | clear | 153 |
| | uvex pheos reflex set M | | | 139 | | Accessories | uvex pheos SLB 1 Visor | clear | 153 |
| | Accessories | Four-point chin strap | | 133/140 | | Accessories | uvex pheos SLB 1 magnetic Visor | clear | 153 |
| | Accessories | Goggles clip/chin strap clip | | 140 | | Accessories | uvex pheos SLB 2 Visor | blue | 153 |
| | Accessories | Pen holder | | 140 | | Accessories | uvex pheos SLB 2 magnetic Visor | blue | 153 |
| | Accessories | LED head torch KS-7630-MCII | | 141 | | Accessories | uvex pheos magnetic with chin guard | black | 153 |
| | Accessories | LED head torch KS-6003-DUO | | 141 | | Accessories | Replacement lens pheos Visor | clear | 148/153 |
| | Accessories | Elasticated chin strap | | 140 | | Accessories | Replacement lens pheos SLB 1 Visor | clear | 153/157 |
| | Accessories | Leather chin straps | | 140 | | Accessories | Replacement lens pheos Visor with chin gua | | 148/153 |
| | Accessories | LED head torch pheos Lights | | 141 | | Accessories | uvex pronamic | clear | 135/148 |
| | Accessories | LED head torch pheos Lights EX | | 141 | | Accessories | uvex pronamic with chin guard | clear | 148 |
| 9790064 | Accessories | LED head torch u-cap sport | | 141 | | Accessories | uvex pronamic SLB 1 | clear | 148 |
| | Accessories | Winter cap | hi-viz yellow | 138 | | Accessories | uvex pronamic SLB 2 | blue | 148 |
| 9790066 | Accessories | Balaclava | black | 138 | | Accessories | uvex pronamic mesh visor | black | 148 |
| 9790067 | Accessories | Visor adapter | black | 154 | 9916200 | Accessories | uvex pronamic half visor | clear | 148 |
| 9790068 | Accessories | Winter cap | hi-viz orange | 138 | 9916201 | Accessories | uvex pronamic half visor | grey | 149 |
| 9790069 | Accessories | Helmet adapter for LED head torch u-ca | ap sport | 141 | 9906017 | Accessories | Replacement lens pheos SLB 2 Visor | blue | 149 |
| 9790071 | Accessories | Helmet bag | | 140 | 9954362 | Accessories | Cloth bag for uvex visors | black | 154 |
| | Accessories | Sunglare filter/rain cover | | 154/157 | | | | | |



Breathing Protection

Product system planet series > Breathing Protection

uvex has developed the **protecting planet** icon, to help raise awareness of its commitment to achieving increased sustainability. Based on the brand claim, **protecting people**, our sustainable approach integrates three core interlinked pillars – **ecology, economy** and **social responsibility**, that are incorporated throughout the business to improve our sustainability performance.

This explains the comprehensive audit, measurement and evaluation management process uvex undertakes along the entire value chain to ensure its products are as sustainable as possible.

UVEX silv-Air 2310 planet



by using recycled material

- > valve made from 95 percent recycled ABS
- headband attachment made of 100 percent recycled PP
- > recycled ABS made of components from e.g. the automotive industry or white goods
- recycled PP comes, for example, from used household appliances
- total recycled content of the mask is 26.5 percent
- \rightarrow significant improvement of the CO₂ footprint to
- 0.18 kg per mask



protecting planet

by using environmentallyfriendly packaging

Packaging

- polybag made of 30 percent recycled material
 cartons made from more than 80 percent
- recycled paper

Calculation method: IPCC 2021 GWP 100a (based on ISO 14067) SimaPro 94.02 ecoinvent database 3.8. Scope: cradle-to-customer. These CO₂ values are valid at the time of calculation and may be subject to change.



uvex silv-Air 2310 planet

- particle-filtering preformed mask with exhalation valve for larger face shapes
- valve and four-point headband attachment partially made of recycled material, 26.5 percent of the total product is made from recycled content
- polybags made of 30 percent recycled material
 flexible, adjustable nose clip so that the mask fits comfortably and securely
- very soft, all-around sealing lip for optimal wearer comfort and secure fit
- exhalation valve for reducing heat and humidity as well as noticeably reducing breathing resistance

| 8762313 |
|-------------------------------------|
| FFP3 NR D preformed mask with valve |
| white |
| BOX |
| 15 PC, packed in BOX |
| |

The uvex brand is our responsibility

We have been producing and selling high-quality products for the protection of people in sport, leisure and work for **over 90 years**. And if you want to protect people, **you have to take responsibility**.

It is precisely from this mission that our obligation derives to act in a **sustainable**, **social and socially-responsible** manner.

uvex Breathing Protection

Following our motto **protecting planet**, sustainability is a major focus for the respiratory protection product group. For single-use products with high consumption in particular, **improvements in the CO₂ footprint** play a decisive role.

In addition to the inclusion of our more sustainable **FFP3 cup-style mask**, **the uvex silv-air 2310 planet**, we are also adapting all of our other product families.

The aim is to **make the entire range more sustainable** and, as part of this, we are converting all our models that have plastic parts to use recycled material.

We constantly analyse other components of the mask for optimisations in order to further expand the mission of protecting planet for greater sustainability in the product group.

The strict requirements for health and environmental protection are always on our minds:



uvex hazardous substances list

List of "banned hazardous substances" – compliance is ensured by regular monitoring from independent test institutes.



Average recycled content for the uvex respiratory protection product group



Calculated based on all models with plastic parts

EN149:2001+A1:2009

Respiratory protective devices – filtering half-masks for protection against particles

All uvex respirators are tested and approved in accordance with the **European standard 149**. This standard sets out a wide range of requirements for respirators, with the aim of providing the user with the highest level of protection and comfort.

The key tests defined in EN149 are:

- measuring inhalation and exhalation resistance
- testing the exhalation valve
- visual inspection (marking, instructions for use)
- determining the filtering efficiency (protection class)
- optional: carrying out the dolomite dust test

Detailed information about the standards and guidelines for respiratory protection is available at:



https://www.uvex-safety.com/en/

The standard divides respirators into three protection classes according to their filtering efficiency and leakage:

FFP 1

FFP1 respirators have a filtering capacity of at least 80% and filter up to four times the respective occupational exposure limit (OEL*). These masks are suitable for particles that are neither toxic nor fibrogenic.

FFP 2

FFP2 respirators are suitable for smoke, particles and dusts that are noxious or harmful to health. They filter at least 94% of particles and can be used up to ten times the respective occupational exposure limit (OEL*).

FFP 3

With a filtering efficiency of at least 99%, FFP3 masks constitute the highest protection class. They filter up to 30 times the respective occupational exposure limit (OEL*) and are suitable for protecting against toxic particles, dusts and smoke.



So that you can see the protection class at a glance, the marking is **blue** on FFP1 masks, **orange** on FFP2 masks and **black** on FFP3 masks.



In addition to the standard tests, all uvex masks fulfil the additional requirement of the dolomite dust test and are therefore marked with the letter D. Therefore the uvex respiratory protection products ensure an excellent breathability, even in extremely dusty environments and during prolonged use. All uvex respirators are in line with current EU legislation. All respiratory protective devices fall into PPE category III (high risks).

* OELs = The occupational exposure limit values (OELs) are the average concentration of a substance in the air in

the workplace, up to which no damage (chronic or acute) is to be expected if employees work there for eight hours a day for five days a week. The OELs replace the maximum workplace concentration (MWC) and the technical reference concentration (TRC) – however, as long as both of these values are not yet fully taken into account in the OELs, they can still be used on an interim basis for assessing risks in the workplace.

The uvex breathing protection navigator

The fast route to finding the right respirator for your needs

Choosing the right respiratory protective devices is essential for ensuring the safety of the respective wearer and is a process that requires the utmost care. In order to choose the filtering respirator that meets your requirements, please observe the following points:

- the type, composition and concentration of the hazardous substances must be provided/known (note the CAS number and OEL). The measurement can be carried out by the employers' liability insurance association, for example. The minimum requirements for selected areas of application can be found on the next page.
- after determining the protection class required (FFP1, FFP2 or FFP3), the following table can be used to select a respirator model that meets the requirements of the respective work conditions.
- there must be a sufficient volume of oxygen in the environment. Please observe the statutory regulations in this regard. A minimum of 17 vol% is required in Germany.
- if further PPE is required, this must be compatible. uvex respirators are ideal for use in combination with uvex safety spectacles – see the compatibility table on page 173.



- respiratory protective devices are not suitable for people with beards, sideburns or deep scars near the respirator sealing lines as these prevent a secure fit. Please contact your safety officer for a custom solution.
- Masks marked "NR" should not be used for more than eight hours. Masks marked "R" may be used for up to 24 hours but must be cleaned after each period of use. Masks should be replaced without delay if the breathing resistance becomes noticeably higher.
- if a half-mask with gas filters is required for the workspace, please note that the uvex respirator models do not offer adequate protection.

| Brief periods of use or lighte | er activities at normal ambient temperatures | |
|--------------------------------|---|---|
| Protection class | Folding mask (with or without valve) | Cup-style mask (without or without valve) |
| FFP1 | 3100, 3110, 5100, 5100+, 5110, 5110+ | 2100, 2110 |
| FFP2 | 3200, 3210, 5200, 5200+, 5210, 5210+ | 2200, 2210, 7212 |
| FFP3 | 3310, 8313, 5310, 5310+ | 2310, 2312 |
| Long periods of wear or har | d, strenuous activities at increased ambient temperatur | es |
| Protection class | Folding mask (with valve) | Cup-style mask (with valve) |
| FFP1 | 3110, 5110, 5110+ | 2110 |
| FFP2 | 3210, 5210, 5210+ | 2210, 7212, 7233, 7232 |
| FFP3 | 3310, 8313, 5310, 5310+ | 2310, 2312, 7333, 7330, 7312, 7317 |
| With activated carbon layer | to protect against unpleasant odours | |
| Protection class | Folding mask (with valve) | Cup-style mask (with valve) |
| FFP1 | - | - |
| FFP2 | 3220, 5220+ | 2220 |
| FFP3 | 5320+ | 2320, 2322 |

Selection

▶ The minimum requirements for selected areas of application can be found on page 172.



UVEX SIV-Air Areas of application




| Activity | Harmful substances | Protection cla | | lass |
|---|-------------------------------------|----------------|------|------|
| | | FFP1 | FFP2 | FFP3 |
| Wood processing | | | | |
| Softwood: cutting and sanding | Fine particles, wood dust | | • | |
| Hard wood (oak, beech, tropical woods, etc.): cutting and sanding | Fine particles, wood dust | | | |
| Brushing/sanding paint | Fine colour particles | | | |
| Brushing/sanding paint (paints containing chrome) | Fine colour particles | | | |
| Soluble paints containing copper/chrome/arsenic | Fine paint mist | | | - |
| Construction and ancillary building industry | | | | |
| Cement work, plastering, tiling, roofing | Cement, plaster, tile or brick dust | | | |
| Masonry: cutting, drilling, demolition | | | - | |
| Asbestos: short periods of work | Fibres | | | |
| Roof insulation: glass and mineral fibres | Dust and fibres | | | |
| Bodyfillers/stopper: Grinding | Dust | | | |
| Welding | | | | |
| Welding aluminium and stainless steel | Metal and aluminium oxide fumes | | | |
| Brazing | Fumes | | | - |
| Metalwork | | | | |
| Metal: drilling, grinding, milling, angle grinding | Metal dust | | - | |
| High-alloy steels and stainless steels: drilling, grinding, milling, angle grinding | Metal dust | | | |
| Waste disposal and cleaning | | | | |
| Refuse separation and disposal | Dust, fungi | | • | |
| Medical waste disposal | Bacteria, spores | | | - |
| Sweeping floors | Dust (non-toxic) | • | | |
| Radioactively contaminated particles | Dust | | | - |
| Agriculture | | | | |
| Animal epidemics and treatment of animals with diseases | Bacteria, viruses | | | |
| Work with fungal spores | Spores | | | - |
| Work with hay, grain and flour | Dust | • | | |
| Medicine/care/health | | | | |
| Allergies, pollen, household dust, animal fur | Dust, particles, spores | | | |
| Bacteria, viruses, infections, legionella bacteria | Bacteria, viruses | | | |
| | | | | |

These filter classes are minimum requirements and simply serve as a guide. It is the wearers' responsibility to make sure the breathing apparatus conforms to the requirements in terms of hazardous materials and concentration before use!

To?

Perfect Match

Combination options of uvex silv-Air respirators with uvex safety eyewear

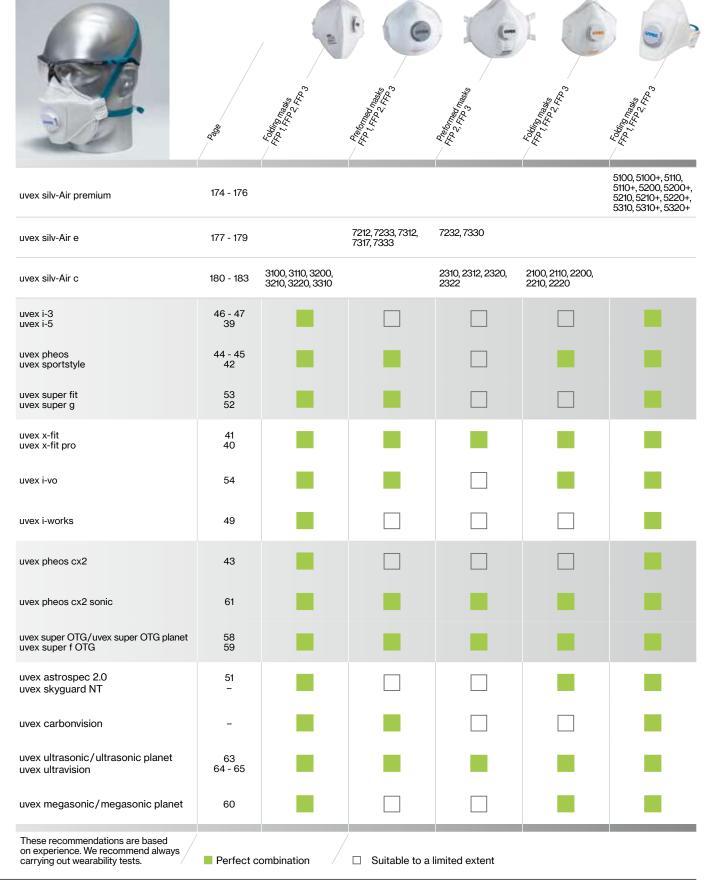

uvex silv-Air premium Respirators





- more sustainable mask family: the valve and headband attachment on all models are partly made of recycled material
- contour-optimised design for maximum wearer comfort and a secure fit
- available in two sizes for improved fit
- sealing lip (in the nose area for FFP1 and FFP2, in the nose and chin area for FFP3) and nose clip provide greater comfort and a very secure fit
- the masks are packaged individually to meet the highest hygiene requirements
- ·adjustable textile headband for greater protection and comfort
- optional: exhalation valve for reducing heat and humidity
- models in FFP2 and FFP3 against unpleasant odours available (5220+, 5320+)



good fit.

The nose clip is easy to adjust, ensuring a particularly



The comfortable sealing lip offers maximum comfort and a reliable fit.



The masks are packaged individually and therefore meet the highest hygiene requirements.



The extra-wide textile headband ensures that the mask fits comfortably and securely.



Exhalation valve for reducing heat and humidity.

| FF | P 1 | FF | P 2 | FF | P 3 |
|---------------|---------------|---------------|---------------------------|---------------|---------------------------|
| flat | fold | flat fold | | flat fold | |
| Small version | Large version | Small version | Large version | Small version | Large version |
| | | | | | |
| 5100 NR D | 5100+ NR D | 5200 NR D | 5200+ NR D | | |
| 07 | 5 | 6 | 5 | 6, | 6 |
| 5110 NR D | 5110+ NR D | 5210 NR D | 5210+ NR D | 5310 NR D | 5310+ NR D |
| | | | 5220+ NR D with carbon | | 5320+ NR D with carbon |

uvex silv-Air premium



UVEX SIV-Air premium Respirators, class FFP1 and FFP2



uvex silv-Air 5100 // 5110

- particle-filtering flat-fold mask for small to medium face shapes
- $\ensuremath{\cdot}$ wide, seamless headband for ensuring a comfortable and secure fit
- incorporated nose clip that is easy to adjust
- comfortable sealing lip in the nose area for a reliable fit
 5110: exhalation valve for reducing heat and humidity as well as
- noticeably reducing breathing resistance

| | uvex silv-Air 5100 | | uvex silv-Air 5110 | |
|----------------------|---------------------|--------------------|---------------------|--------------------|
| Art. no. | 8735100 | 8745100 | 8735110 | 8745110 |
| Version | FFP1NR D folding | mask without valve | FFP1NR D folding | mask with valve |
| | - small version | | - small version | |
| Colour | white | | white | |
| Order quantity | BOX | BG | BOX | BG |
| multiple/ Order unit | | | | |
| Content | 30 PC, individually | 3 PC, individually | 15 PC, individually | 3 PC, individually |
| | packed in BOX | packed in BG | nacked in BOX | packed in BG |



uvex silv-Air 5100+ // 5110+

- particle-filtering flat-fold mask for larger face shapes
- wide, seamless headband for ensuring a comfortable and secure fit
- comfortable sealing lip in the nose area for a reliable fit
- incorporated nose clip that is easy to adjust
- 5110+: exhalation valve for reducing heat and humidity as well as noticeably reducing breathing resistance

| | uvex silv-Air 5100+ | | uvex silv-Air 5110+ | |
|----------------------|---------------------|--------------------|---------------------|--------------------|
| Art. no. | 8735101 | 8745101 | 8735111 | 8745111 |
| Version | FFP1 NR D folding | mask without valve | FFP1 NR D folding | mask with valve |
| | - large version | | - large version | |
| Colour | white | | white | |
| Order quantity | BOX | BG | BOX | BG |
| multiple/ Order unit | | | | |
| Content | 30 PC, individually | 3 PC, individually | 15 PC, individually | 3 PC, individually |
| | packed in BOX | packed in BG | packed in BOX | packed in BG |



uvex silv-Air 5200 // 5210

- particle-filtering flat-fold mask for small to medium face shapes
- wide, seamless headband for ensuring a comfortable and secure fit
- incorporated nose clip that is easy to adjust
- · comfortable sealing lip in the nose area for a reliable fit
- 5210: exhalation valve for reducing heat and humidity as well as noticeably reducing breathing resistance

| | uvex silv-Air 5200 | | uvex silv-Air 5210 | |
|----------------------|---------------------|--------------------|---------------------|--------------------|
| Art. no. | 8735200 | 8745200 | 8735210 | 8745210 |
| Version | FFP2 NR D folding | mask without valve | FFP2 NR D folding | g mask with valve |
| | - small version | | - small version | |
| Colour | white | | white | |
| Order quantity | BOX | BG | BOX | BG |
| multiple/ Order unit | | | | |
| Content | 30 PC, individually | 3 PC, individually | 15 PC, individually | 3 PC, individually |
| | packed in BOX | packed in BG | packed in BOX | packed in BG |



uvex silv-Air 5200+ // 5210+ // 5220+

- particle-filtering flat-fold mask for larger face shapes
- wide, seamless headband for ensuring a comfortable and secure fit
- · incorporated nose clip that is easy to adjust
- · comfortable sealing lip in the nose area for a reliable fit
- 5210+/ 5220+: exhalation valve for reducing heat and humidity as well as noticeably reducing breathing resistance
- 5220+: additional activated carbon filter for protection against odours, gases and vapours under the respective limit values

| | uvex silv | /-Air 5200+ | | uvex | silv-Air 5210+ | |
|----------------------|-----------|--------------|----------------------|--------|-----------------|--------------------|
| Art. no. | 873520 | 1 | 8745201 | 8735 | 211 | 8745211 |
| Version | FFP2N | R D folding | mask without valve | FFP2 | NR D folding | mask with valve |
| | - large v | version | | - larg | e version | |
| Colour | white | | | white | ; | |
| Order quantity | BOX | | BG | BOX | | BG |
| multiple/ Order unit | | | | | | |
| Content | 30 PC, i | individually | 3 PC, individually | 15 PC | C, individually | 3 PC, individually |
| | packed | in BOX | packed in BG | pack | ed in BOX | packed in BG |
| | | | | | | |
| uvex silv-Air 5220+ | | | | | | |
| Art. no. | | 8735221 | | | 8745221 | |
| Version | | FFP2 NR D | folding mask with v | alve a | nd carbon – la | rge version |
| Colour | | grey | | | | |
| Order quantity multi | ple/ | BOX | | | BG | |
| Order unit | | | | | | |
| Content | | 15 PC, indi | vidually packed in E | BOX | 3 PC, individ | ually packed in BG |

uvex silv-Air premium **Respirators in protection class FFP3**



uvex silv-Air 5310

- particle-filtering flat-fold mask for small to medium face shapes
- · wide, seamless headband for ensuring a comfortable and secure fit
- · comfortable sealing lip in the nose and chin area for a reliable fit
- · incorporated nose clip that is easy to adjust
- exhalation valve for reducing heat and humidity as well as noticeably reducing breathing resistance

| uvex silv-Air 5310 | | |
|--------------------------|-----------------------------------|---------------------------------|
| Art. no. | 8735310 | 8745310 |
| Version | FFP3 NR D folding mask with valv | e – small version |
| Colour | white | |
| Order quantity multiple/ | BOX | BG |
| Order unit | | |
| Content | 15 PC, individually packed in BOX | 3 PC, individually packed in BG |

15 PC, individually packed in BOX 3 PC, individually packed in BG



uvex silv-Air 5310+

- particle-filtering flat-fold mask for larger face shapes
- wide, seamless headband for ensuring a comfortable and secure fit
- · comfortable sealing lip in the nose and chin area for a reliable fit
- · incorporated nose clip that is easy to adjust
- exhalation valve for reducing heat and humidity as well as noticeably reducing breathing resistance

| uvex silv-Air 5310+ | | |
|--------------------------|-----------------------------------|---------------------------------|
| Art. no. | 8735311 | 8745311 |
| Version | FFP3 NR D folding mask with valv | ve – large version |
| Colour | white | |
| Order quantity multiple/ | BOX | BG |
| Order unit | | |
| Content | 15 PC, individually packed in BOX | 3 PC, individually packed in BG |



uvex silv-Air 5320+

- particle-filtering flat-fold mask for larger face shapes
- wide, seamless headband for ensuring a comfortable and secure fit
- · comfortable sealing lip in the nose and chin area for a reliable fit
- · incorporated nose clip that is easy to adjust
- exhalation valve for reducing heat and humidity as well as noticeably reducing breathing resistance
- additional activated carbon filter for protection against odours, gases and vapours under the respective limit values

| uvex silv-Air 5320+ | | |
|--------------------------|-----------------------------------|---------------------------------|
| Art. no. | 8735321 | 8745321 |
| Version | FFP3 NR D folding mask with valv | e and carbon – large version |
| Colour | grey | |
| Order quantity multiple/ | BOX | BG |
| Order unit | | |
| Content | 15 PC, individually packed in BOX | 3 PC, individually packed in BG |

UVEX SIIV-Air e Respirators





- more sustainable mask family: the valve and headband attachment on all models are partly made of recycled material
- high-performance respirator excellent protection with maximum wearer comfort
- the combination of a high-quality filter material and a larger filter surface noticeably reduces the breathing resistance
- the additional inhalation valves ensure a cool climate inside the mask (cooling effect)
- 3D nose geometry for a perfectly secure fit
 adjustable textile headband for a customised and comfortable fit
- the integrated sealing lip provides extremely high comfort



Adjustable headband for optimum fit



Perfectly shaped around the nose for secure positioning



Large inhalation valves ensure extremely low breathing resistance.



Nasal recess ensures a perfect fit for almost any nose shape.



Ĩ0

Flexible 4-point headband attachment for a comfortable fit.



uvex silv-Air e

High-performance respirators in protection class FFP2 and FFP3



8787233 8787333

uvex silv-Air High-Performance – A new dimension in breathing protection

- particle-filtering preformed mask with exhalation valve and inhalation valves
- · High-performance climazone system with three compartments for a comfortable, cool climate inside the mask
- · flexible textile headband with neck clip for individual adjustment
- · exhalation valve for reducing heat and humidity as well as noticeably reducing breathing resistance
- · two extra filters with inhalation valves for lower breathing resistance and
- increased comfort due to easier air exchange · very soft, all-around sealing lip for optimal wear-
- er comfort and secure fit · combination of 3D nose area and sealing lip
- ensures ideal fit for almost any nose shape

uvex silv-Air 7233

8787233

8787232 8787330

live

uvex silv-Air High-Performance – Perfect protection combined with maximum wearer comfort

- particle-filtering preformed mask with exhalation valve and inhalation valves
- · High-performance climazone system with three compartments for a comfortable, cool climate inside the mask
- · four-point headband attachment for a comfortable, individual and secure fit
- · flexible, adjustable integrated nose clip
- exhalation valve for reducing heat and humidity as well as noticeably reducing breathing resistance
- · two extra filters with inhalation valves for lower breathing resistance and
- increased comfort due to easier air exchange · very soft, all-around sealing lip for optimal wearer comfort and secure fit
- nasal recess on the sealing lip ensures ideal fit for almost any nose shape

| Nir 7333 | | uvex silv-Air 7232 | uvex silv-Air 7330 |
|----------|----------------|--------------------|--------------------|
| | Art. no. | 8787232 | 8787330 |
| | Version | FFP2 R D | FFP3 R D |
| I mask | | preformed mask | preformed mask |
| S | | with valves | with valves |
| | Colour | silver grey | silver grey |
| | Order quantity | BOX | BOX |
| | multiples | | |
| | | | |

uvex silv-Air 8313 8788313 Art. no. folding mask FFP3 NR D with valve Version Colour white Order quantity multiples BOX 15 PC, individually packed in BOX Content

| resistance | | |
|------------|--|--|
| | | |
| | | |
| | | |

· particle-filtering flat-fold mask with exhala-

• four-point headband attachment for a

comfortable, individual and secure fit

· flexible, adjustable integrated nose clip

· very soft, all-around sealing lip for optimal

• exhalation valve for reducing heat and humid-

ity as well as noticeably reducing breathing

uvex silv-Air 8313

hydrophobic material coating

wearer comfort and secure fit

tion valve

LIVes

8788313

| Version | FFP2 R D | FFP3 R D |
|----------------|---------------------|---------------------|
| | preformed mask | preformed mask |
| | with valves | with valves |
| Colour | white | white |
| Order quantity | BOX | BOX |
| multiples | | |
| Content | 3 PC, packed in BOX | 3 PC, packed in BOX |
| | | |

uvex silv-A

8787333

| ALL NO. | 0101232 | 0/0/330 |
|----------------|----------------------|-------------|
| Version | FFP2 R D | FFP3 R D |
| | preformed mask | preformed m |
| | with valves | with valves |
| Colour | silver grey | silver grey |
| Order quantity | BOX | BOX |
| multiples | | |
| A | 0 DO and look to DOV | 0.00 |

3 PC, packed in BOX 3 PC, packed in BOX Content

Art. no.

UVEX SIV-AICE High-performance respirators in protection class FFP2 and FFP3



8787317 8787318

uvex silv-Air 7317

- particle-filtering preformed mask with exhalation valve
- soft material edges for increased comfort
 very soft, all-around sealing lip for optimal
- wearer comfort and secure fit
- without nose clip (metal-free)
- four-point headband attachment for a comfortable, individual and secure fit
- exhalation valve for reducing heat and humidity as well as noticeably reducing breathing resistance
- extra-wide textile headband ensures that the mask fits comfortably and securely

8787312

uvex silv-Air 7312

- particle-filtering preformed mask with exhalation valve
- soft material edges for increased comfort
 very soft, all-around sealing lip for optimal
- wearer comfort and secure fit
- flexible, adjustable integrated nose clip
 four-point headband attachment for a comfortable, individual and secure fit
- exhalation valve for reducing heat and humidity as well as noticeably reducing breathing resistance

8787212

uvex silv-Air 7212

- particle-filtering preformed mask with exhalation valve
- soft material edges for increased comfort
 seamless headband for a comfortable,
- secure fit • very soft, all-around sealing lip for optimal
- wearer comfort and secure fit
- flexible, adjustable integrated nose clip
- exhalation valve for reducing heat and humidity as well as noticeably reducing breathing resistance

| uvex silv-Air 7317 | | |
|--------------------|------------------------------------|---------------------|
| Art. no. | 8787317 | 8787318 |
| Version | FFP3 R D preformed mask with valve | |
| Colour | white | |
| Order unit | BOX | CT |
| Content | 5 PC, | 80 PC, individually |
| | packed in BOX | packed in CT |
| | | |

| uvex silv-Air 7312 | |
|--------------------------|------------------------------------|
| Art. no. | 8787312 |
| Version | FFP3 R D preformed mask with valve |
| Colour | white |
| Order quantity multiples | BOX |
| Content | 5 PC, packed in BOX |
| | |

| uvex silv-Air 7212 | |
|--------------------------|-------------------------------------|
| Art. no. | 8787212 |
| Version | FFP2 NR D preformed mask with valve |
| Colour | white |
| Order quantity multiples | BOX |
| Content | 15 PC, packed in BOX |
| | |



Anatomically preformed nose area and integrated nosepiece within the filter material, ensures a perfect fit and the highest level of wearer comfort.



4-point headband attachment for a comfortable, secure fit of the mask.



The high-quality filter material ensures low breathing resistance, while the smooth white filter surface reduces the risk of contamination through "linting" in areas with strict hygiene standards.

uvex silv-Air c

Respirators in protection class FFP1, FFP2 and FFP3





- more sustainable mask family: the valve and headband attachment on all models are partly made of recycled material
- soft material edges for greater comfort and wearer acceptance
- continuous textile headband ensures that the mask fits comfortably and securely
- optional: exhalation valve to reduce heat and humidity in the mask
- sealing lip (in the nose area for FFP1 and FFP2, all-round for FFP3) and nose clip provide maximum protection and comfort
- FFP2 and FFP3 models against unpleasant odours available (2220, 3220, 2320, 2322)
- FFP3 preformed masks are available in two sizes and also have a four-point headband attachment



The adjustable nose clip ensures an excellent individual fit and secure positioning.



The soft material edges prevent uncomfortable pressure points.



The seamless headband can be adjusted for an optimum fit.



The exhalation valve with a 360° opening ensures very low breathing resistance and a cooling effect climate inside the mask.



The upper face seal offers both a more secure positioning of the mask and increased wearer comfort.



Tø/

uvex silv-Air c Filtering face masks, protection class FFP1





uvex silv-Air 3100 // 3110

- particle-filtering folding mask
 seamless headband and flexible, adjustable nose clip
- · comfortable sealing lip in nose area for secure fit

| union eile Air 0100 | | |
|--------------------------|-----------------------------------|---------------------------------|
| uvex silv-Air 3100 | | |
| Art. no. | 8763100 | 8743100 |
| Version | FFP1 NR D folding mask without | t valve |
| Colour | white | |
| Order quantity multiple/ | BOX | BG |
| Order unit | | |
| Content | 30 PC, individually packed in BOX | 3 PC, individually packed in BG |

| uvex silv-Air 3110 | | |
|--------------------------|----------------------------------|--------------------------------|
| Art. no. | 8763110 | 8743110 |
| Version | FFP1 NR D folding mask with val | ve |
| Colour | white | |
| Order quantity multiple/ | BOX | BG |
| Order unit | | |
| Content | 15 PC individually packed in BOX | 3 PC individually packed in BG |

3110: exhalation valve for reducing heat and humidity as well as

noticeably reducing breathing resistance





uvex silv-Air 2100 // 2110

• particle-filtering preformed mask

- seamless headband and nose clip for a comfortable, secure fit
- · comfortable sealing lip in nose area for secure fit

| uvex silv-Air 2100 | | |
|--------------------------|-----------------------------|--------------------|
| Art. no. | 8762100 | 8742101 |
| Version | FFP1 NR D preformed mask wi | thout valve |
| Colour | white | |
| Order quantity multiple/ | BOX | BG |
| Order unit | | |
| Content | 20 PC, packed in BOX | 3 PC, packed in BG |
| | | |

• 2110: exhalation valve for reducing heat and humidity as well as noticeably reducing breathing resistance

| uvex silv-Air 2110 | | |
|--------------------------|------------------------------|--------------------|
| Art. no. | 8762110 | 8742111 |
| Version | FFP1 NR D preformed mask wit | h valve |
| Colour | white | |
| Order quantity multiple/ | BOX | BG |
| Order unit | | |
| Content | 15 PC, packed in BOX | 3 PC, packed in BG |

uvex silv-Air c Filtering face masks, protection class FFP2



uvex silv-Air 3200 // 3210

- particle-filtering folding mask
- · seamless headband and flexible, adjustable nose clip
- · comfortable sealing lip in nose area for secure fit
- 3210: exhalation valve for reducing heat and humidity as well as
- noticeably reducing breathing resistance

uvex silv-Air 2200 // 2210

noticeably reducing breathing resistance

· comfortable sealing lip in nose area for secure fit

• particle-filtering preformed mask

secure fit

uvex silv-Air 2200



uvex silv-Air 3220

uvex silv-Air 3220

Order quantity multiple/

Art. no. Version Colour

Order unit

Content

- · particle-filtering folding mask with exhalation valve
- · additional activated carbon filter against odours, gases and vapours below threshold
- · seamless headband and flexible, adjustable nose clip

silver

BOX

- · comfortable sealing lip in nose area for secure fit
- exhalation valve for reducing heat and humidity as well as noticeably reducing breathing resistance

8763220 FFP2 NR D folding mask with valve and carbon

15 PC, individually packed in BOX

| 3763200 | 8743200 |
|--------------------------------------|---|
| FFP2 NR D folding mask without valve | |
| vhite | |
| BOX | BG |
| | |
| 30 PC, individually packed in BOX | 3 PC, individually packed in BG |
| 3 | FP2 NR D folding mask without hite OX |

| uvex silv-Air 3210 | | |
|--------------------------|----------------------------------|--------------------------------|
| Art. no. | 8763210 | 8743210 |
| Version | FFP2 NR D folding mask with va | lve |
| Colour | white | |
| Order quantity multiple/ | BOX | BG |
| Order unit | | |
| Contont | 15 DC individually packed in POV | 2 PC individually packed in PC |



• seamless headband and flexible, adjustable nose clip for a comfortable,

• 2210: exhalation valve for reducing heat and humidity as well as

8762220

uvex silv-Air 2220

- particle-filtering preformed mask with exhalation valve
- additional activated carbon filter against odours, gases and vapours below threshold
- Seamless headband and flexible, adjustable nose clip for a comfortable, secure fit
- · comfortable sealing lip in nose area for secure fit
- · exhalation valve for reducing heat and humidity as well as noticeably reducing breathing resistance

| UVEX SIIV-AII 2200 | | |
|--------------------------|------------------------------|--------------------|
| Art. no. | 8762200 | 8742201 |
| Version | FFP2 NR D preformed mask wit | hout valve |
| Colour | white | |
| Order quantity multiple/ | BOX | BG |
| Order unit | | |
| Content | 20 PC, packed in BOX | 3 PC, packed in BG |
| | | |
| uvex silv-Air 2210 | | |
| Art. no. | 8762210 | 8742211 |
| Version | FFP2 NR D preformed mask wit | h valve |
| Colour | white | |
| Order quantity multiple/ | BOX | BG |
| Order unit | | |
| Content | 15 PC, packed in BOX | 3 PC, packed in BG |
| | | |

| uvex silv-Air 2220 | |
|--------------------------|--|
| Art. no. | 8762220 |
| Version | FFP2 NR D preformed mask with valve and carbon |
| Colour | silver |
| Order quantity multiple/ | BOX |
| Order unit | |
| Content | 15 PC, packed in BOX |
| | |

UVEX SIV-AIC C Filtering face masks, protection class FFP3



uvex silv-Air 3310

- · particle-filtering folding mask with exhalation valve
- adjustable headband and flexible, adjustable nose clip for a comfortable, secure fit
- comfortable, all-around sealing lip for secure fit
- exhalation valve for reducing heat and humidity as well as noticeably reducing breathing resistance

| | |
|------|--|
| | |
| | |

| uvex silv-Air 3310 | | |
|--------------------------|-----------------------------------|---------------------------------|
| Art. no. | 8763310 | 8743311 |
| Version | FFP3 NR D folding mask with valve | |
| Colour | white | |
| Order quantity multiple/ | BOX | BG |
| Order unit | | |
| Content | 15 PC, individually packed in BOX | 3 PC, individually packed in BG |



uvex silv-Air 2310 // 2312

- 2310: particle-filtering preformed mask with exhalation valve for larger face shapes
- 2312: particle-filtering preformed mask with exhalation valve –
- ergonomically adapted for **smaller to medium-sized face shapes** • four-point headband attachment and flexible, adjustable nose clip for a comfortable, secure fit
- very soft, all-around sealing lip for optimal wearer comfort and secure fit
- exhalation valve for reducing heat and humidity as well as noticeably reducing breathing resistance

| uvex silv-Air 2310 | | |
|--------------------------|---|-------------------------|
| Art. no. | 8762310 | 8742310 |
| Version | FFP3 NR D preformed mask wit | h valve – large version |
| Colour | white | |
| Order quantity multiple/ | BOX | BG |
| Order unit | | |
| Content | 15 PC, packed in BOX | 3 PC, packed in BG |
| | | |
| uvex silv-Air 2312 | | |
| Art. no. | 8762312 | 8742312 |
| Version | FFP3 NR D preformed mask with valve – small version | |
| Colour | white | |
| Order quantity multiple/ | BOX | BG |
| Order unit | | |
| Content | 15 PC, packed in BOX | 3 PC, packed in BG |
| | | |



uvex silv-Air 2320 // 2322

- 2320: particle-filtering preformed mask with exhalation valve for larger face shapes
- 2322: particle-filtering preformed mask with exhalation valve ergonomically adapted for smaller to medium-sized face shapes
- four-point headband attachment and flexible, adjustable nose clip for a comfortable, secure fit
- very soft, all-around sealing lip for optimal wearer comfort and secure fit
 exhalation valve for reducing heat and humidity as well as
- noticeably reducing breathing resistance
- additional activated carbon filter against odours, gases and vapours below threshold values

| uvex silv-Air 2320 | | |
|--------------------------|-------------------------------|----------------------------------|
| Art. no. | 8762320 | 8742320 |
| Version | FFP3 NR D preformed mask with | valve and carbon - large version |
| Colour | silver | |
| Order quantity multiple/ | BOX | BG |
| Order unit | | |
| Content | 15 PC, packed in BOX | 3 PC, packed in BG |
| | | |
| uvex silv-Air 2322 | | |
| Art. no. | 8762322 | 8742322 |
| Version | FFP3 NR D preformed mask with | valve and carbon - small version |
| Colour | silver | |
| Order quantity multiple/ | BOX | BG |
| Order unit | | |
| Content | 15 PC, packed in BOX | 3 PC, packed in BG |
| | | |

uvex silv-Air Breathing protection

Quick overview of product features



The **360° exhalation valve** considerably reduces breathing resistance and build-up of heat and moisture in the mask.



Comfortable all-round sealing lip The soft sealing lip guarantees a secure, comfortable sealed positioning of the mask.



Soft sealing lip in the nose and chin area for a secure and comfortable fit.



Comfortable sealing lip in the nose area The soft sealing lip in the nose area guarantees a secure, pressure-free fit.



Comfort nose clip The mask is fitted with a high-quality nose clip making it individually adjustable.



Metal-free

The mask is completely metal-free and is manufactured entirely of skin-tolerant materials.



The **4-point headband attachment** allows an individual and secure fit, which can be perfectly adapted to meet the wearer's requirements.



The masks are **individually** packed and meet the highest standards of hygiene.



Carbon inside The additional activated carbon layer incorporated in the filter material reduces unpleasant odours.



The **3D** nose area ensures a comfortable fit, low leakage and prevents misting of uncoated eyewear.



High performance climate management

The mask offers extremely low breathing resistance due to the filter chambers connected with the inhalation valve. The climate management of the high performance mask guarantees optimum wearer comfort.



R labelling

The mask has been tested for reusability and has the required performance features for wearing during a second work shift.



"NR" designation

The masks are not reusable and must therefore be disposed of after a work shift.



D labelling

The mask has undergone additional dolomite dust testing and therefore affords excellent breathability, even in extremely dusty environments and during longer periods of use.

UVEX SIIV-Air Overview

| Art. no. | Name | Туре | Features | Content per PU | PU per carton | Page |
|----------|---|-----------------------------------|----------|----------------|------------------|------|
| 8735100 | uvex silv-Air 5100 | FFP1 folding mask without valve | | 30 PC | 16 boxes | 175 |
| 8735101 | uvex silv-Air 5100+ | FFP1 folding mask without valve | | 30 PC | 16 boxes | 175 |
| 8735110 | uvex silv-Air 5110 | FFP1 folding mask with valve | | 15 PC | 16 boxes | 175 |
| 8735111 | uvex silv-Air 5110+ | FFP1 folding mask with valve | | 15 PC | 16 boxes | 175 |
| 8735200 | uvex silv-Air 5200 | FFP2 folding mask without valve | | 30 PC | 16 boxes | 175 |
| 8735201 | uvex silv-Air 5200+ | FFP2 folding mask without valve | | 30 PC | 16 boxes | 175 |
| 8735210 | uvex silv-Air 5210 | FFP2 folding mask with valve | | 15 PC | 16 boxes | 175 |
| 8735211 | uvex silv-Air 5210+ | FFP2 folding mask with valve | | 15 PC | 16 boxes | 175 |
| 8735221 | uvex silv-Air 5220+ with carbon | FFP2 folding mask with valve | ⊘©�≹©O® | 15 PC | 16 boxes | 175 |
| 8735310 | uvex silv-Air 5310 | FFP3 folding mask with valve | | 15 PC | 16 boxes | 176 |
| 8735311 | uvex silv-Air 5310+ | FFP3 folding mask with valve | | 15 PC | 16 boxes | 176 |
| 8735321 | uvex silv-Air 5320+ with carbon | FFP3 folding mask with valve | | 15 PC | 16 boxes | 176 |
| 8742101 | uvex silv-Air 2100, Retail | FFP1 preformed mask without valve | | 3 PC | 20 bags | 181 |
| 8742111 | uvex silv-Air 2110, Retail | FFP1 preformed mask with valve | | 3 PC | 20 bags | 181 |
| 8742201 | uvex silv-Air 2200, Retail | FFP2 preformed mask without valve | | 3 PC | 20 bags | 182 |
| 8742211 | uvex silv-Air 2210, Retail | FFP2 preformed mask with valve | | 3 PC | 20 bags | 182 |
| 8742310 | uvex silv-Air 2310, Retail | FFP3 preformed mask with valve | | 3 PC | 20 bags | 183 |
| 8742312 | uvex silv-Air 2312, Retail | FFP3 preformed mask with valve | | 3 PC | 20 bags | 183 |
| 8742320 | uvex silv-Air 2320 with carbon, Retail | FFP3 preformed mask with valve | | 3 PC | 20 bags | 183 |
| 8742322 | uvex silv-Air 2322 with carbon, Retail | FFP3 preformed mask with valve | | 3 PC | 20 bags | 183 |
| 8743100 | uvex silv-Air 3100, Retail | FFP1 folding mask without valve | | 3 PC | 20 bags | 181 |
| 8743110 | uvex silv-Air 3110, Retail | FFP1 folding mask with valve | | 3 PC | 20 bags | 181 |
| 8743200 | uvex silv-Air 3200, Retail | FFP2 folding mask without valve | | 3 PC | 20 bags | 182 |
| 8743210 | uvex silv-Air 3210, Retail | FFP2 folding mask with valve | | 3 PC | 20 bags | 182 |
| 8743311 | uvex silv-Air 3310, Retail | FFP3 folding mask with valve | | 3 PC | 20 bags | 183 |
| 8745100 | uvex silv-Air 5100, Retail | FFP1 folding mask without valve | | 3 PC | 20 bags | 175 |
| 8745101 | uvex silv-Air 5100+, Retail | FFP1 folding mask without valve | | 3 PC | 20 bags | 175 |
| 8745110 | uvex silv-Air 5110, Retail | FFP1 folding mask with valve | | 3 PC | 20 bags | 175 |
| 8745111 | uvex silv-Air 5110+, Retail | FFP1 folding mask with valve | | 3 PC | 20 bags | 175 |
| 8745200 | uvex silv-Air 5200, Retail | FFP2 folding mask without valve | | 3 PC | 20 bags | 175 |
| 8745201 | uvex silv-Air 5200+, Retail | FFP2 folding mask without valve | | 3 PC | 20 bags | 175 |
| 8745210 | uvex silv-Air 5210, Retail | FFP2 folding mask with valve | | 3 PC | 20 bags | 175 |
| 8745211 | uvex silv-Air 5210+, Retail | FFP2 folding mask with valve | | 3 PC | 20 bags | 175 |
| 8745221 | uvex silv-Air 5220+ with carbon, Retail | FFP2 folding mask with valve | | 3 PC | 20 bags | 175 |
| 8745310 | uvex silv-Air 5310, Retail | FFP3 folding mask with valve | | 3 PC | 20 bags | 176 |
| 8745311 | uvex silv-Air 5310+, Retail | FFP3 folding mask with valve | | 3 PC | 20 bags | 176 |
| 8745321 | uvex silv-Air 5320+ with carbon, Retail | FFP3 folding mask with valve | | 3 PC | 20 bags | 176 |
| 8762100 | uvex silv-Air 2100 | FFP1 preformed mask without valve | | 20 PC | 12 boxes | 181 |
| 8762110 | uvex silv-Air 2110 | FFP1 preformed mask with valve | | 15 PC | 12 boxes | 181 |
| 8762200 | uvex silv-Air 2200 | FFP2 preformed mask without valve | | 20 PC | 12 boxes | 182 |
| 8762210 | uvex silv-Air 2210 | FFP2 preformed mask with valve | | 15 PC | 12 boxes | 182 |
| 8762220 | uvex silv-Air 2220 with carbon | FFP2 preformed mask with valve | | 15 PC | 12 boxes | 182 |
| 8762310 | uvex silv-Air 2310 | FFP3 preformed mask with valve | | 15 PC | 12 boxes | 183 |
| 8762312 | uvex silv-Air 2312 | FFP3 preformed mask with valve | | 15 PC | 12 boxes | 183 |
| 8762313 | uvex silv-Air 2310 planet | FFP3 preformed mask with valve | | 15 PC | 12 boxes | 167 |
| 0/02010 | | | | | | |

uvex silv-Air

Overview

| Art. no. | Name | Туре | Features | Content per PU | PU per carton | Page |
|----------|-------------------------------------|---|----------|----------------|------------------|------|
| 8762322 | uvex silv-Air 2322 with carbon | FFP3 preformed mask with valve | | 15 PC | 12 boxes | 183 |
| 8763100 | uvex silv-Air 3100 | FFP1 folding mask without valve | | 30 PC | 12 boxes | 181 |
| 8763110 | uvex silv-Air 3110 | FFP1 folding mask with valve | | 15 PC | 12 boxes | 181 |
| 8763200 | uvex silv-Air 3200 | FFP2 folding mask without valve | | 30 PC | 12 boxes | 182 |
| 8763210 | uvex silv-Air 3210 | FFP2 folding mask with valve | | 15 PC | 12 boxes | 182 |
| 8763220 | uvex silv-Air 3220 with carbon | FFP2 folding mask with valve | | 15 PC | 12 boxes | 182 |
| 8763310 | uvex silv-Air 3310 | FFP3 folding mask with valve | | 15 PC | 12 boxes | 183 |
| 8787212 | uvex silv-Air 7212 | FFP2 preformed mask with valve | | 15 PC | 9 boxes | 179 |
| 8787232 | uvex silv-Air 7232 High-Performance | FFP2 preformed mask with three-chamber system | | 3 PC | 12 boxes | 178 |
| 8787233 | uvex silv-Air 7233 High-Performance | FFP2 preformed mask with three-chamber system | | 3 PC | 12 boxes | 178 |
| 8787312 | uvex silv-Air 7312 | FFP3 preformed mask with valve | | 5 PC | 12 boxes | 179 |
| 8787317 | uvex silv-Air 7317 | FFP3 preformed mask with valve | ☞❹₿₫₿₽ | 5 PC | 12 boxes | 179 |
| 8787318 | uvex silv-Air 7317 | FFP3 preformed mask with valve | | 80 PC | 1 carton | 179 |
| 8787330 | uvex silv-Air 7330 High-Performance | FFP3 preformed mask with three-chamber system | | 3 PC | 12 boxes | 178 |
| 8787333 | uvex silv-Air 7333 High-Performance | FFP3 preformed mask with three-chamber system | | 3 PC | 12 boxes | 178 |
| 8788313 | uvex silv-Air 8313 | FFP3 folding mask with valve | | 15 PC | 24 boxes | 178 |

Disposable Protective Clothing





Disposable Protection Clothing

Guide to standards and products

| | (| | | | | | | | | | |
|---|-------|-------|-------|-------|-------|-------|-------|-------------------|--------------------|----------------------|--|
| | (| | | | | | | Wex 38 chem light | Wet 38 chem classi | Wex 38 chem classic, | |
| EN 14605 Liquid-tight coveralls | 98173 | 89976 | 88497 | 98710 | 17595 | 98449 | 98375 | 89843 | 89880 | 88498 | |
| EN 14605 Spray-tight coveralls | | | | | | | - | | • | | |
| EN 13034 Limited spray-tight coveralls (protection against liquid mist) | | - | • | • | - | • | - | - | | | |
| ISO 13982-1 Particle-tight coveralls (protection against solid particles) | ÷ | • | ÷ | • | • | ÷ | - | - | - | - | |
| EN 1149-5 Protective clothing with antistatic properties (antistatic function only guaranteed if air humidity > 25%) | • | - | - | | | | | | • | - | |
| EN 14126 Protective clothing against infective agents | | | | | - | | - | | • | - | |
| EN 1073-2 Protective clothing against particulate radioactive contamination (no protection against radioactive rays) | | | - | | | - | - | | - | - | |
| ISO 27065 Protective clothing for use with pesticides | | | | | | | | • | | | |

For more detailed information, please see the relevant certificates, technical data sheets or the endorsement on the product!

Defining environmental conditions


Are you exposed to dusty, damp or wet conditions during your work?

To make it easier for you to select the right clothing for the job, we've categorised our overalls depending on their suitability for these environments. The bars indicate how suitable the product is for each setting.

We also provide information on breathability so that you can take wearer comfort into account in your decision.

Identifying additional characteristics

In some work environments, there are additional requirements that you will need to take into account. These symbols indicate whether the items are free from silicone and paint wetting impairment substances.







Disposable protective clothing

Type 4 and Type 5/6 features and technologies



3 pieced hood

- optimum fit
- no limitations of view
- perfect match with resirators and goggles
 soft elastic on edge, feels comfortable



Zipper flap

- · Zipper flap with integrated self adhesive tape
- easy to gum up
- additional security



Fingerloop

- finger loops made of soft elastic
- to keep the sleeves at the wrist
- additional security



Elastic in waistband

- · integrated elastic in waist for optimal fit
- ideal wearer comfort



elasticated bands on arm and legs


- convenient closures thanks to elastics at wrist and ankles for additional security
- soft elastic on edge for high wearer comfort

Technologies



uvex SMS

- build out of several layers of polypropylene non woven material
- Mixure of spunbond and meltblown non woven material for a perfect balance between stability and softness
- High degree on air permeability and breathability



uvex com4-Laminat

- non woven polypropylene material laminated with a microporous polyethylene film
- non woven material on the inside for a comfortable feeling
- material is not sticking on skin
 the microporous film provides a
- certain level of breathability

uvex Laminat light

- non woven polypropylene material laminated with a polyethylene film
- non woven material on the inside for a comfortable feeling
- material is not sticking on skin
 using the film is providing a higher
- level of protection, but reduces the breathability



uvex Laminat classic

- non woven polypropylene material laminated with a polypropylene film
- non woven material on the inside for a comfortable feeling
 material is not sticking on skin
- the polypropylene film provides an effective barrier against many organic and inorganic liquid chemicals

uvex 3B chem classic · uvex 3B chem classic+

Disposable coverall chemical protection Type 3B



uvex 3B chem classic · uvex 3B chem classic+

General features:

- · highly durable material combined with ultrasonically welded and taped seams ensure a great barrier and maximum of safety
- · lightweight and durable material
- skin-friendly textile grip on inside

Protection features:

- · offers protection against a wide range of chemicals
- optimal protection thanks to self-adhesive zipper flap

Comfort features:

- · elasticated waistband, elasticated bands on hood, arms and legs for a perfect fit
- middle finger loops prevent sleeves sliding up the arm

89880

yellow S to 3XL

25 PC per CT

PC

uvex 3B chem classic

with polypropylene film

polypropylene spunbond, laminated

- Areas of application:
- handling organic and inorganic chemicals
- · cleaning and maintenance work · chemical and pharmaceutical industries
- food industry
- · remediation of soil contamination and dismantling
- industrial cleaning and maintenance tank cleaning
- work with paints and varnishes
- · disposal of hazardous materials
- agricultural industry
- waste water treatment and drainage construction
- waste management

88498

yellow

PC


S to 3XL

20 PC per CT

- · disaster response and emergency services
- veterinary medicine and disease control · oil and petrochemicals

uvex 3B chem classic+

with polypropylene film






The double zip flap makes it easy to put on



Double sleeves for extra safety



Double sleeves for extra safety





polypropylene spunbond, laminated



uvex-safety.com/en/overalls

Art. no. Material

Colour

Sizes

Outer

Order unit

UVEX 3B Chem light Disposable coverall chemical protection Type 3B



89843

uvex 3B chem light

General features:

 light and highly flexible material for high wearer comfort with skin-friendly non-woven material inside

Protection features:

- · ideal for cleaning work
- optimal protection thanks to self-adhesive zipper flap

Comfort features:

- elasticated waistband, elasticated bands on hood, arms and legs for optimal fit
- middle finger loops for securing the sleeves

Areas of application:


- handling low-concentration chemicals
- industrial and building cleaning
- ship building and automobile manufacture
- chemical and pharmaceutical industries
- handling paints and varnishes
- electronics
- handling and dismantling of asbestos
- remediation of contaminated sites
- livestock breeding and veterinary medicine
- waste management

| uvex 3B chem ligh | t |
|-------------------|----------------------------------|
| Art. no. | 89843 |
| Material | polypropylene spunbond |
| | laminated with polyethylene film |
| Colour | white, yellow |
| Sizes | S to 3XL |
| Order unit | PC |
| Outer packaging | 40 PC per CT |



Stitched and taped seams. Optimum protection against penetration by liquid aerosols and solid particles.

Certified in acc. with



The chemicals included in this list are examples only. For a full overview for each individual garment, please consult the technical datasheets.

| Chemical | CAS no. | 89843 | 89880 |
|---------------------------------------|-----------|------------------------|------------------------|
| | | Class in acc. EN 14325 | Class in acc. EN 14325 |
| Acetone | 67-64-1 | 6 of 6 | 1 of 6 |
| Acetonnitrile | 75-05-8 | 6 of 6 | 0 of 6 |
| Iron(III) chloride (aq., 45%) | 7705-08-0 | - | 6 of 6 |
| Hydrofluoric acid (aq., 49%) | 7664-39-3 | 6 of 6 | 6 of 6 |
| Hydrofluoric acid (aq., 71 to 75%) | 7664-39-3 | - | 5 of 6 |
| Hydrofluoric acid in urea (62 to 64%) | 7664-39-3 | - | 2 of 6 |
| Formaldehyde (aq., 10%) | 50-00-0 | - | 6 of 6 |
| Isopropanol | 67-63-0 | 6 of 6 | 6 of 6 |
| Methanol | 67-56-1 | 6 of 6 | 6 of 6 |
| Sodium hydroxide, 50% | 1310-73-2 | 6 of 6 | 6 of 6 |
| Nitric acid, 69.5% | 7697-37-2 | - | 6 of 6 |
| Hydrochloric acid (aq., 37%) | 7647-01-0 | 5 of 6 | 6 of 6 |
| Sulphuric acid, 96% | 7664-93-9 | 6 of 6 | 6 of 6 |
| Hydrogen peroxide | 7722-84-1 | 6 of 6 | 6 of 6 |

The information provided in the table was obtained in tests conducted under laboratory conditions (at temperatures of $21 \pm 2^{\circ}$ C). As additional stresses, such as higher temperatures and mechanical influences, are often present in practice, these values serve as a guide only. The information is provided without obligation and is not intended to replace your own suitability tests.



uvex 3B chem light





You can find detailed information about this topic in our related blog post and flyer

Protection when handling crop protection products

In farming and forestry applications, workers are repeatedly exposed to hazardous chemical and biological substances. Depending on the type of application, the duration of the exposure and the specific effects of the hazardous substance, it may be necessary to wear personal protective equipment. In addition to respiratory protection and gloves, appropriate chemical protection clothing is an important component of the wearer's protective equipment. In addition to the uvex 3B chem light, which is certified in accordance with EN ISO 27065 specifically for the handling of crop protection products, there are other protective suits that can be used.

You can find more information in our downloadable flyer "Certified protective equipment when using crop protection products" and our blog post on the topic "Pesticides: Personal protective equipment when handling crop protection products".

uvex 4B Disposable coverall chemical protection type 4B



uvex 4B

General features:

• light and highly flexible material for high wearer comfort lined with skin-friendly non-woven material inside

Protection features:

- taped seams for optimal protection • self-adhesive zipper flap for optimal
- protection

Comfort features:

Art. no.

Material Colour

Sizes

Order unit


- elasticated waistband, elasticated bands on hood, arms and legs for optimal fit
- · middle finger loops prevent sleeves sliding up the arm

Areas of application:

- · low-pressure industrial cleaning and building cleaning
- ship building and automobile manufacture
- chemical and pharmaceutical industries
- · handling paints and varnishes
- agriculture and horticulture
- pest control
- electronics
- · work with asbestos and dismantling
- remediation of contaminated sites
 - pharmaceutical industry and laboratories sampling
 - · livestock breeding and veterinary medicine waste management



Stitched and taped seams. Optimum protection against penetration by liquid aerosols and solid particles.





uvex-safety.com/en/overalls

uvex 4B 98375 polypropylene spunbond, laminated with polyethylene film white, orange S to 3XL PC 40 PC per CT Outer packaging

uvex 4B with overshoes 89094 polypropylene spunbond, laminated with polyethylene film white, orange S to 3XL PC 40 PC per CT

uvex 5/6 classic

Disposable coverall chemical protection Type 5/6



98449

uvex 5/6 classic

General features:

- extremely lightweight and breathable material guarantees an excellent combination of comfort and safety
- skin-friendly and soft non-woven material on the inside

Protection features:

 self-adhesive zipper flap for optimal protection


Comfort features:

- · elasticated waistband, elasticated bands on hood, arms and legs for a perfect fit
- middle finger loops prevent sleeves sliding up the arm

Areas of application:

- handling chemicals in dust and powder form · varnishing and protection against paint
- splashes
- fibreglass production and processing
- industrial cleaning and maintenance
- automotive industry
- grinding and polishing
- cement manufacture
- mining and quarrying
- demolition and refurbishment
- working with asbestos
- wood and metal processing
- construction industry
- pharmaceutical industry

other articles on request











uvex-safety.com/en/overalls

uvex 5/6 classic uvex 5/6 classic mF uvex 5/6 classic light Art. no. 98449 98759 17595 polypropylene spunbond, laminated Material polypropylene spunbond, laminated polypropylene spunbond, laminated with polyethylene film with polyethylene film with polyethylene film Colour white white white Sizes S to 3XL S to 3XL S to 3XL Order unit PC PC PC 50 PC per CT 50 PC per CT 50 PC per CT Outer packaging

uvex 5/6 comfort Disposable coverall chemical protection Type 5/6



88497

uvex 5/6 comfort

General features:

· the combination of polyethylene laminate and a SMS back section provides a high level of moisture management, without reducing protection

Protection features:

- 98710: bound seams in contrasting colour
- 88497: with inside overlock seam
- self-adhesive zipper flap for optimal protection

Comfort features:

- · optimal fit with elasticated waistband,
- elasticated bands on the hood, arms and legs • middle finger loops prevent sleeves sliding up
- the arm

Areas of application:

- · handling chemicals in dust and powder form · varnishing and protection against paint
- splashes
- fibreglass production and processing
- industrial cleaning and maintenance
- automotive industry
- grinding and polishing
- cement manufacture mining and quarrying
- demolition and refurbishment working with asbestos
- wood and metal processing
- construction industry
- cleanroom applications
- pharmaceutical industry



98710: Breathable polyethylene laminate combined with an air permeable SMS back section to provide a high level of moisture management and breathability.



88497: Breathable polyethylene laminate combined with an air permeable SMS back section to provide a high level of moisture management and breathability.

Certified in acc. with





| 5/6 comfort |
|-------------------------------------|
| 10 |
| n material: polypropylene spunbond, |
| nated with polyethylene film |
| : SMS spunbond |
| e, lime |
| 3XL |
| |
| PC per CT |
| |

| uvex 5/6 comfort light |
|--|
| 88497 |
| Main material: polypropylene spunbond, |
| laminated with polyethylene film |
| back: SMS spunbond |
| white |
| S to 3XL |
| PC |
| 40 PC per CT |
| |

uvex 5/6 air

Disposable coverall chemical protection Type 5/6



98173


- uvex 5/6 air
- General features:
- excellent moisture management
- · ideal for warm working environments and extended periods of wear

Protection features:

- optimal protection in dusty environments • self-adhesive zipper flap for optimal protection
- Comfort features:
- optimal fit with elasticated waistband, elasticated bands on hood, arms and legs
- middle finger loops prevent sleeves sliding up the arm

Areas of application:

- handling chemicals in dust and powder form
- working with asbestos
- · fibreglass, ceramic fibre and synthetic resin production and processing
- wood and metal processing
 construction industry
- automotive industry
- · grinding and polishing
- cement manufacture
- mining and quarrying
- refurbishment and renovation
- pharmaceutical industry repair work









| uvex 5/6 air | |
|-----------------|------------------------|
| Art. no. | 98173 |
| Material | polypropylene spunbond |
| Colour | white |
| Sizes | S to 3XL |
| Order unit | PC |
| Outer packaging | 50 PC per CT |

89976 polypropylene spunbond blue S to 3XL PC 50 PC per CT



uvex-safety.com/en/overalls

Disposable chemical protection













| | Hood | Gauntlets | Overshoes | | Overboot |
|------------|---------------------------------------|------------------------------------|--------------------------|-------------------|---------------------------------------|
| Art. no. | 9875200 | 9875300 | 9874946 | 9874948 | 9875046 |
| Sizes | one size fits all | one size fits all | 42 to 46 | 46 to 48 | 42 to 46 |
| Version | with velcro fastening | elasticated band on both ends | opening with elas | sticated band | opening with elasticated band and tie |
| Material | polypropylene spunbond, laminated | polypropylene spunbond, laminated | polypropylene sp | unbond, laminated | polypropylene spunbond, laminated |
| | with polyethylene film | with polyethylene film | with polyethylene | e film | with polypropylene film |
| Colour | white | white | white | | white |
| Order unit | BG | BG | BG | | BG |
| Content | 50 PC, loose | 50 PR, loose | 100 PR, loose | | 50 PR, loose |
| Art. no. | Overboot 8935346 | Overshoe with anti-slip 8909746 | Overboots with a 8909546 | nti-slip | |
| | | | | | |
| Sizes | 42 to 46 | 42 to 46 | 42 to 46 | | |
| Version | opening with elasticated band and tie | with anti-slip sole, | with anti-slip sole | | |
| | | elasticated opening | elasticated openi | ing with band | |
| | | improved fit | improved fit | | |
| Material | polypropylene spunbond, laminated | polypropylene spunbond, laminated | | unbond, laminated | |
| | with polypropylene film | with polyethylene film | with polyethylene | e film | |
| Colour | yellow | white | white | | |
| Order unit | BG | BG | BG | | |
| Content | 30 PR, loose | 100 PR, loose | 25 PR, loose | | |

Disposable chemical protection

Protection against infectious diseases



Workers may come into contact with biological substances in a wide range of situations. Appropriate personal protective equipment must be used to prevent potential infection.

Clothing designed to provide protection against infectious diseases establishes a physical barrier between the wearer's skin and the source of the infection, and prevents the disease from spreading to other people or environments.

Generally, micro-organisms such as bacteria, fungi and viruses are classed as biological substances. A detailed definition is provided in EU Directive 2000/54/EC. The crucial common denominator between all of these materials is that they can cause infections, trigger allergies, or produce a toxic effect.

Biological substances are placed in one of four categories depending on the infection risk they present:

Risk group 1:

Biological substances that are unlikely to cause disease in humans.

Risk group 2:

Biological substances that can cause human disease and might be a hazard to workers, but are unlikely to spread to the community; there is usually effective prophylaxis or treatment available.

Risk aroup 3:

Biological substances that can cause severe human disease and present a serious hazard to workers; they may present a risk of spreading to the community, but there is usually effective prophylaxis or treatment available.

Risk group 4:

Biological substances that cause severe human disease and are a serious hazard to workers; they may present a high risk of spreading to the community, and there is usually no effective prophylaxis or treatment available.

The risk groups of each biological substance are described in detail in the annex to EU Directive 2000/54/EC.

Typical applications in which workers may be exposed to infectious substances include:

- · Waste water treatment and drainage work
- Waste disposal
- Aariculture Food industry
- Work that involves contact with animals and/or products of animal origin
- Healthcare, hospitals, emergency services

A detailed list of all biological substances that you may be exposed to in various applications, and the potential diseases associated with these substances, can be found in a number of publications, including the BGIA Report 1/2013.

Protective clothing in accordance with EN 14126:2003

The EN 14126 standard defines the performance requirements for clothing designed to protect against infectious diseases. The defined test procedures focus on the medium that contains the micro-organisms, such as fluids, aerosols or solid dust particles. Due to the heterogeneous nature of the micro-organisms, it is not possible to define performance criteria for them.

The tests stipulated by the standard relate only to the material; seam technologies are not taken into account. Taped seams provide a higher level of protection, as the micro-organisms are small enough to penetrate through the tiny needle holes along the seam.

The entire protective suit must also be certified as chemical protection clothing (see page 199).


Wearing appropriate protective clothing does not provide complete, guaranteed protection against all chemical risks. It is also essential that you put on and remove the PPE correctly to ensure safety (see page 200). Any person who assists in the removal of the clothing is also exposed to the risk of contamination.

| | | | | | | 1000 |
|--|-------------------------|--------------------------|-----------------------|---------|---------------------|---------------------------|
| Model | uvex 3B chem classic | uvex 3B chem classic+ | uvex 3B chem light | uvex 4B | uvex 5/6 classic | uvex 5/6 classic light |
| Art. no. | | | 89843, 89094 | 98375 | 98449 | 17595 |
| ISO/FDIS 16604/16603 Resistance to contaminated liquids | 6 of 6 | 6 of 6 | 6 of 6 | 6 of 6 | 6 of 6 | 6 of 6 |
| EN 14126 appendix A Resistance due to mechanical contact with substances containing contaminated liquids | 6 of 6 | 6 of 6 | 6 of 6 | 6 of 6 | 6 of 6 | 6 of 6 |
| ISO/DIS 22611 Resistance to contaminated liquid aerosols | 3 of 3 | 3 of 3 | 3 of 3 | 3 of 3 | 3 of 3 | 3 of 3 |
| ISO/DIS 22612 Resistance to contaminated solid particles | 3 of 3 | 3 of 3 | 3 of 3 | 3 of 3 | 3 of 3 | 3 of 3 |

Disposable Protection Clothing Guide to standards and products

Your team's safety at the forefront

From light liquid splashes to hazardous chemicals and radioactive material – employees face various hazards in the course of their daily work. To simplify the process of selecting appropriate protective clothing, the European Union has defined harmonised standards for different protection classes (also called types) for chemical protection – Category III. The protection type is confirmed by certification and indicates the kind of exposure (dust, liquid, gas) for which the suit is suitable. The attainment of the individual types only ensures the minimum requirements necessary for certification. Please refer to our technical datasheets for details of the individual tests.

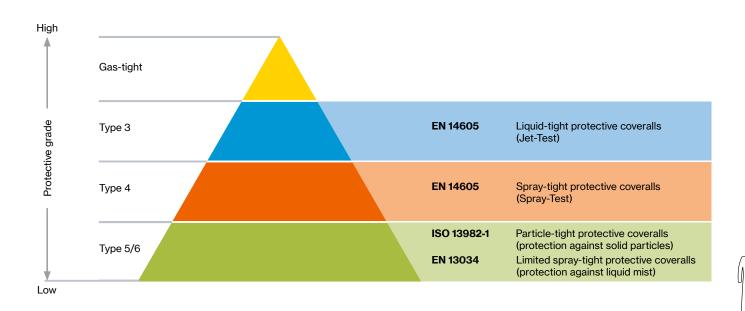

For optimum protection of your team at all times, the breakthrough times of permeation must be taken into account for protective coveralls. uvex protection clothing has undergone the required permeation tests.

More information on the breakthrough times of specific chemicals can be found in the technical datasheets. These are available for download on the individual product pages, which can be accessed via our landing page by scanning the QR code below or visiting **uvex-safety.com/en/ overalls**.



The breakthrough times were determined under laboratory conditions. As additional stresses, such as higher temperatures and mechanical influences, are often present in practice, this information serves as a guide only. Following contamination, wear or damage, the coverall is to be removed immediately and properly disposed of.



Disposable chemical protection

Guidelines for use

Tips for putting on and taking off



Instructions for putting on and taking off Type 3B (PDF)

Instructions for putting on

Instructions for taking off

uvex

Instructions for putting on/ taking off

Instructions for putting on and taking off Type 5/6 (PDF)

Selecting the correct chemical-protection clothing

In order to select appropriate chemical-protection clothing for a specific application within your business, it is important to have your overalls tested by a trained safety officer. Many chemicals can cause serious or irreversible injury to workers if they are not adequately protected. For this reason, chemical-protection clothing should be selected with great care.

Note: It is the responsibility of the user to decide for themselves whether the protective suit used is suitable and correct for the intended use. uvex accepts no responsibility whatsoever in the event of improper use and application of these products.

Information on selecting the correct size of disposable protective suit

To ensure an optimum fit and keep the wearer safe when working with hazardous substances, uvex disposable overalls are available in multiple sizes. However, the correct size may not be the same as your usual clothing size. Use the following overview to find the correct fit based on your height and chest circumference.

| Chest circumference in cm | Size to choose |
|---------------------------|---|
| 84 - 92 cm | S |
| 92 - 100 cm | М |
| 100 - 108 cm | L |
| 108 - 116 cm | XL |
| 116 - 124 cm | XXL |
| 124 - 132 cm | XXXL |
| | 84 - 92 cm 92 - 100 cm 100 - 108 cm 108 - 116 cm 116 - 124 cm |

Proper handling of uvex disposable protective clothing


Storage

uvex disposable protective clothing must be stored in its original packaging, away from light and in a dry environment at temperatures of 15°C-25°C. The products must be disposed of after use in accordance with the respective legal requirements.

Washing disposable protective suits

Disposable overalls are for single use only and must not be washed. Durability

It is recommended to use the product within five years from the production date, which can be found on the label.

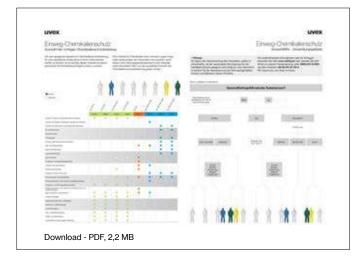



uvex-safety.com/en/ overalls



Safety Gloves

Product system planet series - Safety Gloves

uvex has developed the **protecting planet** icon, to help raise awareness of its commitment to achieving increased sustainability. Based on the brand claim, **protecting people**, our sustainable approach integrates three core interlinked pillars – **ecology, economy** and **social responsibility**, that are incorporated throughout the business to improve our sustainability performance.

This explains the comprehensive audit, measurement and evaluation management process uvex undertakes along the entire value chain to ensure its products are as sustainable as possible.



UVEX phynomic XG planet



protecting planet

by using recycled material // by maximum reduction of pollutants

Polyamide recyclate

 more than 50 percent based on polyamide waste from the fibre manufacturer (polyamide recyclate)

Health

- skin compatibility dermatologically approved by
- the proDerm Institute
- › exceeds REACH regulations



protecting planet

by using environmentallyfriendly packaging

Packaging

- minimisation of packaging (only outer carton and sleeve)
- > 80 percent paper sleeve made of FSC-certified kraft paper
- no polyester bags

orotecting plane



Certifications

- > Environmental management ISO 14001
- > Energy management ISO 50001

Production

- > CO2 neutral, based on emissions resulting directly from production. Using electricity from 100 percent renewable energy sources since 2014.
- > promoting the construction of new plants for renewable energies in the region.

Offsetting

- > operating the highly efficient CHP at our site using green gas
- offsetting the resulting CO₂ emissions
 investing exclusively in approved certified climate protection projects (Gold Standard or VCS Verified Carbon Standard)
 promoting, for example, the construction of new plants in India
- for the generation of solar and wind power

The uvex brand is our responsibility

uvex safety gloves is certified according to both **Environmental Management ISO 14001** and **Energy Management ISO 50001** and has **CO₂-neutral production rating** based on direct emissions from production.

Production in Germany ensures **sustainable, resource-saving production** and short distances from manufacturer to end user.

uvex hand protection

To meet our obligations, we have been using **electricity from 100 percent renewable energy sources** since 2014. With this certified **green electricity** product, we promote the construction of new plants for renewable energies in the region. We use **green gas** to **operate the highly efficient combined heat and power plant** at our site, thereby offsetting the CO₂ emissions produced by gas combustion processes. Through **carbon offsetting**, we invest exclusively in **climate protection projects** that are certified by internationally recognised quality standards (Gold Standard or VCS – Verified Carbon Standard) and thereby promote, for example, the construction of new plants in India for the generation of solar and wind power.

Material

- focus on bio-based materials: cotton, bamboo viscose, HPPE (bio-based) and/or polyamide made from recycled raw materials
- use of accelerator-free NBR coatings
- extremely comfortable and natural fit thanks to the use of breathable natural
- thanks to the use of breathable natural and functional fibres

Health

- exceeds REACH regulations on eliminating harmful substances
- ongoing analysis of almost 200 critical substances (uvex harmful substances standard)
- certified in line with Oeko-Tex® Standard 100 • DERMA-certified free from allergenic sub-
- stances

Product information/packaging

- instructions for use on FSC-certified paper (as soon as legally possible via QR code)
- minimisation/optimisation of packaging
- (outer carton and sleeve) • paper sleeve made of 80 percent FSC-
- certified kraft paper
- carton adhesive tape: Wet adhesive tape with starch-based adhesive made from potatoes

Social responsibility

- full implementation of the ILO standard
 continuous social audits at partner com-
- panies (uvex social standard)
- social engagement with a focus on disadvantaged children

Green electricity



Amount of waste in glove production reduced by



between 2019/2020 and 2021/2022

CO₂-neutral production



Innovative safety gloves "Made in Germany"

Manufacturing and technology expertise



uvex hand protection centre of expertise in Lüneburg

A fully integrated development process, state-of-the-art robot-controlled plant technology and strict production controls guarantee that our safety gloves are of first-class quality. Production in Germany ensures sustainable, resource-saving production and short distances from manufacturer to end user.







MADE IN GERMANY

Video

Fully integrated development processes

- own yarn/liner manufacturing
- own compounding (blending)
- specially developed moulding and process technology
- innovative coating technology
- development of customer-specific solutions
- technical modifications to existing products (e.g. thermal lining)
- individual production
 (e.g. gloves for disabled people)

We know exactly what you want.

Our expertise is available for you at all times which forms the basis of our on-site. Risk-hazard analysis service: Our hand protection specialists work with you to determine which safety gloves are best suited to your individual requirements. Seminars, laboratory analyses and online tools round off our service portfolio.

Extensive know-how is part of our service Service expertise







management





management

Consultation / training / application technology

- on-site consultation from uvex product specialists
- practical hand protection seminars (uvex academy)
- plant and laboratory tours for customers
- cooperation with scientific institutes
- measurement and analysis service in own laboratories
 - mechanical standard test in accordance with EN 388
 - permeation tests in accordance with EN 374
 - special tests (e.g. antistatic/grip measurement/climate test)
- individual certifications (e.g. for ingredients, coating compatibility, food product suitability)



Information / e-services

- uvex glove expert
- designer glove plan
- online glove navigator
- online product data sheets
- online declaration of conformity

For further information, please visit: www.uvex-safety.de/usglfilm

207

Safety Gloves Mechanical Risks / Special risks





Safety Gloves

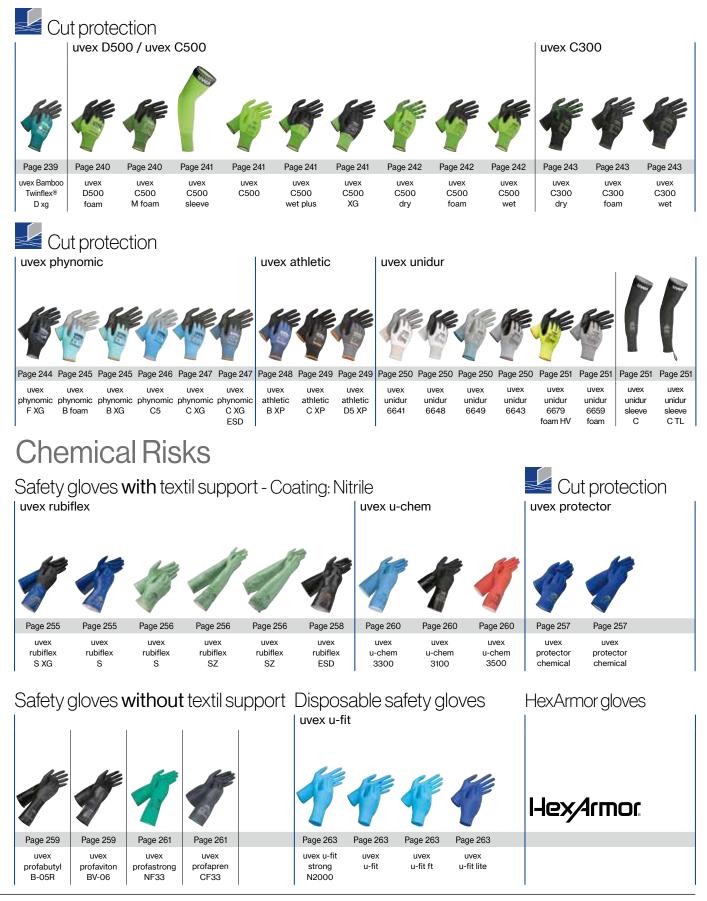


Table of contents Standards and product advice

International standards for safety gloves

| International standards for | safety gloves | Page |
|---|--|------|
| DIN EN 388:2016+A1:2018 | Safety gloves to protect against mechanical risks | 212 |
| DIN EN ISO 374-1:2018-10 DIN EN ISO 374-5: 2017-03 | Safety gloves to protect against dangerous chemicals and micro-organisms | 213 |
| DIN EN 16350:2014-07 | Safety gloves to protect against electrostatic characteristics | 215 |
| DIN EN 60903:2004-07 | Live working - Gloves of insulating material | 215 |
| DIN EN 61482-1-2:2015-08 | Working with high voltage - Clothing that protects against the thermal hazards of an electric arc – part 1–2 | 215 |
| DIN EN 407:2020-06 | Safety gloves and other protective hand equipment designed to protect against thermal risks (heat and/or fire) | 214 |
| DIN EN 511:2006-07 | Safety gloves to protect against the cold | 214 |
| | Suitable for use with foods (glove materials) | 212 |
| ISO 18889:2019-04 | Crop protection | 215 |

We help you choose the right safety gloves for your needs

| Discover all our helpful s | services on our website | Page |
|----------------------------|---|------|
| uvex glove expert | - Chemicals database, permeation lists - Glove plan designer | 252 |

uvex - consultation and product expertise from a single source



Contents Pictograms

These pictograms in our catalogue help you to choose the perfect safety glove.

1. Select the risk potential

2. Determine your individual

What type of activity are the safety gloves being

3. Defining environmental conditions


Are the activities in wet/oily or more humid or dry

requirements

selected for?

setting.

What is the main risk for users in the workplace?

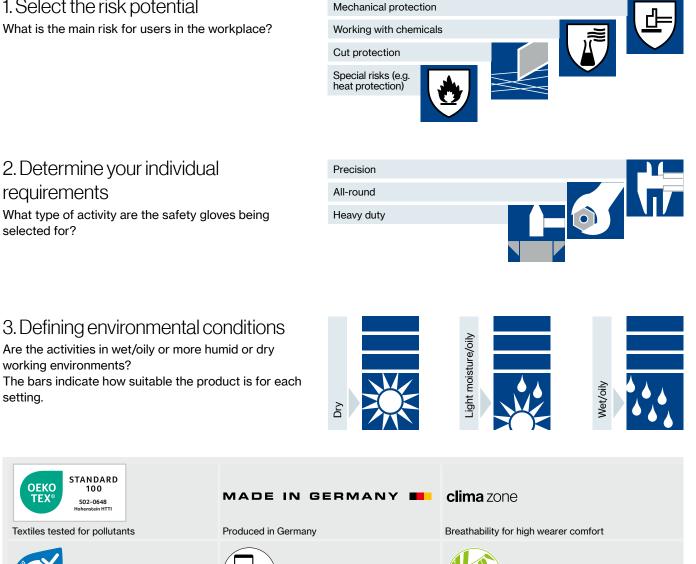

Bamboo TwinFlex® technology for safety

(cut protection) and comfort (bamboo fibre)



working environments?



Dermatologically tested for skin compatibility

Produced in Germany




Can be used with touchscreens

Detailed information on the award criteria of the certificate issuers can be found at: uvex-safety.com/certificates

Standards EN 388:2016+A1:2018

Standard for safety gloves to protect against mechanical risks

EN 388:2016 contains various test methods for comparing the mechanical performance of gloves. This standard focusses on the following six performance levels:

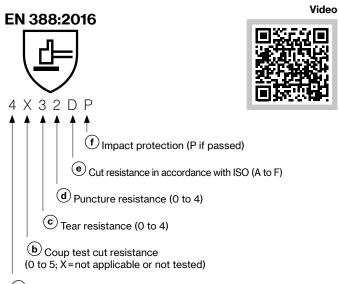

(a) Abrasion resistance (0 to 4)

(a) Abrasion resistance

To test the abrasion resistance of the safety glove, the material is rubbed with abrasive paper under pressure. The number of cycles required to grind a hole into the material is used as a reference value. (Highest performance class 4 = 8000 cycles)

b Cut resistance by means of the coupe test

A rotating circular knife is used to test the cut resistance of a safety glove. The knife cuts through the glove material at constant speed and constant force. The reference value is the comparison with a reference material and a resulting index. (Highest performance class 5 = index 20)

(c) Tear resistance

To test the tear resistance of the safety glove, the material is first cut. The reference value is the force required to tear the material. (Highest performance class 4 = 75 newtons)

d Puncture resistance

To test the puncture resistance, the material to be tested is pierced with a nail (defined dimension). The force used for this is used as a reference value.

e Cut resistance according to TDM

The application of the test method in accordance with ISO 13997 is relevant for materials that blunt the rotating circular knife during the coupe test (see above). The required force for cutting a material is measured at a defined distance (20 mm) (highest performance class F= 30 newton)

(f) Additional impact protection

Gloves with performance class "P" at the end offer specific impact absorption.

Suitability grades

Safety gloves for working with food must be designed in such a way that absolutely no components can be transferred to food which may

pose a hazard to human health (migration) under normal and predictable conditions.



| Area of application | Aqueous pH > 4.5 | Acidic pH < 4.5 | Alcoholic | Fatty | Dry, non fatty |
|--|--|-------------------------------------|-----------------------------|--|---|
| Examples | Non-alcoholic beverages Fruit Eggs Vegetables Crustaceans | Vinegar Yeast Milk Yoghurt | Wine Spirits Liqueurs | R1 = olive oil R2 = butter, margarine R3 = fish, cheese, baked goods R4 = meat, poultry R5 = sandwiches fried food | Bread Pasta Rice Tea Spices Pulses |
| uvex Bamboo TwinFlex® D xg | YES | YES | YES | YES (R1 – R5) | YES |
| uvex phynomic airlite A ESD | YES | YES | YES | YES (R1 – R5) | YES |
| uvex profi ergo/ uvex contact ergo | YES | YES | YES | YES (R1 – R5) | YES |
| uvex phynomic B foam/ uvex phynomic C5 | YES | YES | YES | YES (R1 – R5) | YES |
| uvex rubiflex und uvex rubiflex S | YES | YES | YES | YES (R1 – R5) | YES |
| uvex profastrong NF 33 | YES | YES | YES | YES (R2 – R5) | YES |
| uvex u-fit | YES | YES | YES | YES (R3 – R5) | YES |
| uvex phynomic foam | YES | YES | YES | YES (R5) | YES |
| uvex phynomic lite (w) | YES | YES | YES | YES (R1 – R5) | YES |
| uvex unilite thermo | YES | YES | YES | NO | YES |
| uvex u-fit strong N2000 | YES | NO | YES | YES (R3 – R5) | YES |
| uvex u-fit lite | YES | NO | YES | YES (R3 – R5) | YES |
| uvex phynomic F XG | YES | YES | YES | YES (R1 – R5) | YES |
| uvex phynomic C XG ESD | YES | YES | YES | YES (R1 – R5) | YES |
| uvex athletic lite | YES | YES | YES | YES (R1 – R5) | YES |

Standards EN ISO 374-1:2018-10 · DIN EN 374-5:2017-03

EN ISO 374-1:2018-10 Standard for safety gloves to protect against chemical risks

Chemical safety gloves must meet the requirements of European standard EN ISO 374-1. This standard has undergone fundamental changes in terms of certification.

Test chemicals: From the list of 18 test chemicals, the glove material must be tested for permeation as part of the certification process using 6, 3 or 1 chemical(s), depending on the type class.

| Identifier | Test chemical | Group | Class |
|------------|-----------------------|-------------------|--|
| A | Methanol | | Primary alcohol |
| В | Acetone | | Ketone |
| С | Acetonitrile | | Nitrile |
| G | Diethylamine | polar* | Amine |
| н | Tetrahydrofuran | pola | Heterocyclic, ether compounds |
| I | Ethyl acetate | | Ester |
| т | Formaldehyde 37% | | Aldehyde |
| E | Carbon disulphide | | Sulphur-containing organic compound |
| J | n-heptane | aliphatic* | |
| F | Toluene | aromatic* | |
| D | Dichloromethane | halogenated* | Chlorinated |
| L | Sulphuric acid 96% | | Inorganic acid, oxidising |
| М | Nitric acid 65% | Acids | Inorganic acid, oxidising |
| N | Acetic acid 99% | ACIUS | Organic acid |
| S | Hydrofluoric acid 40% | | Inorganic acid |
| к | Sodium hydroxide 40% | Bases (alkalis) | Inorganic base |
| 0 | Ammonia water 25% | Dases (aikalis) | Organic base |
| Р | Hydrogen peroxide 30% | Peroxide (bleach) | Peroxide |

* Solvents (hvdrocarbons (KWS))

Labelling of safety gloves





Permeation resistance of type A: at least 30 minutes each with at least 6 test chemic

Permeation resistance of type B: at least 30 minutes each with

≈

Permeation resistance of type C: at least 10 minutes each with at least 1 test chemical.

EN ISO 374-1:2016/Type C

ž

With the uvex Chemical Expert System, uvex provides a multilingual, online platform to search for individual permeation times. In addition, experienced staff are available on-site and in the centre of expertise for safety gloves in Lüneburg to provide advice on all questions relating to safety gloves for protection against chemical risks.

Your uvex account manager will be happy to provide advice.

DIN EN 374-5:2017-03 Standard for safety gloves to protect against dangerous chemicals and micro-organisms

To protect against microorganisms such as bacteria, fungi and viruses, safety gloves must undergo and pass special penetration tests in accordance with ISO 16604:2004 (method B). Only then may they be marked with the pictogram for EN ISO 374-5.

Labelling of safety gloves



Variant 1: Protects against bacteria. fungi and viruses

Labelling on the glove



Variant 2: Protects against bacteria and fungi

- 1 Name of the manufacturer
- 2 Glove Product Name
- 3 Performance classes, mechanical
- 4 CE conformity mark
- 5 No. of Test Institute
- 6 Letters symbolise test chemicals against which the glove has a protection index of at least class 2.
- 7 Pictogram with designation of standard
- 8 Note enclosed instructions for use
- 9 Glove size
- 10 Expiration date
- 11 Manufacturer address

Permeation

| Time measured to penetration | Protection index |
|------------------------------|------------------|
| > 10 min | Class 1 |
| > 30 min | Class 2 |
| > 60 min | Class 3 |
| > 120 min | Class 4 |
| > 240 min | Class 5 |
| > 480 min | Class 6 |

Permeation refers to molecular penetration through the safety glove material. The time required by the chemicals to permeate, determines the performance class in accordance with EN ISO 374-1.

The actual period of protection at the workplace may vary depending on real-time process factors.




Standards EN 407:2020 - DIN EN 511:2006-07

DIN EN 407:2020 Standard for safety gloves providing protection against thermal risks – heat

The European **standard DIN EN 407** regulates the requirements for safety gloves that provide protection against thermal risks in applications involving heat. Safety gloves certified according to this standard protect the wearer against contact heat, radiant heat and small splashes of molten metal, for example.

However, this does not apply to the specific use of safety gloves in firefighting. According to DIN EN 407, heat protection gloves must have the following features:

- · low flammability and low flame propagation
- · low heat transmission (protection against radiant,
- convective and contact heat)
- high temperature resistance

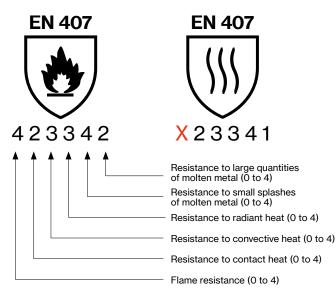

Important changes to standards!


In the latest version of DIN EN 407: As of 2020, the first performance class is no longer named "resistance to flammability", but is now called "limited flame spread". If the glove has not been tested for this, a new pictogram is used (see above right). However, there are no changes to the performance classes.

The test described in DIN EN 407 assigns safety gloves a performance class in relation to each of the individual thermal hazards. It is important that the glove does not come into contact with open flames if it does not meet the criteria of performance class 3 in the limited flame spread test.

DIN EN 511:2006-07 Standard for safety gloves providing protection against thermal risks – cold

Cold safety gloves must meet the requirements of the European **standard DIN EN 511**. The certified gloves below are designed to protect the wearer from penetrating ambient cold and from contact cold through direct contact.

Gloves can also be tested for water impermeability in accordance with EN ISO 15383, thus enabling them to protect the hands from wetness and moisture. This test is considered to have been passed if water does not penetrate the safety glove over a 30-minute period.

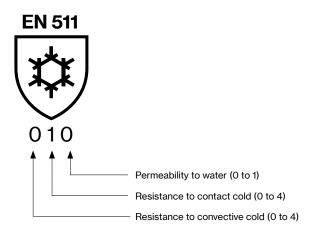

As with mechanical risk protection, the safety glove is assigned a different performance class for each individual aspect. The performance classes are indicated by a number from 0 to 4 next to the pictogram, whereby 4 is the highest performance class.

Standards

DIN EN 16350:2014 · DIN EN 60903:2004-07 · ISO 18889:2019-04 · DIN EN 61482-1-2:2015-08

DIN EN 16350:2014 Safety gloves – Electrostatic characteristics

The new standard

Choosing the right personal protective equipment (PPE) is particularly important in working environments that are hazardous or harbour health risks. For workplaces at risk of fire and explosive atmospheres, "EN 16350:2014 – Protective gloves – electrostatic properties" is the first European standard to prescribe the test conditions and minimum requirements for electrostatic properties of safety gloves.

- vertical resistance must be less than $1.0 \times 10^8 \Omega$
 - $(R_V < 1.0 \times 10^8 \Omega).$
- test atmosphere: ambient temperature of 23 ± 1 °C, relative humidity of 25 ± 5%.

Important notice:

Electrostatic discharge safety gloves are only effective if the wearer is grounded with resistance of less than 10⁸ Ω .

What should users take into account?

EN 16350:2014 is the first standard to define a limit value for vertical resistance for protective gloves; this value was not included in DIN EN 1149.

Users must therefore check the suitability of the protective gloves in line with EN 16350:2014.

References to EN 1149 are no longer sufficient, as this standard only describes the testing procedure and does not specify a limit value.

ISO 18889:2019-04 Standard for safety gloves for users of crop protection products

The EN 18889 standard consists of three performance levels – GR, G1 and G2. G2 offers the highest level of protection.







GR: Partially coated safety gloves provide protection against dried spray coatings during follow-up work.

G1: Fully coated safety gloves for handling ready-to-use crop protection products.

G2: Fully coated safety gloves for use with concentrated crop protection products.

DIN EN 60903:2004-07 Live working – Gloves made from insulating material

DIN EN 60903-compliant safety gloves are category iii PPE. The insulation protection class of the insulating personal protective equipment (PPE) is determined according to the nominal voltage of the plant, with both the maximum permissible nominal AC voltage (AC) and the nominal DC voltage (DC) being calculated.

Labelling of safety gloves

| DIN EN 60903 | | | | |
|-----------------------------|--|--|--|--|
| Insulation protection class | Max. permissible nominal AC voltage (AC) | Max. permissible nominal direct voltage (DC) | | |
| 00 | 500 volts | 750 volts | | |
| 0 | 1,000 volts | 1,500 volts | | |
| 1 | 7,500 volts | 11,250 volts | | |
| 2 | 17,000 volts | 25,000 volts | | |
| 3 | 26,500 volts | 39,750 volts | | |
| 4 | 36,000 volts | 54,000 volts | | |

Additional identifier

| | Category | Resistant to |
|---|----------|----------------------------|
| | A | Acids |
| R | Н | Oil |
| | Z | Ozone |
| | С | Extremely low temperatures |

DIN EN 61482-1-2:2015-08 Live working - Protective clothing against the thermal hazards of an electric arc

Part 1-2: Test methods - Method 2:

Determining the arc protection class of the material and the clothing using a directed test arc (box test)

Hands are at the greatest risk of burns from short circuit electric arcs when working on electrical equipment. Unfortunately, there is no recognised standard for safety gloves in Germany for testing the potential dangers of a short circuit electric arc. Therefore, safety gloves for protection against the thermal discharge of a short circuit electric arc are generally tested in accordance with EN 61482-1-2 and classified accordingly.

| Class | Test current [kA] | Arcing time [ms] | Arc energy [kJ] | Incident energy [kJ/m ²] |
|-------|----------------------|---------------------|--------------------|---|
| 1 | 4 | 500 | 168 +/- 17 | 146 +/- 28 |
| 2 | 7 | 500 | 320 +/- 22 | 427 +/- 39 |



More on this topic

Mechanical Risks Area of application: precision/all-round





Working areas which do not have any moisture (water, oil, fat, cooling lubricant, etc.). Safety gloves for these conditions are extremely breathable. Examples: quality control, assembly work, distribution, end processing.



Working areas with some moisture. Safety gloves for these conditions are less breathable. The water/oil-repelling coating is crucial and also guarantees slip-resistance. Examples: oil-coated parts, changing between dry and damp working environments.



Working areas in which hands should be protected from liquids (not chemicals). Sealed safety gloves with high slip-resistance are necessary. Examples: removing oily/wet parts from machines, outdoor activities (weather-related humidity).

216

uvex phynomic Perfection in 3 dimensions

1. Perfect fit



3D ergo technology precision all the way to the fingertips

- Ergonomic solution for every wearer: up to 8 perfectly coordinated sizes
- The advantages for the wearer: . the glove fits like a second skin
 - natural touch
 - maximum flexibility for fatigue-free work

2. Optimum functionality



Coatings perfectly adapted to the application at hand

- · for dry areas:
- aqua-polymer waterproofing
- · for dry and slightly damp areas: aquapolymer foam coating
- · for humid and oily areas:
- aqua-polymer xtra grip foam coating · for wet and oily areas:
- aqua-polymer pro coating
- · for applications with industrial touchscreen monitors: airLite aqua-polymer foam coating***

3. Skin safe – product safe



Enhanced skin care and product protection

Health protection

- no skin irritation
- dermatologically approved*
- certified in accordance with OEKO-TEX[®] Standard 100
- free from harmful solvents (DMF, TEA)
- free from allergenic substances

Product protection

- · silicone-free according to imprint test
- suitable for sensitive surfaces
- · does not leave any traces/marks
- · certified for food processes*

clima zone









* The uvex phynomic series was clinically tested by the proDERM® Institute for Applied Dermatological Research (Hamburg, Germany). The extremely good skin tolerability of uvex phynomic safety gloves has been dermatologically tested (proDERM® studies: 11.0356-02, 11.0482-11, 13.0202-02, 15.0188-02, 15.0219-11). Detailed information on the award criteria applied by the certification bodies OEKO-TEX® and proDERM can be found at: uvex-safety.com/certificates
** Models uvex phynomic lite/lite w, uvex phynomic Sam, uvex phynomic B foam and phynomic C5
*** Models uvex phynomic airLite A ESD, uvex phynomic airLite B ESD, uvex phynomic airLite C ESD

protecting planet

The logical addition to the successful uvex phynomic XG model

The uvex phynomic XG with Xtra Grip coating is known for its excellent grip in oily conditions. But it performs just as well in dry applications.

It is manufactured at our CO₂-neutral site in Germany and, like all of our products that are "Made in Germany", contributes towards greater sustainability today.



protecting planet

by using recycled material// by maximum reduction of pollutants

Now we are increasing our contribution to sustainability once again:

The polyamide in our textiles, comprising > 50% of the total weight, will be replaced with recycled polyamide. This allows us to conserve our environmental resources, while also reducing our carbon footprint.



We've also equipped the glove with an additional touchscreen function, so there's no need for you to take it off.





uvex phynomic XG planet

- · flexible and extremely durable assembly glove with the best oil grip in its class
- outstanding mechanical abrasion resistance thanks to the aqua-polymer Xtra Grip coating
- outstanding grip in oily areas

- · high level of breathability due to the porous foam coating
- very good tactile feel when assembling (oily) parts
- · free from accelerators for health protection and skin compatibility dermatologically approved (proDERM®), highly suitable for allergy sufferers
- certified according to OEKO-TEX® Standard 100 (S02-0648 HOHENSTEIN HTTI)

| | uvex phynomic XG |
|--------------|--|
| Art. no. | 60070 |
| Design | knitted cuff |
| Standard | EN 388 (4121X) |
| Material | polyamide recyclate, elastane, carbon |
| Coating | aqua-polymer xtra grip foam coating on palm and fingertips |
| Suitable for | damp and oily working conditions |
| Colour | black, black |
| Sizes | 5 to 12 |
| Order unit | 10 PR |



Mechanical Risks

Area of application: precision/all-round



uvex phynomic airLite A ESD

- the lightest safety glove in its class
- ESD function (DIN EN 16350:2014)
- · a noticeable difference in wearer comfort: combination of high sensitivity and tactile feel, lightness and breathability
- touchscreen compatibility for use on almost all screens, tablets and mobile phones
- · thin and breathable "airLite" aqua-polymer coating combines the highest sensitivity and tactile feel with touchscreen compatibility
- very good grip in dry and slightly damp areas · free from accelerators, health protection and skin compatibility dermatologically approved
- (proDERM®), highly suitable for allergy sufferers certified according to OEKO-TEX® Standard 100 (S02-0648 HOHENSTEIN HTTI)

- · dexterity safety glove for precision
- mechanical work

Art. no.

- very good mechanical abrasion resistance thanks to the damp-resistant aqua-polymer foam coating
- · good grip in dry and slightly damp areas
- highly breathable coating
- outstanding tactile feel when assembling parts
- · free from accelerators, health protection and skin compatibility dermatologically approved (proDERM®), highly suitable for allergy sufferers
- certified according to OEKO-TEX® Standard 100 (S02-0648 HOHENSTEIN HTTI)

60050

- uvex phynomic allround
- light and dirt-resistant all-round safety glove for mechanical activities
- very good mechanical abrasion resistance thanks to the damp-resistant aqua-polymer foam coating
- · good grip in dry and slightly damp areas
- highly breathable coating
- outstanding tactile feel when assembling parts
- · free from accelerators, health protection and skin compatibility dermatologically approved (proDERM®), highly suitable for allergy sufferers
- certified according to OEKO-TEX[®] Standard 100 (S02-0648 HOHENSTEIN HTTI)

| | uvex phynomic airLite A ESD |
|--------------------------|---------------------------------|
| Art. no. | 60038 |
| Design | knitted cuff |
| Standard | EN 388 (3 1 1 0 X), EN 16350 |
| Material | polyamide, elastane, carbon |
| Coating | palm and fingertips with |
| | airLite aqua-polymer coating |
| Suitable for | for dry and slightly damp areas |
| | of application |
| Colour | black |
| Sizes | 5 to 12 |
| Order quantity multiples | 10 PR |
| | |




You can find more information at www.uvex-safety.com/airlite





uvex phynomic foam







Mechanical Risks

Area of application: precision/all-round



uvex phynomic x-foam HV

- unique safety glove with break sections
- reduced tear resistance in the finger area with the integration of a seamless break section, which clearly reduces the risk of severe hand injuries when using handheld power tools
- very good mechanical abrasion resistance thanks to the damp-resistant aqua-polymer foam coating
- · good grip in dry and slightly damp areas
- highly breathable coating
- · outstanding tactile feel when assembling parts

- free from accelerators, health protection and skin compatibility dermatologically approved (pro-DERM®), highly suitable for allergy sufferers
- certified according to OEKO-TEX® Standard 100 (S02-0648 HOHEN-STEIN HTTI)

NOTE:

- only partially suitable for handling moving machine parts
- a thorough hazard analysis with the support of our uvex hand protection specialists is vital before use

uvex phynomic wet · uvex phynomic wet plus

- safety glove with water-repellent aqua-polymer foam coating for use in outdoor areas
- outstanding mechanical abrasion resistance thanks to the durable coating
- very good grip in damp and wet areas
- · high level of breathability due to the coating

uvex phynomic wet 60060

EN 388 (3131X)

blue, anthracite

polyamide, elastane

palm and fingertips with aqua-polymer foam coating

knitted cuff

- very good tactile feel when assembling parts
- free from accelerators, health protection and skin compatibility dermatologically approved (pro-DERM®), highly suitable for allergy sufferers
- certified according to OEKO-TEX® Standard 100 (S02-0648 HOHEN-STEIN HTTI)

| | uvex phynomic x-toam HV | | uvex pr |
|--------------------------|--|--------------------------|----------|
| Art. no. | 60054 | Art. no. | 60060 |
| Design | knitted cuff | Design | knitted |
| Standard | EN 388 (3 1 X 1 X) | Standard | EN 388 |
| Material | polyamide, elastane | Material | polyami |
| Coating | palm and fingertips with aqua-polymer foam coating | Coating | palm ar |
| Suitable for | dry areas and slightly damp areas | | aqua-po |
| Colour | orange, grey | | |
| Sizes | 6 to 12 | Suitable for | damp a |
| Order quantity multiples | 10 PR | Colour | blue, an |
| | | Sizes | 6 to 12 |
| | | Order quantity multiples | 10 PR |
| | | | |









Mechanical Risks

Area of application: precision/all-round/heavy duty

uvex phynomic pro: comfort made by uvex

In addition to protective function, safety gloves for assembly work must meet a variety of other demands placed on them by the wearer. These include dexterity, a comfortable internal temperature, flexibility and a slip-resistant coating, of which all ensure the gloves do not hinder work.

These requirements are met by a number of safety gloves currently available on the market. However, the workplace often involves a combination of activities, when wearers still need to have an excellent sense of touch even if there is a significant amount of dirt or moisture. If open cell coatings continue to be used in these environments, the hands become dirty, wet or oily as well as reduced product life and regular replacement rates.

This is where uvex's new product concept comes into its own.

The coating: the innovative aqua-polymer-pro coating features dirt and moisture-repellent properties. The gloves are coated up to and including the knuckles. It remains completely flexible and offers exceptional dry and wet grip (in both wet and oily applications).

The liner: uvex has already set new standards in cut protection with the patented Bamboo-TwinFlex[®] technology. The uvex phynomic pro represents a further ground-breaking development in the Cut 1 segment.

The liner combines bamboo with polyamide/elastane. The dirt and moisture-repellent coating requires that it is particularly important that the fibre combination is absorbent and wicks moisture away from the skin. The silky feel of this fibre also feels pleasant on the skin.

Purity "Made in Germany": This product in the uvex phynomic range has also been tested by the proDERM[®] Institute to confirm the skin compatibility and dermatological tolerance through a comprehensive process of repeated patch tests and in-use studies.



uvex phynomic pro 2 · uvex phynomic pro

- high dexterity and dirt- and damp-resistant safety glove
- good mechanical abrasion resistance thanks to the durable aqua-polymer Pro coating
- very good grip in damp, wet and oily areas
 High breathability and very good moisture
- absorption thanks to the bamboo viscose liner
- very good tactile feel when handling parts
 outstanding wearer comfort on the
- skin thanks to the bamboo-polyamideelastane liner
- free from accelerators, health protection and skin compatibility dermatologically approved (proDERM®), highly suitable for allergy sufferers
- certified according to OEKO-TEX® Standard 100 (S02-0648 HOHENSTEIN HTTI)

| | uvex phynomic pro 2 | uvex phynomic pro |
|--------------------------|----------------------------------|--------------------------------------|
| Art. no. | 60064 | 60062 |
| Design | knitted cuff | knitted cuff |
| Standard | EN 388 (2121X) | EN 388 (2121X) |
| Material | bamboo, polyamide, elastane | bamboo, polyamide, elastane |
| Coating | palm and fingertips with | palm and 3/4 of the back of the hand |
| | aqua-polymer foam coating | with aqua-polymer pro coating |
| Suitable for | damp and oily working conditions | damp and oily working conditions |
| Colour | blue, anthracite | blue, anthracite |
| Sizes | 5 to 12 | 6 to 12 |
| Order quantity multiples | 10 PR | 10 PR |
| | | |





221

Mechanical Risks Area of application: precision/all-round







uvex phynomic lite · uvex phynomic lite w

- lightweight safety glove for fatigue-free work
 good mechanical abrasion resistance thanks to the very thin but highly durable aqua-polymer impregnation
- good grip in dry and slightly damp areas
- very high level of breathability with the porous coating, which reduces sweating
- outstanding tactile feel when handling small parts
- free from accelerators, dermatologically approved skin compatibility (proDERM®), highly suitable for allergy sufferers

• certified according to OEKO-TEX® Standard 100 (S02-0648 HOHENSTEIN HTTI)

uvex glove clip

- universal fastening options due to snap hooks
- easy handling
- suitable for all gloves
- gloves are quickly fixed and released
- perfect hold due to jagged clamps
- uncomplicated attachment to work clothing

| | uvex phynomic lite | uvex phynomic lite w |
|--------------------------|--|--|
| Art. no. | 60040 | 60041 |
| Design | knitted cuff | knitted cuff |
| Standard | EN 388 (2121X) | EN 388 (2121X) |
| Material | polyamide, elastane | polyamide, elastane |
| Coating | palm and fingertips with aqua-polymer impregnation | palm and fingertips with aqua-polymer impregnation |
| Suitable for | dry and slightly damp areas of application | dry and slightly damp areas of application |
| Colour | grey, grey | white, white |
| Sizes | 5 to 12 | 5 to 12 |
| Order quantity multiples | 10 PR | 10 PR |
| | | |

| | uvex glove clip |
|--------------------------|-----------------------------|
| Art. no. | 6047900 |
| Design | glove keeper with snap hook |
| Material | Polycarbonate |
| Coating | without |
| Suitable for | easy access to gloves |
| Colour | black |
| Order quantity multiples | 10 PC |
| | |





Mechanical Risks Area of application: precision/all-round



- layer of NBR impregnation · very good tactile feel through the flexible
- stretch cotton material with elastane
- ergonomic fit


- foam coating
- · very good grip in dry and slightly damp areas • perfect fit thanks to the "slim fit" design and
- elastane with liner
- certified according to OEKO-TEX® Standard 100
 (S02-0648 HOHENSTEIN HTTI)

| | uvex rubipor XS2001 |
|--------------------------|----------------------------|
| Art. no. | 60276 |
| Design | knitted cuff |
| Standard | EN 388 (1110 X) |
| Material | cotton interlock, elastane |
| Coating | palm and fingertips coated |
| | with breathable |
| | NBR special impregnation |
| Suitable for | dry areas of application |
| Colour | white, white |
| Sizes | 6 to 10 |
| Order quantity multiples | 10 PR |
| | |



uvex rubipor XS5001B 60316 knitted cuff EN 388 (1110 X) cotton interlock, elastane palm and fingertips coated with breathable NBR special impregnation dry areas of application white, blue 6 to 10 10 PR







Mechanical Risks Area of application: precision/all-round



uvex athletic lite uvex athletic lite dry

- lightweight, breathable and sensitive safety glove for mechanical tasks
- matt, open-celled and especially abrasionresistant microfoam coating
- with dots, for increased durability and a good grip (athletic lite dry)
- very good grip in dry and slightly damp areas
 perfect fit thanks to the "slim fit" design and
- elastane in the liner • certified according to OEKO-TEX® Standard 100 (S02-0648 HOHENSTEIN HTTI)

uvex athletic lite xt

- lightweight, breathable and sensitive safety glove for mechanical tasks
- matt, open-celled and especially abrasionresistant microfoam coating
- Touchscreen capability
- protection against contact heat up to 100°C
 very good grip in dry and slightly damp areas
- perfect fit thanks to the "slim fit" design and elastane in the liner
- certified according to OEKO-TEX® Standard 100 (S02-0648 HOHENSTEIN HTTI)

uvex athletic lite ESD

- lightweight, breathable and sensitive safety glove for mechanical tasks, even thinner and
- more sensitive than the uvex athletic lite • touchscreen ability and ESD function according to DIN EN 16350:2014
- matt, porous and particularly abrasion-
- resistant microfoam coating
- very good grip in dry and slightly damp areas
 perfect fit thanks to the "slim fit" design and
- elastane in the liner
- certified according to OEKO-TEX® Standard 100 (S02-0648 HOHENSTEIN HTTI)

| | uvex athletic lite | uvex athletic lite dry | uvex athletic lite xt |
|--------------------------|-----------------------------|-----------------------------|-----------------------------|
| Art. no. | 60027 | 60033 | 60026 |
| Design | knitted cuff | knitted cuff | knitted cuff |
| Standard | EN 388 (4131X) | EN 388 (4131X), | EN 388 (4131X), |
| | | EN 407 (X1XXXX) | EN 407 (X1XXXX) |
| Material | polyamide, elastane | polyamide, elastane | polyamide, elastane |
| Coating | palm and fingertips with | palm and fingertips with | palm and fingertips with |
| | NBR foam coating | NBR foam coating, dots | NBR foam coating |
| Suitable for | dry and slightly damp areas | dry and slightly damp areas | dry and slightly damp areas |
| Colour | blue, anthracite | blue, anthracite | black, black |
| Sizes | 6 to 12 | 6 to 12 | 6 to 12 |
| Order quantity multiples | 10 PR | 10 PR | 10 PR |
| | | | |









Mechanical Risks Area of application: precision/all-round



uvex unilite 7700

polyamide, elastane

palm and fingertips coated with NBR/polyurethane coating dry and damp, oily working conditions

t;

60585

knitted cuff EN 388 (4121X)

grey, black 7 to 11

Art. no.

Design Standard

Material

Coating

Colour Sizes

Suitable for

Order quantity multiples 10 PR

| | uvex unilite 6605 |
|--------------------------|---------------------------------|
| Art. no. | 60573 |
| Design | knitted cuff |
| Standard | EN 388 (4122X) |
| Material | polyamide |
| Coating | palm and fingertips coated with |
| | nitrile foam coating |
| Suitable for | dry and slightly damp areas |
| Colour | black, black |
| Sizes | 6 to 11 |
| Order quantity multiples | 10 PR |



| | uvex unipur 6634 |
|--------------------------|---------------------------------|
| Art. no. | 60321 |
| Design | knitted cuff |
| Standard | EN 388 (4131X) |
| Material | polyamide |
| Coating | palm and fingertips coated with |
| | NBR coating |
| Suitable for | damp, oily or greasy areas of |
| | application |
| Colour | grey, black |
| Sizes | 7 to 10 |
| Order quantity multiples | 10 PR |
| | |



Mechanical Risks Area of application: precision/all-round




uvex unipur 6630 · uvex unipur 6631

- light and very sensitive PU safety glove for mechanical precision work
- good mechanical abrasion resistance
- good grip in dry and slightly damp areas
- outstanding tactile feel
- very good fit
- highly flexible

uvex unipur 6639

- · lightweight, high dexterity and dirt-resistant PU safety glove for mechanical precision work
- good mechanical abrasion resistance
- good grip in dry and slightly damp areas
- outstanding tactile feel
- very good fit
- highly flexible

| | uvex unipur 6630 | uvex unipur 6631 |
|--------------------------|----------------------------|----------------------------|
| Art. no. | 60943 | 60944 |
| Design | knitted cuff | knitted cuff |
| Standard | EN 388 (4141X) | EN 388 (4141X) |
| Material | polyamide | polyamide |
| Coating | palm and fingertips coated | palm and fingertips coated |
| | with polyurethane coating | with polyurethane coating |
| Suitable for | dry and | dry and |
| | slightly damp areas | slightly damp areas |
| Colour | white, white | grey, grey |
| Sizes | 6 to 11 | 6 to 11 |
| Order quantity multiples | 10 PR | 10 PR |
| | | |

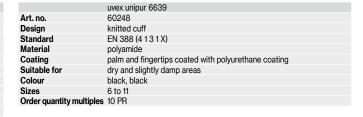








Mechanical Risks Area of application: precision/all-round



Variant with microdots on palm

60587 Variant without microdots on palm





MADE IN GERMANY

uvex unipur carbon

- sensitive and anti-static safety glove for precision work with electronic parts
- very good grip
- fulfils requirement of DIN EN 16350:2014
- · very high level of breathability
- outstanding tactile feel
- Art.No. 60556: Made in Germany

| | uvex unipur carbon | uvex unipur carbon FT |
|--------------------------|--|--------------------------|
| Art. no. | 60556 | 60587 |
| Design | knitted cuff | knitted cuff |
| Standard | EN 388 (2131X) | EN 388 (2131X) |
| | EN 16350 | EN 16350 |
| Material | polyamide, carbon | polyamide, carbon |
| Coating | palm with carbon microdots, | fingertips with thin |
| | fingertips with thin elastomer coating | elastomer coating |
| Suitable for | dry areas of application | dry areas of application |
| Colour | grey, black, white | grey, white |
| Sizes | 6 to 10 | 6 to 10 |
| Order quantity multiples | 10 PR | 10 PR |
| | | |



ţ;

uvex unigrip 6620 60135 knitted cuff, 13-gauge EN 388 (2 2 4 1 B) polyamide, cotton palm and fingers coated with PVC dots dry areas of application white, blue 7 to 10

60135

388:2016

₽

• knitted safety gloves with 13-gauge (uvex unigrip PA and uvex unigrip 6620) for precise mechanical work and 10 gauge (uvex unigrip 6624)

Order quantity multiples 10 PR

uvex unigrip

for rougher mechanical activities

good grip with the thin PVC dots in dry areas





0

00

Mechanical Risks Area of application: all-round/heavy duty









Hydro Grip MADE IN GERMANY

uvex profi pure HG

- safety glove with uvex Hydro-Grip technology
- outstanding grip in wet working conditions
- heat protection up to 100°C
- excellent wearer comfort thanks to the high moisture absorption of the cotton lining
- dermatologically tested, free from allergenic accelerators
- certified according to OEKO-TEX[®] Standard 100
- (S02-0648 HOHENSTEIN HTTI) • ergonomic fit
- highly flexible
- · good tactile feel

Design Standard Material Coating

Suitable for

Colour

Sizes

Art. no.

uvex profi pure HG 60023 knitted cuff EN 388 (2 1 2 1 X), EN 407 (X 1 X X X X) cotton interlock palm and whole back of hand with hydro-grip special polymer coating for damp and wet applications white, blue 6 to 11 Order quantity multiples 10 PR



Mechanical Risks Area of application: all-round/heavy duty





uvex profi ergo XG

safety glove with uvex Xtra-Grip Technology

- outstanding grip in oily working conditions
- heat protection up to 100°C
- very good mechanical abrasion resistance thanks to the multi-layer design for increased service life • outstanding grip in damp and oily areas
- good tactile feel
- ergonomic fit
- highly flexible
- excellent wearer comfort thanks to the high moisture absorption of the cotton lining
- certified according to OEKO-TEX® Standard 100 (S02-0648 HOHENSTEIN HTTI)

Art. no. Design Standard Material Coating

Suitable for

Colour Sizes

Order quantity multiples 10 PR

60558 knitted cuff EN 388 (3121X), EN 407 (X 1 X X X X) cotton interlock palm and 3/4 of the back of the hand with special NBR coating and Xtra Grip coating (nitrile rubber) oily or greasy areas of application white, orange, black 6 to 11

uvex profi ergo XG20A

| uvex profi ergo XG20 |
|------------------------------------|
| 60208 |
| knitted cuff |
| EN 388 (3121X), |
| EN 407 (X 1 X X X X) |
| cotton interlock |
| palm and whole back of the hand |
| with special NBR and |
| Xtra Grip coating (nitrile rubber) |
| oily or greasy areas |
| of application |
| white, orange, black |
| 6 to 11 |
| 10 PR |

Xtra Grip

MADE IN GERMANY





Mechanical Risks

Area of application: all-round/heavy duty



- uvex contact ergo
- thick, hard-wearing cotton interlock safety glove with NBR coating
- very good grip in damp, wet and oily areas
- good tactile feel
- ergonomic fit
- highly flexible

• excellent wearer comfort thanks to the high moisture absorption of the cotton lining

MADE IN GERMANY

- certified according to OEKO-TEX® Standard 100 (S02-0648 HOHEN-
- STEIN HTTI)



uvex profi ergo

- cotton interlock safety glove with NBR coating for universal use
- very good grip in damp, wet and oily areas
- good tactile feel
- ergonomic fit
- high flexibility
- very good wearer comfort due to the high water vapour absorption of the cotton lining

MADE IN GERMAN

 certified according to OEKO-TEX[®] Standard 100 (S02-0648 HOHEN-STEIN HTTI)

| | uvex contact ergo ENB20C |
|---------------------------------|--|
| Art. no. | 60150 |
| Design | knitted cuff |
| Standard | EN 388 (2121X) |
| Material | cotton interlock |
| Coating | palm and fingers with special NBR coating (nitrile rubber) |
| Suitable for | oily and greasy areas of application |
| Colour | white, orange |
| Sizes | 6 to 10 |
| Order quantity multiples | 10 PR |
| | |
| Suitable for Colour Sizes | oily and greasy areas of application white, orange 6 to 10 |

| | uvex profi ergo ENB20A | uvex profi ergo ENB20 |
|--------------------------|---------------------------------|-------------------------------|
| Art. no. | 60147 | 60148 |
| Design | knitted cuff | knitted cuff |
| Standard | EN 388 (2121X), | EN 388 (2121X), |
| | EN 407 (X 1 X X X X) | EN 407 (X 1 X X X X) |
| Material | cotton interlock | cotton interlock |
| Coating | palm and 3/4 of the back of the | palm and whole back of the |
| | hand with special NBR coating | hand with special NBR coating |
| | (nitrile rubber) | (nitrile rubber) |
| Suitable for | damp, oily or greasy | damp, oily or greasy |
| | areas of application | areas of application |
| Colour | white, orange | white, orange |
| Sizes | 6 to 11 | 6 to 10 |
| Order quantity multiples | 10 PR | 10 PR |
| | | |





Mechanical Risks

Area of application: Heavy duty



- mechanical activities · very good mechanical abrasion resistance
- with NBR coating
- good tactile feel
- ergonomic fit
- certified according to OEKO-TEX® Standard 100 (S02-0648 HOHENSTEIN HTTI)
- · excellent grip in wet and oily areas
- · extremely abrasion-resistant for heavy-duty activities
- protection against contact heat to 100°C (level 1)
- highly flexible, seamless polyester-knit liner
- with NBR coating

• very good mechanical abrasion resistance

| | uvex rubiflex NB2/ |
|--------------------------|---------------------------------------|
| Art. no. | 89636 |
| Design | gauntlet, approx. 27 cm |
| Standard | EN 388 (3111X) |
| Material | cotton interlock |
| Coating | fully coated with special NBR coating |
| | (nitrile rubber) |
| Suitable for | damp, oily or greasy areas |
| | of application |
| Colour | orange |
| Sizes | 7 to 11 |
| Order quantity multiples | 10 PR |
| | |











Mechanical Risks

Area of application: Heat risks



- safety glove for thermal applications
- good mechanical abrasion resistance
- very good grip in dry, damp and oily areas
- through the rough surface • very good thermal insulation in direct contact with warm to hot objects
- suitable for contact heat up to +100 °C (as per EN 407)
- certified according to OEKO-TEX® Standard 100 (S02-0648 HOHENSTEIN HTTI)

| | uvex NK4022 |
|--------------------------|---|
| Art. no. | 60202 |
| Design | gauntlet, |
| | approx. 40 cm |
| Standard | EN 388 (2 3 4 2 X), |
| | EN 407 (X 1 X X X X) |
| Material | cotton interlock, aramid knit |
| Coating | fully coated with special NBR coating |
| | (nitrile rubber) |
| Suitable for | damp, oily or greasy areas of application |
| Colour | orange |
| Sizes | 9 to 10 |
| Order quantity multiples | 10 PR |
| | |



- · Kevlar® coarse-knitted glove for mechanical and thermal activities
- very good thermal insulation in direct contact with warm to hot objects
- suitable for contact heat up to +250 °C good cut protection
- · good wearer comfort with cotton lining on the inside
- breathable

- cotton terry safety glove for thermal applications
- very good thermal insulation in direct contact with warm to hot objects
- suitable for contact heat up to +250 °C
- · good wearer comfort with the cotton terry material on the inside

| | uvex k-basic extra 6658 |
|--------------------------|--|
| Art. no. | 60179 |
| Design | knitted cuff, 7-gauge |
| Standard | EN 388 (2 4 4 2 D), |
| | EN 407 (X 2 X X X X) |
| Material | 100 % Kevlar [®] , cotton lining (inside) |
| Coating | none |
| Suitable for | cut and heat-resistant |
| Colour | yellow |
| Sizes | 8, 10, 12 |
| Order quantity multiples | 5 PR |
| | |

| uvex profatherm XB40 |
|----------------------------------|
| 60595 |
| gauntlet, approx. 40 cm |
| EN 388 (2 2 4 1 B), |
| EN 407 (X 2 X X X X) |
| cotton terry |
| none |
| insulation against heat and cold |
| white |
| 11 |
| 6 PR |
| |



Mechanical Risks Area of application: Cold protection



- winter glove with dual-layer design
- good mechanical abrasion resistance with a polymer coating that is flexible at low temperatures
- very good thermal insulation in direct contact with cold objects
- good fit

- outstanding tactile feel
- high abrasion resistance
 flexible at cold temperatures
- mechanical resistance
- very high cut protection (Level C)

| | uvex unilite thermo | uvex unilite thermo plus | uvex unilite thermo FC | | uvex unilite thermo plus cut c |
|--------------------------|------------------------------------|---|----------------------------------|--------------------------|--------------------------------------|
| Art. no. | 60593 | 60592 | 60842 | Art. no. | 60591 |
| Design | knitted cuff | knitted cuff | knitted cuff | Design | back of the hand partially coated, |
| Standard | EN 388 (3131X), EN 511 (010) | EN 388 (3131X), EN 511 (010) | EN 388 (224 2 C), EN 511 (12X), | | knitted cuff |
| | | | EN 407 (X2XXXX) | Standard | EN 388 (3X42C), EN 511 (02 X) |
| Material | acrylic and new wool mix (lining), | acrylic and new wool mix (lining), | acrylic (inner), nylon (outer) | Material | two-layer design: acrylic (inside), |
| | polyamide and elastane (outer) | polyamide and elastane (outer) | palm and whole | | glass/polyamide (outside) |
| Coating | palm and fingertips with | palm and 3/4 of the back of the | back of hand with | Coating | palm and fingertips with polymer |
| | cold-flexible polymer coating | hand with cold-flexible polymer coating | natural latex coating, | | coating that is flexible in the cold |
| Suitable for | dry and slightly | dry and slightly | 3/4 grip coating | Suitable for | dry and slightly damp working |
| | damp working conditions | damp working conditions | for wet, oily working conditions | | conditions |
| Colour | black, black | black, black | red, black | Colour | lime, black |
| Sizes | 7 to 11 | 7 to 11 | 7 to 11 | Sizes | 7 to 11 |
| Order quantity multiples | 10 PR | 10 PR | 10 PR | Order quantity multiples | 10 PR |
| | | | | | |







Πħ

Mechanical Risks

Area of application: Working on live parts



- · due to the anatomical shape the glove offers high dexterity
- low temperatures • arc flash protection class 1 EN 61482-1-2 (box test)
- exceptional dexterity right to the fingertips
- very good protection against thermal discharge
- thermal protection • certified according to OEKO-TEX® Standard 100 (S02-0648 HOHEN-STEIN HTTI)

| | uvex power protect V1000 |
|--------------|---|
| Art. no. | 60840 |
| Design | 41 cm straight cuff |
| Standard | EN 60903 (Class 0/RC), EN 61482-1-2 (Class 1) |
| Material | no lining |
| Coating | natural latex, 1.6 mm |
| Suitable for | good resistance to oils, acids and ozone |
| Colour | red |
| Sizes | 7 to 11 |
| Order unit | PR |
| | |

| | uvex arc protect g1 |
|--------------------------|--|
| Art. no. | 60838 |
| Design | 27 cm cuff |
| Standard | 388:2016 (1 X 2 1 X), 407 (4 1 1 1 X X), 61482-1-2 (Class 1) |
| Material | modacryl, cotton, antistatic |
| Coating | none |
| Suitable for | for dry areas of application |
| Colour | anthracite |
| Sizes | 7 to 11 |
| Order quantity multiples | 10 PR |








Mechanical Risks

Cut protection at a glance

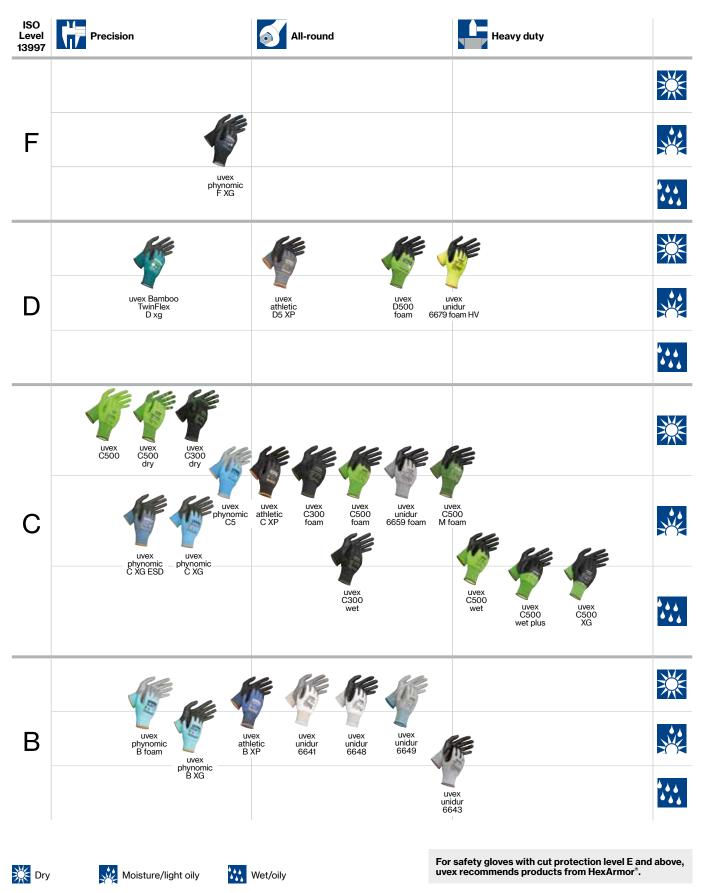



Bamboo TwinFlex® technology

High-tech for greater comfort when wearing the cut protection glove



Silky-soft feel and high moisture absorption thanks to bamboo fibre

The only cut protection gloves with natural bamboo fibre: uvex cut protection gloves based on the latest generation of patented uvex Bamboo TwinFlex® technology set new standards in protection, comfort, flexibility, dexterity and economy. The tailor-made cut-protection comfort class helps increase wearer acceptance – particularly when carrying out demanding activities – as the unique combination of silky-soft bamboo fibre and high-tech protective fibres ensures a high level of wearer comfort and good climate characteristics while also providing effective protection. After all, a safety glove can only help to prevent accidents if the user actually wears it.


Technology

Patented Bamboo TwinFlex® comfort

Silky-soft, comfortable material on the inside of the bamboo-viscose glove ensures very high wearer comfort against the skin. The bamboo fibre not only feels incredibly good on the skin, it also has a very high and quick moisture absorption to keep your skin comfortable and dry while working.

Patented Bamboo TwinFlex® protection

Cut-resistant glass fibres and abrasion-resistant polyamide guarantee optimum mechanical protection. The use of steel fibres in combination with HPPE and polyamide increases the cut protection even to level D.

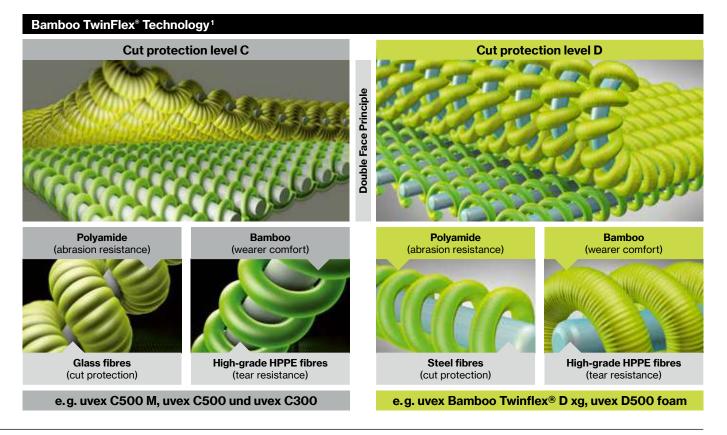

¹ Bamboo TwinFlex* technology is a registered brand of UVEX SAFETY Gloves GmbH & Co. KG., Germany.

Bamboo TwinFlex[®] technology High-tech for greater comfort when wearing the cut protection glove

First-class climate control

uvex climazone - measurably enhanced comfort

- reduced sweating
- high breathability
- · significantly greater moisture absorption compared to other types of fibres

Wearer comfort and an improved microclimate are the ultimate benchmarks in safety gloves. This is why the uvex climazone climate-management system in hand protection is being continuously developed together with market-leading partners and renowned testing and research institutes.



clima zone



Noticeably SUPERIOR in

- 3 Cost-effectiveness (long-lasting)
- 4 Protection, touchscreen
- 5 Quality, sustainability

sustainable materials:

- bamboo comfort fibre
- Polyamide-Recyclate

protecting planet

Bamboo TwinFlex® D xg The latest generation of cut protection gloves – Cut Level D





Comfortable: Silky-soft bamboo fibre



Healthy: tested for skin compatibility



Long-lasting: uvex protexxion zone



Additional feature: Can be used with touchscreens



Local: Made in Germany

uvex Bamboo TwinFlex® D xg

- the patented Bamboo TwinFlex yarn technology ensures fast absorption and high retention of moisture as well as a silky-soft feel against the skin
- uses sustainable raw materials: Bamboo fibre, recycled polyamide
- high level of sensitivity
- adaptive fit: adapts precisely to fit the shape of the hand within a few minutes of wearing
- particularly light, thin and flexible with high cut protection due to the use of the finest steel (Cut Level D)
- touchscreen capability means there is no need to remove the glove

- heat protection: Protection against contact heat up to 100°C
- long service life thanks to uvex protexxion zone and premium Xtra-Grip coating
 uvex protexxion zone with smooth material
- surface ensures that work processes run smoothly
- dermatologically tested, free from allergenic accelerators
- certified according to OEKO-TEX® Standard 100 (S02-0648 HOHENSTEIN HTTI)

| | uvex Bamboo TwinFlex® D xg |
|--------------------------|--|
| Art. no. | 60090 |
| Design | knitted cuff |
| Standard | EN 388 (4X41D), EN 407 (X1XXXX) |
| Material | bamboo viscose, HPPE, steel, polyamide, elastane |
| Coating | aqua-polymer xtra grip foam coating |
| Suitable for | dry and damp, oily areas |
| Colour | green, black |
| Sizes | 6 to 12 |
| Order quantity multiples | 10 PR |
| | |



Mechanical Risks Area of application: cut protection



60604



EN 407:2020

555

X1XXXX

88:2016

≞

4 X 4 2 C



uvex D500 foam

- cut protection gloves with excellent wearer comfort, well suited for all-round activities
- high abrasion resistance thanks to the innovative Soft-Grip-Coating
- very good grip in slighty damp enviroments
- very high uvex cut protection with Bamboo Twin Flex® technology
- very good tactile feel • perfect fit with 3D Ergo man mold
- technology
- certified according to OEKO-TEX® Standard 100 (S02-0648 HOHEN-STEIN HTTI)

uvex C500 M foam

- cut protection gloves with excellent wearer comfort, well suited for all-round activities
- outstanding mechanical abrasion resistance thanks to the innovative SoftGrip coating
- very good grip in dry and slightly damp environments
- very high level of cut protection with patented Bamboo TwinFlex® technology
- suitable for contact heat up to +100°C, in line with EN 407

MADE IN GERMANY

- partially reinforced thumb joints · very good tactile feel, high level of
- flexibility • perfect fit with 3D Ergo man
- mould technology
- silicone-free according to imprint test
- certified according to OEKO-TEX® Standard 100 (S02-0648 HOHEN-STEIN HTTI)

| | uvex D500 foam | |
|--------------------------|--|----|
| Art. no. | 60604 | A |
| Design | knitted cuff | D |
| Standard | EN 388 (4 X 4 2 D) | S |
| Material | bamboo-rayon, Dyneema® Diamond, steel, polyamide | Μ |
| Coating | palm and fingertips with HPE SoftGrip foam coating | C |
| Suitable for | dry areas and slightly damp areas | S |
| Colour | lime, anthracite | C |
| Sizes | 7 to 11 | Si |
| Order quantity multiples | 10 PR | 0 |
| | | |

| | uvex C500 M foam |
|--------------------------|--|
| Art. no. | 60498 |
| Design | crouch zone reinforcement, knitted cuff |
| Standard | EN 388 (4 X 4 2 C), EN 407 (X 1 X X X X) |
| Material | bamboo-rayon, HPPE, glass, polyamide |
| Coating | palm and fingertips with HPE SoftGrip foam coating |
| Suitable for | for dry and slightly oily/damp areas |
| Colour | lime, black, anthracite |
| Sizes | 7 to 11 |
| Order quantity multiples | 10 PR |
| | |







Mechanical Risks Area of application: cut protection



uvex C500

- cut protection glove or forearm protection (uvex C500 sleeve)
- with excellent wearer comfort, well suited for all-round activities • outstanding mechanical abrasion resistance thanks to the innovative
- Soft Grip coating (uvex C500 wet plus and uvex C500 XG) • very good grip in dry (all models), slightly damp/wet (uvex C500 wet
- plus) and oily (uvex C500 XG) environments • very high level of cut protection with patented uvex Bamboo TwinFlex® technology
- highly flexible
- very good tactile feel
- perfect fit with 3D Ergo technology
- silicone-free according to imprint test
- certified according to OEKO-TEX® Standard 100 (S02-0648 HOHENSTEIN HTTI)

| | uvex C500 sleeve | | uvex C500 | uvex C500 wet plus | uvex C500 XG |
|---------------------------|-----------------------------|------------------|----------------------------|--|---------------------------------|
| Art. no. | 60491-07 | 60491-10 | 60497 | 60496 | 60600 |
| Design | underarm protection with ve | elcro fastening, | knitted cuff | knitted cuff | knitted cuff |
| | 34 cm (M), 40 cm (L) | | | | |
| Standard | EN 388 (2 X 4 X C) | | EN 388 (1 X 4 X C) | EN 388 (4 X 4 2 C), EN 407 (X 1 X X X X) | EN 388 (4 X 4 2 C) |
| Material | bamboo rayon, HPPE, glass | i, | bamboo rayon, HPPE, glass, | bamboo rayon, HPPE, glass, | bamboo rayon, HPPE, glass, |
| | polyamide | | polyamide | polyamide | polyamide |
| Coating | none | | none | palm and 3/4 of the back of the hand | palm and whole back of the hand |
| | | | | with high performance elastomer | with HPE Xtra-Grip coating |
| | | | | (HPE) coating | |
| Suitable for | dry areas of application | | dry areas of application | damp, oily or greasy areas | damp, wet, oily or greasy |
| | | | | of application | areas of application |
| Colour | lime | | lime | lime, anthracite | lime, anthracite |
| Sizes | Μ | L | 7 to 11 | 7 to 11 | 7 to 11 |
| Order quantity multiples/ | PC | PC | 10 PR | 10 PR | 10 PR |
| Order unit | | | | | |
| | | | | | |
| | | | | | |







Mechanical Risks Area of application: cut protection



uvex C500

- cut protection safety gloves with outstanding wearer comfort
- outstanding mechanical abrasion resistance thanks to the innovative SoftGrip coating (uvex C500 foam and uvex C500 wet)
- very good grip in dry (all models), slightly damp (uvex C500 foam) and wet (uvex C500 wet) environments
- very high level of cut protection with patented uvex Bamboo TwinFlex[®] technology
- in line with EN 407, the model is suitable for contact heat up to +100 $^\circ C$ (uvex C500 foam and C500 sleeve)
- highly flexible
- very good tactile feel
- perfect fit with 3D Ergo technology
- silicone-free according to imprint test
- certified according to OEKO-TEX® Standard 100 (S02-0648 HOHENSTEIN HTTI)

| | uvex C500 dry | uvex C500 foam | uvex C500 wet |
|--------------------------|---------------------------------------|--|---|
| Art. no. | 60499 | 60494 | 60492 |
| Design | knitted cuff | knitted cuff | knitted cuff |
| Standard | EN 388 (X X 4 X C) | EN 388 (4 X 4 2 C), EN 407 (X 1 X X X X) | EN 388 (4 X 4 2 C), EN 407 (X 1 X X X X) |
| Material | bamboo rayon, HPPE, glass, polyamide | bamboo rayon, HPPE, glass, polyamide | bamboo rayon, HPPE, glass, polyamide |
| Coating | palm and fingers with | palm and fingertips with | palm and fingertips with |
| | high performace vinyl (HPV) grip dots | HPE SoftGrip foam coating | high performance elastomer (HPE) coating |
| Suitable for | dry areas of application | dry areas of application | damp, oily or greasy areas of application |
| Colour | lime, anthracite | lime, anthracite | lime, anthracite |
| Sizes | 7 to 11 | 7 to 11 | 7 to 11 |
| Order quantity multiples | s 10 PR | 10 PR | 10 PR |
| | | | |








Mechanical Risks Area of application: cut protection



uvex C300

- cut protection glove with excellent wearer comfort
- outstanding mechanical abrasion resistance thanks to the innovative SoftGrip coating (uvex C300 foam and uvex C300 wet)
- very good grip in dry (all models), slightly damp (uvex C300 foam) and wet (uvex C300 wet) environments
- good cut protection with patented uvex Bamboo TwinFlex[®] technology
- highly flexible
- very good tactile feel
- perfect fit with 3D Ergo technology
- silicone-free according to imprint test
- certified according to OEKO-TEX® Standard 100 (S02-0648 HOHENSTEIN HTTI)

| | uvex C300 dry |
|--------------------------|--|
| Art. no. | 60549 |
| Design | knitted cuff |
| Standard | EN 388 (X X 4 X C) |
| Material | bamboo rayon, HPPE, glass, polyamide |
| Coating | palm and fingers with |
| | high performance vinyl (HPV) grip dots |
| Suitable for | dry areas of application |
| Colour | anthracite |
| Sizes | 7 to 11 |
| Order quantity multiples | 10 PR |
| | |



uvex C300 wet 60542 knitted cuff EN 388 (4 X 4 2 C) bamboo rayon, HPPE, glass, polyamide palm and fingertips with high performance elastomer (HPE) coating damp, oily or greasy areas of application anthracite 7 to 11 10 PR







uvex phynomic Perfection in 3 dimensions

- 1. Outstanding health protection: certified according to proDERM and uvex harmful substances standards 2. Sustainability:
- CO₂-neutral production in Lueneburg 3. Extreme durability reduces costs and waste

Choose the ideal phynomic cut protection glove for your application:

Additional functions such as Xtra-Grip for oily areas, touchscreen and ESD compatibility and suitability for the food industry enable these products to be used in a variety of special application areas. uvex phynomic cut protection gloves are available with cut protection levels B to F. The uvex phynomic C XG and uvex phynomic F XG are available with

additional protection in the thumb crotch as an option: The uvex protexxion zone further increases the service life.



Unique uvex XG coating with excellent grip in oily conditions





uvex phynomic cut protection products are now also available with our well-known and popular XG coating.

This Xtra-Grip coating is designed for excellent grip in oily conditions and for increased grip during mechanical activities in slightly damp and oily applications.

High cut protection, with high sensitivity – now with cut protection level F.



uvex phynomic F XG

- sensitive glove with very high cut protection level (Cut F) and excellent grip in oily conditions, for mechanical activities
- outstanding mechanical abrasion resistance
- thanks to the Aqua-Polymer-Xtra-Grip coating
- excellent grip in oily, slightly damp, and dry areas
- heat protection up to 100°C
- touchscreen compatibility for use with almost all screens, tablets and mobile phones
- high level of breathability thanks to the open-pored foam coating
- excellent tactile feel when assembling (oily) parts
- free from accelerators for health protection and skin compatibility dermatologically approved (proDERM®), highly suitable for allergy sufferers
- certified according to OEKO-TEX® Standard 100 (S02-0648 HOHENSTEIN HTTI)

| | uvex phynomic F XG |
|--------------------------|--|
| Art. no. | 60068 |
| Design | knitted cuff |
| Standard | EN 388 (4 X 4 3 F) |
| Material | polyamide, elastane, HPPE, glass, steel |
| Coating | aqua-polymer foam coating on palm and fingertips |
| | Xtra-Grip foam coating |
| Suitable for | for damp and oily areas |
| Colour | black, black |
| Sizes | 6 to 12 |
| Order quantity multiples | 10 PR |



Mechanical Risks

Area of application: cut protection



uvex phynomic B foam


- · sensitive cut protection safety glove for mechanical activities
- suitable for use in the food industry
- very good mechanical abrasion resistance thanks to the damp-resistant aqua-polymer foam coating
- · good grip in dry and slightly damp areas
- good cut protection and high tear resistance
- highly breathable coating
- outstanding tactile feel when assembling parts
- touchscreen compatibility for use with almost all screens, tablets and mobile phones
- very high level of breathability thanks to the especially open-pored foam coating
- free from accelerators for health protection and skin compatibility dermatologically approved (proDERM®), highly suitable for allergy sufferers
- certified according to OEKO-TEX® Standard 100 (S02-0648 HOHENSTEIN HTTI)

uvex phynomic B XG

- sensitive cut protection glove, with excellent grip in oily conditions, for mechanical activities
- outstanding mechanical abrasion resistance thanks to the aqua-polymer XtraGrip coating
- excellent grip in oily, slightly damp, and dry areas
- touchscreen compatibility for use with almost all screens, tablets and mobile phones
- high level of breathability thanks to the open-pored foam coating
- excellent tactile feel when assembling (oily) parts
- free from accelerators for health protection and skin compatibility dermatologically approved (proDERM®), highly suitable for allergy sufferers
- · good cut protection and high tear resistance
- certified according to OEKO-TEX® Standard 100 (S02-0648 HOHENSTEIN HTTI)

| | uvex phynomic B foam |
|--------------------------|--|
| Art. no. | 60080 |
| Design | knitted cuff |
| Standard | EN 388 (4 X 4 2 B) |
| Material | polyamide, elastane, HPPE, glass, carbon |
| Coating | aqua-polymer foam coating on palm and fingertips |
| | Xtra-Grip foam coating |
| Suitable for | for damp and oily areas |
| Colour | sky blue, grey |
| Sizes | 6 to 12 |
| Order quantity multiples | 10 PR |
| | |



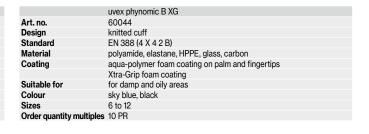





Mechanical Risks Area of application: cut protection





protecting planet by maximum reduction of pollutants //

With the uvex phynomic C5 cut protection glove, we protect not only your hands, but also all of our resources.

The uvex phynomic C5 is manufactured with bio-based

HPPE (Dyneema®). The high-performance fibres provide cut protection and increase the tear resistance of the glove. Usually, HPPE is based on crude oil, a finite raw material.



Bio-based HPPE is derived from oils produced

during the pulp production process. The underlying raw material for pulp products, such as various papers, is wood. This means that the raw material that is used in your safety glove is renewable and therefore more sustainable.

In the uvex phynomic C5, bio-based HPPE accounts for least 45% of the weight of the glove.



uvex phynomic C5

- all-round cut protection safety glove for mechanical activities
- suitable for use in the food industry
- very good mechanical abrasion resistance thanks to the moistureresistant aqua-polymer foam coating
- very good grip in dry and slightly damp areas
- very good cut protection (level C) and high tear resistance
- highly breathable coating
- outstanding tactile feel when assembling parts
- sustainable: with 45% bio-based HPPE (Dyneema®)
- very high level of breathability thanks to the especially open-pored foam coating
- free from accelerators for health protection and skin compatibility dermatologically approved (proDERM®), highly suitable for allergy sufferers
- certified according to OEKO-TEX® Standard 100 (S02-0648 HOHENSTEIN HTTI)

| | uvex phynomic C5 |
|--------------------------|--|
| Art. no. | 60081 |
| Design | knitted cuff |
| Standard | EN 388 (4 X 4 2 C) |
| Material | Dyneema® Diamond Technology (bio-based), polyamide, elastane |
| Coating | palm and fingertips with aqua-polymer foam coating |
| Suitable for | dry areas and slightly damp areas |
| Colour | blue, grey |
| Sizes | 6 to 12 |
| Order quantity multiples | 10 PR |



Mechanical Risks

Area of application: cut protection



uvex phynomic C XG

- · sensitive cut protection safety glove for mechanical activities
- · suitable for use in the food industry
- very good mechanical abrasion resistance thanks to the damp-resistant aqua-polymer foam coating
- good grip in dry and slightly damp areas
- good cut protection and high tear resistance
- high level of breathability thanks to the open-pored foam coating
- outstanding tactile feel when assembling parts
- free from accelerators for health protection and skin compatibility, dermatologically approved (proDERM®), highly suitable for allergy sufferers
- certified according to OEKO-TEX® Standard 100 (S02-0648 HOHENSTEIN HTTI)

uvex phynomic C XG ESD

- sensitive cut protection glove, with excellent grip in oily conditions, for mechanical activities
- ESD function (DIN EN 16350:2014)
- outstanding mechanical abrasion resistance thanks to the aqua-polymer XtraGrip coating
- excellent grip in oily, slightly damp, and dry areas
- touchscreen compatibility for use with almost all screens, tablets and mobile phones
- free from accelerators for health protection and skin compatibility dermatologically approved (proDERM®), highly suitable for allergy sufferers
- certified according to DEKO-TEX® Standard 100
 (S02-0648 HOHENSTEIN HTTI)

| | uvex phynomic C XG |
|--------------------------|--|
| Art. no. | 60047 |
| Design | knitted cuff |
| Standard | EN 388 (4 X 4 2 C) |
| Material | polyamide, elastane, HPPE, glass, carbon |
| Coating | aqua-polymer foam coating on palm and fingertips |
| | Xtra-Grip foam coating |
| Suitable for | damp and oily areas |
| Colour | blue, black |
| Sizes | 6 to 12 |
| Order quantity multiples | 10 PR |
| | |



| | uvex phynomic C XG ESD |
|--------------------------|--|
| Art. no. | 60048 |
| Design | knitted cuff |
| Standard | EN 388 (3 X 4 2 C), EN 16350 |
| Material | polyamide, elastane, HPPE, glass, carbon |
| Coating | aqua-polymer foam coating on palm and fingertips |
| | Xtra-Grip foam coating |
| Suitable for | damp and oily areas |
| Colour | blue, black |
| Sizes | 6 to 12 |
| Order quantity multiples | 10 PR |
| | |



Mechanical Risks Area of application: cut protection





60036





uvex athletic B XP

- good cut protection (Level B)
 good grip on dry and (slightly)
 oily/damp workpieces
- very good mechanical abrasion resistance
- reinforced thumb joints
- bio-based HPPE
- high flexibility, very good fit
- very good tactile feel
- suitable for industrial washing
 certified according to OEKO-TEX®
 Standard 100 (S02-0648 HOHEN STEIN HTTI)

Matt, breathable and durable micro-foam coating

The uvex athletic series is known for its excellent wearer comfort.

These gloves effectively combine thin and lightweight materials with a special matt, finely textured and breathable micro-foam coating and a slim fit.

The slim fit make the glove feel like a second skin. Together with the elasticated liner, which contains elastane, the product provides outstanding wearer comfort, enabling fatigue-free work throughout the day.

| | uvex athletic B XP |
|--------------------------|---|
| Art. no. | 60036 |
| Design | knitted cuff |
| Standard | EN 388 (4 X 4 3 B) |
| Material | bio-based HPPE, glas, polyamide, elastane |
| Coating | palm and fingertips coated, |
| | micro NBR foam coating |
| Suitable for | dry and slightly damp/ |
| | oily working conditions |
| Colour | grey, anthracite |
| Sizes | 6 to 12 |
| Order quantity multiples | 10 PR |
| | |



Mechanical Risks Area of application: cut protection





uvex athletic C XP

- high cut protection (Level C) • good grip on dry and (slightly)
- oily/damp workpieces very good mechanical abrasion
- resistance • reinforced thumb joints

• high flexibility, very good fit

STEIN HTTI)

very good tactile feel
suitable for industrial washing

certified according to OEKO-TEX®

Standard 100 (S02-0648 HOHEN-

uvex athletic D5 XP

- very high cut protection (Level D) good grip on dry and (slightly) oily/damp workpieces
- very good mechanical abrasion
- resistance • reinforced thumb joints



EN 388:2016 ₫

4 X 4 3 D

- high flexibility, very good fit
 - very good tactile feel
 - suitable for industrial washing certified according to OEKO-TEX® Standard 100 (S02-0648 HOHEN-STEIN HTTI)

| | uvex athletic C XP |
|--------------------------|---------------------------------|
| Art. no. | 60037 |
| Design | knitted cuff |
| Standard | EN 388 (4 X 4 3 C) |
| Material | HPPE, glas, polyamide, elastane |
| Coating | palm and fingertips coated, |
| | micro NBR foam coating |
| Suitable for | dry and slightly damp/ |
| | oily working conditions |
| Colour | grey, anthracite |
| Sizes | 6 to 12 |
| Order quantity multiples | 10 PR |
| | |









Mechanical Risks Area of application: cut protection





uvex unidur 6641

- PU cut protection safety glove with highquality Special Cut Performance PE fibre
- outstanding mechanical abrasion resistance thanks to a good combination of fibres and coating
- · good grip in dry and slightly damp areas · good cut protection due to high-quality
- Special Cut Performance PE fibre very good tactile feel
- highly flexible
- outstanding comfort

| | uvex unidur 6641 |
|--------------------------|-----------------------------------|
| Art. no. | 60210 |
| Design | knitted cuff |
| Standard | EN 388 (4 3 4 3 B) |
| Material | HPPE, elastane |
| Coating | palm and fingertips |
| | with polyurethane coating |
| Suitable for | dry areas and slightly damp areas |
| Colour | white, grey |
| Sizes | 6 to 11 |
| Order quantity multiples | 10 PR |
| | |





EN 388:2016

₽ ₽

• PU cut protection glove with HPPE fibres

EN 388:2016

4342B

• outstanding mechanical abrasion resistance

- · good grip in damp and oily areas
- good cut protection with HPPE fibres
- good tactile feel
- highly flexible

Art. no. Design

Standard

Material

Coating Suitable for

Colour

Sizes Order quantity multiples

good wearer comfort

uvex unidur 6643

- · NBR cut protection safety glove with highquality Special Cut Performance PE fibre
- outstanding mechanical abrasion resistance with NBR coating

EN 388:201

<u>ل</u>

- · good grip in damp and oily areas · good cut protection due to high-quality
- Special Cut Performance PE fibre
- good tactile feel
- highly flexible
- good wearer comfort

| uvex unidur 6648 uvex unidur 6649 | | | | | uvex unidur 6643 |
|-----------------------------------|----------------------------------|--------------------|--|--------------------------|--------------------------------------|
| | 60932 | 60516 | | Art. no. | 60314 |
| | knitted cuff | knitted cuff | | Design | knitted cuff |
| | EN 388 (4 3 4 2 B) | | | Standard | EN 388 (4 3 4 4 B) |
| | HPPE, polyamide (6649), elastane | | | Material | HPPE, polyamide, elastane |
| palm and fingertips with | | | | Coating | palm and fingertips with NBR coating |
| polyurethane coating | | | | Suitable for | damp, oily or greasy |
| dry areas and slightly damp areas | | | | | areas of application |
| | white, black | mottled blue, grey | | Colour | mottled grey, black |
| | 6 to 11 | 7 to 11 | | Sizes | 7 to 10 |
| | 10 PAA | 10 PAA | | Order quantity multiples | 10 PR |
| | | | | | |

B



Mechanical Risks

Area of application: cut protection



uvex unidur 6659 foam

- cut protection glove with NBR foam coating and HPPE/glass fibre
- outstanding mechanical abrasion resistance with NBR coating
- · good grip in dry and slightly damp areas • high level of cut protection with HPPE and
- glass fibre combination
- very good tactile feel
- highly flexible
- outstanding comfort

uvex unidur sleeve C · uvex unidur sleeve C TL


- very high cut protection (Cut Level C)
- very thin and flexible
- high comfort
- velcro fastening for a custom fit
- 60974: thumb loop (TL) for added safety (protection against cuts on the wrist)
- certified according to OEKO-TEX® Standard 100 (S02-0648 HOHENSTEIN HTTI)

uvex unidur 6679 foam HV

- · cut protection glove with NBR foam coating
- · coating has an outstanding abrasion resistance and reinforced thumb crotch enables a
- long service life
- · good grip in dry and slightly damp areas
- very good cutting protection
- very good tactile feel
- highly flexible
- high visibility due to high-vis colouring

| | uvex unidur 6659 foam |
|--------------------------|-----------------------------------|
| Art. no. | 60938 |
| Design | knitted cuff |
| Standard | EN 388 (4 X 4 4 C) |
| Material | HPPE, glass, polyamide |
| Coating | palm and fingertips with |
| | nitrile foam coating |
| Suitable for | dry areas and slightly damp areas |
| Colour | mottled grey, black |
| Sizes | 6 to 11 |
| Order quantity multiples | 10 PR |
| | |














uvex consulting and product expertise from a single source

The expert by your side:

The **uvex glove expert** gives you access to our innovative consultation tool. The intuitive operation and modern graphical user interface makes the selection and documentation

of suitable safety gloves even easier. The perfect chemical protection glove or gloves plan for your application is just a few clicks away.

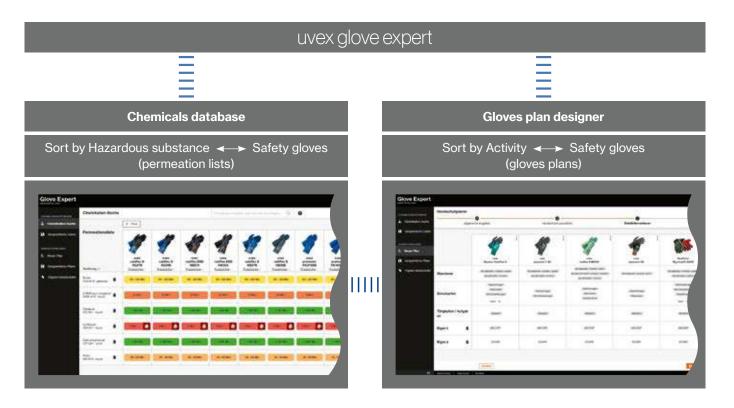

Register for free and get access to the following premium features:



https://www.uvex-safety.com/ en/glove-expert/


- full access to measurement results for over 50,000 substances
- creation and management of your own permeation lists
- creation and management of your own glove plans

Chemical Risks Selecting the right hand protection

Chemical protection gloves must be used in a wide variety of areas of application while still enabling wearers to complete tasks effectively. This is why uvex very pays close attention to the requirements placed on the product in the possible areas of application when developing new chemical protection gloves. The matrix shown will help you choose the most suitable material for chemical protection gloves:

| chemical protection gloves. | | | | | |
|--|--|-----------------------------|------------------------|--|---------------------------------------|
| Handling chemicals | Example industries | Potential contact/splash | Irregular contact | Permanent contact | Explosion-prone area |
| aliphatic (grease, mineral oil) | Cleaning agents petroleum industry Adhesives Paint production | Nitrile | Nitrile | Nitrile | uvex rubiflex ESD |
| Polar | Cleaner/universal thinner Loctite/industrial adhesive Coating industry Printing industry Raw materials in the chemical industry Intermediates in the chemical industry | Nitrile Chloroprene | Nitrile Chloroprene | Butyl | uvex profabutyl |
| polar (alcohols) | Disinfectant, raw materials in the chemical industry | Nitrile Chloroprene | Nitrile Chloroprene | Nitrile Chloroprene Butyl | uvex rubiflex ESD, uvex profabutyl |
| aromatic, halogenated | Solvents for paints, resins, oils etc. Adhesives Printing and coating industry | Nitrile | Nitrile | Viton | |
| aqueous solutions, diluted acids/ bases | water treatment (sewage plant) commercial cleaning | Nitrile Chloroprene | Nitrile Chloroprene | Nitrile Chloroprene Chloroprene/nitrile | uvex rubiflex ESD |
| concentrated acids/bases | electroplating surface treatment of aluminium (anodised), steel, raw materials in the chemical industry, fertiliser production, food industry/raw materials in the polymer industry | Nitrile Chloroprene | Nitrile Chloroprene | Nitrile Chloroprene Chloroprene/nitrile Butyl | uvex profabutyl |

uvex rubiflex S – Put them on and feel great.

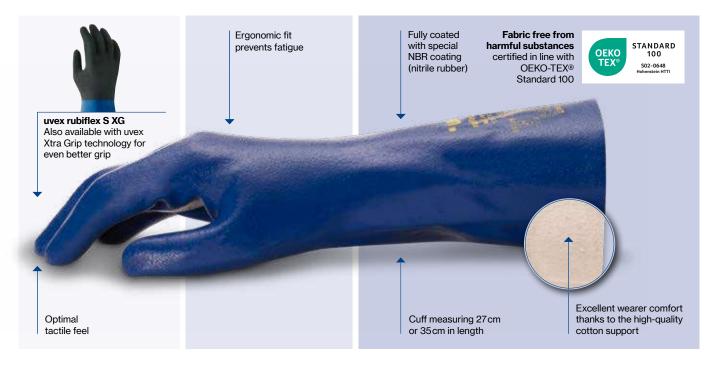

Precise working

The uvex rubiflex S fits perfectly on the hand. Its ergonomic design guarantees an optimal fit.

No fatigue

The ergonomic shape of the uvex rubiflex S saves the wearer effort and increases wearer acceptance.

Active protection for the skin

The cotton lining absorbs four times more moisture than synthetic fibres (polyamide/polyester), ensuring that the wearer's skin stays dry and the gloves feel comfortable and natural to wear.

The uvex rubiflex S series offers a unique combination of:

Comfort


Every single model in the uvex rubiflex range stands for ergonomic fit and excellent wearer comfort thanks to the high level of moisture absorption offered by the cotton lining, which helps to prevent moisture build-up inside the glove.

Safety

The supported safety glove provides effective protection when working with substances such as greases, mineral oils and a wide range of chemicals. The uvex rubiflex S XG with innovative Xtra Grip coating ensures excellent grip. In this way, tools and machines can be operated safely at all times.

Sustainability

The rubiflex safety gloves are manufactured at the uvex site in Lüneburg – producing high-quality occupational health and safety "Made in Germany".

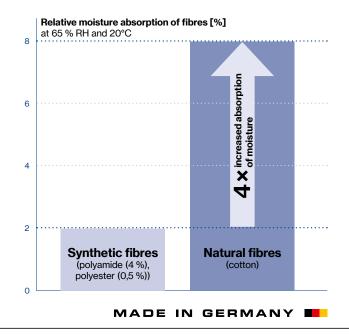

Chemical Risks Safety gloves with cotton support: NBR coating



- lightweight, stockinette NBR chemical protection glove with optimal grip properties
- very good mechanical abrasion resistance and good lifecycle thanks to multi-layered structure
- · outstanding grip in wet and oily areas thanks to uvex Xtra Grip technology
- good resistance to grease, mineral oils and many chemicals
- very good tactile feel
- ergonomic fit
- outstanding wearer comfort due to the high-quality cotton
- interlock supporting material • extremely high flexibility
- certified according to OEKO-TE
- Standard 100 (S02-0648 HOHEN-STEIN HTTI)

| | good mechanical abrasion |
|-----|---|
| | resistance thanks to the NBR |
| | coating |
| X® | good grip in damp and wet are |
| FNL | • and resistance to arease |

and wet areas good resistance to grease, mineral oils and many chemicals

chemical protection glove suited

to handling a variety of chemicals

Order quantity multiples

10 PR

- outstanding wearer comfort due to the high-quality cotton interlock supporting material
- · extremely high flexibility

10 PR

Standard 100 (S02-0648 HOHEN-STEIN HTTI)

| | uvex rubiflex S XG27B | uvex rubiflex S XG35B |
|--------------------------|-----------------------------------|------------------------------------|
| Art. no. | 60560 | 60557 |
| Design | gauntlet, approx. 27 cm | gauntlet, approx. 35 cm |
| Standard | EN 388 (3121X) | EN 388 (3 1 2 1 X), ISO 18889 (G2) |
| | EN ISO 374-1:2016/Type A (J K N O | P T), EN 407 (X 1 X X X X) |
| Material | cotton interlock | cotton interlock |
| Coating | fully coated with special NBR | fully coated with special NBR |
| | coating (nitrile rubber) and | coating (nitrile rubber) and |
| | XG Grip coating, approx. 0.40 mm | XG Grip coating, approx. 0.40 mm |
| Suitable for | very good resistance to grease, | very good resistance to grease, |
| | mineral oils and many chemicals | mineral oils and many chemicals |
| Colour | blue, black | blue, black |
| Sizes | 7 to 11 | 7 to 11 |
| Order quantity multiples | 10 PR | 10 PR |
| | | |



- outstanding tactile feel • ergonomic fit uvex rubiflex S NB35B uvex rubiflex S NB27B 60271 Art. no. 60224 gauntlet, approx. 35 cm EN 388 (2 1 1 1 X), ISO 18889 (G2) Design gauntlet, approx. 27 cm Standard EN 388 (2111X) EN ISO 374-1:2016/Type A (J K N O P T), EN 407 (X 1 X X X X) cotton interlock Material cotton interlock fully coated with special NBR Coating fully coated with special NBR coating (nitrile rubber), coating (nitrile rubber), approx. 0.40 mm approx. 0.40 mm Suitable for good resistance to grease, good resistance to grease, mineral oils and many chemicals mineral oils and many chemicals Colour blue blue Sizes 7 to 11 6 to 11
- certified according to OEKO-TEX®

| 255 | |
|-----|--|

Chemical Risks

Safety gloves with cotton support: NBR coating





uvex rubiflex S

- NBR chemical protection glove with reinforced cotton interlock supporting material
- good mechanical abrasion resistance thanks to the NBR coating
- · good resistance to many chemicals, acids, alkalis, mineral oils and solvents
- good heat insulation with reinforced supporting material

- good tactile feel ergonomic fit
- outstanding wearer comfort due to the high-quality cotton
- interlock supporting material
- highly flexible
- certified according to OEKO-TEX® Standard 100 (S02-0648 HOHEN-STEIN HTTI)
- resistance thanks to the NBR coating · good resistance to many

long NBR chemical protection

glove with reinforced cotton

interlock supporting material

additional elastic collar at

good tactile feel

SSS

X1XXXX

- ergonomic fit
- outstanding wearer comfort due to the high-quality cotton interlock supporting material

MADE IN GERMANY

 certified according to OEKO-TEX® Standard 100 (S02-0648 HOHEN-STEIN HTTI)

- uvex rubiflex S NB27S NB35S NB40S 89646 98891 98902 Art. no. Design gauntlet, gauntlet, gauntlet, approx. 27 cm approx. 35 cm approx. 40 cm EN 388 (2 1 2 1 X), EN ISO 374-1:2016 / Type A (J K N O P T), EN 407 (X 1 X X X X) Standard Material cotton interlock, cotton interlock, cotton interlock, reinforced reinforced reinforced fully coated with NBR Coating fully coated with NBR fully coated with NBR special coating special coating special coating (nitrile rubber), (nitrile rubber), (nitrile rubber), approx. 0.50 mm approx. 0.50 mm approx. 0.50 mm Suitable for very good resistance to grease, mineral oils and many chemicals Colour green green green 8 to 11 8 to 11 8 to 11 Sizes Order quantity multiples 10 PR 10 PR 10 PR
- gauntlet end (NB60SZ/NB80SZ) good mechanical abrasion highly flexible chemicals, acids, alkalis, mineral oils and solvents

Ň

JKÕPT

uvex rubiflex S (long version)

| uvex rubiflex S | NB60S | NB80S | NB60SZ | NB80SZ |
|--------------------------|---------------------|--------------------|----------------------|-------------------|
| Art. no. | 89647 | 60190 | 89651 | 60191 |
| Design | gauntlet, | gauntlet, | elastic collar at | elastic collar at |
| | approx. 60 cm | approx. 80 cm | gauntlet end, | gauntlet end, |
| | | | approx. 60 cm | approx. 80 cm |
| Standard | EN 388 (2121X) | , EN ISO 374-1:20 | 16/Type B (J K O I | ΡT), |
| | EN 407 (X1XX) | (X) | | |
| Material | cotton interlock, | cotton interlock, | cotton interlock, | cotton interlock, |
| | reinforced | reinforced | reinforced | reinforced |
| Coating | fully coated with : | special NBR coatir | ng (nitrile rubber), | approx. 0.50 mm |
| Suitable for | very good resista | nce to grease, mir | neral oils and many | chemicals |
| Colour | green | green | green | green |
| Sizes | 9 to 11 | 9 to 11 | 8 to 11 | 9 to 11 |
| Order quantity multiples | 10 PR | 10 PR | 10 PR | 10 PR |
| | | | | |

₫


2121X

Chemical Risks

Area of application: cut protection



60536

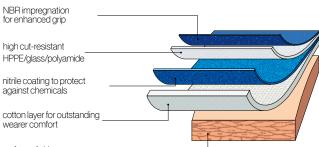

surface of skin



uvex protector chemical

- very robust safety glove with mul-ti-layer technology combining impermeability and optimal cut protection
- very high level of cut protection with the multi-layer design of the supporting material made from cotton, HPPE and glass

• good grip in damp, wet and oily areas

- uvex protector chemical also offers protection against chemicals good wearer comfort
- certified according to OEKO-TEX® Standard 100 (S02-0648 HOHEN-STEIN HTTI)

| | uvex protector chemical NK2725B | uvex protector chemical NK4025B | |
|--------------------------|--|---------------------------------|--|
| Art. no. | 60535 | 60536 | |
| Design | gauntlet, approx. 27 cm | gauntlet, approx. 40 cm | |
| Standard | EN 388 (4 X 4 4 C), | EN 388 (4 X 4 4 C), | |
| | EN ISO 374-1:2016/ | EN ISO 374-1:2016/ | |
| | Type A (J K N O P T) | Type A (J K N O P T) | |
| Material | sandwich liner: cotton interlock, HP | PE, glass, PA | |
| Coating | fully coated with special NBR coating (nitrile rubber) | | |
| Suitable for | good resistance to oil, grease and many chemicals | | |
| Colour | blue | blue | |
| Sizes | 9 to 10 | 9 to 10 | |
| Order quantity multiples | 10 PR | 10 PR | |

Chemical Risks

Safety gloves with cotton support: conductive NBR coating

The ideal solution for areas with explosive atmospheres

The introduction of the new standard EN 16350:2014 (Protective gloves – electrostatic properties) is the first standard to prescribe the electrostatic properties and testing procedure of safety gloves for work environments with risk of explosive atmospheres and fire.

- The testing conditions and minimum requirements in accordance with EN 16350:2014 are as follows:
- The contact resistance must be less than $1.0 \times 10^8 \Omega$ (R_V <1.0 × 10⁸ Ω).
- Contact resistance R_v was tested in accordance with EN 1149-2:1997.
- Test atmosphere: ambient temperature 23°C ±1°C, relative air humidity 25% ±5%.


uvex rubiflex ESD fulfils the requirements of the new norm EN 16350:2014.



Functional combination of liner and coating

conductive NBR coating

cotton support with carbon for high wearer comfort and excellent conductivity



surface of skin

ENISO 374-1:2016/Type A EN 388:2016 EN 407:2020 EN 16350:2014

uvex rubiflex ESD

- lightweight, stockinette and antistatic NBR chemical protection glove for applications in areas with explosion risks
- good mechanical abrasion resistance thanks to the NBR coating
- good grip in damp and wet areas
 good resistance to grease,
- mineral oils and many chemicals
- outstanding tactile feel
- ergonomic fit
- outstanding wearer comfort due to the high-quality cotton inter-
- lock/carbon supporting material

 extremely high flexibility
- certified according to OEKO-TEX® Standard 100 (S02-0648 HOHEN-STEIN HTTI)

| uvex rubiflex ESD | NB27A | NB35A |
|--------------------------|--------------------------------------|---------------------------------|
| Art. no. | 60880 | 60954 |
| Design | gauntlet, approx. 27 cm | gauntlet, approx. 35 cm |
| Standard | EN 388 (2111X), EN ISO 374-1:20 | 16 / Type A (J K N O P T), |
| | EN 16350, EN 407 (X 1 X X X X) | |
| Material | cotton interlock/carbon | cotton interlock/carbon |
| Coating | fully coated with special conductive | e NBR coating (nitrile rubber), |
| | approx. 0.40 mm | |
| Suitable for | good resistance to grease, mineral | oils and many chemicals |
| Colour | black | black |
| Sizes | 6 to 11 | 6 to 11 |
| Order quantity multiples | 10 PR | 10 PR |



Chemical Risks Unsupported safety gloves





uvex profabutyl

- chemical protection glove without stockinette made from butyl rubber
 good grip in damp and wet areas
- good resistance to polar bonds such as esters, ketones, aldehydes, amines and saturated saline solutions, plus acids and alkalis
- good fit
- highly flexible
- satisfies the requirements of DIN EN 16350:2014



uvex profaviton

- chemical protection gloves made from butyl rubber with $\mathsf{Viton}^{\$}$ outer layer
- good grip in damp and wet areas
- good resistance to aliphatic and aromatic hydrocarbons (e.g. hexane, benzene, toluene, xylene and others), halogenated hydrocarbons (e.g. trichloroethylene, perchloroethylene, dichloromethane and others) organic and inorganic acids (diluted to concentrated), as well as saturated saline solutions
- good fit
- highly flexible

| | uvex profabutyl B-05R | | uvex profaviton BV-06 |
|--------------|--|--------------|--|
| Art. no. | 60949 | Art. no. | 60957 |
| Design | gauntlet, rolled edge, approx. 35 cm | Design | gauntlet, rolled edge, approx. 35 cm |
| Standard | EN 388 (2 0 1 0 X), EN 374 (A B I K L N O T), EN 16350 | Standard | EN 388 (2 1 2 0 A), EN ISO 374-1:2016/Type A (A F K L M N) |
| Material | without stockinette | Material | without stockinette |
| Coating | seamlessly coated with bromobutyl (approx. 0.50 mm) | Coating | seamlessly coated with bromobutyl (approx. 0.40 mm) |
| Suitable for | good resistance to polar bonds acids and alkalis | | and Viton® outer layer (approx. 0.20 mm) |
| Colour | black | Suitable for | good resistance to aliphatic and aromatic hydrocarbons, |
| Sizes | 7 to 11 | | halogenated hydrocarbons |
| Order unit | PR | Colour | black |
| | | Sizes | 8 to 11 |
| | | Order unit | PR |

Chemical Risks

Safety gloves with bamboo-fiber/nylon support: NBR coating



| | uvex u-chem 3300 |
|--------------------------|------------------------------------|
| Art. no. | 60971 |
| Design | cuff, fully coated, approx. 32 cm |
| Standard | EN 388 (2121X), EN ISO 374-1:2016, |
| | Type A (J K L O P T) |
| Material | Bamboo-rayon/Nylon (seamless) |
| Coating | NBR (nitrile butadiene rubber), |
| | approx. 0.21 mm |
| Suitable for | good resistance to grease, |
| | mineral oils and many chemicals |
| Colour | blue |
| Sizes | 7 to 11 |
| Order quantity multiples | 10 PR |
| | |

| | uvex u-chem 3100 |
|--------------------------|---|
| Art. no. | 60968 |
| Design | cuff, fully coated, aproxx. 30 cm |
| Standard | EN 388 (4 1 2 1 X), EN ISO 374-1:2016 / |
| | Type A (A J K L M O) |
| Material | cotton (seamless) |
| Coating | NBR (nitrile butadiene rubber), |
| | approx. 0.50 mm |
| Suitable for | good resistance to grease, |
| | mineral oils and many chemicals |
| Colour | black |
| Sizes | 8 to 11 |
| Order quantity multiples | 10 PR |
| | |

| | uvex u-chem 3500 |
|--------------------------|--------------------------------------|
| Art. no. | 60188 |
| Design | cuff, fully coated, approx. 32cm |
| Standard | EN ISO 374-1:2016 / |
| | Typ A (A C J K L M N O P S T), |
| | EN ISO 374-5:2016 VIRUS, |
| | EN 388 (3121X), EN 407 (X1XXX) |
| Material | cotton (seamless) |
| Coating | fully coated with Chloroprene |
| | and NBR (nitrile butadiene rubber), |
| | approx. 0.40 mm |
| Suitable for | good resistance to acetone, |
| | cleaning agents, adhesives, solvents |
| Colour | orange |
| Sizes | 7 to 11 |
| Order quantity multiples | 10 PR |
| | |



Chemical Risks Unsupported safety gloves



uvex profastrong

- sensitive NBR chemical protec-tion glove with flocked cotton
- outstanding mechanical abrasion resistance
- good grip in damp and wet areas thanks to the Grip structure in the palm
- good resistance to many oils,
- grease, acids and alkalis
- good tactile feel
- good fit
- highly flexible

uvex profapren

- flexible chloroprene chemical protection glove with flocked cotton
- good grip in damp and wet areas thanks to the Grip structure in the palm
- good resistance to many chemicals and solvents
- · good tactile feel
- very good fithighly flexible

| | uvex profastrong NF33 |
|--------------------------|---|
| Art. no. | 60122 |
| Design | gauntlet, palm with grip structure, approx. 33 cm |
| Standard | EN 388 (4 1 0 1 X), EN ISO 374-1:2016/Type A (A J K L O T), |
| | EN ISO 374-5:2016 VIRUS |
| Material | flocked cotton |
| Coating | fully coated with NBR (nitrile rubber), approx. 0.38 mm |
| Suitable for | good resistance to oils, grease, acids and solvents |
| Colour | green |
| Sizes | 7 to 11 |
| Order quantity multiples | 12 PR |
| | |

| | uvex profapren CF33 |
|--------------------------|--|
| Art. no. | 60119 |
| Design | gauntlet, roughened palm, approx. 33 cm |
| Standard | EN 388 (3 1 3 1 X), EN ISO 374-1:2016/Type A (A K L M N O), |
| | EN ISO 374-5:2016 |
| Material | flocked cotton |
| Coating | fully coated with polychloroprene (latex inner), approx. 0.71 mm |
| Suitable for | good resistance to many chemicals |
| Colour | dark blue |
| Sizes | 7 to 10 |
| Order quantity multiples | 10 PR |
| | |



Chemical Risks

Disposable safety gloves

The uvex u-fit product range, provides high-quality disposable safety gloves, which guarantee a high level of safety and functionality.

uvex u-fit gloves ensures reliable wearer protection throughout industry, including the chemical, medical, food and light industry sectors enabling comfortable and precise work.

uvex disposable safety gloves are available in four different materials to cater for a wide range of application areas:

uvex u-fit lite uvex u-fit uvex u-fit ft uvex u-fit strong N2000

| | uvex u-fit lite | uvex u-fit | uvex u-fit ft | uvex u-fit strong N2000 |
|-----------------|--|--|--|--|
| Material | accelerator-free NBR (nitrile rubber) | NBR (nitrile rubber) | NBR (nitrile rubber) | NBR (nitrile rubber) |
| | wall thickness 0.06 mm | wall thickness 0.10 mm | wall thickness 0.10 mm | wall thickness 0.20 mm |
| Certification | EN ISO 374 | EN ISO 374 | EN ISO 374 | EN ISO 374 |
| | EN 455 | EN 455 | EN 455 | EN 455 |
| | handling foodstuffs | handling foodstuffs | handling foodstuffs | handling foodstuffs |
| Characteristics | high level of sensitivity | good mechanical abrasion resistance | good mechanical abrasion resistance | very good abrasion resistance |
| | hypo-allergenic | good chemical resistance | good chemical resistance | increased chemical resistance |
| Handling | reinforced rolled edge – easy to put on |





Please contact us if you require a copy of our complete resistance list.

Detailed information can also be found in the uvex glove expert online at https://www.uvex-safety.com/de/glove-expert/

| Area of application | uvex u-fit lite | uvex u-fit | uvex u-fit ft | uvex u-fit strong N2000 |
|--|--|--|--|--|
| Intended for medical examinations and to prevent infections between users and patients | + + | - | + + | - |
| Precision assembly work, dry/oily | + + | + | + | - |
| Assembly work, dry/oily | + | + | + | ++ |
| Product protection | ++ | ++ | ++ | + |
| Gentle cleaning | + | + | + | ++ |
| Inspection | ++ | ++ | ++ | + |
| Food handling | + | + | + | + |
| Chemicals | short-term work, in acc. with resistance list | short-term work, in acc. with resistance list | short-term work, in acc. with resistance list | in acc. with resistance list |
| Paint shop | as splash protection | as splash protection | as splash protection | full contact in acc. with resistance list |



Chemical Risks Disposable safety gloves

roughened fingertips, approx. 24 cm

without stockinette NBR (nitrile rubber), approx. 0.06 mm

highly resistant to grease and oil,

good resistance to chemicals,

EN ISO 374-1:2016/Type B (K P T),

EN 374-5:2016 VIRUS

uvex u-fit lite

60168





uvex

60166

60962

uvex u-fit lite

- nitrile examination and safety gloves single use (0.06 mm)
- non-sterile, can be used on both sides, powder-free
- free from natural latex
- · free from allergenic accelerators.
- · good grip with the roughened fingertips
- · LABS-conformity in accordance with
- VDMA 24364 A2-L
- accelerator-free





Art. no.

Design

Standard

Material

Coating

Suitable for

uvex u-fit

- nitrile single-use safety gloves (0.10 mm) • non-sterile, can be used on both sides,
- powder-free
- free from natural latex
- good grip with the roughened surface · LABS-conformity in accordance with
- VDMA 24364 A2-L



uvex u-fit ft

- nitrile single-use examination and safety gloves (0.10 mm)
- non-sterile, can be used on both sides,
- powder-free
- free from natural latex
- · good grip with the roughened fingertips · LABS-conformity in accordance with
- VDMA 24364 A1/A2/A3 L/W



uvex u-fit strong N2000

- nitrile single-use safety gloves (0.20 mm)
- non-sterile, can be used on both sides,
- powder-free
- free from natural latex
- good grip with the roughened fingertips · LABS-conformity in accordance with



| Suitable IOI | nigniy resistant to grease and on, |
|--------------|------------------------------------|
| | good resistance to chemicals, |
| | for medical examinations |
| | and to prevent infections |
| | between users and patients |
| Colour | blue |
| Sizes | XS to XL |
| Order unit | BOX |
| Content | box of 100 PC |
| | |
| | |
| | |
| | |
| | |

| | uvex u-fit strong N2000 |
|--------------|---|
| Art. no. | 60962 |
| Design | textured surface of fingertips, approx. 28 cm |
| Standard | EN ISO 374-1:2016/Type A (J K L O P S T), |
| | EN 374-5:2016 VIRUS |
| Material | no lining |
| Coating | NBR (nitrile butadiene rubber), approx. 0.20 mm |
| Suitable for | highly resistant to grease and oil, |
| | increased resistance to chemicals |
| Colour | blue |
| Sizes | S to XXL |
| Order unit | BOX |
| Content | box of 50 PC |
| | |

Art. no. 60167 roughened surface. Design approx. 24 cm Standard EN ISO 374-1:2016/ Type B (K P T), EN 374-5:2016 VIRUS Material without stockinette NBR (nitrile rubber), approx. 0.10 mm Coating Suitable for highly resistant to grease and oil, good resistance to chemicals Colour blue Sizes Order unit S to XL BOX box of 100 PC Content

uvex u-fit

uvex u-fit ft Art. no. 60166 roughened fingertips, approx. 24 cm Design Standard EN ISO 374-1:2016/ Type B (J K P T), EN 374-5:2016 VIRUS Material without stockinette Coating Suitable NBR (nitrile rubber), approx, 0.10 mm



Safety Gloves





A Cut Above

HexArmor[®] is an exclusive licensee of SuperFabric[®] brand material in the industrial PPE market. HexArmor[®] products with SuperFabric[®] brand material have a secret weapon against cut hazards that no other glove can boast. SuperFabric[®] technology is designed to prevent lacerations and slashes from reaching the skin. Performance is enhanced through the configuration of tiny guard plates.

Impact Resistance

Impacts come in all forms, shapes, and magnitudes for workers. Whether caused by falling tools, equipment or pinches, impact injuries have one thing in common: unpredictability. Individuals must always be prepared and protected from impact and pinch points, and the patented IR-X[®] Impact Exoskeleton[™] from HexArmor[®] has proven to reduce the number and effects of injuries.


Needlestick Resistance

Needles are sharp, beveled cutting instruments designed to pierce the skin. HexArmor® needle resistant products work by layering SuperFabric® brand materials over each other. SuperFabric® brand material guardplates block and deflect needle hazards or trap and arrest them in the small gaps found between guardplates. Multiple aligned layers of fabric provide extra resistance against needle hazards.

HexArmor[®] products are tested in real world applications and are proven to reduce needlestick injuries. Using the correct test will ensure you have the right glove to protect your employees. As always, we recommend proper field testing to validate the appropriate level of protection necessary for your application.

Two brands with one global mission: protecting people I-lex/Armor. + uvex

uvex and HexArmor[®] – two brands with one global mission: protecting people. We now offer a select range of safety gloves from HexArmor's portfolio to all uvex customers in the Eastern Hemisphere (Europe, Africa, Middle East and Russia). View the HexArmor[®] safety gloves range at www.uvex-safety.com/en/hexarmor

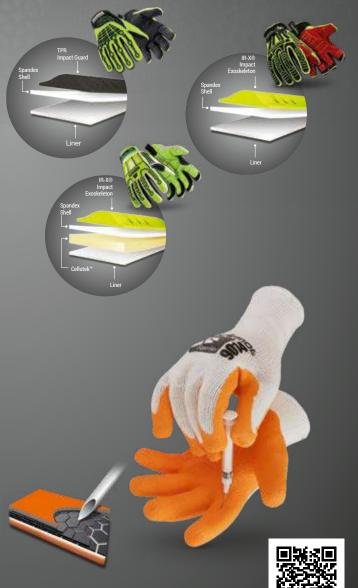

🖃 SuperFabric°

Detailed information can be found at https://www.uvex-safety.com/en/ hexarmor

Hex/Armor

Cut resistance: Comparison between EN 388-2016 and ANSI/ISEA 105-2016

When comparing the cut resistance of two or more fabrics, it is important to make sure that for all materials:

- The same test method was used
- The same type of cut tester was used

Unless these points are met, you cannot accurately compare the results.

Cut resistance levels: The use of the TDM-100 test method is required by both ANSI/ISEA 105 and by EN 388 (for high-cut materials). However, the ANSI/ISEA standard reports results in grams on an A1-A9 scale (200-6000 grams/2-60 Newtons). While the A1-A9 scale is comparable to the EN 388 A-F levels which reports up to 30 Newtons (200-3000 grams/2-30 Newtons), ANSI/ISEA extends their scale by three levels to 6000 grams/60 Newtons to report high cut materials more accurately.

ANSI/ISEA & EN 388 cut test standards



| | | | | | | | | | High cut |
|---|---------|--------|-------------------|----------|----------|----------|----------|----------|----------|
| Level | A1 | A2 | A3 | A4 | A5 | A6 | A7 | A8 | A9 |
| Weight (G) needed to cut with 1" (20mm) blade travel | ≥ 200 G | ≥ 500G | <u>></u> 1000G | ≥ 1500 G | ≥ 2200 G | ≥ 3000 G | ≥ 4000 G | ≥ 5000 G | ≥ 6000 G |

Puncture & Needle Testing Explained

The ANSI/ISEA 105 Test

In February of 2016, the ANSI/ISEA 105 standard was updated and published to include two puncture standards: Puncture Resistance (other than hypodermic needle) and Hypodermic Needlestick Puncture. Prior to 2015, there was only one puncture test, which did not specify the type of puncture hazard the standard was created for, leaving it open for interpretation. Having both an industrial puncture standard and a hypodermic needle puncture standard allows safety managers to differentiate between what protection they need most, based on more relevant testing and classification.





EN 388: Industrial Puncture Resistance (Non-Hypodermic Needlestick Puncture)

The EN 388 probe is the approved puncture test for ANSI/ISEA 105 and measures the amount of force needed for a blunt probe to pierce through the sample material (taken from palm).

- The blunt probe moves at a 90° angle at a speed of 100mm/minute
- Results are reported in Newtons and are given a 1-5 classification rating, with 1 being low resistance and 5 being high resistance
- The test is done 4 times for every palm sample
- The lowest score is reported

ASTM F2878: Hypodermic Needlestick Puncture Resistance

The ASTM F2878 is the approved puncture test for ANSI/ISEA 105 and measures the amount of force needed for a 25-gauge hypodermic needle to pierce through the sample material.

- The puncture probe (25-gauge needle) travels at a 90° angle into specimen at a vector of 500 millimeters per minute.
- Results are reported in Newtons and are giving a 1-5 classification rating, with 1 being low resistance and 5 being high resistance
- The test is done 12 times for every palm sample
- The average of the 12 results is reported



Impact protection

Back-of-hand bones and soft tissues are extremely vulnerable to impact-related hand injuries among a wide range of job sites. This U.S.-based impact performance standard will help safety professionals make better-informed decisions about glove selection – ultimately keeping more people safe on the job.

Impact protection: ANSI/ISEA 138

The ISEA 138 standard establishes the minimum performance, classification, and labeling requirements for gloves that are designed to protect the knuckles and fingers from impacts based on three performance levels.

How the test works: To score gloves into their appropriate level, impact protection testing under ISEA 138 requires consistent, regulated tests on each kind of glove on two areas for impact performance: knuckles and fingers/thumb. On both gloves, knuckles are tested four times and fingers/thumb are tested five times.


To start, one pair of gloves is required per test. The gloves are cut in half and the back-of-hand (where the impact protection is located) is placed on an anvil. A striker with a force of 5 Joules is dropped on the required back-of-hand locations, and the amount of force transferred through the glove back-of-hand is recorded with a force gauge that is connected below the anvil and measured in kiloNewtons (kN). **Scoring:** The average of eight knuckle tests are compared to the average of the ten finger tests. The highest average of the two is the impact testing score.

- **Performance Level 1** Results in an average peak transmitted force of less than or equal to 9 kN.
 - 55% of force absorbed
- **Performance Level 2** Results in an average peak transmitted force of less than 6.5 kN.
 - 67.5% of force absorbed
- **Performance Level 3** Results in an average peak transmitted force of less than 4 kN.
 - 80% of force absorbed

The chart showcases the ISEA 138 performance levels, with "Performance Level 3" being the highest. Any impact-resistant PPE that scores higher than a 9 kN force transfer will not qualify for a ranking and will fail. With no impact material, the machine registers around 20kN, so in order to pass the test, the impact material must register less than 9kN, reducing the force or energy transferred by 55%. The anvil will drop roughly around 5 ½ pounds from 8 inches.

Impact protection: EN 388

The European industrial glove market includes impact testing performance ratings in EN 388, which tests the impact on just the knuckles, and the tests are given a basic score of pass or fail. To pass the test, the transmitted force needs to be less than or equal to 7 kN with no single results greater than 9 kN.

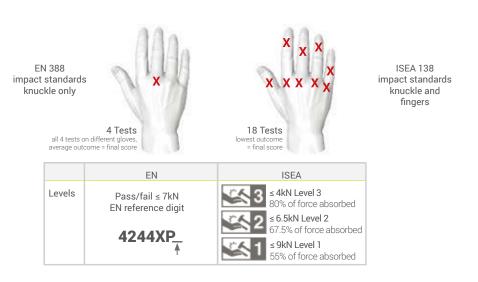



Needlestick Series



Hex/Armor

Needlestick Series



- Back-of-hand knuckle padding for incidental bumps/impact
- Silicone palm pattern for enhanced grip
- Neoprene cuff with Velcro® closure
- needlestick resistance (in noted enhanced areas)
- Full coverage design and pre-curved shape for maximum comfort and protection
- Silicone dot palm grip

- cut resistance for some of the highest cut protection available in the industry (over the entire hand)
- · Innovative industrial puncture protection over the entire hand from wires, metal, wood, glass, and other puncture-related hazards
- · Gauntlet design and pre-curved shape for maximum comfort and dexterity
- Specialized silicone gripping surface on the palm

| | Hercules [®] 400R6E | |
|-----------------------|------------------------------|--|
| Artikel-Nr. | 60634 | |
| Norm | EN 388: 2016 (4 X 3 4 F) | |
| Farbe | black | |
| Größen | 8/M through 11/XXL | |
| Bestellmengenschritte | 1 PR | |

| | PointGuard®Ultra 4045 |
|--------------------------|---------------------------|
| Article No. | 60005 |
| Standard | EN 388: 2016 (4 X 2 2 F) |
| Colour | black |
| Sizes | 6/XS through 12/3XL |
| Order quantity multiples | 1 PR |

| | Hercules [®] NSR 3041 |
|--------------------------|--------------------------------|
| Article No. | 60983 |
| Standard | EN 388: 2016 (4 X 1 2 F) |
| Colour | black |
| Sizes | 7/S through 11/XXL |
| Order quantity multiples | 1 PR |
| | |



Cut protection Series





3092 Article No. 60010

ThornArmor 3092

- Three layers of SuperFabric®* brand material in the palm and partial index finger wrap provides industry-leading cut resistance (interior layer)
- Breathable HexVent® panel on the backof-hand helps keep you cool
- Airprene cuff with $\mathsf{Velcro}^{\scriptscriptstyle(\! B\!)}$ closure for a secure fit
- Durable TP-X[®] palm provides superior grip and abrasion resistance

| | HexArmor ThornArmor 3092 |
|--------------------------|--------------------------|
| Article No. | 60010 |
| Standard | EN 388: 2016 (4 X 3 3 F) |
| Colour | brown/black |
| Sizes | 5/XXS through 11/2XL |
| Order quantity multiples | 1 PR |



AG10009S

Article No. 60985

Article No.

Standard Colour

Order quantity multiples

Sizes

Arm Guard AG10009S

- The SuperFabric[®] brand material provides industry-leading cut resistance
- Industrial puncture protection in exposed areas to help protect against injuries caused by cables, metal, wood and glass

Arm (

60985

1 PC

ard AG10009

EN 388: 2016 (4 X 4 2 F)

black/neon-yellow 6/XS through 12/3XL

· Elastane insert on wrist with thumb hole



4062

Article No. 60655

Chrome SLT®

- Arc Flash Level 4 Rating: Lab tested in accordance with HRC ATPV at 46 Cal/cm²
- Goatskin leather palm provides a traditional style of comfort and grip
- Stitched with Aramid thread
- Full aramid liner for 360° cut protection
- Extended safety cuff for easy on and off

| | Chrome SLT® 4062 |
|--------------------------|--|
| Article No. | 60655 |
| Standard | EN 388: 2016 (2 X 2 3 E), EN 407 (4 1 2 1 X X) |
| Colour | beige |
| Sizes | 6/XS through 12/3XL |
| Order quantity multiples | 1 PR |

270

Hex/Armor

Cut protection Series






Cut protection Series







3033

Article No. 60668

Helix[®]

- Engineered knit to specifically prevent glove particles from contacting food (outer layer tested to FDA 21 CFR 177.1630 for food safe contact)
- Seamless construction for enhanced comfort and breathability
- Can be used in direct contact with food or as an underglove with appropriate top-glove solution

| | | | EN 388:2016 |
|------------------|---------------|------------|-----------------------|
| HPPE Blend Shell | ANSI/ISEA CUT | GRAM SCORE | ANSI/ISEA PUNCTURE |
| ₩₩ | A6 | 3276 | 5 |

2076

Article No. 60660

Helix[®]

- 13-gauge HPPE, steel, and fiberglass blend shell
- Flexible polyurethane palm coating
- Reinforced thumb crotch patch

| | Helix® 3033 |
|--------------------------|--------------------------|
| Article No. | 60668 |
| Standard | EN 388: 2016 (3 X 4 1 E) |
| Colour | mottled blue |
| Sizes | 6/XS through 11/2XL |
| Order quantity multiples | 1 PR |

| | Helix [®] 2076 |
|--------------------------|---------------------------|
| Article No. | 60660 |
| Standard | EN 388: 2016 (4 X 4 4 F) |
| Colour | blue mottled/black |
| Sizes | 5/XXS through 13/4XL |
| Order quantity multiples | 1 PR |

Hex/Armor

Cut protection Series



• Highest cut protection level F (according to EN388:2016)

| | Helix® 3023 |
|--------------------------|--------------------------|
| Article No. | 60683 |
| Standard | EN 388: 2016 (4 X 4 3 D) |
| Colour | blue mottled/black |
| Sizes | 6/XS through 11/2XL |
| Order quantity multiples | 1 PR |
| | |

| | Helix® 3070 |
|--------------------------|--|
| Article No. | 60684 |
| Standard | EN 388: 2016 (2 X 4 3 C), EN 407 (X 1 X X X X) |
| Colour | blue/black |
| Sizes | 7/S through 11/2XL |
| Order quantity multiples | 1 PR |
| | |

| | Helix®3071 |
|--------------------------|--|
| Article No. | 60685 |
| Standard | EN 388: 2016 (4 X 4 3 F), EN 407 (X 1 X X X X) |
| Colour | blue/black |
| Sizes | 7/S through 11/2XL |
| Order quantity multiples | 1 PR |
| | |



Chemical protection Series/Cut protection Series/Impact Series



Hex/Armor

Impact Series



- Flexible sandy nitrile palm coating
- Back-of-hand IR-X[®] Impact Exoskeleton[™] with high-flex design provides ANSI/ISEA 138 Level 1 protection on knuckles and fingers
- Back-of-hand IR-X[®] Impact Exoskeleton[™] with high-flex design provides ANSI/ISEA 138 Level 2 protection on knuckles and Level 1 protection on fingers
- · Sandy nitrile full coating provides superior grip and abrasion resistance
- Full double dip for fluid/water resistance

on knuckles and Level 1 protection on fingers

- 13-gauge HPPE and fiberglass blend shell
- Sandy nitrile full coating
- Full double-dipped coating offers liquid resistance

| | Helix [®] 1095 |
|--------------------------|----------------------------|
| Article No. | 60642 |
| Standard | EN 388: 2016 (4 1 2 1 X P) |
| Colour | grey/black/yellow |
| Sizes | 6/XS through 12/3XL |
| Order quantity multiples | 1 PR |

| | Rig Lizard 7101 | | Thin Lizzie [™] Fluid 7102 |
|--------------------------|----------------------------|--------------------------|-------------------------------------|
| Article No. | 60651 | Article No. | 60652 |
| Standard | EN 388: 2016 (4 1 2 1 X P) | Standard | EN 388: 2016 (4 X 4 2 C P) |
| Colour | yellow/blue | Colour | blue/yellow |
| Sizes | 6/XS through 12/3XL | Sizes | 6/XS through 12/3XL |
| Order quantity multiples | 1 PR | Order quantity multiples | 1 PR |
| . , . | | | |



Impact Series



Hex/Armor

Impact Series






2090X Article No. 60648

Thin Lizzie™

- Back-of-hand IR-X[®] Impact Exoskeleton[™] with high-flex design provides ANSI/ ISEA 138 Level 2 protection on knuckles and Level 1 protection on fingers
- \cdot 13-guage HPPE and glass fiber blend shell provides exceptional dexterity and feel
- Sandy nitrile palm coating
- Reinforced thumb crotch patch
- Protected by U.S. Patent No. D703,389

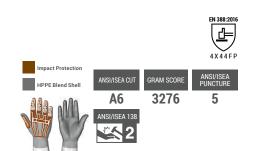



Thin Lizzie™

- Back-of-hand IR-X[®] Impact Exoskeleton[™] with high-flex design provides ANSI/ ISEA 138 Level 2 protection on knuckles and Level 1 protection on fingers
- 13-gauge HPPE, steel, and fiberglass blend shell
- Polyurethane palm coating
- Reinforced thumb crotch patch


| | Thin Lizzie™ 2090X |
|--------------------------|----------------------------|
| Article No. | 60648 |
| Standard | EN 388: 2016 (4 X 4 4 E P) |
| Colour | grey/yellow |
| Sizes | 5/XXS through 12/3XL |
| Order quantity multiples | 1 PR |
| Order quantity multiples | 1 PR |

| | Thin Lizzie™ 2095 |
|--------------------------|----------------------------|
| Article No. | 60650 |
| Standard | EN 388: 2016 (4 X 4 4 F P) |
| Colour | blue/black/yellow |
| Sizes | 5/XXS through 12/3XL |
| Order quantity multiples | 1 PR |



Impact Series









2021X

Article No. 60670

Rig Lizard®

- Back-of-hand IR-X[®] Impact Exoskeleton™ with high-flex design provides ANSI/ISEA 138 Level 1 protection on knuckles and fingers
- Additional IR-X $^{\scriptscriptstyle (\! 8\!)}$ guard between thumb and index finger
- Durable TP-X® palm with reinforced stitching
- SlipFit[®] cuff with pull tab
- Protected by patents and patents pending

| | Rig Lizard [®] 2021X |
|--------------------------|--|
| Article No. | 60670 |
| Standard | EN 388: 2016 (4 X 4 3 C P), EN 407 (X 2 X X X X) |
| Colour | yellow/black/red |
| Sizes | 6/XS through 12/3XL |
| Order quantity multiples | 1 PR |

2039

Article No. 60682

Rig Lizard 2039

- Back-of-hand sewn-on IR-X[®] Impact Exoskeleton™ with high-flex design provides ANSI/ISEA 138 Level 2 protection on knuckles and fingers
- Reinforced TP-X $^{\scriptscriptstyle (\! 8\!)}$ index finger and thumb saddle
- MudGrip+ palm: Synthetic leather with
- abrasion resistant PVC dots
- Elastic cuff with Velcro® closure for a secure fit, Pull tab loop

| Rig Lizard 2039 |
|---|
| 60682 |
| EN 388: 2016 (4 X 4 3 E P), 407 (X 2 X X X X) |
| red/yellow |
| 6/XS through 12/3XL |
| 1 PR |
| |

4026

4

Article No. 60986

Chrome 4026

- SuperFabric® brand materials provide industryleading cut resistance (interior layer)
- Back-of-hand impact guards provide ANSI/ISEA 138 Level 1 protection on knuckles and fingers
- · Synthetic leather palm with abrasion-resistant PVC dots
- · Hi-vis color and reflective tape on back-of-hand
- · Elastic cuff with Velcro® closure for a secure fit

| | Chrome 4026 |
|--------------------------|----------------------------|
| Article No. | 60986 |
| Standard | EN 388: 2016 (4 X 2 1 F P) |
| Colour | black/neon-yellow |
| Sizes | 6/XS through 12/3XL |
| Order quantity multiples | 1 PR |
| | |

Safety Gloves

| Art. no. | Art. code | Sizes | Colour | Page | Art. no. | Art. code | Sizes | Colour | Page |
|----------------|-----------------------------|-----------|----------------------|------|----------|---------------------------------|----------|-------------------------|------|
| 60023 | uvex profi pure HG | 6 to 11 | white, blue | 228 | | uvex glove clip | - | black | 222 |
| 60026 | uvex athletic lite xt | 6 to 12 | black, black | 224 | 60491 | uvex C500 sleeve | M, L | lime | 241 |
| 60027 | uvex athletic lite | 6 to 12 | blue, anthracite | 224 | 60492 | uvex C500 wet | 7 to 11 | lime, anthracite | 242 |
| 60028 | uvex athletic allround | 6 to 11 | grey, anthracite | 223 | 60494 | uvex C500 foam | 7 to 11 | lime, anthracite | 242 |
| 60030 | uvex athletic D5 XP | 6 to 12 | grey, anthracite | 249 | 60496 | uvex C500 wet plus | 7 to 11 | lime, anthracite | 241 |
| 60033 | uvex athletic lite dry | 6 to 12 | blue, anthracite | 224 | 60497 | uvex C500 | 7 to 11 | lime | 241 |
| 60036 | uvex athletic B XP | 6 to 12 | grey, anthracite | 248 | 60498 | uvex C500 M foam | 7 to 11 | lime, black, anthracite | 240 |
| 60037 | uvex athletic C XP | 6 to 12 | grey, anthracite | 249 | 60499 | uvex C500 dry | 7 to 11 | lime, anthracite | 242 |
| 60038 | uvex phynomic airLite A ESD | 5 to 12 | black | 219 | 60516 | uvex unidur 6649 | 7 to 11 | mottled grey, grey | 250 |
| 60040 | uvex phynomic lite | 5 to 12 | grey, grey | 222 | 60535 | uvex protector chemical NK2725B | 9 to 10 | blue | 257 |
| 60041 | uvex phynomic lite w | 5 to 12 | white, white | 222 | 60536 | uvex protector chemical NK4025B | 9 to 10 | blue | 257 |
| 60044 | uvex phynomic B XG | 6 to 12 | sky blue, black | 245 | 60542 | uvex C300 wet | 7 to 11 | anthracite | 243 |
| 60047 | uvex phynomic C XG | 6 to 12 | blue, black | 247 | 60544 | uvex C300 foam | 7 to 11 | anthracite | 243 |
| 60048 | uvex phynomic C XG ESD | 6 to 12 | blue, black | 247 | 60549 | uvex C300 dry | 7 to 11 | anthracite | 243 |
| 60049 | uvex phynomic allround | 5 to 12 | grey, black | 219 | 60556 | uvex unipur carbon | 6 to 10 | grey | 227 |
| 60050 | uvex phynomic foam | 5 to 12 | white, grey | 219 | 60557 | uvex rubiflex S XG35B | 7 to 11 | blue, black | 255 |
| 60054 | uvex phynomic x-foam HV | 6 to 12 | orange, grey | 220 | 60558 | uvex profi ergo XG20A | 6 to 11 | white, orange, black | 229 |
| 60060 | uvex phynomic wet | 6 to 12 | blue, anthracite | 220 | 60560 | uvex rubiflex S XG27B | 7 to 11 | blue, black | 255 |
| 60061 | uvex phynomic wet plus | 6 to 12 | blue, anthracite | 220 | 60573 | uvex unilite 6605 | 6 to 11 | black, black | 225 |
| 60062 | uvex phynomic pro | 6 to 12 | blue, anthracite | 221 | 60585 | uvex unilite 7700 | 7 to 11 | grey, black | 225 |
| 60064 | uvex phynomic pro 2 | 5 to 12 | blue, anthracite | 221 | 60587 | uvex unipur carbon FT | 6 to 10 | grey | 227 |
| 60068 | uvex phynomic F XG | 6 to 12 | black, black | 244 | 60591 | uvex unilite thermo plus cut C | 7 to 11 | lime, black | 233 |
| 60070 | uvex phynomic XG | 5 to 12 | black, black | 218 | 60592 | uvex unilite thermo plus | 7 to 11 | black | 233 |
| 60080 | uvex phynomic B foam | 6 to 12 | sky blue, grey | 245 | 60593 | uvex unilite thermo | 7 to 11 | black | 233 |
| 60081 | uvex phynomic C5 | 6 to 12 | blue, grey | 246 | 60595 | uvex profatherm XB40 | 11 | white | 232 |
| 60090 | uvex BambooTwinflex® D xg | 6 to 12 | green, black | 239 | 60600 | uvex C500 XG | 7 to 11 | lime, anthracite | 241 |
| 60119 | uvex profapren CF33 | 7 to 10 | dark blue | 261 | 60604 | uvex D500 foam | 7 to 11 | lime, anthracite | 240 |
| 60122 | uvex profastrong NF33 | 7 to 11 | green | 261 | 60838 | uvex arc protect g1 | 7 to 11 | anthracite | 234 |
| 60135 | uvex unigrip 6620 | 7 to 10 | white, blue | 227 | 60840 | uvex power protect V1000 | 7 to 11 | red | 234 |
| 60147 | uvex profi ergo ENB20A | 6 to 11 | white, orange | 230 | 60842 | unilite thermo FC | 7 to 11 | lime, black | 233 |
| 60148 | uvex profi ergo ENB20 | 6 to 10 | white, orange | 230 | 60894 | uvex unidur 6679 foam HV | 6 to 12 | high-vis green, black | 251 |
| 60150 | uvex contact ergo | 6 to 10 | white, orange | 230 | 60932 | uvex unidur 6648 | 6 to 11 | white, black | 250 |
| 60179 | uvex k-basic extra 6658 | 8, 10, 12 | yellow | 263 | 60938 | uvex unidur 6659 foam | 6 to 11 | mottled grey, black | 251 |
| 60166 | uvex u-fit ft | XS to XL | blue | 263 | 60943 | uvex unipur 6630 | 6 to 11 | white | 226 |
| 60167 | uvex u-fit | S to XL | blue | 263 | 60944 | uvex unipur 6631 | 6 to 11 | grey | 226 |
| 60168 | uvex u-fit lite | S to XL | indigo blue | 232 | 60945 | uvex compact NB27H | 10 | white, blue | 231 |
| 60188 | uvex u-chem 3500 | 7 to 11 | orange | 260 | 60946 | uvex compact NB27E | 9 to 10 | white, blue | 231 |
| 60190 | uvex rubiflex S NB80S | 9 to 11 | green | 256 | 60949 | uvex profabutyl B-05R | 7 to 11 | black | 259 |
| 60191 | uvex rubiflex S NB80SZ | 9 to 11 | green | 256 | 60954 | uvex rubiflex ESD NB35A | 6 to 11 | black | 258 |
| 60202 | uvex NK4022 | 9 to 10 | orange | 232 | 60957 | uvex profaviton BV-06 | 8 to 11 | black | 259 |
| 60208 | uvex profi ergo XG20 | 6 to 11 | white, orange, black | 229 | 60962 | uvex u-strong N2000 | S to XXL | blue | 263 |
| 60210 | uvex unidur 6641 | 6 to 11 | white, grey | 250 | 60968 | uvex u-chem 3100 | 8 to 11 | black | 260 |
| 60224 | uvex rubiflex S NB35B | 7 to 11 | blue | 255 | 60971 | uvex u-chem 3300 | 7 to 11 | blue | 260 |
| 60248 | uvex unipur 6639 | 6 to 11 | black, black | 226 | 60973 | uvex unidur sleeve | M, L | mottled grey | 251 |
| 60271 | uvex rubiflex S NB27B | 7 to 11 | blue | 255 | 60974 | uvex unidur sleeve TL | M, L | mottled grey | 251 |
| 60276 | uvex rubipor XS2001 | 6 to 10 | white, white | 223 | 89636 | uvex rubiflex NB27 | 7 to 11 | orange | 231 |
| 60278 | uvex unilite 7710F | 7 to 11 | blue, black | 231 | 89646 | uvex rubiflex S NB27S | 8 to 11 | green | 256 |
| 60314 | uvex unidur 6643 | 7 to 10 | mottled grey, black | 250 | 89647 | uvex rubiflex S NB60S | 9 to 11 | green | 256 |
| 60314 60316 | uvex rubipor XS5001B | 6 to 10 | white, blue | 230 | 89651 | uvex rubiflex S NB60SZ | 9 to 11 | green | 256 |
| 60321 | uvex unipur 6634 | 7 to 10 | grey, black | 225 | 98891 | uvex rubiflex S NB35S | 8 to 11 | - | 256 |
| 00021 | avez driipur 0004 | 1 10 10 | grey, black | 220 | 98902 | uvex rubiflex S NB40S | | green | 256 |
| | | | | | 309UZ | | 8 to 11 | green | 200 |

ſM

Hex/Armor

Safety Gloves

| Art. no. | Art. code | Sizes | Colour | Page |
|----------|---------------------------------------|---------|---------------------|------|
| 60005 | PointGuard® Ultra 4045 | 6 to 12 | black | 269 |
| 60010 | ThornArmor 3092 | 5 to 11 | brown/black | 270 |
| 60609 | Chrome SLT 4070 | 6 to 12 | orange/grey | 274 |
| 60614 | Helix [®] 2082 | 7 to 11 | green mottled/black | 271 |
| 60634 | Hercules® 400R6E | 8 to 11 | black | 269 |
| 60638 | PointGuard® Ultra 9032 | 7 to 10 | yellow/blue | 268 |
| 60642 | Helix® 1095 | 6 to 12 | grey/black/yellow | 275 |
| 60646 | Thin Lizzie [™] Thermal 2099 | 6 to 10 | yellow/black/red | 274 |
| 60648 | Thin Lizzie [™] 2090X | 5 to 12 | grey/yellow | 277 |
| 60650 | Thin Lizzie [™] 2095 | 5 to 12 | blue/black/yellow | 277 |
| 60651 | Rig Lizard 7101 | 6 to 12 | yellow/blue | 275 |
| 60652 | Thin Lizzie [™] Fluid 7102 | 6 to 12 | blue/yellow | 275 |
| 60655 | Chrome SLT® 4062 | 6 to 12 | beige | 271 |
| 60660 | Helix® 2076 | 5 to 13 | blue mottled/black | 272 |
| 60662 | Helix® 3000 | 6 to 12 | yellow/black | 276 |
| 60663 | Helix® 3001 | 6 to 11 | yellow/black | 276 |
| 60665 | Helix® 3003 | 7 to 10 | black/black | 276 |
| 60668 | Helix® 3033 | 6 to 11 | mottled blue | 272 |
| 60670 | Rig Lizard® 2021X | 6 to 12 | yellow/black/red | 278 |
| 60673 | Chrome 4023M | 7 to 12 | grey/green | 271 |
| 60682 | Rig Lizard 2039 | 6 to 12 | red/yellow | 278 |
| 60683 | Helix® 3023 | 6 to 11 | mottled blue/black | 273 |
| 60684 | Helix® 3070 | 7 to 11 | blue/black | 273 |
| 60685 | Helix® 3071 | 7 to 11 | blue/black | 273 |
| 60687 | Helix® 3062 | 6 to 11 | yellow/black | 271 |
| 60708 | rubiflex S XG27BI | 7 to 11 | blue/black/yellow | 274 |
| 60709 | rubiflex S XG35BI | 7 to 11 | blue/black/yellow | 274 |
| 60981 | SharpsMaster II® 9014 | 6 to 10 | white/orange | 268 |
| 60982 | Arm Guard AG8TW | 7 to 10 | black | 268 |
| 60983 | Hercules® NSR 3041 | 7 to 11 | black | 269 |
| 60985 | Arm Guard AG10009S | 6 to 12 | black/neon-yellow | 270 |
| 60986 | Chrome 4026 | 6 to 12 | black/neon-yellow | 278 |
| | | | | |



J.

Safety Footwear

Product system planet series > Safety Footwear

uvex has developed the **protecting planet** icon, to help raise awareness of its commitment to achieving increased sustainability. Based on the brand claim, **protecting people**, our sustainable approach integrates three core interlinked pillars – **ecology, economy** and **social responsibility**, that are incorporated throughout the business to improve our sustainability performance.

This explains the comprehensive audit, measurement and evaluation management process uvex undertakes along the entire value chain to ensure its products are as sustainable as possible.

UVex 1 x-craft planet



MADE IN ITALY



protecting planet

by using bio-based material // by using recycled material // by maximum reduction of pollutants

Upper

 100 percent recycled polyester made from PET bottles

Textile penetration resistance

› 100 percent recycled fibres

Distance mesh lining

 > 52 percent recycled polyester and 18 percent bamboo fibres

Comfortable climatic insock

 73 percent recycled PU foam and 85 percent recycled polyester

Health

 produced in accordance with the provisions of the REACH regulation and beyond, according to the specifications of the uvex banned hazardous substances list

orotecting planet

Upper



Midsole 15%

68081

uvex

18%

Bamboo



protecting planet

by using environmentallyfriendly packaging

Shoe boxes

- > 90 percent recycled cardboard
- > 100 percent recycled tissue paper

Instructions for use

> 100 percent recycled paper



protecting planet

by reducing waste // by reducing CO₂ emissions

Certifications

 Environmental Management ISO 14001 (since 2017)

Production

- exclusively with green electricity and green gas
- · Use of a photovoltaic system
- Continuous optimisation of the cleaning and injection process

Waste prevention

- Continuous process and tool optimisation to reduce PU waste
- vvex i-PUREnrj planet midsole
 made of 15 percent granulated and
- recycled PU surplus that cannot be prevented

The uvex brand is our responsibility

We have been producing and selling high-quality products for the protection of people in sport, leisure and work for **over 90 years**. And if you want to protect people, **you have to take responsibility**.

It is precisely from this mission that our obligation derives to act in a **sustainable**, **social and socially-responsible** manner.

uvex safety footwear

The safety footwear product group has embodied its motto, protecting planet, for over 10 years. Our uvex Cagi production facility in Italy is a certified environmental management system in accordance with ISO 14001 and has been exclusively making use of green electricity and green gas since 2019. A photovoltaic system on the roof provides environmentally friendly solar energy.

Since 2011, we have implemented numerous projects to reduce the amount of PU waste generated. Since the end of 2022, we have been able to granulate PU surpluses and reuse them in our midsoles. We now use the uvex i-PUREnrj planet midsole with 15% granulate in over 30 models. The goal is to continuously increase the proportion of recycled and bio-based materials in the product portfolio.

Materials and procurement

- > By 2024: at least one recycled component in 100% of our catalogue range
- Goal by 2030: 10% of the weight of the item is made from sustainable materials
- Collaboration with the Leather Working Group for certified leather
- Main suppliers are ISO 14001-certified environmental management systems

Production

- Reuse of PU surplus generated by uvex production processes as granules in uvex i-PUREnrj planet midsoles and uvex x-tended grip planet outsoles
- Continuous optimisation of the injection and cleaning processes
- > Continuous measures to reduce CO2 and waste

Packaging

- Shoe box made of 90% recycled paper
- Tissue paper and instructions for use made from 100% recycled paper

Product lifecycle

- The use of high-quality and durable materials in combination with professional workmanship ensures the longevity of our products
- uvex overperformance defines standards that exceed test requirements
- Initial projects with external partners to recycle safety shoes



Safety footwear for the highest demands

uvex safety footwear competence center



Laly uvex competence center for safety footwear in Ceva (CN), Italy

Development expertise, state-of-the-art robot-controlled production systems and optimised process structures to meet the highest ecological standards guarantee the firstclass and sustainable quality of our safety shoes. The production in Italy, which is one of the most modern production facilities for safety shoes in Europe, ensures efficient, resource-saving production and short distances from manufacturer to user.

🗣 Expertise

- production of direct-injected safety shoes with outsoles made of polyurethane, thermoplastic polyurethane and rubber
- innovative production technologies, e.g. for using rebound properties
- six DESMA direct-injection machines for producing uvex outsoles, with DESMA AMIR system (automated material handling with integrated robots)
- extensively equipped test laboratory for quality and production assurance and for product development



Made in UVEX Made in Italy

Responsibility:

Uses renewable energy and

CO₂-neutral electricity and gas

Sustainability

- uses 100% green energy and green gas
- uses environmentally friendly solar energy (photovoltaic system installed since 2011)
- PUR waste management for recycling and saving polyurethane waste
- uses water-based release agents (numerous approvals in the automotive and supplier industries)

Certifications

- · ISO 9001-certified quality management system (since 2003)
- ISO 14001-certified environmental management system (since 2017, first certificate in the uvex safety group)
- ISO 45001-certified occupational health and safety management system (since 2020, replacement for OHSAS 18001 certification)

Expertise at uvex headquarters in Fürth, Germany

- · product design and development
- biomechanics
- model building and prototyping
- quality and international manufacturing support
- supply chain management
- commercial processing
- process engineering
- · training, product management and marketing







Safety Footwear

Areas of application: light · medium · heavy









light areas of application

'Light' covers all areas of application where work is primarily carried out indoors and without significant demands on the physical properties of the outsole. Examples include assembly workplaces, as well as storage and logistics areas. We recommend products from the uvex 1 G2, uvex 1, uvex 1 x-tended support, uvex 1 sport, uvex 1 sport white, uvex 1 x-cite and uvex 1 business product groups.



medium areas of application

'Medium' applications usually take place both indoors and outdoors, with the outsole needing to be significantly more robust. Typical users include manual labourers, public sector employers and people working the chemical industry. We recommend products from the uvex 2, uvex 2 MACSOLE®, uvex 2 construction, uvex 2 xenova® and uvex 2 trend product groups.

heavy areas of application

'Heavy' applications involve external influences that place extensive demands on the shoe, its durability and stability. They are usually found in heavy mechanical engineering and in the construction industry, especially in building and civil engineering.

We recommend products from the uvex 3, uvex 3 MACSOLE[®] and uvex 3 asphaltpro product groups.



Safety Footwear

uvex multiple fit system

uvex multiple fit system

As part of the safety footwear multiple fit system, a footwear style is offered in the same size but in a range of different fits. The different fits are based on the measurement of the widest part of the foot. While the foot is under load, a measurement is taken of either the circumference of the foot at the base joint of the big toe and the base joint of the little toe, or alternatively the width of the foot at this point (see opposite).

The classification of sizes and the corresponding values are detailed in the table below (all measurements in mm):

| uvex shoe size | Foot length | UK size | Width 10 | Width 11 (standard) | Width 12 | Width 14 |
|-------------------|----------------|---------|----------|------------------------|----------|----------|
| | | | | Circumferen | ce up to | |
| 35 | 210-217 | 3 | 216.5 | 222.5 | 228.5 | 240.5 |
| 36 | 218-225 | 3.5 | 221 | 227 | 233 | 245 |
| 37 | 226-232 | 4 | 225.5 | 231.5 | 237.5 | 249.5 |
| 38 | 233-240 | 5 | 230 | 236 | 242 | 254 |
| 39 | 241-247 | 6 | 234.5 | 240.5 | 246.5 | 258.5 |
| 40 | 248-255 | 6.5 | 239 | 245 | 251 | 263 |
| 41 | 256-262 | 7 | 243.5 | 249.5 | 255.5 | 267.5 |
| 42 | 263-270 | 8 | 248 | 254 | 260 | 272 |
| 43 | 271-277 | 9 | 252.5 | 258.5 | 264.5 | 276.5 |
| 44 | 278-285 | 10 | 257 | 263 | 269 | 281 |
| 45 | 286-292 | 10.5 | 261.5 | 267.5 | 273.5 | 285.5 |
| 46 | 293-300 | 11 | 266 | 272 | 278 | 290 |
| 47 | 301-307 | 12 | 270.5 | 276.5 | 282.5 | 294.5 |
| 48 | 308-315 | 13 | 275 | 281 | 287 | 299 |
| 49 | 316-322 | 14 | 279.5 | 285.5 | 291.5 | 303.5 |
| 50 | 323-330 | 14.5 | 284 | 290 | 296 | 308 |
| 51 | 331-337 | 15 | 288.5 | 294.5 | 300.5 | 312.5 |
| 52 | 338-345 | 16 | 293 | 299 | 305 | 317 |


All measurements in mm.


uvex fit advisor app


- User-friendly operation
- Automatic foot recognition
- Size and width recommendation
- Shoe recommendation
 based on the area of
- application • Filter options in the
- footwear advisor





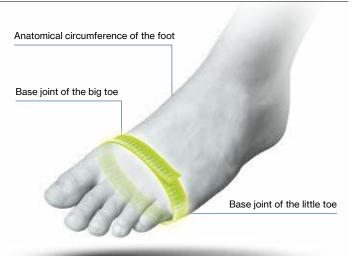










Länge: 26,5 Weite: 10,3

Weite: 9,9

Find out how it works



Safety Footwear

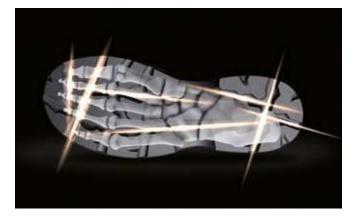

bionom X

Unique design approach of safety shoes based on biomechanics. The visible, shared properties optimise the interaction between the foot, the upper part of the shoe, the sole and the ground, ensuring exceptional performance and comfort for many applications.



clima zone

Innovative climate control system that optimises breathability and climate management. The selection of materials, reduced number of layers and intelligent processing technologies all help to draw moisture away from the foot and ensure exceptional wearer comfort.






Patented rubber compound especially for the uvex and Heckel brands. Featuring exceptional slip resistance, durability, abrasion resistance, grip, heat and cold resistance, chemical resistance and high elasticity, the rubber outsole is ideal for medium and heavy-duty applications.





MACSOLE® technology with added recycled rubber in the form of devulcanised powder and granulate forms the basis of MACSOLE® planet.

Using recycled material in this way saves resources and reduces waste while maintaining the same level of performance.

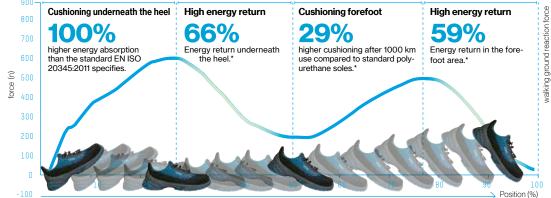

i-**PURE**nrj

Midsole with shock absorption and energy-return features, made of foamed polyurethane. This helps the wearer keep fit for longer and reduces premature fatigue and the risk of injury.



Safety Footwear Technologies

Water vapour coefficient

better than the minimum

better than the minimum

requirement of EN ISO 20345

requirement of EN ISO 20345

X

Water absorption



Water vapour permeability

40X better than the minimum requirement of EN ISO 20345

Water penetration

better than the minimum requirement of EN ISO 20345

i-**PURE**nrj planet

uvex i-PUREnrj technology plus up to 20% recycled polyurethane residues from our in-house production processes. Using recycled material in this way saves resources and reduces waste while maintaining the same level of performance.

x-**dry** knit

The unique, breathable and water-resistant knitted upper prevents sweating due to overheating and prevents water entering the shoe from the outside.

Abrasion with uvex x-tended grip






With double load

x-tended grip planet

The TPU outsole with up to 10% recycled PU granulate provides abrasion resistance and slip resistance on smooth and wet floors.

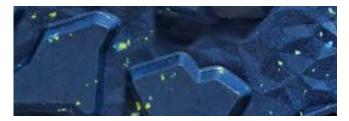

#Weave

The special geometric sole structure between the tread blocks reduces the weight by up to 20%.





Safety Footwear Pictogram overview uvex anklepro ankle pro Absorbent foam protects the ankle area against external impacts. uvex flexzone Integrated flex groove in the midsole design increases flexibility when bending flex zone the forefoot and improves comfort, especially during tasks that require kneeling. uvex lacelock Locking lacing hook fixes the laces in place, preventing them from loosening lace lock and ensuring more stability in the shoe. uvex medicare Certified for orthopaedic adjustments in accordance with EN ISO 20345:2022, German DGUV regulation 112-191 and/or Austrian ÖNORM Z 1259. uvex medicare = certified for orthopaedic insocks uvex medicare + = certified for orthopaedic insocks and shoe adjustments Silicone-free Free of silicones, plasticisers and other paint wetting impairment substances in accordance with automotive industry tests. uvex waterstop The special tanning technique used for the leather upper protects against water penetration for four times longer than the safety shoe standard requires - without additional chemical water stop treatments. Snowflake Shoes with cold-insulating lining material that keeps the foot warm for longer. uvex workzone Durable and extremely abrasion-resistant materials protect the shoe from wear in the relevant work zone area of application and ensure longevity.





UVEX Technologies

Outdoor humidity

approx. 60 %

The BOA® Fit System.

Delivering fit solutions purpose-built for performance, the BOA® Fit System is featured in products across industries (in medical, sports and workwear) and consists of three integral parts: a micro-adjustable dial, a super-strong lightweight lace and low friction lace guides.

The BOA® benefits.

Fit to perform.

Dial in your precise fit quickly and effortlessly. Even micro adjustments can be made quickly and easily on the fly, so you can always get the job done.

Confidence in all conditions.

The BOA® Fit System is extremely robust and has been tested under the toughest conditions. It will work as hard as you do so you can stay focused and confident in any environment without ever having to remove your gloves.

Stay secure and focused.

BOA®'s precision engineered laces stay contained in the dial cartridge, out our your way and out of machinery.

Fit for life with BOA®.

The BOA® Fit System dials and laces are guaranteed for the lifetime of the product on which they are integrated.

How it works.

Outdoor temperature approx. 20° C






Excellent comfort whatever the weather: waterproof, breathable, windproof

There is nothing more unpleasant than wet and cold clothing and shoes. Sympatex has therefore developed a special membrane which absorbs the water vapour and removes it to the outside. This keeps the foot warm and dry even in extreme situations.

And the best thing about it is that the higher the physical activity, the more efficient the sympatex membrane works. Shoes with a sympatex membrane also provide effective protection from low temperatures and rain.



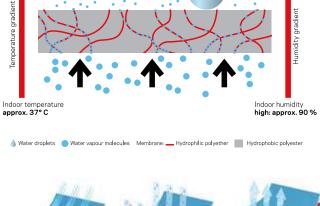



www.sympatex.com



uvex medicare


Personal insocks are not permitted in safety shoes.

Orthopaedic solutions for uvex safety shoes

Our feet are extremely important for our daily life after all they help us to stand and move from A to B. It is therefore particularly important to protect our feet in working life - whether that's because we're running, kneeling, working on a machine or in order to prevent an occupational accident. The protective features of safety shoes, such as ESD protection, protective caps etc., are tested and certified at regular intervals by independent test institutes in accordance with the requirements of DIN EN ISO 20345.

In order to ensure that all safety-related protective features are still guaranteed in the event of an orthopaedic change to the safety shoe, orthopaedic insocks must only be used in combination with tested, orthopaedic materials.

This means that personal orthopaedic insocks are not allowed in safety shoes. All uvex medicare products have therefore been tested and certified in combination with uvex safety shoes.

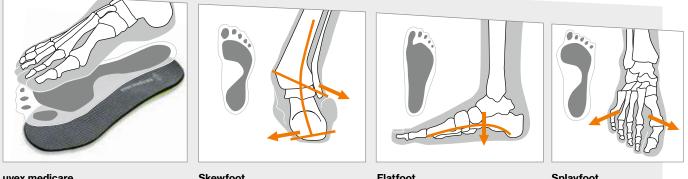

uvex medicare

Skewfoot




Splayfoot



How do I get an orthopaedic adjustment for uvex safety shoes?

uvex requires the footprint of your feet. This can be taken by our field service on site or you can use our uvex medicare footprint set - a convenient, simple and flexible way to self-record the footprint. All order details can be found on the order form in the folder.

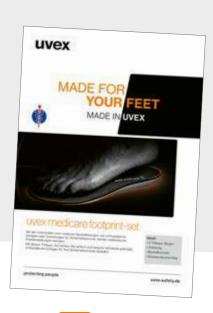

uvex medicare

Instructions



Separate the white sheet from the clear protective film and place the film over the blueprint, making sure that there are no wrinkles.




Place this on a flat surface and place your foot in the middle of it, putting your full body weight onto it. Draw around the foot with a pen.



Peel off the transparent film and remove the blueprint. Now place the film with your footprint on the chequered backing sheet and smooth it out, ensuring that there are no creases.

Repeat the process for your other foot.





Simply scan the QR code.

Safety Footwear

Standards · Labels

Labelling



The labelling on the shoe contains the following information

- 1 Manufacturer 2 CE symbol
- (4) Article number (5) Size
- 6 Number of European standard
- 7 Symbol for protection
- 8 Date of manufacture
- 9 Country of Manufacture 10 Postal address of the manufacturer

③ Manufacturer's type designation

(11) UKCA symbol

Basic and additional requirements for safety shoes (in accordance with EN ISO 20345:2022, marking S) and occupational shoes (in accordance with EN ISO 20347:2022, marking O)

| Symbol | nbol Requirement | | Category | | | | | | | | | | | |
|--------|---|----|----------|----|----|-----|-----|----|----|----|-----|-----|----|----|
| Symbol | Requirement | SB | S1 | S2 | S3 | S3L | S3S | S5 | S6 | S7 | S7L | S7S | 01 | 02 |
| - | Basic requirements | Х | Х | Х | Х | Х | Х | Х | Х | Х | Х | Х | Х | Х |
| - | Toe cap, tested via 200 joule drop test and 15 kilonewton pressure test | х | Х | Х | х | х | х | х | Х | х | х | х | - | - |
| - | Footwear made of leather or other materials, not including solid rubber or total polymers | 0 | Х | Х | х | х | х | - | Х | х | х | х | х | х |
| - | Footwear made of solid rubber or total polymers | 0 | - | - | - | - | - | Х | - | - | - | - | - | - |
| - | Slip resistance on ceramic tile floors with SLS | х | Х | Х | х | х | Х | Х | Х | х | х | х | Х | х |
| - | Closed seat region | 0 | Х | Х | Х | Х | Х | Х | Х | Х | Х | Х | Х | Х |
| А | Antistatic footwear | 0 | Х | Х | Х | Х | Х | Х | Х | Х | Х | Х | Х | Х |
| E | Energy absorption of seat region | 0 | Х | Х | Х | Х | Х | Х | Х | Х | Х | Х | Х | Х |
| WPA | Water penetration and absorption of upper material | 0 | - | Х | х | х | Х | - | Х | х | х | х | - | х |
| WR | Whole shoe waterproof | 0 | 0 | 0 | 0 | 0 | 0 | - | Х | Х | Х | Х | 0 | 0 |
| Р | Perforation resistance, metallic insert | 0 | 0 | 0 | Х | - | - | Х | 0 | Х | - | - | 0 | 0 |
| PL | Perforation resistance, non-metallic insert, tested with a 4.5 mm test nail | 0 | 0 | 0 | - | х | - | - | 0 | - | х | - | 0 | 0 |
| PS | Perforation resistance, non-metallic insert, tested with a 3.0 mm test nail | 0 | 0 | 0 | - | - | х | - | 0 | - | - | х | 0 | 0 |
| - | Treaded sole | 0 | 0 | 0 | Х | Х | Х | Х | 0 | Х | Х | Х | 0 | 0 |

Additional requirements for special applications

| Symbol | Requirement |
|--------|--|
| FO | Fuel resistance and oil resistance |
| SR | Slip resistance on ceramic tile floors with glycerol |
| HI | Heat insulation of the sole complex |
| CI | Cold insulation of the sole complex |
| HRO | Heat resistance of the outsole |
| Μ | Metatarsal protection |
| AN | Ankle protection |
| CR | Cut resistance of the upper part of the shoe |
| SC | Abrasion resistance of optional overcaps |
| LG | Outsoles provide hold on ladders |

X = Requirement must be fulfilled O = Requirement may be fulfilled, but is not mandatory - = Requirement cannot be fulfilled

To ensure optimal clarity, we have included the labelling in accordance with both the old and the new standard in this catalogue. The new labelling on the products will be introduced gradually. The label on your product will help you to identify the version of the standard to which the product is certified.



Safety Footwear Standards · Labels · ESD

Perforation resistance

The perforation resistance of the footwear has been measured in a laboratory using standardised nails and forces. Nails with a smaller diameter and higher static or dynamic loads increase the risk of perforation. Under these conditions, additional protective measures should be considered. Three generic types of perforation-resistant insoles are currently available for PPE footwear. These include types made of metal materials and of non-metallic materials, which must be chosen by means of an activity-based risk assessment. All types offer protection against perforation risks, but each has different additional advantages or disadvantages, including the following:

Metal (P e.g. S1 P, S3):

Is less affected by the shape of the sharp object/hazard (i.e. diameter, geometry, sharpness) due to the processes used in shoe manufacturing, however, it may not be possible to cover the entire bottom of the foot.

Non-metal (PS or PL or category e.g. S1 PS, S3L):

May be lighter and more flexible and may cover a larger area, but perforation resistance may vary more depending on the shape of the sharp object/hazard (i.e. diameter, geometry, sharpness). In terms of the protection obtained, two types are available. Type PS may offer better protection against objects with a smaller diameter than type PL.

Electrostatic

R = electrical resistance

Controlling unwelcome electrostatic charge is becoming an increasingly important role in industry, as more and more employees come into contact with processes, materials or objects which are sensitive to electro static charge. It is often necessary to use safety footwear as part of a system to conduct electrostatic charge in such workplaces.

Independent of various measuring methods, volume resistance between 100 kiloohms (1.0×10^5 ohms) and 100 megaohms (1×10^8 ohms) is required to fulfil the various relevant standards (e.g. EN ISO 20345, EN 61340).

All ESD-certified products in this catalogue feature the ESD symbol.



These products are also suitable in accordance with the specification for conductive footwear in the German Technical Rules for Hazardous Substances (TRGS) 727 "Avoiding risks of ignition resulting from electrostatic charges."

| Volume resistance in accordance | | | | | | | |
|---|---|---|---------|---|---|--|--|
| Low resistance (conductive) | Antistatic acc. | EN ISO 20345 / EN ISO 2 | 20347 | High resistance (insulating) | Ł | | |
| | $1 \times 10^5 \Omega \le R \le 1 \times 10^5 \Omega$ | 10 ⁹ Ω (100 kiloohms to 1 g | igaohm) | | 2 | | |
| | Electrostatic discharg accordance with EN 6134 | | | | | | |
| | (ES) 1×10 ⁵ Ω ≤ R | | | | | | |
| R < 1×10 ⁵ Ω (100 kiloohms) | (100 kiloohms to | 100 megohms) | | R > 1×10 ⁹ Ω (1 gigaohms) | | | |
| | 105 106 | 107 | 108 10 | 09 Ohm | | | |

Safety Footwear light areas of application

vex

uvex





68082 68083



reddot winner 2024 best of the best



clima zone i-PUREnrj planet x-tended grip planet

uvex 1 x-craft planet · Shoe S1 PL

The sustainable cherry on the cake. The uvex 1 x-craft planet offers the next level of sustainability. It is the perfect combination of the innovations of the uvex 1 x-craft product family and the sustainable materials for which the uvex 1 G2 planet is known: Midsole and outsole with up to 15% recycled granulate from residues, upper made of recycled and biobased materials such as PET bottles and bamboo. In total, it consists of 30% recycled materials in accordance with DIN EN ISO 14021:2016.

Features:

- uvex i-PUREnrj planet midsole with shock-absorption and energyreturn features, made with 15% recycled granulate from residues generated by uvex production processes
- abrasion-resistant uvex x-tended grip planet TPU outsole made with 10% recycled granulate from residues generated by uvex production processes
- foamed polyurethane scuffcap
- foamed polyurethane heel basket
- 100% metal-free protective toe cap

- · flexible textile penetration resistance
- lightweight and breathable uvex x-dry knit planet textile upper
- breathable distance mesh lining made from 18% bamboo and 52% recycled polyamide
- elastic laces
- ESD certified
- sizes 35 to 40 produced using a womens' last
- metal-free
- suitable for people allergic to chrome
- removable antistatic comfortable insock (Art. no.: 95797-0)

Sustainability:

- outsole, midsole, removable insock, penetration resistance, upper, laces and lining made wholly or partly from recycled materials
- free from harmful substances in accordance with the uvex restricted substances list

| uvex 1 x-craft planet | Shoe |
|----------------------------|----------------------|
| Art. no. Width 10 | 68081 |
| Art. no. Width 11 | 68082 |
| Art. no. Width 12 | 68083 |
| Art. no. Width 14 | - |
| Standard EN ISO 20345:2011 | - |
| Standard EN ISO 20345:2022 | S1 PL FO SC SR |
| Upper | textile |
| Lining | distance mesh lining |
| Fastening | elastic laces |
| Sizes | 35 to 52 |
| Order unit | PR |
| | |

You can find more information on uvex medicare on pages 434 to 437





uvex 1 x-craft pro

the next level



Reliable comfort thanks to a flexzone within the i-PUREnrj planet midsole and bionom x sole design



workzone with direct injected scuffcap and PUtek upper for extreme durability



Breathability thanks to perforated tongue and lightweight ripstop upper



(a)/h

Sporty look with pull tab and high-quality 3D details on the upper















You can find more information at www.uvex-safety.com/en/x-craft/





uvex 1 x-craft pro · Shoe S1 PL · Lace-up boot S1 PL

Designed for makers. Full support and flexibility are guaranteed by the sole with uvex bionom x and integrated flexzone in the forefoot area. Thanks to the dynamic scuffcap, technological upper materials and perforated tongue design, the range offers added abrasion resistance, protection and breathability. Whether sustainability, comfort, sportiness or innovation, the uvex 1 x-craft is simply the next level safety shoe.

Features:

- uvex i-PUREnrj planet midsole with shock-absorption and energyreturn features, made with 15% recycled granulate from residues generated by uvex production processes
- abrasion-resistant uvex x-tended grip planet TPU outsole made with 10% recycled granulate from residues generated by uvex production processes
- foamed polyurethane scuffcap
- · foamed polyurethane heel basket

- 100% metal-free protective toe cap
- flexible textile penetration resistance
- breathable, lightweight and tear-resistant ripstop upper
- durable, robust and flexible PUtek upper in the forefoot area
- · breathable distance mesh lining
- ESD certified
- sizes 35 to 40 produced using a womens' last
- metal-free (Art. no.: 68011-4)
- suitable for people allergic to chrome
- removable antistatic comfortable insock (Art. no.: 95797-0)

- midsole, outsole, penetration resistance and removable insock made
 wholly or partly from recycled materials
- free from harmful substances in accordance with the uvex restricted substances list

| uvex 1 x-craft pro | Shoe | Lace-up boot |
|----------------------------|----------------------|----------------------|
| Art. no. Width 10 | 68001 | 68011 |
| Art. no. Width 11 | 68002 | 68012 |
| Art. no. Width 12 | 68003 | 68013 |
| Art. no. Width 14 | 68004 | 68014 |
| Standard EN ISO 20345:2011 | - | - |
| Standard EN ISO 20345:2022 | S1 PL FO SC SR | S1 PL FO SC SR |
| Upper | textile/ripstop | textile/ripstop |
| Lining | distance mesh lining | distance mesh lining |
| Fastening | elastic laces | shoe laces |
| Sizes | 35 to 52 | 35 to 52 |
| Order unit | PR | PR |





Safety Footwear uvex 1 x-craft



clima zone i-PUREnrj planet

uvex 1 x-craft · Perforated shoe S1 PL · Shoe S3L · Lace-up boot S3L

Features:

- uvex i-PUREnrj planet midsole with shock-absorption and energyreturn features, made with 15% recycled granulate from residues generated by uvex production processes
- PU outsole
- · foamed polyurethane scuffcap
- foamed polyurethane heel basket
 100% metal-free protective toe cap
- flexible textile penetration resistance
- · lightweight and breathable microvelour upper
- breathable distance mesh lining

ESD certified • sizes 35 to 40 produced using a womens' last • metal-free (Art. no.: 68041-4)

- suitable for people allergic to chrome
- removable antistatic comfortable insock (Art. no.: 95797-0)

- midsole, penetration resistance and removable insock made wholly or partly from recycled materials
- free from harmful substances in accordance with the uvex restricted substances list

| uvex 1 x-craft | Perforated Shoe | Shoe | Lace-up boot |
|----------------------------|----------------------|----------------------|----------------------|
| Art. no. Width 10 | 68021 | 68031 | 68041 |
| Art. no. Width 11 | 68022 | 68032 | 68042 |
| Art. no. Width 12 | 68023 | 68033 | 68043 |
| Art. no. Width 14 | 68024 | 68034 | 68044 |
| Standard EN ISO 20345:2011 | - | - | - |
| Standard EN ISO 20345:2022 | S1 PL FO SC SR | S3L FO SC SR | S3L FO SC SR |
| Upper | microvelour | microvelour | microvelour |
| Lining | distance mesh lining | distance mesh lining | distance mesh lining |
| Fastening | elastic laces | elastic laces | shoe laces |
| Sizes | 35 to 52 | 35 to 52 | 35 to 52 |
| Order unit | PR | PR | PR |





clima zone i-PUREnrj planet

uvex 1 x-craft \cdot Perforated shoe S1 \cdot Shoe S2 \cdot Lace-up boot S2

Features:

- uvex i-PUREnrj planet midsole with shock-absorption and energyreturn features, made with 15% recycled granulate from residues generated by uvex production processes
- PU outsole
- foamed polyurethane scuffcap
- foamed polyurethane heel basket
- 100% metal-free protective toe cap
- · lightweight and breathable microvelour upper
- breathable distance mesh lining
- ESD certified

- sizes 35 to 40 produced using a womens' last
- metal-free (Art. no.: 68157-0)
- suitable for people allergic to chrome
- removable antistatic comfortable insock (Art. no.: 95797-0)

- midsole, insole and removable insock made wholly or partly from recycled materials
- free from harmful substances in accordance with the uvex restricted substances list

| uvex 1 x-craft | Perforated Shoe | Shoe | Lace-up boot |
|----------------------------|----------------------|----------------------|----------------------|
| Art. no. Width 10 | 68137 | 68147 | 68157 |
| Art. no. Width 11 | 68138 | 68148 | 68158 |
| Art. no. Width 12 | 68139 | 68149 | 68159 |
| Art. no. Width 14 | 68130 | 68140 | 68150 |
| Standard EN ISO 20347:2011 | - | - | - |
| Standard EN ISO 20347:2022 | S1 FO SC SR | S2 FO SC SR | S2 FO SC SR |
| Upper | microvelour | microvelour | microvelour |
| Lining | distance mesh lining | distance mesh lining | distance mesh lining |
| Fastening | elastic laces | elastic laces | shoe laces |
| Sizes | 35 to 52 | 35 to 52 | 35 to 52 |
| Order unit | PR | PR | PR |
| | | | |

uvex1G2planet

100% Performance. 30% recycled.*



Calculation date 03/2023**

calculated in accordance with DIN EN ISO 14021:2016

** Calculated in accordance with Diversion 100 (402) (2016



clima zone i-PUREnrj planet x-dry knit planet x-tended grip planet

uvex 1 G2 planet · Shoe S1 PL

Recycled down to the last crumb: From the upper to the sole, the new uvex 1 G2 planet offers both sustainability and performance in one. The injected polyurethane midsole contains up to 20% granulate made using PU waste from our production processes. In accordance with DIN EN ISO 14021:2016, it consists of 30% recycled materials in terms of weight, without compromising its protective properties or comfort compared to the well-known uvex 1 G2 models. Many of the shoes components, such as the outer shoe material and insock, are made from 100% recycled materials.

Features:

- uvex i-PUREnrj planet midsole with shock-absorption and energyreturn features, made with 20% recycled granulate from residues generated by uvex production processes
- abrasion-resistant uvex x-tended grip planet TPU outsole made with 10% recycled granulate from residues generated by uvex production processes
- foamed polyurethane heel basket

- 100% metal-free protective toe cap flexible textile penetration resistance
- · lightweight and breathable uvex x-dry knit planet textile upper
- TPU scuffcap made from 40% recycled material · breathable distance mesh lining made from 18% bamboo and 52% recycled polyamide
- ESD certified
- dust tongue
- sizes 35 to 40 produced using a womens' last · suitable for people allergic to chrome
- removable antistatic comfortable insock (Art. no.: 94907-0)

Sustainability:

- outsole, midsole, removable insock, penetration resistance, upper, laces, scuffcap and lining made wholly or partly from recycled materials
- · free from harmful substances in accordance with the uvex restricted substances list


uvex 1 G2 planet Shoe Art. no. Width 11 68242 S1 P SBC Standard EN ISO 20345:2011 Standard EN ISO 20345:2022 S1 PL FO SR Upper textile Lining distance mesh lining Fastening elastic laces Sizes 35 to 52 Order unit PR



uvex1G2

Science. Not Fiction. uvex i-PUREnrj Technology Cushioning. Stability. Energy Return.

The future is full of energy with the pioneering uvex 1 G2. uvex's innovative new polyurethane sole technology – uvex PUREnrj – returns the landing energy over the entire sole unit back to the wearer. It redefines shock absorption and stability, with noticeably greater comfort and significantly lower fatigue in the feet for a working day that is brimming with energy – from beginning to end.



Water-repellent and breathable knitted upper material.

Less fatigue. More comfort. More performance



less perceived fatigue compared to standard polyurethane soles



uvex 1 G2 Art. no. Width 10 Art. no. Width 11 Art. no. Width 11 Art. no. Width 12 Art. no. Width 14 Standard EN ISO 20345:2011 Standard EN ISO 20345:2022 Upper Lining Fastening Sizes Order unit
 Shoe
 68341

 68342
 68343

 68343
 68344

 S1 PL FO SR
 51 PL FO SR

 textile
 distance mesh lining

 elastic laces
 35 to 52

 PR
 PR

Abrasion and Slip restistance optimised



Safety Footwear

uvex 1G2



clima zone i-PUREnrj planet x-tended grip planet

uvex 1 G2 · Sandal S1 PL · Perforated shoe S1 PL · Shoe S3L · Lace-up boot S3L

Features:

- uvex i-PUREnrj planet midsole with shock-absorption and energyreturn features, made with 15% recycled granulate from residues generated by uvex production processes
- abrasion-resistant uvex x-tended grip planet TPU outsole made with 10%
 recycled granulate from residues generated by uvex production processes
- foamed polyurethane heel basket
- 100% metal-free protective toe cap
- flexible textile penetration resistance
- · lightweight and breathable microvelour upper
- TPU scuffcap
- breathable distance mesh lining

- ESD certified
- dust tongue
 sizes 35 to 40 produced using a womens' last
- metal-free (Art. no.: 6836, 6839 only)
- suitable for people allergic to chrome
- removable antistatic comfortable insock (Art. no.: 94907-0)

Sustainability:

- midsole, outsole and removable insock made wholly or partly from recycled materials
- free from harmful substances in accordance with the uvex restricted substances list

| uvex 1 G2 | Sandal | Perforated shoe | Shoe | Shoe | Lace-up boot |
|----------------------------|-------------------------|----------------------|----------------------|----------------------|----------------------|
| Art. no. Width 10 | 68361 | 68371 | 68381 | 68401 | 68391 |
| Art. no. Width 11 | 68362 | 68372 | 68382 | 68402 | 68392 |
| Art. no. Width 12 | 68363 | 68373 | 68383 | 68403 | 68393 |
| Art. no. Width 14 | 68364 | 68374 | 68384 | - | 68394 |
| Standard EN ISO 20345:2011 | S1 P SRC | S1 P SRC | S3 SRC | S3 SRC | S3 SRC |
| Standard EN ISO 20345:2022 | S1 PL FO SC SR | S1 PL FO SC SR | S3L FO SC SR | S3L FO SC SR | S3L FO SC SR |
| Upper | microvelour | microvelour | microvelour | microvelour | microvelour |
| Lining | distance mesh lining | distance mesh lining | distance mesh lining | distance mesh lining | distance mesh lining |
| Fastening | hook-and-loop fastening | elastic laces | elastic laces | BOA® Fit System | shoe laces |
| Sizes | 35 to 52 | 35 to 52 | 35 to 52 | 35 to 52 | 35 to 52 |
| Order unit | PR | PR | PR | PR | PR |

You can find more information on uvex medicare on pages 434 to 437

Safety Footwear





uvex 1 G2 · Sandal S1 · Perforated shoe S1 · Shoe S2 · Lace-up boot S2

Features:

- uvex i-PUREnrj planet midsole with shock-absorption and energyreturn features, made with 15% recycled granulate from residues generated by uvex production processes
- abrasion-resistant uvex x-tended grip planet TPU outsole made with 10% recycled granulate from residues generated by uvex production processes
- foamed polyurethane heel basket
- 100% metal-free protective toe cap
- lightweight and breathable microvelour upper
- breathable distance mesh lining
- ESD certified

- dust tongue
- sizes 35 to 40 produced using a womens' last
- metal-free (Art. no.: 6842, 6845 only)
- suitable for people allergic to chrome
- removable antistatic comfortable insock (Art. no.: 94907-0)

- midsole, outsole, insole and removable insock made wholly or partly from recycled materials
- free from harmful substances in accordance with the uvex restricted substances list

| uvex 1 G2 | Sandal | Perforated shoe | Shoe | Lace-up boot |
|----------------------------|-------------------------|----------------------|----------------------|----------------------|
| Art. no. Width 10 | 68427 | 68437 | 68447 | 68457 |
| Art. no. Width 11 | 68428 | 68438 | 68448 | 68458 |
| Art. no. Width 12 | 68429 | 68439 | 68449 | 68459 |
| Art. no. Width 14 | 68420 | 68430 | 68440 | 68450 |
| Standard EN ISO 20345:2011 | S1 SRC | S1 SRC | S2 SRC | S2 SRC |
| Standard EN ISO 20345:2022 | S1 FO SR | S1 FO SR | S2 FO SR | S2 FO SR |
| Upper | microvelour | microvelour | microvelour | microvelour |
| Lining | distance mesh lining | distance mesh lining | distance mesh lining | distance mesh lining |
| Fastening | hook-and-loop fastening | elastic laces | elastic laces | shoe laces |
| Sizes | 35 to 52 | 35 to 52 | 35 to 52 | 35 to 52 |
| Order unit | PR | PR | PR | PR |





uvex 1 G2 · Sandal S1 · Perforated shoe S1 · Shoe S1 · Lace-up boot S1

Features:

- uvex i-PUREnrj planet midsole with shock-absorption and energy-return features, made with 15% recycled granulate from residues generated by uvex production processes
- PU outsole
- foamed polyurethane heel basket
- 100% metal-free protective toe cap
- lightweight and breathable microvelour upper (6846, 6848)
- lightweight and breathable uvex x-dry knit textile upper (6852, 6853)
- TPU scuffcap (6852, 6853)
- breathable distance mesh lining
- ESD certified

- dust tongue
- sizes 35 to 40 produced using a womens' last
- metal-free (Art. no.: 6848, 6853 only)
- suitable for people allergic to chrome
- removable antistatic comfortable insock (Art. no.: 94907-0)
- Sustainability:
- midsole, insole and removable insock made wholly or partly from recycled materials
- free from harmful substances in accordance with the uvex restricted substances list

| uvex 1 G2 | Sandal | Perforated shoe | Shoe | Lace-up boot |
|----------------------------|-------------------------|----------------------|----------------------|----------------------|
| Art. no. Width 10 | 68487 | 68467 | 68527 | 68537 |
| Art. no. Width 11 | 68488 | 68468 | 68528 | 68538 |
| Art. no. Width 12 | 68489 | 68469 | 68529 | 68539 |
| Art. no. Width 14 | 68480 | 68460 | - | - |
| Standard EN ISO 20345:2011 | S1 SRC | S1 SRC | S1 SRC | S1 SRC |
| Standard EN ISO 20345:2022 | S1 FO SR | S1 FO SR | S1 FO SR | S1 FO SR |
| Upper | microvelour | microvelour | textile | textile |
| Lining | distance mesh lining | distance mesh lining | distance mesh lining | distance mesh lining |
| Fastening | hook-and-loop fastening | elastic laces | elastic laces | shoe laces |
| Sizes | 35 to 52 | 35 to 52 | 35 to 52 | 35 to 52 |
| Order unit | PR | PR | PR | PR |



Safety Footwear uvex 1G2





uvex 1 G2 · Sandal S1 · Perforated shoe S1 · Perforated lace-up boot S1

Features:

- uvex i-PUREnrj planet midsole with shock-absorption and energy-return features, made with 15% recycled granulate
- from residues generated by uvex production processes • PU outsole
- foamed polyurethane heel basket
- 100% metal-free protective toe cap
- lightweight and breathable microvelour upper
 breathable distance mesh lining
- ESD certified
- dust tongue

- sizes 35 to 40 produced using a womens' last
- metal-free (Art. no.: 6828, 6831 only)
- suitable for people allergic to chrome
- removable antistatic comfortable insock (Art. no.: 94907-0)

- midsole, insole and removable insock made wholly or partly from recycled materials
- free from harmful substances in accordance with the uvex restricted substances list

| uvex 1 G2 | Sandal | Perforated shoe | Perforated shoe | Perforated lace-up boot |
|----------------------------|-------------------------|----------------------|----------------------|-------------------------|
| Art. no. Width 10 | 68287 | 68297 | 68267 | 68317 |
| Art. no. Width 11 | 68288 | 68298 | 68268 | 68318 |
| Art. no. Width 12 | 68289 | 68299 | - | 68319 |
| Art. no. Width 14 | 68280 | 68290 | - | 68310 |
| Standard EN ISO 20345:2011 | S1 SRC | S1 SRC | S1 SRC | S1 SRC |
| Standard EN ISO 20345:2022 | S1 FO SR | S1 FO SR | S1 FO SR | S1 FO SR |
| Upper | microvelour | microvelour | microvelour | microvelour |
| Lining | distance mesh lining | distance mesh lining | distance mesh lining | distance mesh lining |
| Fastening | hook-and-loop fastening | elastic laces | elastic laces | shoe laces |
| Sizes | 35 to 52 | 35 to 52 | 35 to 43 | 35 to 52 |
| Order unit | PR | PR | PR | PR |





Features:

- uvex i-PUREnrj planet midsole with shock-absorption and energy-return features, made with 15% recycled granulate from residues generated by uvex production processes PU outsole
- · foamed polyurethane heel basket
- 100% metal-free protective toe cap
- lightweight and breathable microvelour upper
 breathable distance mesh lining
- ESD certified
- dust tongue

• sizes 35 to 40 produced using a womens' last

- metal-free (Art. no.: 6833, 6850 only)
- suitable for people allergic to chrome
- removable antistatic comfortable insock (Art. no.: 94907-0)

- midsole, insole and removable insock made wholly or partly from recycled materials
- · free from harmful substances in accordance with the uvex restricted substances list

| uvex 1 G2 | Shoe | Lace-up boot | Shoe | Lace-up boot |
|----------------------------|----------------------|----------------------|----------------------|----------------------|
| Art. no. Width 10 | 68307 | 68337 | 68497 | 68507 |
| Art. no. Width 11 | 68308 | 68338 | 68498 | 68508 |
| Art. no. Width 12 | 68309 | 68339 | 68499 | 68509 |
| Art. no. Width 14 | 68300 | 68330 | 68490 | 68500 |
| Standard EN ISO 20345:2011 | S2 SRC | S2 SRC | S2 SRC | S2 SRC |
| Standard EN ISO 20345:2022 | S2 FO SR | S2 FO SR | S2 FO SR | S2 FO SR |
| Upper | microvelour | microvelour | microvelour | microvelour |
| Lining | distance mesh lining | distance mesh lining | distance mesh lining | distance mesh lining |
| Fastening | elastic laces | shoe laces | elastic laces | shoe laces |
| Sizes | 35 to 52 | 35 to 52 | 35 to 52 | 35 to 52 |
| Order unit | PR | PR | PR | PR |

uvex 1 sport – Winners at work

Designed for Individuals



Website



Sporty. Premium wearer comfort and a sporty look.



Breathable. Climate-optimised upper materials.



DEST

Lightweight. Ergonomic. Slip-resistant dual-density polyurethane sole



Safety Footwear uvex 1 sport





uvex 1 sport · Shoe S1 · Shoe S1 P/S1 PL · Shoe S3L

Sporty design meets sophisticated functionality:

The uvex 1 sport is a youthful and stylish shoe that also offers first-class wearer comfort. Thanks to its low weight, climate-optimised high-tech materials and ergonomic outsole, the uvex 1 sport is the ideal footwear for the working day and beyond.

Features:

- shock-absorbing PU midsole
- PU outsole
- 100% metal-free protective toe cap
- flexible textile penetration resistance (65941-4, 65961-4)
- lightweight and breathable microvelour upper (6596)
- lightweight and breathable textile upper (6598, 6594)

- TPU scuffcap
- breathable distance mesh lining
- ESD certified
- sizes 35 to 40 produced using a womens' last
- metal-free
- suitable for people allergic to chrome
 removable antistatic comfortable insock (Art. no.: 95797-0)
-
- Sustainability:
- removable insock and heel cap made wholly or partly from recycled materials
- free from harmful substances in accordance with the uvex restricted substances list

| uvex 1 sport | Shoe | Shoe | Shoe | Shoe |
|----------------------------|----------------------|----------------------|----------------------|----------------------|
| Art. no. Width 10 | 65941 | 65947 | 65987 | 65961 |
| Art. no. Width 11 | 65942 | 65948 | 65988 | 65962 |
| Art. no. Width 12 | 65943 | 65949 | 65989 | 65963 |
| Art. no. Width 14 | 65944 | 65940 | 65980 | 65964 |
| Standard EN ISO 20345:2011 | S1 P SRC | S1 SRC | S1 SRC | S3 SRC |
| Standard EN ISO 20345:2022 | S1 PL FO SC SR | S1 FO SC SR | S1 FO SC SR | S3L FO SC SR |
| Upper | textile | textile | textile | microvelour |
| Lining | distance mesh lining | distance mesh lining | distance mesh lining | distance mesh lining |
| Fastening | shoe laces | shoe laces | shoe laces | shoe laces |
| Sizes | 35 to 52 | 35 to 52 | 35 to 52 | 35 to 52 |
| Order unit | PR | PR | PR | PR |

313



Safety Footwear uvex 1 sport



uvex 1 sport · Shoe S1 PL/S3L

Features:

- shock-absorbing PU midsole
- PU outsole
- 100% metal-free protective toe cap
- flexible textile penetration resistance
- lightweight and breathable microvelour upper (6592)
- lightweight and breathable textile upper (6590)
- TPU scuffcap breathable distance mesh lining
- ESD certified



clima zone

- metal-free
- suitable for people allergic to chrome • removable antistatic comfortable insock (Art. no.: 95797-0)

- removable insock and heel cap made wholly or partly from recycled materials
- free from harmful substances in accordance with the uvex restricted substances list

| uvex 1 sport | Shoe | Shoe |
|----------------------------|----------------------|----------------------|
| Art. no. Width 10 | 65901 | 65921 |
| Art. no. Width 11 | 65902 | 65922 |
| Art. no. Width 12 | 65903 | 65923 |
| Art. no. Width 14 | 65904 | 65924 |
| Standard EN ISO 20345:2011 | S1 P SRC | S3 SRC |
| Standard EN ISO 20345:2022 | S1 PL FO SC SR | S3L FO SC SR |
| Upper | textile | microvelour |
| Lining | distance mesh lining | distance mesh lining |
| Fastening | shoe laces | shoe laces |
| Sizes | 35 to 52 | 35 to 52 |
| Order unit | PR | PR |



uvex 1 sport white · Shoe S1/S2/S3L

The uvex 1 sport white safety shoe line combines a sporty design, optimal comfort and sophisticated functionality for working in areas where hygiene is important or foodstuffs are handled. The almost seamless upper finish prevents unwanted contaminants from getting inside the shoe when working in sensitive hygienic areas. The work shoes and removable comfortable climatic insocks can be washed at 30°C. uvex 1 sport white – pure sporty comfort for areas where hygiene is important, clean room applications, the food industry, the pharmaceutical industry, industrial kitchens and hospitality.

65807 65808 65809

Features:

• shock-absorbing PU midsole

• PU outsole

65837 65838 65839

• 100% metal-free protective toe cap

• flexible textile penetration resistance (6582)

65821 65822 65823

- hydrophobic microfibre upper
- breathable distance mesh lining
- ESD certified
- dust tongue (6582)
- sizes 35 to 40 produced using a womens' last
- metal-free

65817 65818 65819

- suitable for people allergic to chrome
- removable antistatic comfortable insock (Art. no.: 95797-0)

Sustainability:


• removable insock and heel cap made wholly or partly from recycled materials

clima zone

- free from harmful substances in accordance with the uvex restricted
- substances list

| uvex 1 sport white | Shoe | Shoe | Shoe | Shoe |
|----------------------------|-------------------------------|-------------------------|----------------------|----------------------|
| Art. no. Width 10 | 65837 | 65807 | 65817 | 65821 |
| Art. no. Width 11 | 65838 | 65808 | 65818 | 65822 |
| Art. no. Width 12 | 65839 | 65809 | 65819 | 65823 |
| Art. no. Width 14 | - | - | - | - |
| Standard EN ISO 20345:2011 | S1 SRC | S2 SRC | S2 SRC | S3 SRC |
| Standard EN ISO 20345:2022 | S1 FO SR | S2 FO SR | S2 FO SR | S3L FO SR |
| Upper | microfibre | microfibre | microfibre | microfibre |
| Lining | distance mesh lining | distance mesh lining | distance mesh lining | distance mesh lining |
| Fastening | plastic closure/hook-and-loop | hook-and-loop fastening | - | shoe laces |
| Sizes | 35 to 52 | 35 to 52 | 35 to 52 | 35 to 52 |
| Order unit | PR | PR | PR | PR |
| | | | | |

Occupational shoes uvex 1 sport NC



Features:

- shock-absorbing PU midsole
- PU outsole
 Ightweight and breathable textile upper
- TPU scuffcap
- · breathable distance mesh lining
- ESD certified
- sizes 35 to 40 produced using a womens' last
- metal-free



clima zone

- suitable for people allergic to chrome
- removable antistatic comfortable insock (Art. no.: 95177-9)


Sustainability:

65937 65938 65939

- · insole, removable insock and heel cap made wholly or partly from recycled materials
- free from harmful substances in accordance with the uvex restricted substances list

| uvex 1 sport NC | Shoe |
|----------------------------|----------------------|
| Art. no. Width 10 | 65937 |
| Art. no. Width 11 | 65938 |
| Art. no. Width 12 | 65939 |
| Standard EN ISO 20347:2012 | O1 FO SRC |
| Standard EN ISO 20347:2022 | O1 FO SC SR |
| Upper | textile |
| Lining | distance mesh lining |
| Fastening | shoe laces |
| Sizes | 35 to 52 |
| Order unit | PR |
| | |





Dressup for safety

Safety and style without compromise

Safety Footwear uvex 1 x-cite



uvex 1 x-cite · Shoe S3L · Chelsea boot S3L · Lace-up boot S3L

Do you need to head straight from the meeting room to the production line? Or from the office to the construction site? uvex combines trends from the fashion world with essential protective features and is uncompromising in terms of style and safety. The elegant look of the footwear can be perfectly combined with stylish business outfits. Their first-class wearer comfort never fails to impress, from morning to night.

Features:

- PU outsole
- composite toe cap with carbon
- flexible textile penetration resistance

- hydrophobic leather upper
- breathable textile lining
- ESD certified
- metal-free
- removable antistatic comfortable insock (Art. no.: 86397-9)

- insole, removable insock and heel cap made wholly or partly from recycled materials
- free from harmful substances in accordance with the uvex restricted substances list

| uvex 1 x-cite | Shoe | Chelsea boot | Lace-up boot |
|----------------------------|-------------------------|-------------------------|-------------------------|
| Art. no. Width 10 | 86401 | 86471 | 86421 |
| Art. no. Width 11 | 86402 | 86472 | 86422 |
| Art. no. Width 12 | 86403 | 86473 | 86423 |
| Standard EN ISO 20345:2011 | - | - | - |
| Standard EN ISO 20345:2022 | S3L FO SR | S3L FO SR | S3L FO SR |
| Upper | water-repellent leather | water-repellent leather | water-repellent leather |
| Lining | textile | textile | textile |
| Fastening | shoe laces | - | shoe laces; zip |
| Sizes | 34 to 44 | 34 to 44 | 34 to 44 |
| Order unit | PR | PR | PR |
| | | | |







uvex 1 business · Shoe S2/S3L · Lace-up boot S3L

Features:

• PU outsole

- steel protective toe cap
 flexible textile penetration resistance
 lightweight and breathable microvelour upper (8427, 8428)
- breathable textile lining
- ESD certified

• suitable for people allergic to chrome

• removable antistatic comfortable insock (Art. no.: 95157-9)

Sustainability:

• removable insock and heel cap made wholly or partly from recycled materials

clima zone

• free from harmful substances in accordance with the uvex restricted substances list

| uvex 1 business | Shoe | Shoe | Lace-up boot |
|----------------------------|-------------|-------------|--------------|
| Art. no. Width 10 | 84697 | 84281 | 84271 |
| Art. no. Width 11 | 84698 | 84282 | 84272 |
| Art. no. Width 12 | 84699 | 84283 | 84273 |
| Standard EN ISO 20345:2011 | S2 SRC | S3 SRC | S3 SRC |
| Standard EN ISO 20345:2022 | S2 FO SR | S3L FO SR | S3L FO SR |
| Upper | microvelour | microvelour | microvelour |
| Lining | textile | textile | textile |
| Fastening | shoe laces | shoe laces | shoe laces |
| Sizes | 39 to 52 | 39 to 52 | 39 to 52 |
| Order unit | PR | PR | PR |



Safety Footwear uvex 1 business



84301 84302 84303



uvex 1 business · Shoe S3L

Features:

- PU outsole

- steel protective toe cap
 flexible textile penetration resistance
 lightweight and breathable microvelour upper (8430)
- hydrophobic leather upper (8448, 8449)
- breathable textile lining
- ESD certified

• suitable for people allergic to chrome (8430)

• removable antistatic comfortable insock (Art. no.: 95157-9)

Sustainability:

- removable insock and heel cap made wholly or partly from recycled materials
- free from harmful substances in accordance with the uvex restricted substances list

| uvex 1 business | Shoe | Shoe | Shoe |
|----------------------------|-------------|-------------------------|-------------------------|
| Art. no. Width 10 | 84301 | 84481 | 84491 |
| Art. no. Width 11 | 84302 | 84482 | 84492 |
| Art. no. Width 12 | 84303 | 84483 | 84493 |
| Standard EN ISO 20345:2011 | S3 SRC | S3 SRC | S3 SRC |
| Standard EN ISO 20345:2022 | S3L FO SR | S3L FO SR | S3L FO SR |
| Upper | microvelour | water-repellent leather | water-repellent leather |
| Lining | textile | textile | textile |
| Fastening | shoe laces | shoe laces | shoe laces |
| Sizes | 39 to 52 | 35 to 52 | 39 to 52 |
| Order unit | PR | PR | PR |
| | | | |

You can find more information on uvex medicare on pages 434 to 437



redefining performance



100% more shock absorption. Comfort in 3 dimensions.



Outstanding stability. Reliable support and safety.



uvex monoskin shaft design. Pressure-free, comfortable fit.



uvex climazone standard. Temperature and climate control.

Outstanding flexibility. Optimum wearer comfort.

The ergonomic design of the outsole supports the natural movement and flexibility of the feet

High abrasion-resistant TPU sections



Jointed insert for securely climbing ladders.

Ergonomic sole design



Safety Footwear

uvex 1



clima zone

uvex 1 · Sandal S1 · Perforated shoe S1 · Perforated lace-up boot S1

The uvex 1 safety shoe provides robust protection for light applications. Its ergonomic design and seam-free construction prevent pressure points and provide optimal foot protection. The dual-density polyurethane sole offers both shock absorption and comfort. The timeless design is characterised by clean lines and a simplified look.

- breathable distance mesh lining
 ESD certified
- sizes 35 to 40 produced using a womens' last
- metal-free (Art. no.: 8542, 8547 only)
- suitable for people allergic to chrome
- removable antistatic comfortable insock (Art. no.: 95347-0)

Sustainability:

- insole and removable insock made wholly or partly from recycled materials
- free from harmful substances in accordance with the uvex restricted substances list

| uvex 1 | Sandal | Perforated shoe | Perforated shoe | Perforated shoe | Perforated lace-up boot |
|----------------------------|-------------------------|----------------------|----------------------|-----------------------------|-------------------------|
| Art. no. Width 10 | 85427 | 85437 | 85467 | 65657 | 85477 |
| Art. no. Width 11 | 85428 | 85438 | 85468 | 65658 | 85478 |
| Art. no. Width 12 | 85429 | 85439 | 85469 | 65659 | 85479 |
| Art. no. Width 14 | 85420 | 85430 | - | - | - |
| Standard EN ISO 20345:2011 | S1 SRC | S1 SRC | S1 SRC | S1 SRC | S1 SRC |
| Standard EN ISO 20345:2022 | S1 FO SR | S1 FO SR | S1 FO SR | S1 FO SR | S1 FO SR |
| Upper | microvelour | microvelour | microvelour | microvelour | microvelour |
| Lining | distance mesh lining | distance mesh lining | distance mesh lining | distance mesh lining | distance mesh lining |
| Fastening | hook-and-loop fastening | elastic laces | elastic laces | BOA [®] Fit System | shoe laces |
| Sizes | 35 to 52 | 35 to 52 | 35 to 52 | 35 to 52 | 35 to 52 |
| Order unit | PR | PR | PR | PR | PR |

You can find more information on uvex medicare on pages 434 to 437

Features:

• PU outsole

shock-absorbing PU midsole

· foamed polyurethane heel basket

• 100% metal-free protective toe cap

· lightweight and breathable microvelour upper

Safety Footwear





uvex 1 · Shoe S2 · Lace-up boot S2

Features:

- shock-absorbing PU midsole
- PU outsole
- foamed polyurethane heel basket
- 100% metal-free protective toe cap
- · lightweight and breathable microvelour upper
- breathable distance mesh lining
- ESD certified
- sizes 35 to 40 produced using a womens' last

- metal-free (Art. no.: 8545 only)
- suitable for people allergic to chrome
- removable antistatic comfortable insock (Art. no.: 95347-0)

Sustainability:

- insole and removable insock made wholly or partly from recycled materials
- free from harmful substances in accordance with the uvex restricted substances list

| uvex 1 | Shoe | Shoe | Lace-up boot |
|----------------------------|----------------------|-----------------------------|----------------------|
| Art. no. Width 10 | 85447 | 65667 | 85457 |
| Art. no. Width 11 | 85448 | 65668 | 85458 |
| Art. no. Width 12 | 85449 | 65669 | 85459 |
| Art. no. Width 14 | 85440 | - | 85450 |
| Standard EN ISO 20345:2011 | S2 SRC | S2 SRC | S2 SRC |
| Standard EN ISO 20345:2022 | S2 FO SR | S2 FO SR | S2 FO SR |
| Upper | microvelour | microvelour | microvelour |
| Lining | distance mesh lining | distance mesh lining | distance mesh lining |
| Fastening | elastic laces | BOA [®] Fit System | shoe laces |
| Sizes | 35 to 52 | 35 to 52 | 35 to 52 |
| Order unit | PR | PR | PR |
| | | | |

You can find more information on uvex medicare on pages 434 to 437





uvex 1 ladies · Sandal S1 · Perforated shoe S1 · Shoe S2

Features:

- shock-absorbing PU midsole
- PU outsole
- foamed polyurethane heel basket
- 100% metal-free protective toe cap
- · lightweight and breathable microvelour upper
- breathable distance mesh lining
- ESD certified

sizes 35 to 40 produced using a womens' last

- metal-free (Art. no.: 8560 only)
- suitable for people allergic to chrome
- removable antistatic comfortable insock (Art. no.: 95347-0)

Sustainability:

• insole and removable insock made wholly or partly from recycled materials

clima zone

• free from harmful substances in accordance with the uvex restricted substances list

| uvex 1 | Sandal | Perforated shoe | Shoe |
|----------------------------|-------------------------|----------------------|----------------------|
| Art. no. Width 10 | 85607 | 85617 | 85627 |
| Art. no. Width 11 | 85608 | 85618 | 85628 |
| Standard EN ISO 20345:2011 | S1 SRC | S1 SRC | S2 SRC |
| Standard EN ISO 20345:2022 | S1 FO SR | S1 FO SR | S2 FO SR |
| Upper | microvelour | microvelour | microvelour |
| Lining | distance mesh lining | distance mesh lining | distance mesh lining |
| Fastening | hook-and-loop fastening | elastic laces | elastic laces |
| Sizes | 35 to 52 | 35 to 52 | 35 to 52 |
| Order unit | PR | PR | PR |



uvex

Safety Footwear

uvex 1 x-tended support



uvex 1 x-tended support · Sandal S1 PL · Perforated Shoe S1 PL/S1

Features:

- shock-absorbing PU midsole
- PU outsole
- foamed polyurethane scuffcap (8514, 8519, 8536, 6568)
- foamed polyurethane heel basket
- 100% metal-free protective toe cap
- flexible textile penetration resistance (8514, 8519, 8536, 6568)
- lightweight and breathable microvelour upper
- breathable distance mesh lining
- ESD certified

• dust tongue (not 8536)

- sizes 35 to 40 produced using a womens' last
- metal-free (Art. no.: 8536 only)
- suitable for people allergic to chrome
- removable antistatic comfortable insock (Art. no.: 95347-0)

Sustainability:

- removable insock made wholly or partly from recycled materials
- free from harmful substances in accordance with the uvex restricted substances list

clima zone

| uvex 1 x-tended support | Sandal | Perforated shoe |
|-------------------------|-------------------------|----------------------|----------------------|----------------------|----------------------|----------------------|
| Art. no. Width 10 | 85361 | 85127 | 85117 | 85141 | 85191 | 65681 |
| Art. no. Width 11 | 85362 | 85128 | 85118 | 85142 | 85192 | 65682 |
| Art. no. Width 12 | 85363 | 85129 | 85119 | 85143 | 85193 | 65683 |
| Norm EN ISO 20345:2011 | S1 P SRC | S1 SRC | S1 SRC | S1 P SRC | S1 P SRC | S1 P SRC |
| Norm EN ISO 20345:2022 | S1 PL FO SC SR | S1 FO SR | S1 FO SR | S1 PL FO SC SR | S1 PL FO SC SR | S1 PL FO SC SR |
| Upper | microvelour | microvelour | microvelour | microvelour | microvelour | microvelour |
| Lining | distance mesh lining | distance mesh lining | distance mesh lining | distance mesh lining | distance mesh lining | distance mesh lining |
| Fastening | hook-and-loop fastening | elastic laces | elastic laces | elastic laces | elastic laces | BOA® Fit System |
| Sizes | 35 to 52 | 35 to 52 | 35 to 52 | 35 to 52 | 35 to 52 | 35 to 52 |
| Bestelleinheit | PR | PR | PR | PR | PR | PR |



Safety Footwear uvex 1 x-tended support





uvex 1 x-tended support · Shoe S3L · Lace-up boot S3L

Features:

- shock-absorbing PU midsole
- PU outsole
- foamed polyurethane scuffcap
- · foamed polyurethane heel basket
- 100% metal-free protective toe cap
- flexible textile penetration resistance
- lightweight and breathable microvelour upper
 breathable distance mesh lining
- ESD certified

dust tongue

- sizes 35 to 40 produced using a womens' last
- metal-free (Art. no.: 8517 only)
- suitable for people allergic to chrome
- removable antistatic comfortable insock (Art. no.: 95347-0)

Sustainability:

• removable insock made wholly or partly from recycled materials • free from harmful substances in accordance with the uvex restricted substances list

| uvex 1 x-tended support | Shoe | Shoe | Lace-up boot |
|----------------------------|----------------------|----------------------|----------------------|
| Art. no. Width 10 | 85161 | 65671 | 85171 |
| Art. no. Width 11 | 85162 | 65672 | 85172 |
| Art. no. Width 12 | 85163 | 65673 | 85173 |
| Standard EN ISO 20345:2011 | S3 SRC | S3 SRC | S3 SRC |
| Standard EN ISO 20345:2022 | S3L FO SC SR | S3L FO SC SR | S3L FO SC SR |
| Upper | microvelour | microvelour | microvelour |
| Lining | distance mesh lining | distance mesh lining | distance mesh lining |
| Fastening | elastic laces | BOA® Fit System | shoe laces |
| Sizes | 35 to 52 | 35 to 52 | 35 to 52 |
| Order unit | PR | PR | PR |
| | | | |



ñ

LS

a oligit

uvex

Winners at Work – uvex 2

Pushing the Limits!

Superior performance across all disciplines

The innovative uvex 2 safety shoe series does not shy away from any challenge among medium applications: robust upper materials and a deep sole profile ensure maximum performance in your everyday work. The lightweight design, flexible sole and breathability ensure comfort all day long.

Website





Full sole flexibility



Quick-release laces can be adjusted to fit any foot



Directly mouled PU scuffcap reliably protects the upper



High stability thanks to integrated heel basket









clima zone

uvex 2 · Shoe S3L · Lace-up boot S3L

Features:

- shock-absorbing PU midsole
- PU outsole
- foamed polyurethane scuffcap
- · foamed polyurethane heel basket
- 100% metal-free protective toe cap
- flexible textile penetration resistance
- hydrophobic leather upper
 breathable distance mesh lining
- reflective elements

ESD certified

- dust tongue
- sizes 35 to 40 produced using a womens' last metal-free (Art. no.: 6503 only)
- removable antistatic comfortable insock (Art. no.: 95347-0)

- removable insock made wholly or partly from recycled materials
- free from harmful substances in accordance with the uvex restricted substances list

| uvex 2 | Shoe | Lace-up boot | Lace-up boot |
|----------------------------|--|--|--|
| Art. no. Width 10 | 65021 | 65031 | 65061 |
| Art. no. Width 11 | 65022 | 65032 | 65062 |
| Art. no. Width 12 | 65023 | 65033 | 65063 |
| Art. no. Width 14 | 65024 | 65034 | - |
| Standard EN ISO 20345:2011 | S3 SRC | S3 SRC | - |
| Standard EN ISO 20345:2022 | S3L FO SC SR | S3L FO SC SR | S3L FO SC SR |
| Upper | water-repellent, full-grain smooth leather | water-repellent, full-grain smooth leather | water-repellent, full-grain smooth leather |
| Lining | distance mesh lining | distance mesh lining | distance mesh lining |
| Fastening | elastic laces | shoe laces | BOA® Fit System |
| Sizes | 35 to 52 | 35 to 52 | 35 to 52 |
| Order unit | PR | PR | PR |



Safety Footwear uvex 2





uvex 2 · Sandal S1 PL · Perforated shoe S1 PL · Shoe S3L · Lace-up boot S3L

Features:

- shock-absorbing PU midsole
- PU outsole
- foamed polyurethane scuffcap
- · foamed polyurethane heel basket
- 100% metal-free protective toe cap
- flexible textile penetration resistance
- Iightweight and breathable microvelour upper
 breathable distance mesh lining
- reflective elements
- ESD certified

- dust tongue
- sizes 35 to 40 produced using a womens' last
- metal-free (Art. no.: 6500, 6509 only)
- suitable for people allergic to chrome
- removable antistatic comfortable insock (Art. no.: 95347-0)

Sustainability:

• removable insock made wholly or partly from recycled materials • free from harmful substances in accordance with the uvex restricted substances list

| uvex 2 | Sandal | Perforated Shoe | Shoe | Lace-up boot |
|----------------------------|-------------------------|----------------------|----------------------|----------------------|
| Art. no. Width 10 | 65001 | 65011 | 65081 | 65091 |
| Art. no. Width 11 | 65002 | 65012 | 65082 | 65092 |
| Art. no. Width 12 | 65003 | 65013 | 65083 | 65093 |
| Art. no. Width 14 | 65004 | 65014 | 65084 | 65094 |
| Standard EN ISO 20345:2011 | S1 P SRC | S1 P SRC | S3 SRC | S3 SRC |
| Standard EN ISO 20345:2022 | S1 PL FO SC SR | S1 PL FO SC SR | S3L FO SC SR | S3L FO SC SR |
| Upper | microvelour | microvelour | microvelour | microvelour |
| Lining | distance mesh lining | distance mesh lining | distance mesh lining | distance mesh lining |
| Fastening | hook-and-loop fastening | elastic laces | elastic laces | shoe laces |
| Sizes | 35 to 52 | 35 to 52 | 35 to 52 | 35 to 52 |
| Order unit | PR | PR | PR | PR |

uvex

Safety Footwear uvex 2 MACSOLE®



clima zone

uvex 2 MACSOLE® · Shoe S3L · Lace-up boot S3L

All the advantages of the uvex 2 safety shoe range combined with a MACSOLE® rubber outsole: The uvex 2 MACSOLE® is characterised by outstanding resistance to heat, chemicals and cuts. In addition, the MACSOLE® rubber sole technology features an unparalleled level of slip resistance, even in cold conditions.

Features:

- shock-absorbing PU midsole
- heat-, chemical- and cut-resistant uvex MACSOLE® rubber outsole
- foamed polyurethane scuffcap
- foamed polyurethane heel basket
- 100% metal-free protective toe cap
- · flexible textile penetration resistance
- hydrophobic leather upper

- breathable distance mesh lining (6522, 6523, 6531, 6532)
- warm winter lining (6530, 6536)
- reflective elements (6522, 6523, 6530)
- ESD certified
- dust tongue
- sizes 35 to 40 produced using a womens' last
- metal-free (Art. no.: 6523, 6530 only)
- removable antistatic comfortable insock (Art. no.: 95347-0)

Sustainability:

- removable insock made wholly or partly from recycled materials
- free from harmful substances in accordance with the uvex restricted substances list

| uvex 2 MACSOLE® | Shoe | Shoe | Lace-up boot | Lace-up boot | Winter lace-up boot | Winter lace-up boot |
|----------------------------|---------------------------|-----------------------------|---------------------------|-----------------------------|-----------------------------|---------------------------|
| Art. no. Width 10 | 65221 | 65311 | 65231 | 65321 | - | - |
| Art. no. Width 11 | 65222 | 65312 | 65232 | 65322 | - | - |
| Art. no. Width 12 | 65223 | 65313 | 65233 | 65323 | 65363 | 65303 |
| Art. no. Width 14 | 65224 | - | 65234 | - | - | - |
| Standard EN ISO 20345:2011 | S3 HI HRO SRC | S3 HI HRO SRC | S3 HI HRO SRC | S3 HI HRO SRC | S3 CI HI HRO SRC | S3 CI HI HRO SRC |
| Standard EN ISO 20345:2022 | S3L FO HI HRO SC SR | S3L FO HI HRO SC SR | S3L FO HI HRO SC SR | S3L FO HI HRO SC SR | S3L FO CI HI HRO SC SR | S3L FO CI HI HRO SC SR |
| Upper | water-repellent, | water-repellent, | water-repellent, | water-repellent, | water-repellent, | water-repellent, |
| | full-grain smooth leather | full-grain smooth leather | full-grain smooth leather | full-grain smooth leather | full-grain smooth leather | full-grain smooth leather |
| Lining | distance mesh lining | distance mesh lining | distance mesh lining | distance mesh lining | distance mesh lining | distance mesh lining |
| Fastening | elastic laces | BOA [®] Fit System | shoe laces | BOA [®] Fit System | BOA [®] Fit System | shoe laces |
| Sizes | 35 to 52 | 35 to 52 | 35 to 52 | 35 to 52 | 35 to 52 | 35 to 52 |
| Order unit | PR | PR | PR | PR | PR | PR |



uvex 2 MACSOLE® · Shoe S7L/S3L · Lace-up boot S7L/S3L

Features:

- shock-absorbing PU midsole
- heat-, chemical- and cut-resistant uvex MACSOLE® rubber outsole
- foamed polyurethane scuffcap
- foamed polyurethane heel basket
 100% metal-free protective toe cap
- flexible textile penetration resistance
- · lightweight and breathable microvelour upper • breathable distance mesh lining (6528, 6529)
- waterproof sympatex® lining (6524, 6525)
- reflective elements
- ESD certified

- dust tongue
- sizes 35 to 40 produced using a womens' last
- metal-free (Art. no.: 6528, 6529 only)
- suitable for people allergic to chrome
- removable antistatic comfortable insock (Art. no.: 95347-0)

Sustainability:

- · removable insock made wholly or partly from recycled materials
- free from harmful substances in accordance with the uvex restricted substances list

| uvex 2 STX MACSOLE® | Shoe | Lace-up boot | Shoe | Lace-up boot |
|------------------------|--------------------------------|--------------------------------|----------------------|----------------------|
| ArtNr. Weite 10 | 65241 | 65251 | 65281 | 65291 |
| ArtNr. Weite 11 | 65242 | 65252 | 65282 | 65292 |
| ArtNr. Weite 12 | 65243 | 65253 | 65283 | 65293 |
| ArtNr. Weite 14 | - | - | 65284 | 65294 |
| Norm EN ISO 20345:2011 | S3 WR HI HRO SRC | S3 WR HI HRO SRC | S3 HI HRO SRC | S3 HI HRO SRC |
| Norm EN ISO 20345:2022 | S7L FO HI HRO SC SR | S7L FO HI HRO SC SR | S3L FO HI HRO SC SR | S3L FO HI HRO SC SR |
| Upper | microvelour | microvelour | microvelour | microvelour |
| Lining | sympatex [®] laminate | sympatex [®] laminate | distance mesh lining | distance mesh lining |
| Fastening | elastic laces | shoe laces | elastic laces | shoe laces |
| Sizes | 35 to 52 | 35 to 52 | 35 to 52 | 35 to 52 |
| Order unit | PR | PR | PR | PR |



uvex 2 construction

The essential allrounder

uvex recommends footwear with steel midsoles for demanding applications such as construction and construction-related industries.



uvex waterstop technology Reliable protection against water penetration for four times longer



Stability and ankle protection Anatomically shaped heel cage for better protection against twisted ankles on uneven surfaces



Increased visibility Reflective side strips for increased visibility in many work environments



livex

Safe slip resistance Deep sole tread for reliable slip resistance and grip







uvex 2 construction · Lace-up boot S3

The new uvex 2 construction was developed to meet the specific challenges of the construction industry. The construction and engineering industries really put workers and their footwear to the test. In addition to high mechanical stress, extreme weather conditions are often a factor too. Thanks to their intelligent design and innovative technologies, the uvex 2 construction models offer reliable protection, stability and exceptional comfort.

Features:

- shock-absorbing PU midsole
- PU outsole
- foamed polyurethane scuffcap
- foamed polyurethane heel basket
- 100% metal-free protective toe cap

- steel penetration resistance
- water-resistant uvex waterstop leather upper
- breathable distance mesh lining
- reflective elements
- dust tongue
- sizes 35 to 40 produced using a womens' last
 removable antistatic comfortable insock (Art. no.: 95347-0)
- Sustainability:
- insole and removable insock made wholly or partly from recycled materials
- free from harmful substances in accordance with the uvex restricted substances list

clima zone

| uvex 2 construction | Lace-up boot | Lace-up boot | Lace-up boot |
|----------------------------|-------------------------|-------------------------|-------------------------|
| Art. no. Width 10 | 65101 | 65121 | 65131 |
| Art. no. Width 11 | 65102 | 65122 | 65132 |
| Art. no. Width 12 | 65103 | 65123 | 65133 |
| Standard EN ISO 20345:2011 | S3 SRC | S3 SRC | S3 SRC |
| Standard EN ISO 20345:2022 | S3 FO SC SR | S3 FO SC SR | S3 FO SC SR |
| Upper | water repellent leather | water repellent leather | water repellent leather |
| Lining | textile | textile | textile |
| Fastening | shoe laces | shoe laces | shoe laces |
| Sizes | 35 to 52 | 35 to 52 | 35 to 52 |
| Order unit | PR | PR | PR |

wex 2 xenova® Trend-setting all-rounder



uvex

uvex 2 xenova

B

You can find more information at www.uvex-safety.com/ uvex2xenova



Metal-free protective toe cap and optional metal-free penetration resistance



Breathable upper



Lightweight and robust dual-density polyurethane sole



uvex 2 xenova® · Sandal S1 PL/S1 · Perforated shoe S1/S1 PL · Shoe S2

Improved comfort, guaranteed protection and an attractive design: All of this is offered by the new and completely metal-free uvex 2 xenova® safety shoes. An improved fit, lighter weight and optimum shock absorption, breathability and padding significantly increase wearer comfort. The combination of protection, style and comfort makes the new uvex 2 xenova® a popular all-rounder for indoor and outdoor work, for example in mechanical and plant engineering, metalworking or handicraft work.

Features:

- shock-absorbing PU midsole with 15% recycled granulate from residues generated by uvex production processes
- PU outsole
- 100% metal-free protective toe cap
- flexible textile penetration resistance (95531-3, 9558)
- · lightweight and breathable microvelour upper

- breathable distance mesh lining
- reflective elements
- ESD certified
- dust tongue (9554, 9557, 9558)
- sizes 35 to 40 produced using a womens' last
- metal-free (Art. no.: 9553, 9554, 9557 only)
- suitable for people allergic to chrome
- removable antistatic comfortable insock (Art. no.: 95347-0)

- removable insock and heel cap made wholly or partly from recycled materials
- free from harmful substances in accordance with the uvex restricted substances list

| uvex 2 xenova® | Sandal | Sandal | Perforated shoe | Perforated shoe | Shoe |
|----------------------------|-------------------------|-------------------------|----------------------|----------------------|----------------------|
| Art. no. Width 10 | 95531 | 95537 | 95547 | 95581 | 95577 |
| Art. no. Width 11 | 95532 | 95538 | 95548 | 95582 | 95578 |
| Art. no. Width 12 | 95533 | 95539 | 95549 | 95583 | 95579 |
| Standard EN ISO 20345:2011 | S1 P SRC | S1 SRC | S1 SRC | S1 P SRC | S2 SRC |
| Standard EN ISO 20345:2022 | S1 PL FO SR | S1 FO SR | S1 FO SR | S1 PL FO SR | S2 FO SR |
| Upper | microvelour | microvelour | microvelour | microvelour | microvelour |
| Lining | distance mesh lining | distance mesh lining | distance mesh lining | distance mesh lining | distance mesh lining |
| Fastening | hook-and-loop fastening | hook-and-loop fastening | shoe laces | BOA® Fit System | shoe laces |
| Sizes | 35 to 52 | 35 to 52 | 35 to 52 | 35 to 52 | 35 to 52 |
| Order unit | PR | PR | PR | PR | PR |



uvex 2 xenova®





You can find more information on uvex medicare on pages 434 to 437

uvex 2 xenova® · Shoe S2/S3L · Lace-up boot S3L

Features:

- shock-absorbing PU midsole with 15% recycled granulate from residues generated by uvex production processes
- PU outsole
- 100% metal-free protective toe cap
- flexible textile penetration resistance
- hydrophobic leather upper
- scuffcap with PU coating (95551-3, 9556, 9569)
- breathable distance mesh lining
- reflective elements
- ESD certified

- dust tongue
- sizes 35 to 40 produced using a womens' last
- metal-free (Art. no.: 9555, 9556 only)
- removable antistatic comfortable insock (Art. no.: 95347-0)

- removable insock and heel cap made wholly or partly from recycled materials
- free from harmful substances in accordance with the uvex restricted substances list

| uvex 2 xenova® | Shoe | Shoe | Lace-up boot | Lace-up boot |
|----------------------------|----------------------|----------------------|----------------------|----------------------|
| Art. no. Width 10 | 95557 | 95551 | 95561 | 95691 |
| Art. no. Width 11 | 95558 | 95552 | 95562 | 95692 |
| Art. no. Width 12 | 95559 | 95553 | 95563 | 95693 |
| Standard EN ISO 20345:2011 | S2 SRC | S3 SRC | S3 SRC | S3 SRC |
| Standard EN ISO 20345:2022 | S2 FO SR | S3L FO SC SR | S3L FO SC SR | S3L FO SC SR |
| Upper | water-repellent, | water-repellent, | water-repellent, | water-repellent, |
| | full-grain leather | full-grain leather | full-grain leather | full-grain leather |
| Lining | distance mesh lining | distance mesh lining | distance mesh lining | distance mesh lining |
| Fastening | shoe laces | shoe laces | shoe laces | BOA® Fit System |
| Sizes | 35 to 52 | 35 to 52 | 35 to 52 | 35 to 52 |
| Order unit | PR | PR | PR | PR |

uvex

Safety and comfort redefined – uvex 2 trend

Affordable Quality and Comfort



You can find more information at www.uvex-safety.com/ uvex2trend





Lightweight and robust dualdensity polyurethane sole



Breathable upper



N(D)

Steel protective toe cap and optional steel penetration resistance



Reliable ankle protection thanks to integrated heel cap





uvex 2 trend · Sandal S1 P/S1 · Perforated shoe S1 P

Whether in the assembly hall or on the production line, indoors or outdoors: uvex 2 trend safety shoes are equipped with numerous proven technologies in a modern entry-level product line for medium applications. The product family relies on steel protective elements. In addition, the uvex anti-twist heel cap provides greater protection against twisted ankles, while the polyurethane outsole ensures wearer comfort. The result: maximum comfort and reliable safety for your everyday work.

Features:

- shock-absorbing PU midsole
- PU outsole
- steel protective toe cap
- steel penetration resistance (6906, 69361-3, 6938)
- lightweight and breathable microvelour upper

- breathable distance mesh lining
- reflective elements
- ESD certified
- dust tongue (6938)
- sizes 35 to 40 produced using a womens' last
- suitable for people allergic to chrome
- removable antistatic comfortable insock (Art. no.: 95187-9)

- removable insock and heel cap made wholly or partly from recycled materials
- free from harmful substances in accordance with the uvex restricted substances list

| uvex 2 trend | Sandal | Sandal | Sandal | Perforated shoe |
|----------------------------|-------------------------|-------------------------|-------------------------|----------------------|
| Art. no. Width 10 | 69361 | 69367 | 69061 | 69381 |
| Art. no. Width 11 | 69362 | 69368 | 69062 | 69382 |
| Art. no. Width 12 | 69363 | 69369 | 69063 | 69383 |
| Standard EN ISO 20345:2011 | S1 P SRC | S1 SRC | S1 P SRC | S1 P SRC |
| Standard EN ISO 20345:2022 | S1 P FO SR | S1 FO SR | S1 P FO SR | S1 P FO SR |
| Upper | microvelour | microvelour | microvelour | microvelour |
| Lining | distance mesh lining | distance mesh lining | distance mesh lining | distance mesh lining |
| Fastening | hook-and-loop fastening | hook-and-loop fastening | hook-and-loop fastening | BOA® Fit System |
| Sizes | 35 to 52 | 35 to 52 | 35 to 52 | 35 to 52 |
| Order unit | PR | PR | PR | PR |

uvex

Safety Footwear

uvex 2 trend



uvex 2 trend \cdot Perforated shoe S1 P/S1 \cdot Shoe S2

Features:

- shock-absorbing PU midsole
- PU outsole
- steel protective toe cap
- steel penetration resistance (69371-3)
- · lightweight and breathable microvelour upper
- breathable distance mesh lining
- reflective elements
- ESD certified
- dust tongue

- sizes 35 to 40 produced using a womens' last
- suitable for people allergic to chrome
- removable antistatic comfortable insock (Art. no.: 95187-9)

Sustainability:

removable insock and heel cap made wholly or partly from recycled materials

clima zone

free from harmful substances in accordance with the uvex restricted substances list

| uvex 2 trend | Perforated shoe | Perforated shoe | Perforated shoe | Shoe | Shoe | Shoe |
|----------------------------|----------------------|----------------------|----------------------|----------------------|----------------------|----------------------|
| Art. no. Width 10 | 69371 | 69377 | 69477 | 69397 | 69497 | 69097 |
| Art. no. Width 11 | 69372 | 69378 | 69478 | 69398 | 69498 | 69098 |
| Art. no. Width 12 | 69373 | 69379 | 69479 | 69399 | 69499 | 69099 |
| Standard EN ISO 20345:2011 | S1 P SRC | S1 SRC | S1 SRC | S2 SRC | S2 SRC | S2 SRC |
| Standard EN ISO 20345:2022 | S1 P FO SR | S1 FO SR | S1 FO SR | S2 FO SR | S2 FO SR | S2 FO SR |
| Upper | microvelour | microvelour | microvelour | microvelour | microvelour | microvelour |
| Lining | distance mesh lining | distance mesh lining | distance mesh lining | distance mesh lining | distance mesh lining | distance mesh lining |
| Fastening | shoe laces |
| Sizes | 35 to 52 |
| Order unit | PR | PR | PR | PR | PR | PR |



uvex 2 trend · Shoe S2/S3 · Lace-up boot S2/S3

- Features:
- shock-absorbing PU midsole
- PU outsole
- · foamed polyurethane scuffcap
- steel protective toe cap
 steel penetration resistance (69341-3, 69351-3, 69481-3)
- hydrophobic leather upper (6934, 6935)
- lightweight and breathable microvelour upper (6948)
- breathable distance mesh lining
- reflective elements

- ESD certified
- dust tongue
- sizes 35 to 40 produced using a womens' last
- removable antistatic comfortable insock (Art. no.: 95187-9)

Sustainability:

• removable insock and heel cap made wholly or partly from recycled materials

clima zone

• free from harmful substances in accordance with the uvex restricted substances list

| uvex 2 trend | Shoe | Shoe | Shoe | Lace-up boot | Lace-up boot |
|----------------------------|-------------------------|-------------------------|-----------------------------|-------------------------|-------------------------|
| Art. no. Width 10 | 69347 | 69341 | 69481 | 69357 | 69351 |
| Art. no. Width 11 | 69348 | 69342 | 69482 | 69358 | 69352 |
| Art. no. Width 12 | 69349 | 69343 | 69483 | 69359 | 69353 |
| Standard EN ISO 20345:2011 | S2 SRC | S3 SRC | - | S2 SRC | S3 SRC |
| Standard EN ISO 20345:2022 | S2 FO SR | S3 FO SR | S3 FO SR | S2 FO SR | S3 FO SR |
| Upper | full-grain soft leather | full-grain soft leather | mikrovelour | full-grain soft leather | full-grain soft leather |
| Lining | distance mesh lining | distance mesh lining | distance mesh lining | distance mesh lining | distance mesh lining |
| Fastening | shoe laces | shoe laces | BOA [®] Fit System | shoe laces | shoe laces |
| Sizes | 35 to 52 | 35 to 52 | 35 to 52 | 35 to 52 | 35 to 52 |
| Order unit | PR | PR | PR | PR | PR |







< 3 – safety and comfort made easy.

Hard work. Easy going.

reddot winner 2022



uvex anklepro Protection against impacts in the ankle area



uvex lacelock Optimised lacing for increased stability with locking lace hooks



uvex waterstop Technologie Reliable protection against water penetration for four times longer



uvex 3



bionom x **clima** zone i-**PURE**nrj planet

uvex 3 · Shoe S3L · Lace-up boot S3L

The uvex 3 is the ideal companion for heavy-duty applications. It combines the necessary robustness with a sporty and dynamic design. The uvex bionom x design ensures that upper and outsole offer optimum wearer comfort. Additional features also provide outstanding protection.

Features:

- uvex i-PUREnrj planet midsole with shock-absorption and energy-return features, made with 10% recycled granulate from residues generated by uvex production processes
- PU outsole
- foamed polyurethane scuffcap
- foamed polyurethane heel basket
- 100% metal-free protective toe cap
- flexible textile penetration resistance

- water-resistant uvex waterstop leather upper
- breathable textile lining
- uvex anklepro ankle protection (6874)
- uvex lacelock fastening hook (6874)
- reflective elements
- ESD certified
- dust tongue
- sizes 36 to 40 produced using a womens' last
 removable antistatic comfortable insock (Art. no.: 86937-9)

- removable insock made wholly or partly from recycled materials
- free from harmful substances in accordance with the uvex restricted
- substances list

| uvex 3 | Shoe | Lace-up boot |
|----------------------------|-------------------------|-------------------------|
| Art. no. Width 10 | 68711 | 68741 |
| Art. no. Width 11 | 68712 | 68742 |
| Art. no. Width 12 | 68713 | 68743 |
| Standard EN ISO 20345:2011 | - | S3 CI SRC |
| Standard EN ISO 20345:2022 | S3L FO CI SC SR | S3L FO CI SC SR |
| Upper | water repellent leather | water repellent leather |
| Lining | textile | textile |
| Fastening | shoe laces | shoe laces |
| Sizes | 36 to 52 | 36 to 52 |
| Order unit | PR | PR |





reddot winner 2022 bionom x clima zone i-PUREnrj planet

uvex 3 · Lace-up boot S3 · High lace-up boot S3

Features:

- uvex i-PUREnrj planet midsole with shock-absorption and energy-return features, made with 10% recycled granulate from residues generated by uvex production processes
- PU outsole
- foamed polyurethane scuffcap
- · foamed polyurethane heel basket
- 100% metal-free protective toe cap
- steel penetration resistance
- · water-resistant uvex waterstop leather upper
- breathable textile lining
- uvex anklepro ankle protection
- uvex lacelock fastening hook
- reflective elements

- ESD certified
- dust tongue
- sizes 36 to 40 produced using a womens' last
- removable antistatic comfortable insock (Art. no.: 86937-9)

- insole and removable insock made wholly or partly from recycled materials
- free from harmful substances in accordance with the uvex restricted substances list
- uvex recommends footwear with steel midsoles for demanding applications such as construction and construction-related industries.

| uvex 3 | Lace-up boot | Lace-up boot | High lace-up boot |
|----------------------------|-------------------------|-------------------------|-------------------------|
| Art. no. Width 10 | 68721 | 68731 | 68751 |
| Art. no. Width 11 | 68722 | 68732 | 68752 |
| Art. no. Width 12 | 68723 | 68733 | 68753 |
| Standard EN ISO 20345:2011 | S3 CI SRC | S3 CI SRC | - |
| Standard EN ISO 20345:2022 | S3 FO CI SC SR | S3 FO CI SC SR | S3 FO CI SC SR |
| Upper | water repellent leather | water repellent leather | water repellent leather |
| Lining | textile | textile | textile |
| Fastening | shoe laces | shoe laces | shoe laces |
| Sizes | 36 to 52 | 36 to 52 | 36 to 52 |
| Order unit | PR | PR | PR |



bionom x clima zone i-PUREnrj planet

uvex 3 · High lace-up boot S3L CI · High zip-up boot S3L CI

Features:

- uvex i-PUREnrj planet midsole with shock-absorption and energy-return features, made with 10% recycled granulate from residues generated by uvex production processes
- PU outsole
- foamed polyurethane scuffcap
- foamed polyurethane heel basket
- 100% metal-free protective toe cap
- flexible textile penetration resistance
- water-resistant uvex waterstop leather upper
- warm winter lining
- uvex anklepro ankle protection (6877)

- uvex lacelock fastening hook (6877)
- reflective elements
 - ESD certified
 - dust tongue (6877)
 - sizes 36 to 40 produced using a womens' last
 - removable antistatic comfortable insock (Art. no.: 86937-9)

- removable insock made wholly or partly from recycled materials
 free from harmful substances in accordance with the uvex restricted
- free from harmful substances in accordance with the uvex restricted substances list

| uvex 3 | High lace-up boot | High zip-up boot |
|----------------------------|-------------------------|-------------------------|
| Art. no. Width 10 | 68771 | 68781 |
| Art. no. Width 11 | 68772 | 68782 |
| Art. no. Width 12 | 68773 | 68783 |
| Standard EN ISO 20345:2011 | - | - |
| Standard EN ISO 20345:2022 | S3L FO CI SC SR | S3L FO CI SC SR |
| Upper | water repellent leather | water repellent leather |
| Lining | warm lining | warm lining |
| Fastening | shoe laces | zip |
| Sizes | 36 to 52 | 36 to 52 |
| Order unit | PR | PR |
| | | |



uvex 3 Macsole®

Sustainable rubber technology









Contact heat resistant short-term up to 300° Celsius and heat-insulating





Flexible, even at low temperatures



less weight



Extremely slip-resistant, cut-resistant and largely chemical-resistant







bionom x **clima** zone i-**PURE**nrj planet

uvex 3 MACSOLE® · Shoe S3/S7 · Lace-up boot S3/S7

The uvex 3, but even more robust. The MACSOLE® rubber outsole provides even stronger support for heavy-duty applications, making it particularly resistant to heat, chemicals and cuts. In addition, the MACSOLE® rubber sole technology features an unparalleled level of slip resistance, even in cold conditions.

Features:

- uvex i-PUREnrj planet midsole with shock-absorption and energy-return features, made with 10% recycled granulate from residues generated by uvex production processes
- heat-, chemical- and cut-resistant uvex MACSOLE® rubber outsole
- foamed polyurethane scuffcap
- foamed polyurethane heel basket
- 100% metal-free protective toe cap
- steel penetration resistance
- hydrophobic leather upper (6862, 6863)

- water-resistant uvex waterstop leather upper (6860, 6861)
- waterproof Sympatex lining (6862, 6863)
- breathable textile lining (6860, 6861)
- uvex anklepro ankle protection (6861, 6863)
- uvex lacelock fastening hook (6861, 6863)
- reflective elements
- ESD certified
- dust tongue
- sizes 36 to 40 produced using a womens' last
 removable antistatic comfortable insock (Art. no.: 86937-9)

Sustainabiltiy:

- insole and removable insock made wholly or partly from recycled materials
- free from harmful substances in accordance with the uvex restricted substances list

| uvex 3 MACSOLE® | Shoe | Lace-up boot | Shoe | Lace-up boot |
|----------------------------|-------------------------|--------------------------|--------------------------------|--------------------------------|
| Art. no. Width 10 | 68601 | 68611 | 68621 | 68631 |
| Art. no. Width 11 | 68602 | 68612 | 68622 | 68632 |
| Art. no. Width 12 | 68603 | 68613 | 68623 | 68633 |
| Standard EN ISO 20345:2011 | - | - | - | - |
| Standard EN ISO 20345:2022 | S3 FO CI HI HRO SC SR | S3 FO CI HI HRO SC SR | S7 FO CI HI HRO SC SR | S7 FO CI HI HRO SC SR |
| Upper | water repellent leather | hwater repellent leather | water repellent leather | water repellent leather |
| Lining | textile | textile | sympatex [®] laminate | sympatex [®] laminate |
| Fastening | shoe laces | shoe laces | shoe laces | shoe laces |
| Sizes | 36 to 52 | 36 to 52 | 36 to 52 | 36 to 52 |
| Order unit | PR | PR | PR | PR |

uvex



UVEX 3 asphaltpro Reliable protection for


Reliable protection for extremely challenging applications



Reflective side strips for increased visibility



Outsole with flat tread to avoid tread marks



Heat resistance testet at +300 °C (HRO) Heat insulation testet at +150 °C (HI) and at +250 °C (HI-3 according to standard DIN EN ISO 20349-1 passed, not certifiable)



Heat-insulating insock thanks to film in the forefoot area



Anatomically shaped heel basket for stability and ankle protection







uvex 3 asphaltpro · Lace-up boot S3 HI HRO

Designed for the extreme challenges of asphalt work with really high temperatures. The highlight is the sole made from special heat-insulating and heat-resistant materials. The high-quality leather upper with uvex waterstop technology and steel sole for perforation protection provide reliable protection against external influences. Its ergonomic fit, lightweight design and optimum climate characteristics make it the perfect partner for road construction work.

Features:

- shock-absorbing PU midsole
- heat-, chemical- and cut-resistant uvex MACSOLE® rubber outsole
- integrated heel cage made of MACSOLE® rubber

- 100% metal-free protective toe cap
- steel penetration resistance
- water-resistant uvex waterstop leather upper
- breathable textile lining

65591 65592 65593

- reflective elements
- dust tongue
- removable antistatic comfortable insock (Art. no.: 94597-9)

Sustainability:

- removable insock made wholly or partly from recycled materials
- free from harmful substances in accordance with the uvex restricted substances list

(We)

clima zone

| uvex 3 asphaltpro | Lace-up boot |
|----------------------------|-------------------------|
| Art. no. Width 10 | 65591 |
| Art. no. Width 11 | 65592 |
| Art. no. Width 12 | 65593 |
| Standard EN ISO 20345:2011 | S3 HI HRO SRA |
| Standard EN ISO 20345:2022 | S3 FO HI HRO |
| Upper | water repellent leather |
| Lining | textile |
| Fastening | shoe laces |
| Sizes | 38 to 50 |
| Order unit | PR |
| | |



Heckel safety shoes Performance with style

A brand of the uvex group

Heckel, headquartered in France, has been a specialist in safety footwear since 1970 and is among the pioneers of the industry. Heckel has been part of the uvex group since 2001 and its products are distributed in over 30 countries.

Performance with style

Heckel stands for performance. When wearing Heckel safety shoes, users know they are fully protected and ready for the most extreme conditions. By not compromising on the quality and testing of our products, we guarantee the performance of our safety shoes and the protection of the professionals who wear them. Heckel safety shoes protect against mechanical and chemical risks as well as heat, cold and moisture, while emphasising style.

MACSOLE® technology

Being a true specialist in rubber soles, Heckel has been developing its own technology for more than 20 years: MACSOLE[®]. Made from an exclusive mixture of nitrile rubbers, MACSOLE[®] soles offer unrivalled performance in slip resistance, durability and comfort.



MACSOLE® ADVENTURE 3.0

OFF THE BEATEN TRACK



44000

Resistant and durable MACSOLE® ADVENTURE 3.0 rubber soles guarantee unrivalled performance in slip resistance and durability and are also resistant to contact heat.



Designed for outdoor use With a scuffcap made from highly abrasion-resistant rubber and the Agile Ankle Guard support system, these safety shoes are suitable for outdoor work and difficult surfaces.



Comfortable & wear-resistant The natural elastic properties of rubber combined with innovative MACABSORB technology ensure shock absorption that is 85% higher than the standard for durable wearer comfort.







MACCROSSROAD 3.0 LOW + HIGH S3L FO CI HI HRO SC SR

MACSOLE® ADVENTURE 3.0 rubber **sole** with EVA MACABSORB inserts at the heel and forefoot | liquid-resistant oiled full-grain leather **upper** with Agile Ankle Guard reinforced heel and sides | polyester 3D mesh **lining** | non-metallic **toe cap** | non-metallic **penetration-resistant sole** | **hygienic insock** made from 85% recycled PU foam with shock absorption at the front and heel

Areas of application: heavy application

Removable insock made wholly or partly from recycled materials Free from harmful substances according to our restricted substances list



| | MACCROSSROAD 3.0 LOW | MACCROSSROAD 3.0 HIGH |
|----------------------------|-------------------------|--------------------------|
| Art. no. Width 10 | 67322 | 67312 |
| Art. no. Width 11 | 67323 | 67313 |
| Art. no. Width 12 | 67324 | 67314 |
| Standard EN ISO 20345:2011 | S3 CI HI HRO SRC | S3 CI HI HRO SRC |
| Standard EN ISO 20345:2022 | S3L FO CI HI HRO SC SR | S3L FO CI HI HRO SC SR |
| Colours | black, lime | black, lime |
| Sizes | 36 to 48 | 35 to 51 |
| Weight | 650 g | 700 g |
| Order unit | PR | PR |









MACCROSSROAD 3.0 HIGH META S3L FO CI HI HRO M SC SR + HIGH BOA S3L FO CI HI HRO SC SR + LOW BOA S3L FO CI HI HRO SC SR

MACSOLE® ADVENTURE 3.0 rubber **sole** with EVA MACABSORB inserts at the heel and forefoot | liquid-resistant oiled full-grain leather **upper** with Agile Ankle Guard reinforced heel and sides | BOA® Fit System easy, quick fastening solution with personalised adjustment (BOA) | D30 100 J energy absorption highly flexible (META) **metatarsal protection** | polyester 3D mesh lining | non-metallic **toe cap** | non-metallic **penetration-resistant sole** | **hygienic insock** made from 85% recycled PU foam with shock absorption at the front and heel

Areas of application: heavy application

Removable insock made wholly or partly from recycled materials Free from harmful substances according to our restricted substances list

| | MACCROSSROAD 3.0 HIGH META | MACCROSSROAD 3.0 High Boa | MACCROSSROAD 3.0 Low Boa | |
|----------------------------|-------------------------------|------------------------------|-----------------------------|--|
| Art. no. Width 10 | 67352 | 67362 | 67372 | |
| Art. no. Width 11 | 67353 | 67363 | 67373 | |
| Art. no. Width 12 | 67354 | 67364 | 67374 | |
| Standard EN ISO 20345:2011 | S3 M CI HI HRO SRC | S3 CI HI HRO SRC | S3 CI HI HRO SRC | |
| Standard EN ISO 20345:2022 | S3L FO CI HI HRO M SC SR | S3L FO CI HI HRO SC SR | S3L FO CI HI HRO SC SR | |
| Colours | black, lime | black, blue | black, blue | |
| Sizes | 36 to 48 | 36 to 48 | 36 to 48 | |
| Weight | 740 g | 700 g | 670 g | |
| Order unit | PR | PR | PR | |



METAL FREE



67733



67723

FOCUS 2.0 SANDAL + PERFO S1 PL FO SR

double density PU **sole**, excellent levels of grip, shock absorption | ultra-breathable oiled nubuck leather **upper**, large perforations for perfect ventilation, Velcro fastening [SANDAL] | ultra-breathable oiled nubuck perforated leather **upper**, reflective elements, non-metallic eyelets and hooks (PERFO) | 3D polyester mesh **lining** for excellent breathability, quick drying | metal-free **toe cap** | metal-free **penetration-resistant midsole** | anatomically shaped **hygienic insock**, textile top layer and perforations, EVA heel shock absorber

Areas of application: medium applications

Removable insock made wholly or partly from recycled materials. Free from harmful substances according to our restricted substances list

| | FOCUS 2.0 SANDAL | FOCUS 2.0 PERFO |
|----------------------------|---------------------|--------------------|
| Art. no. Width 11 | 67733 | 67723 |
| Standard EN ISO 20345:2011 | S1P SRC | S1P SRC |
| Standard EN ISO 20345:2022 | S1 PL FO SR | S1 PL FO SR |
| Colours | black | black |
| Sizes | 36 to 47 | 36 to 47 |
| Weight | 565 g | 575 g |
| Order unit | PR | PR |





67713



67703



FOCUS 2.0 S3 LOW + HIGH S3L FO SR

double density PU **sole**, excellent levels of grip, shock absorption | water- resistant and padded **tongue** with gussets to keep dirt and debris out | water-resistant oiled nubuck leather and textile **upper**, reflective elements, non-metallic eyelets and hooks, padded collar | 3D polyester mesh lining for excellent breathability, quick drying | metal-free **toe cap** | metal-free **penetration-resistant midsole** | anatomically shaped **hygienic insock**, textile top layer and perforations, EVA heel shock absorber

Areas of application: medium applications

Removable insock made wholly or partly from recycled materials. Free from harmful substances according to our restricted substances list

| | FOCUS 2.0 Low | FOCUS 2.0 HIGH |
|----------------------------|------------------|-------------------|
| Art. no. Width 11 | 67713 | 67703 |
| Standard EN ISO 20345:2011 | S3 SRC | S3 SRC |
| Standard EN ISO 20345:2022 | S3L FD SR | S3L FD SR |
| Colours | black | black |
| Sizes | 36 to 47 | 36 to 47 |
| Weight | 570 g | 615 g |
| Order unit | PR | PR |

MACSOLE® 1.0 WLD LOW S3 CI HI-1 HRO WG SRC



MACSOLE® 1.0 smooth rubber **sole** | liquid-resistant pigmented full-grain leather **upper** | fire-resistant Kevlar® thread seams, pigmented full-grain leather protective flap, double Velcro® fastening | mesh lining | non-metallic **toe cap** | stainless steel **penetration-resistant sole** | **insock** PU insock

Areas of application:

welding, steelworking, protection against metal projection

Free from harmful substances according to our restricted substances list

| | MACSOLE® 1.0 WLD LOW |
|------------------------------|-------------------------|
| Art. no. | 62963 |
| Standard EN ISO 20349-2:2021 | S3 CI HI-1 HRO WG SRC |
| Colours | black |
| Sizes | 38 to 48 |
| Weight | 810 g |
| Order unit | PR |



Safety Footwear Accessories · Insocks





Replacement insocks

- improved full-surface shock absorption
- ultra-breathable, moisture-absorbing and quick-drying materials
 shock absorption zones support natural movement of the foot
 non-irritating, comfortable surface structure

- antistatic properties
 arch support
 washable, hand wash at 30°C

| Accessories - inso | cks | | | | | | | | |
|--------------------|------------------|---------------------|-----------------|-----------------|--------------|---------------------|-------------------|-------------------|---------------|
| Art. no. Width 10 | 94907 | 95797 | 95177 | 95157 | 95187 | 95347 | 86937 | 94597 | 86397 |
| Art. no. Width 11 | 94908 | 95798 | 95178 | 95158 | 95188 | 95348 | 86938 | 94598 | 86398 |
| Art. no. Width 12 | 94909 | 95799 | 95179 | 95159 | 95189 | 95349 | 86939 | 94599 | 86399 |
| Art. no. Width 14 | 94900 | 95790 | - | - | - | 95340 | - | - | - |
| Version | for uvex 1 G2, | for uvex 1 x-craft, | for | for | for | for uvex 1, uvex 2, | for uvex 3, | for | for |
| | uvex 1 G2 planet | uvex 1 sport, | uvex 1 sport NC | uvex 1 business | uvex 2 trend | uvex 2 construction | , uvex 3 MACSOLE® | uvex 3 asphaltpro | uvex 1 x-cite |
| | | uvex 1 sport white | | | | uvex 2 MACSOLE® | , | | |
| | | | | | | uvex 2 xenova® | | | |
| Sizes | 35 to 52 | 35 to 52 | 35 to 52 | 39 to 52 | 36 to 52 | 35 to 52 | 36 to 52 | 38 to 50 | 34 to 44 |
| Order unit | PR | PR | PR | PR | PR | PR | PR | PR | PR |







uvex tune-up comfortable insock

Antistatic insock concept for use in safety footwear. Designed to increase wearer comfort and enhance ergonomics by providing optimum support for the arches of the feet, helping to reduce foot fatigue.

- three different arch support versions:
- high, medium, low
- very good cushioning for comfort underfoot
- reduces symptoms of fatigue
- prevents pressure points
- non-irritating, comfortable surface structure

- · breathable and absorbs moisture
- anti-bacterial
- antistatic
- suitable for ESD footwear
- hand-washable at 30°C
- · certified for use in the following uvex safety shoes

| Accessories – insocks | uvex tune-up comfortable insock | uvex tune-up comfortable insock | uvex tune-up comfortable insock |
|---|---------------------------------|---------------------------------|---------------------------------|
| Art. no. arch support low | 95281 | 95284 | 95287 |
| Art. no. arch support medium | 95282 | 95285 | 95288 |
| Art. no. arch support high | 95283 | 95286 | 95289 |
| Version certified in accordance with EN ISO 20345 | uvex 1, uvex 2, uvex 2 MACSOLE® | uvex 1 x-craft, | uvex 1 G2 |
| for the safety shoe types | uvex 2 xenova® | uvex 1 sport | |
| Sizes | 35 to 52 | 35 to 52 | 35 to 52 |
| Order unit | PR | PR | PR |

uvex care system




uvex nano shoe add on

footwear waterproofing for protection against moisture penetration and stains

The principle

Water-based uvex nano shoe "add on" waterproofing forms a colourless, invisible film on leather and textile surfaces which protects footwear from moisture penetration and water or oil stains. Although the technological expertise owes its origins to chemical nanotechnology, the product contains no actual nano particles. uvex nano shoe 'add on' makes footwear surfaces smooth so. that liquids simply run off. It does not alter the look or breathability of the impregnated material, irrespective of whether this is suede.

The nano shoe add on working principle

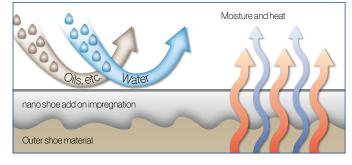

leather or textile. Contains no aggressive ingredients which might attack footwear surfaces.

How it works

 Protects from moisture penetration: The speed at which moisture

penetrates leather or textile surfaces which have been treated is significantly reduced. Water and oil simply run off.

- Maintains breathability: uvex nano shoe 'add on' waterproofing does not affect the breathability of footwear surface materials.
- Improves cleaning Footwear surfaces impregnated with uvex nano shoe 'add on' can be more easily cleaned, since water and oil stains cannot pen-
- etrate deep into the fabric. • Long-lasting stain prevention: Regular applications will significantly reduce repeated staining from water or oil-based liquids.

'add in' does not contain any

actual nano particles: The formula

contains only active ingredients

which are approved for use for a

number of years and can be found

Regular application of uvex nano

shoe 'add in' in new shoes will

prevent any build-up of odour

from the outset. Unlike deodor-

ants, which simply cover sweaty

smells, this product deals with the underlying causes: bacteria.

Application of uvex nano shoe

has already been well worn to

odour-neutral conditions.

'add in' will return footwear that

Ongoing deodorization:

in cosmetics (formaldehyde-free,

phenol-free).

How it works

uvex nano

Art. no. Content Order unit

Odour prevention:

| uvex nano shoe add on | | |
|-----------------------|---------|--|
| Art. no. | 9698100 | |
| Content | 100 ml | |
| Order unit | PC | |

uvex nano shoe add in:


footwear disinfectant against foot odour and athlete's foot

The principle

uvex nano shoe 'add in' uses specially developed technology which releases controlled doses of active ingredients with longlasting effect:

The uvex nano shoe 'add in' disinfectant contains antimicrobial and antifungal active ingredients which eliminate bacteria and fungus over the longer term. Although this expertise owes its origins to chemical nanotechnology, the uvex nano shoe

The nano shoe add in working principle

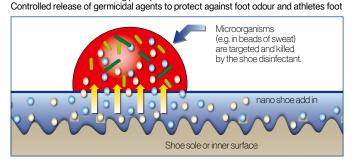

• Kills fungi:

Filamentous or yeast fungi are among the most common causes of skin diseases (such as athlete's foot) affecting the feet. uvex nano shoe 'add in' kills existing fungi and prevents reoccurrence.

• No change to the look or feel of

The look or feel of footwear is

not altered by the neutral uvex

uvex nano shoe 'add on' is free

from formaldehvde and phenol

and contains no nano particles.

· clean leather and textile sur-

faces thoroughly beforehand • shake solution before use, then

spray onto material to form a

• if necessary, wipe over excess

· leave to dry at room temperature

repeat treatment as above when

needed to maintain the effect

liquid with a cloth to spread

for at least 12 hours

thin film over the surface (avoid

shoe 'add on' waterproofing.

the surface:

Application

drips forming)

evenly

Use

uvex nano shoe add in is optimised for use in the interior of the shoe. Shake before use. Hold the spray head inside the shoe and spray on approximately five to ten pumps of the uvex nano shoe add in. Only wear shoes that have dried fully. (Allow shoes to dry for at least 15 minutes).

Application

1–2 times a week.

| shoe add in | |
|-------------|---------|
| | 9698300 |
| | 125 ml |
| | PC |
| | |



Safety Footwear Polymer boot · Accessories









uvex tricot liner socks

extremely high level of moisture absorption

NORA safety boots S5

General features:

long PVC safety boot

Protection features:

- free of plasticisers included on the SVHC
- Candidate List of the REACH Regulation · resistant to oil, grease, fuel, alkalis, acids and
- disinfectants
- with steel toecap and midsole
- toe and heel reinforcements plus ankle protection
- antistatic

Comfort features:

- anatomically shaped lasts, prevent foot fatigue
- leg height 33 cm (for size 42 boot)
- · long shaft, can be shortened
- anatomically shaped insock
- pull-off aid
- - uvex tricot liner socks Art. no. Sizes Material Order unit

kind to the skin

elastic

washable at up to 30°C

98754 39/40 to 47/48 70% polyester, 30% wool PR

| NORA safety boots S5 |
|----------------------------|
| Art. no. |
| Standard EN ISO 20345:2011 |
| Standard EN ISO 20345:2022 |
| Upper |
| Sizes |
| Order unit |

94756 S5 SRC S5 FO SR PVC 37 to 48 PR

94766 S5 SRC S5 FO SR PVC 36 to 47 PR

Safety Footwear _{Overview}

| | | Replacement | | | | Replacement | | | | Replacement | |
|----------------|--|----------------|------------|----------------|------------------------------|----------------|------------|----------------|------------------------|----------------|------------|
| Art. no. | Collection | insock | Page | Art. no. | Collection | insock | Page | Art. no. | Collection | insock | Page |
| 65001 | uvex 2 | 95347 | 331 | 65809 | uvex 1 sport white | 95799 | 315 | 68300 | uvex 1 G2 | 94900 | 311 |
| 65002 | uvex 2 | 95348 | 331 | 65817 | uvex 1 sport white | 95797 | 315 | 68307 | uvex 1 G2 | 94907 | 311 |
| 65003 | uvex 2 | 95349 | 331 | 65818 | uvex 1 sport white | 95798 | 315 | 68308 | uvex 1 G2 | 94908 | 311 |
| 65004 | uvex 2 | 95340 | 331 | 65819 | uvex 1 sport white | 95799 | 315 | 68309 | uvex 1 G2 | 94909 | 311 |
| 65011 | uvex 2 | 95347 | 331 | 65821 | uvex 1 sport white | 95797 | 315 | 68310 | uvex 1 G2 | 94900 | 310 |
| 65012 | uvex 2 | 95348 | 331 | 65822 | uvex 1 sport white | 95798 | 315 | 68317 | uvex 1 G2 | 94907 | 310 |
| 65013 | uvex 2 | 95349 | 331 | 65823 | uvex 1 sport white | 95799 | 315 | 68318 | uvex 1 G2 | 94908 | 310 |
| 65014 | uvex 2 | 95340 | 331 | 65837 | uvex 1 sport white | 95797 | 315 | 68319 | uvex 1 G2 | 94909 | 310 |
| 65021 | uvex 2 | 95347 | 330 | 65838 | uvex 1 sport white | 95798 | 315 | 68330 | uvex 1 G2 | 94900 | 311 |
| 65022 | uvex 2 | 95348 | 330 | 65839 | uvex 1 sport white | 95799 | 315 | 68337 | uvex 1 G2 | 94907 | 311 |
| 65023 | uvex 2 | 95349 | 330 | 65901 | uvex 1 sport | 95797 | 314 | 68338 | uvex 1 G2 | 94908 | 311 |
| 65024 | uvex 2 | 95350 | 330 | 65902 | uvex 1 sport | 95798 | 314 | 68339 | uvex 1 G2 | 94909 | 311 |
| 65031 | uvex 2 | 95347 | 330 | 65903 | uvex 1 sport | 95799 | 314 | 68341 | uvex 1 G2 | 94907 | 306 |
| 65032 | uvex 2 | 95348 | 330 | 65904 | uvex 1 sport | 95790 | 314 | 68342 | uvex 1 G2 | 94908 | 306 |
| 65033 | uvex 2 | 95349 | 330 | 65921 | uvex 1 sport | 95797 | 314 | 68343 | uvex 1 G2 | 94909 | 306 |
| 65034 | uvex 2 | 95350 | 330 | 65922 | uvex 1 sport | 95798 | 314 | 68344 | uvex 1 G2 | 94900 | 306 |
| 65061 | uvex 2 | 95347 | 330 | 65923 | uvex 1 sport | 95799 | 314 | 68361 | uvex 1 G2 | 94907 | 307 |
| 65062 | uvex 2 | 95348 | 330 | 65924 | uvex 1 sport | 95790 | 314 | 68362 | uvex 1 G2 | 94908 | 307 |
| 65063 | uvex 2 | 95349 | 330 | 65937 | uvex 1 sport NC | 95177 | 316 | 68363 | uvex 1 G2 | 94909 | 307 |
| 65081 | uvex 2 | 95347 | 331 | 65938 | uvex 1 sport NC | 95178 | 316 | 68364 | uvex 1 G2 | 94900 | 307 |
| 65082 | uvex 2 | 95348 | 331 | 65939 | uvex 1 sport NC | 95179 | 316 | 68371 | uvex 1 G2 | 94907 | 307 |
| 65083 | uvex 2 | 95349 | 331 | 65940 | uvex 1 sport | 95790 | 313 | 68372 | uvex 1 G2 | 94908 | 307 |
| 65084 | uvex 2 | 95340 | 331 | 65941 | uvex 1 sport | 95797 | 313 | 68373 | uvex 1 G2 | 94909 | 307 |
| 65091 | uvex 2 | 95347 | 331 | 65942 | uvex 1 sport | 95798 | 313 | 68374 | uvex 1 G2 | 94900 | 307 |
| 65092 | uvex 2 | 95348 | 331 | 65943 | uvex 1 sport | 95799 | 313 | 68381 | uvex 1 G2 | 94907 | 307 |
| 65093 | uvex 2 | 95349 | 331 | 65944 | uvex 1 sport | 95790 | 313 | 68382 | uvex 1 G2 | 94908 | 307 |
| 65094 65101 | uvex 2 | 95340 | 331 335 | 65947 65948 | uvex 1 sport | 95797 | 313 | 68383 68384 | uvex 1 G2 | 94909 | 307 307 |
| | uvex 2 construction | 95347 | | | uvex 1 sport | 95798 | 313 | | uvex 1 G2 | 94900 | |
| 65102 65103 | uvex 2 construction | 95348 | 335 335 | 65949 | uvex 1 sport | 95799 | 313 313 | 68391 | uvex 1 G2 | 94907 | 307 307 |
| 65121 | uvex 2 construction | 95349 95347 | 335 | 65961 65962 | uvex 1 sport | 95797 | 313 | 68392 | uvex 1 G2 uvex 1 G2 | 94908 94909 | 307 |
| 65121 | uvex 2 construction | 95348 95348 | 335 | | uvex 1 sport | 95798 | 313 | 68393 | | | 307 |
| 65122 | uvex 2 construction | 95349 | 335 | 65963 65964 | uvex 1 sport uvex 1 sport | 95799 95700 | 313 | 68394 68401 | uvex 1 G2 uvex 1 G2 | 94900 94907 | 307 |
| 65131 | uvex 2 construction uvex 2 construction | 95347 | 335 | 65980 | | 95790 95790 | 313 | 68401 68402 | uvex 1 G2 uvex 1 G2 | 94908 | 307 |
| 65132 | uvex 2 construction | 95348 | 335 | 65987 | uvex 1 sport | 95797 | 313 | 68402 | uvex 1 G2 uvex 1 G2 | 94909 | 307 |
| 65133 | uvex 2 construction | 95349 | 335 | 65988 | uvex 1 sport | 95798 | 313 | 68420 | uvex 1 G2 | 94900 | 308 |
| 65221 | uvex 2 MACSOLE® | 95347 | 332 | 65989 | uvex 1 sport uvex 1 sport | 95799 | 313 | 68427 | uvex 1 G2 uvex 1 G2 | 94907 | 308 |
| 65222 | uvex 2 MACSOLE® | 95348 | 332 | 68001 | uvex 1 x-craft pro | 95797 | 301 | 68428 | uvex 1 G2 uvex 1 G2 | 94908 | 308 |
| 65223 | uvex 2 MACSOLE® | 95349 | 332 | 68002 | uvex 1 x-craft pro | 95798 | 301 | 68429 | uvex 1 G2 | 94909 | 308 |
| 65224 | uvex 2 MACSOLE® | 95340 | 332 | 68003 | uvex 1 x-craft pro | 95799 | 301 | 68430 | uvex 1 G2 | 94900 | 308 |
| 65231 | uvex 2 MACSOLE® | 95347 | 332 | 68004 | uvex 1 x-craft pro | 95790 | 301 | 68437 | uvex 1 G2 | 94907 | 308 |
| 65232 | uvex 2 MACSOLE® | 95348 | 332 | 68011 | uvex 1 x-craft pro | 95797 | 301 | 68438 | uvex 1 G2 | 94908 | 308 |
| 65233 | uvex 2 MACSOLE® | 95349 | 332 | 68012 | uvex 1 x-craft pro | 95798 | 301 | 68439 | uvex 1 G2 | 94909 | 308 |
| 65234 | uvex 2 MACSOLE® | 95340 | 332 | 68013 | uvex 1 x-craft pro | 95799 | 301 | 68440 | uvex 1 G2 | 94900 | 308 |
| 65241 | uvex 2 STX MACSOLE® | 95347 | 333 | 68014 | uvex 1 x-craft pro | 95790 | 301 | 68447 | uvex 1 G2 | 94907 | 308 |
| 65242 | uvex 2 STX MACSOLE® | 95348 | 333 | 68021 | uvex 1 x-craft | 95797 | 302 | 68448 | uvex 1 G2 | 94908 | 308 |
| 65243 | uvex 2 STX MACSOLE® | 95349 | 333 | 68022 | uvex 1 x-craft | 95798 | 302 | 68449 | uvex 1 G2 | 94909 | 308 |
| 65251 | uvex 2 STX MACSOLE® | 95347 | 333 | 68023 | uvex 1 x-craft | 95799 | 302 | 68450 | uvex 1 G2 | 94900 | 308 |
| 65252 | uvex 2 STX MACSOLE® | 95348 | 333 | 68024 | uvex 1 x-craft | 95790 | 302 | 68457 | uvex 1 G2 | 94907 | 308 |
| 65253 | uvex 2 STX MACSOLE® | 95349 | 333 | 68031 | uvex 1 x-craft | 95797 | 302 | 68458 | uvex 1 G2 | 94908 | 308 |
| 65281 | uvex 2 MACSOLE® | 95347 | 333 | 68032 | uvex 1 x-craft | 95798 | 302 | 68459 | uvex 1 G2 | 94909 | 308 |
| 65282 | uvex 2 MACSOLE® | 95348 | 333 | 68033 | uvex 1 x-craft | 95799 | 302 | 68460 | uvex 1 G2 | 94900 | 309 |
| 65283 | uvex 2 MACSOLE® | 95349 | 333 | 68034 | uvex 1 x-craft | 95790 | 302 | 68467 | uvex 1 G2 | 94907 | 309 |
| 65284 | uvex 2 MACSOLE® | 95340 | 333 | 68041 | uvex 1 x-craft | 95797 | 302 | 68468 | uvex 1 G2 | 94908 | 309 |
| 65291 | uvex 2 MACSOLE® | 95347 | 333 | 68042 | uvex 1 x-craft | 95798 | 302 | 68469 | uvex 1 G2 | 94909 | 309 |
| 65292 | uvex 2 MACSOLE® | 95348 | 333 | 68043 | uvex 1 x-craft | 95799 | 302 | 68480 | uvex 1 G2 | 94900 | 309 |
| 65293 | uvex 2 MACSOLE® | 95349 | 333 | 68044 | uvex 1 x-craft | 95790 | 302 | 68487 | uvex 1 G2 | 94907 | 309 |
| 65294 | uvex 2 MACSOLE® | 95340 | 333 | 68081 | uvex 1 x-craft planet | 95797 | 283/299 | 68488 | uvex 1 G2 | 94908 | 309 |
| 65303 | uvex 2 MACSOLE® | 95349 | 332 | 68082 | uvex 1 x-craft planet | 95798 | 283/299 | 68489 | uvex 1 G2 | 94909 | 309 |
| 65311 | uvex 2 MACSOLE® | 95347 | 332 | 68083 | uvex 1 x-craft planet | 95799 | 283/299 | 68490 | uvex 1 G2 | 94900 | 311 |
| 65312 | uvex 2 MACSOLE® | 95348 | 332 | 68130 | uvex 1 x-craft | 95790 | 303 | 68497 | uvex 1 G2 | 94907 | 311 |
| 65313 | uvex 2 MACSOLE® | 95349 | 332 | 68137 | uvex 1 x-craft | 95797 | 303 | 68498 | uvex 1 G2 | 94908 | 311 |
| 65321 | uvex 2 MACSOLE® | 95347 | 332 | 68138 | uvex 1 x-craft | 95798 | 303 | 68499 | uvex 1 G2 | 94909 | 311 |
| 65322 | uvex 2 MACSOLE® | 95348 | 332 | 68139 | uvex 1 x-craft | 95799 | 303 | 68500 | uvex 1 G2 | 94900 | 311 |
| 65323 | uvex 2 MACSOLE® | 95349 | 332 | 68140 | uvex 1 x-craft | 95790 | 303 | 68507 | uvex 1 G2 | 94907 | 311 |
| 65363 | uvex 2 MACSOLE® | 95349 | 332 | 68147 | uvex 1 x-craft | 95797 | 303 | 68508 | uvex 1 G2 | 94908 | 311 |
| 65591 | uvex 3 asphaltpro | 94597 | 351 | 68148 | uvex 1 x-craft | 95798 | 303 | 68509 | uvex 1 G2 | 94909 | 311 |
| 65592 | uvex 3 asphaltpro | 94598 | 351 | 68149 | uvex 1 x-craft | 95799 | 303 | 68527 | uvex 1 G2 | 94907 | 309 |
| 65593 | uvex 3 asphaltpro | 94599 | 351 | 68150 | uvex 1 x-craft | 95790 | 303 | 68528 | uvex 1 G2 | 94908 | 309 |
| 65657 | uvex 1 | 95347 | 323 | 68157 | uvex 1 x-craft | 95797 | 303 | 68529 | uvex 1 G2 | 94909 | 309 |
| 65658 | uvex 1 | 95348 | 323 | 68158 | uvex 1 x-craft | 95798 | 303 | 68537 | uvex 1 G2 | 94907 | 309 |
| 65659 | uvex 1 | 95349 | 323 | 68159 | uvex 1 x-craft | 95799 | 303 | 68538 | uvex 1 G2 | 94908 | 309 |
| 65667 | uvex 1 | 95347 | 324 | 68242 | uvex 1 G2 planet | 94908 | 305 | 68539 | uvex 1 G2 | 94909 | 309 |
| 65668 | uvex 1 | 95348 | 324 | 68267 | uvex 1 G2 | 94907 | 310 | 68601 | uvex 3 MACSOLE® | 86937 | 349 |
| 65669 | uvex 1 | 95349 | 324 | 68268 | uvex 1 G2 | 94908 | 310 | 68602 | uvex 3 MACSOLE® | 86938 | 349 |
| 65671 | uvex 1 x-tended support | 95347 | 327 | 68280 | uvex 1 G2 | 94900 | 310 | 68603 | uvex 3 MACSOLE® | 86939 | 349 |
| 65672 | uvex 1 x-tended support | 95348 | 327 | 68287 | uvex 1 G2 | 94907 | 310 | 68611 | uvex 3 MACSOLE® | 86937 | 349 |
| 65673 | uvex 1 x-tended support | 95349 | 327 | 68288 | uvex 1 G2 | 94908 | 310 | 68612 | uvex 3 MACSOLE® | 86938 | 349 |
| 65681 | uvex 1 x-tended support | 95347 | 326 | 68289 | uvex 1 G2 | 94909 | 310 | 68613 | uvex 3 MACSOLE® | 86939 | 349 |
| 65682 | uvex 1 x-tended support | 95348 | 326 | 68290 | uvex 1 G2 | 94900 | 310 | 68621 | uvex 3 MACSOLE® | 86937 | 349 |
| 65683 | uvex 1 x-tended support | 95349 | 326 | 68297 | uvex 1 G2 | 94907 | 310 | 68622 | uvex 3 MACSOLE® | 86938 | 349 |
| 65807 | uvex 1 sport white | 95797 | 315 | 68298 | uvex 1 G2 | 94908 | 310 | 68623 | UVEX 3 MACSOLE® | 86939 | 349 |
| 65808 | uvex 1 sport white | 95798 | 315 | 68299 | uvex 1 G2 | 94909 | 310 | 68631 | uvex 3 MACSOLE® | 86937 | 349 |

| | | Replacement | | | | Replacement | | | | Replacement | |
|----------------|------------------------------------|----------------|------------|----------------|--|----------------|------------|------------------|--|----------------|------------|
| Art. no. | Collection | insock | Page | Art. no. | Collection | insock | Page | Art. no. | Collection | insock | Page |
| 68632 68633 | uvex 3 MACSOLE® uvex 3 MACSOLE® | 86938 86939 | 349 349 | 84697 84698 | uvex 1 business uvex 1 business | 95157 95158 | 320 320 | 95188 95189 | Insocks Insocks | - | 358 358 |
| 68711 | uvex 3 | 86937 | 345 | 84699 | uvex 1 business | 95159 | 320 | 95281 | Insocks | - | 359 |
| 68712 | uvex 3 | 86938 | 345 | 85117 | uvex 1 x-tended support | 95347 | 326 | 95282 | Insocks | - | 359 |
| 68713 68721 | uvex 3 uvex 3 | 86939 86937 | 345 346 | 85118 85119 | uvex 1 x-tended support uvex 1 x-tended support | 95348 95349 | 326 326 | 95283 95284 | Insocks Insocks | - | 359 359 |
| 68722 | uvex 3 | 86938 | 346 | 85127 | uvex 1 x-tended support | 95349 95347 | 326 | 95285 | Insocks | - | 359 |
| 68723 | uvex 3 | 86939 | 346 | 85128 | uvex 1 x-tended support | 95348 | 326 | 95286 | Insocks | - | 359 |
| 68731 | uvex 3 | 86937 | 346 | 85129 | uvex 1 x-tended support | 95349 | 326 | 95287 | Insocks | - | 359 |
| 68732 68733 | uvex 3 uvex 3 | 86938 86939 | 346 346 | 85141 85142 | uvex 1 x-tended support uvex 1 x-tended support | 95347 95348 | 326 326 | 95288 95289 | Insocks Insocks | - | 359 359 |
| 68741 | uvex 3 | 86937 | 345 | 85143 | uvex 1 x-tended support | 95349 | 326 | 95340 | Insocks | - | 358 |
| 68742 | uvex 3 | 86938 | 345 | 85161 | uvex 1 x-tended support | 95347 | 327 | 95347 | Insocks | - | 358 |
| 68743 68751 | uvex 3 uvex 3 | 86939 86937 | 345 346 | 85162 85163 | uvex 1 x-tended support uvex 1 x-tended support | 95348 95349 | 327 327 | 95348 95349 | Insocks Insocks | - | 358 358 |
| 68752 | uvex 3 | 86938 | 346 | 85171 | uvex 1 x-tended support | 95347 | 327 | 95531 | uvex 2 xenova® | 95347 | 337 |
| 68753 | uvex 3 | 86939 | 346 | 85172 | uvex 1 x-tended support | 95348 | 327 | 95532 | uvex 2 xenova® | 95348 | 337 |
| 68771 68772 | uvex 3 uvex 3 | 86937 86938 | 347 347 | 85173 85191 | uvex 1 x-tended support uvex 1 x-tended support | 95349 95347 | 327 326 | 95533 95537 | uvex 2 xenova® uvex 2 xenova® | 95349 95347 | 337 337 |
| 68773 | uvex 3 | 86939 | 347 | 85192 | uvex 1 x-tended support | 95348 | 326 | 95538 | uvex 2 xenova® | 95348 | 337 |
| 68781 | uvex 3 | 86937 | 347 | 85193 | uvex 1 x-tended support | 95349 | 326 | 95539 | uvex 2 xenova® | 95349 | 337 |
| 68782 68783 | uvex 3 uvex 3 | 86938 | 347 347 | 85361 85362 | uvex 1 x-tended support | 95347 95348 | 326 | 95547 95548 | uvex 2 xenova® uvex 2 xenova® | 95347 95348 | 337 337 |
| 69061 | uvex 3 uvex 2 trend | 86939 95187 | 340 | 85363 | uvex 1 x-tended support uvex 1 x-tended support | 95349 | 326 326 | 95549 | uvex 2 xenova® | 95349 | 337 |
| 69062 | uvex 2 trend | 95188 | 340 | 85420 | uvex 1 | 95340 | 323 | 95551 | uvex 2 xenova® | 95347 | 338 |
| 69063 | uvex 2 trend | 95189 | 340 | 85427 | uvex 1 | 95347 | 323 | 95552 | uvex 2 xenova® | 95348 | 338 |
| 69097 69098 | uvex 2 trend uvex 2 trend | 95187 95188 | 341 341 | 85428 85429 | uvex 1 uvex 1 | 95348 95349 | 323 323 | 95553 95557 | uvex 2 xenova® uvex 2 xenova® | 95349 95347 | 338 338 |
| 69099 | uvex 2 trend | 95189 | 341 | 85430 | uvex 1 | 95340 | 323 | 95558 | uvex 2 xenova® | 95348 | 338 |
| 69341 | uvex 2 trend | 95187 | 342 | 85437 | uvex 1 | 95347 | 323 | 95559 | uvex 2 xenova® | 95349 | 338 |
| 69342 69343 | uvex 2 trend uvex 2 trend | 95188 95189 | 342 342 | 85438 85439 | uvex 1 uvex 1 | 95348 95349 | 323 323 | 95561 95562 | uvex 2 xenova® uvex 2 xenova® | 95347 95348 | 338 338 |
| 69343 | uvex 2 trend | 95189 | 342 | 85440 | uvex 1 | 95349 | 323 | 95563 | uvex 2 xenova® | 95349 | 338 |
| 69348 | uvex 2 trend | 95188 | 342 | 85447 | uvex 1 | 95347 | 324 | 95577 | uvex 2 xenova® | 95347 | 337 |
| 69349 | uvex 2 trend | 95189 | 342 | 85448 | uvex 1 | 95348 | 324 | 95578 | uvex 2 xenova® | 95348 | 337 |
| 69351 69352 | uvex 2 trend uvex 2 trend | 95187 95188 | 342 342 | 85449 85450 | uvex 1 uvex 1 | 95349 95340 | 324 324 | 95579 95581 | uvex 2 xenova® uvex 2 xenova® | 95349 95347 | 337 337 |
| 69353 | uvex 2 trend | 95189 | 342 | 85457 | uvex 1 | 95347 | 324 | 95582 | uvex 2 xenova® | 95348 | 337 |
| 69357 | uvex 2 trend | 95187 | 342 | 85458 | uvex 1 | 95348 | 324 | 95583 | uvex 2 xenova® | 95349 | 337 |
| 69358 69359 | uvex 2 trend uvex 2 trend | 95188 95189 | 342 342 | 85459 85467 | uvex 1 uvex 1 | 95349 95347 | 324 323 | 95691 95692 | uvex 2 xenova® uvex 2 xenova® | 95347 95348 | 338 338 |
| 69361 | uvex 2 trend | 95187 | 340 | 85468 | uvex 1 | 95348 | 323 | 95693 | uvex 2 xenova® | 95349 | 338 |
| 69362 | uvex 2 trend | 95188 | 340 | 85469 | uvex 1 | 95349 | 323 | 95790 | Insocks | - | 358 |
| 69363 69367 | uvex 2 trend uvex 2 trend | 95189 95187 | 340 340 | 85477 85478 | uvex 1 uvex 1 | 95347 95348 | 323 323 | 95797 95798 | Insocks Insocks | - | 358 358 |
| 69368 | uvex 2 trend | 95188 | 340 | 85479 | uvex 1 | 95349 | 323 | 95799 | Insocks | - | 358 |
| 69369 | uvex 2 trend | 95189 | 340 | 85607 | uvex 1 ladies | 95347 | 325 | 9698100 | uvex nano shoe add on | - | 360 |
| 69371 69372 | uvex 2 trend uvex 2 trend | 95187 95188 | 341 341 | 85608 85617 | uvex 1 ladies uvex 1 ladies | 95348 95347 | 325 325 | 9698300 98754 | uvex nano shoe add in | - | 360 361 |
| 69372 | uvex 2 trend | 95189 | 341 | 85618 | uvex 1 ladies | 95348 | 325 | 90/04 | uvex tricot liner socks | - | 301 |
| 69377 | uvex 2 trend | 95187 | 341 | 85627 | uvex 1 ladies | 95347 | 325 | | | | |
| 69378 | uvex 2 trend uvex 2 trend | 95188 | 341 | 85628 | uvex 1 ladies | 95348 | 325 | | | | |
| 69379 69381 | uvex 2 trend | 95189 95187 | 341 340 | 86397 86398 | Insocks Insocks | _ | 358 358 | | | | |
| 69382 | uvex 2 trend | 95188 | 340 | 86399 | Insocks | - | 358 | | | | |
| 69383 | uvex 2 trend | 95189 | 340 | 86401 | uvex 1 x-cite | 86397 | 318 | | <hr/> | | |
| 69397 69398 | uvex 2 trend uvex 2 trend | 95187 95188 | 341 341 | 86402 86403 | uvex 1 x-cite uvex 1 x-cite | 86398 86399 | 318 318 | | HEC | IKE | <u>EL</u> |
| 69399 | uvex 2 trend | 95189 | 341 | 86421 | uvex 1 x-cite | 86397 | 318 | | | MANCE WITH | |
| 69477 | uvex 2 trend | 95187 | 341 | 86422 | uvex 1 x-cite | 86398 | 318 | | | | |
| 69478 69479 | uvex 2 trend uvex 2 trend | 95188 95189 | 341 341 | 86423 86471 | uvex 1 x-cite uvex 1 x-cite | 86399 86397 | 318 318 | | | | |
| 69481 | uvex 2 trend | 95187 | 342 | 86472 | uvex 1 x-cite | 86398 | 318 | Art. no. | Collection | | Page |
| 69482 | uvex 2 trend | 95188 | 342 | 86473 | uvex 1 x-cite | 86399 | 318 | 62963 | MACSOLE 1.0 WLD LOW | 211 | 357 |
| 69483 69497 | uvex 2 trend uvex 2 trend | 95189 95187 | 342 341 | 86937 86938 | Insocks Insocks | - | 358 358 | 67312 67313 | MACCROSSROAD 3.0 HI | | 354 354 |
| 69498 | uvex 2 trend | 95188 | 341 | 86939 | Insocks | - | 358 | 67314 | MACCROSSROAD 3.0 HI | | 354 |
| 69499 | uvex 2 trend | 95189 | 341 | 94597 | Insocks | - | 358 | 67322 | MACCROSSROAD 3.0 LC | | 354 |
| 84271 | uvex 1 business | 95157 | 320 | 94598 | Insocks | - | 358 | 67323 67324 | MACCROSSROAD 3.0 LC MACCROSSROAD 3.0 LC | | 354 354 |
| 84272 84273 | uvex 1 business uvex 1 business | 95158 95159 | 320 320 | 94599 94756 | Insocks NORA safety boots | - | 358 361 | 67352 | MACCROSSROAD 3.0 HI | | 355 |
| 84281 | uvex 1 business | 95157 | 320 | 94766 | NORA safety boots | - | 361 | 67353 | MACCROSSROAD 3.0 HI | GH META | 355 |
| 84282 | uvex 1 business | 95158 | 320 | 94900 | Insocks | - | 358 | 67354 | MACCROSSROAD 3.0 HI | | 355 |
| 84283 84301 | uvex 1 business uvex 1 business | 95159 95157 | 320 321 | 94907 94908 | Insocks Insocks | _ | 358 358 | 67362 67363 | MACCROSSROAD 3.0 HI MACCROSSROAD 3.0 HI | | 355 355 |
| 84302 | uvex 1 business | 95158 | 321 | 94908 | Insocks | - | 358 | 67364 | MACCROSSROAD 3.0 HI | | 355 |
| 84303 | uvex 1 business | 95159 | 321 | 95157 | Insocks | - | 358 | 67372 | MACCROSSROAD 3.0 LC | W BOA | 355 |
| 84481 | uvex 1 business | 95157 | 321 | 95158 | Insocks | - | 358 | 67373 67374 | MACCROSSROAD 3.0 LC | | 355 |
| 84482 84483 | uvex 1 business uvex 1 business | 95158 95159 | 321 321 | 95159 95177 | Insocks Insocks | - | 358 358 | 67374 | MACCROSSROAD 3.0 LC FOCUS 2.0 HIGH | W DUA | 355 357 |
| 84491 | uvex 1 business | 95157 | 321 | 95178 | Insocks | - | 358 | 67713 | FOCUS 2.0 LOW | | 357 |
| 84492 | uvex 1 business | 95158 | 321 | 95179 | Insocks | - | 358 | 67723 | FOCUS 2.0 PERFO | | 356 |
| 84493 | uvex 1 business | 95159 | 321 | 95187 | Insocks | - | 358 | 67733 | FOCUS 2.0 SANDAL | | 356 |

You can find more information on uvex medicare on pages 434 to 437

363





You can find more information at uvex-academy.com







Industrial protective footwear

This practical seminar will help you to analyse the dangers that employees face, determine what equipment is required to keep them safe and select the most appropriate protective footwear

- basic information on the areas of application of PPE footwear
- information on standards, the differences between primary and secondary requirements and their applications
- description of the labels found on protective footwear and the meaning of the various codes
- identification and assessment of dangers, developing a risk analysis strategy and understanding which safety equipment is necessary
- information on materials, production processes and areas of application including:
- Upper materials and liningSoles
- Protective toecaps
- Penetration-resistant inlay
- choosing the correct protective footwear for each application

Target group

Those responsible for the workrelated health and safety of employees, e.g. health and safety officers, specialist purchasers and representatives of employee groups.

For more information or to book a place, please visit uvex-academy.de, call +49 911 9736-1710 or email academy@uvex.de



uvex academy



Individual PPE



The uvex brand is our responsibility

We have been producing and selling high-quality products for the protection of people in sport, leisure and work for **over 90 years**. And if you want to protect people, **you have to take responsibility**.

It is precisely from this mission that our obligation derives to act in a **sustainable**, **social and socially-responsible** manner.

uvex Individual PPE

Organisational measures:

Durability and waste prevention

Compared to standard products (e.g. overspecs, disposable hearing protection), our custom protective products can be used for much longer. This saves valuable resources and reduces waste and CO_2 emissions over the entire period of use.

uvex hearing protection otoplastics, prescription safety spectacles and prescription VDU spectacles are supplied in reusable cases that can be used throughout their use. We are therefore making an important contribution to the prevention of packaging waste and at the same time we are extending the service life of our products.

Expertise and supply network

Decades of experience and reliable cooperation with our partners form the basis for the production of custom uvex protective products.

Our production partners are subject to regular audits and are obligated to comply with uvex social standards.

All uvex products are manufactured according to the strictest safety standards, regularly inspected, and certified by independent institutes.

uvex hazardous substances list

We do not use harmful ingredients for our individual protective products. The products are produced in accordance with the provisions of the REACH regulation and, in addition, in accordance with the requirements of the uvex banned hazardous substances list.



SBU Occupational Health

Individual personal protective equipment from uvex



Individual personal protective equipment from uvex

The health of your employees is of central importance to us through the uvex vision **protecting people**.

uvex offers individual premium solutions for protecting the eyes, ears and feet – providing maximum safety for your team.

That's because standard solutions are not enough for uvex.

Individual personal protective equipment combines a high level of innovation and individual adjustment to the wearer, making each product unique. All products from the fields of optics, otoplastics and orthopaedics are customised, ensuring that they are tailor-made to the needs of your employees.

Protective equipment that fits your employees perfectly is more likely to be worn – giving your team reliable protection.

Our custom protective products are characterised in particular by their longevity. Compared to standard products (e.g., overspecs, disposable-hearing

protection), they are used for a much longer time, saving us valuable resources and, calculated over the entire period of use, producing much less waste.



'Made in uvex'

DUAL ADJUSTMEN

Decades of experience and innovative technologies form the basis for products that are manufactured in accordance with the most stringent safety standards.

Whether it's eye, hearing or foot protection: Our individual personal protective equipment ensures that maximum levels of safety and comfort are provided.

Our innovations set new standards in quality and technology by combining excellent wearing comfort, attractive design and sophisticated functionality. Our motto 'Made in uvex' guarantees a comprehensive quality system and the best possible processing technology. All materials used are free from harmful substances and are regularly inspected.

uvex places great importance on a sustainable production concept with first-class products and an in-house value creation chain, with a focus on production facilities in Germany and Europe. What's more, uvex offers maximum service with maximum flexibility.

SBU Occupational Health

Individual personal protective equipment from uvex

Individual eye protection - uvex prescription safety spectacles

- certified prescription safety spectacles in accordance with EN 166 and Regulation (EU) 2016/425 on personal protective equipment
- wide selection of focus types and lens materials to meet all requirements
- the wide range of frames in different designs are available internationally and take into account the diverse head shapes of your employees
- qualified consultation and customisation by uvex specialists



Individual eye protection – uvex VDU spectacles

- VDU spectacles for professional use when working in front of a computer monitor and when no safety spectacles need to be worn
- wide selection of focus types and lens materials to meet all requirements
- qualified consultation and customisation by uvex specialists



Individual hearing protection - uvex hight-fit

- certified otoplastic hearing protection in accordance with EN 352
- a wide selection of filters, otoplastic shapes and materials ensures that appropriate otoplastics are available for (virtually) all areas of application
- · individual adjustments carried out by qualified specialists

Orthopaedic solutions for uvex safety shoes – uvex medicare

- certified orthopaedic safety footwear in accordance with EN ISO 20345:2011
- e.g. comfortable customised insoles and shoe adjustments
- wide range of usable uvex safety shoes
- uvex motion 3XL for extra-wide feet and medical conditions (e.g. diabetes)
- customisation by orthopaedics specialists



SBU Occupational Health Individual personal protective equipment from uvex

ONE BRAND. ONE VISION. ONE MISSION.





#protecting people

The uvex brand mission. This is our objective and our responsibility. uvex protects people – when working, playing sport and pursuing leisure activities. Decades of experience enable us to transfer expertise continuously between the sectors of industrial safety and top-level sport, and provides the foundation on which we are able to continuously develop our products. It allows us to create innovations and solutions based on advanced technologies that reliably protect people – whether they are on a production line, on the ski slopes or on a mountain bike.

OUR FUTURE

Sustainable actions and social responsibility

If you rely on uvex, you are guaranteed sustainable actions. From environmental protection to social commitment: uvex puts corporate responsibility at the forefront of its daily business.

The focus of our commitment is to protect people:

 sustainable product concept
 avoidance of the use of hazardous beyond the requirements of the REACH regulation (the uvex banned

hazardous substances list)

- uvex social standard for all manufacturing plants
- social commitment
 (e.g. Rainer Winter Foundation, Vision for the World)

Time and location adapted to your needs

As an experienced specialist in occupational safety, uvex is able to offer an all-round professional service for individual personal protective equipment and meet the specific requirements of your company. Individual PPE products demand a wealth of expertise in the consultation stage. This is why the adaptation is made by highly qualified experts – such as opticians, audiologists or orthopaedic shoe manufacturers – at a time and location to suit your needs.



Individual PPE: For more information, visit our website.









uvexsafety



uvexsafetygroup

R SERVICE



Prescription safety spectacles and prescription VDU spectacles



Product system planet series - Individual PPE

uvex has developed the **protecting planet** icon, to help raise awareness of its commitment to achieving increased sustainability. Based on the brand claim, **protecting people**, our sustainable approach integrates three core interlinked pillars – **ecology, economy** and **social responsibility**, that are incorporated throughout the business to improve our sustainability performance.

This explains the comprehensive audit, measurement and evaluation management process uvex undertakes along the entire value chain to ensure its products are as sustainable as possible.

UVEX RX cd 5521 planet



protecting planet


by using bio-based material // by maximum reduction of pollutants

Material and health protection

- the frame is mostly made of high-quality, bio-based material
- instead of crude oil, the base is made of the renewable raw material from the castor plant
- 38 percent of the frame is based on castor oil
- castor cultivation does not compete with foodgrowing areas or endanger forested areas
- no harmful ingredients
- produced in accordance with the provisions of the REACH regulation and beyond, according to the specifications of the uvex banned hazardous substances list

orotecting planel





Mex

Durability approx.

years of use

6109257





protecting planet

by creating durable products

Durability

- uvex prescription safety spectacles are characterised by their durability
- > the average service life is 1.5 years, which saves valuable resources and reduces CO_2 emissions



protecting planet

by using environmentallyfriendly packaging // by reducing waste

Packaging

- uvex prescription safety spectacles are supplied with a case to extend the service life
- > the case can be reused after its useful life
- > this means we are making an important contribution to the prevention of packaging waste

Prescription safety spectacles



uvex prescription safety spectacles are individually adapted to the wearer's vision while offering the best possible protection in the workplace.

The spectacles are certified and marked in accordance with EN 166, so they can be used in workplaces where safety spectacles are mandatory. As occupational safety spectacles, they not only protect the eyes (from UV radiation, flying particles, dust etc.), but are also a visual aid because the lenses have a dioptric effect. uvex offers a wide range of high-quality lens materials, focus types and frames. This makes it easier to switch between personal spectacles and employer-provided safety spectacles, which increases wearer acceptance.

The comprehensive uvex quality system guarantees the best design from an optical and processing technology perspective. All materials used (lenses, frames, cases etc.) are free from harmful substances and are regularly inspected.

The collection

uvex offers a variety of frames for prescription safety spectacles.

uvex RX bc plastic



bc: basic collection
in different shapes, sizes and colours

uvex RX cd



cd: comfort and design
safety spectacles in a sporty design

uvex RX bc metal



bc: basic collection
in different shapes, sizes and colours

uvex RX sp



sp: sporty
safety spectacles in a wraparound design for anatomic sport lenses



- ti: titan
- made of high-quality titanium
 extremely stable
- lightweight
- allergy-neutral

uvex RX cd flip-up



cd: comfort and design
for workplaces with special requirements

uvex RX cb



cb: custom bridge

- Suitable for people with:
- a flat nose bridge high cheekbones
- wide temples
- wide temples

uvex RX cf



cf: close fit
safety spectacles with all-round protection and tailored to your individual prescription
recommended for handling

chemicals and/or working in dusty environments

Prescription safety spectacles

Individual eye protection from uvex

uvex as a partner for individual protective equipment

Our eyesight needs special protection – and many activities in our working lives leave them vulnerable to serious risks. uvex does not compromise on eye protection and offers reliable protection with individually adapted safety spectacles. Decades of experience and innovative technologies form the basis for uvex products, which are manufactured in accordance with the most stringent safety standards. In addition to safety, uvex also guarantees maximum comfort and quality. Protective equipment that fits properly not only offers reliable protection, but is more likely to be worn by the employee.

uvex experts:

- on-site service from qualified opticians and master opticians
- qualified advisers in uvex customer service
- comprehensive uvex optical service partner network in Germany, Austria and Switzerland, as well as in other European countries

uvex flexibility:

- product consultation and adaptations on request.
- appointments are also possible during the early, late or night shift
- uvex online appointment tool optimises planning

uvex expertise:

- · decades of experience in optics and continuous development of products
- training courses/practical seminars for your employees (e.g. company doctors, occupational safety specialists)
- 'Made in uvex' quality: First-class products with an in-house value creation chain and a focus on production facilities in Germany/Europe



of your company.

www.uvex-safety. com/en/ individual-ppe/ digital-servicetools/

Our service – your benefits

are happy to advise you with regard

to professional and flexible solutions,

tailored to the individual requirements

Our wide uvex collection enables

cles for each of your employees.

us to find prescription safety specta-

uvex offers maximum service with maximum flexibility. Our specialists

digital service tools:

uvex RX lens consulting for the optimal product selection for your requirements
uvex centRX, the web-based centring tool for determining the necessary centring parameters to order your individual safety spectacles

The easy steps to your prescription safety spectacles

1 Scheduled appointment and consultation

Make an appointment by phone or email and get advice from uvex experts on prescription safety spectacles.

L +49 911 97361400

Customerservice.sbu-oh@uvex.de



Workplace analysis and product search

Our uvex specialists will be happy to present our uvex collection in person at your company and will conduct a workplace analysis with you to find the best products for you and your employees.




Finished prescription safety spectacles

After consulting and selecting your personal product, either onsite or at one of the uvex optical service partners, your prescription safety spectacles will be ready for you in a timely manner.


Please contact us for further, non-binding information.


Prescription safety spectacles

uvex international service expertise

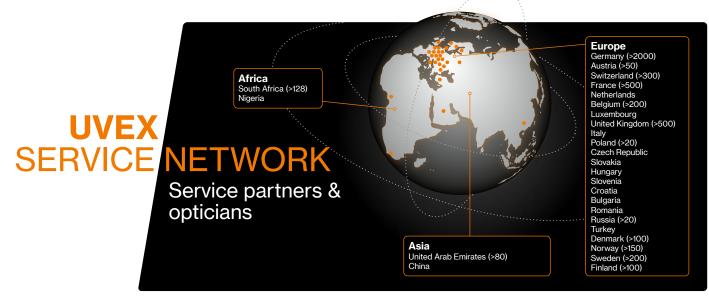

uvex strives to provide you and your employees with uvex prescription safety spectacles, no matter where your company is located. That's why we offer an international uvex network of production facilities and service partners in many countries. This network is continuously being expanded.

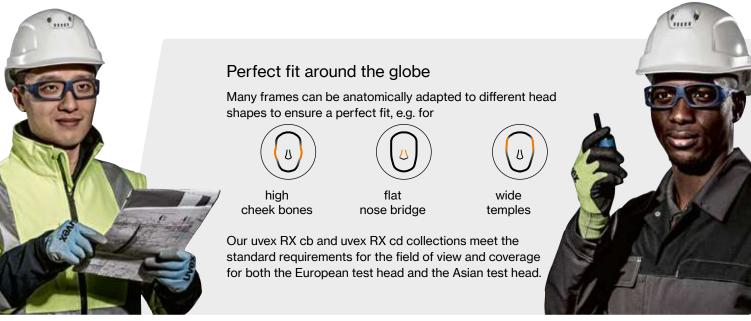



+49 911 9736-1400customerservice.sbu-oh@uvex.de

Digital service tools uvex centRX – uvex RX lens advice





www.uvex-safety. com/en/ individual-ppe/ digital-servicetools/

Maximum service with maximum flexibility

With our uvex RX lens consulting and uvex centRX digital service tools, we offer useful service tools in the fields of prescription safety spectacles and prescription VDU spectacles, which provide you with valuable information at a glance to facilitate your daily work or the ordering process.





www.uvex-safety. com/en/uvex-rxlens-consulting/

uvex RX lens consulting

Optimal selection of products – conveniently online What are the advantages of the different lens types and coatings for innovative uvex prescription safety spectacles? Find the optimum product to meet requirements quickly and easily using the practical uvex RX app.

uvex centRX - customisation - simple, fast, digital

The uvex centRX [pronounced 'sentriks'] photo-centring tool is a web-based, easy-touse solution for quickly and reliably determining the necessary centring parameters for ordering uvex safety and VDU prescription spectacles. It offers customers, retailers and service partners the opportunity to determine the necessary parameters via a photo and to order glasses digitally using the simple menu navigation. The centring requirements of individual focus groups are stored in the application, so that the possibility of calculation errors in determining the specific height is eliminated.



centrx. uvex-safety. com

Your benefits at a glance:

Determine independent, custom centring parameters for ordering lenses

- \checkmark Very simple and digital
- web-based, no installation required
- \checkmark No registration required
- ✓ No data storage
- ✓ Available in German and English

What you need for uvex centRX:

- V PC, laptop or notebook with Internet browser Edge, Chrome or Firefox
- Ability to shoot photos in .jpg/.jpeg/.png formats
- ✓ An Internet Connection

Start straightaway without registering

Are you interested in uvex centRX? Feel free to add our web adress as a favourite in your browser. You can start the application online immediately.





Prescription safety spectacles uvex RX bc plastic frames

Basic collection uvex RX bc plastic

classic timeless virtually unrestricted prescription lenses



uvex RX bc 5523

- round plastic frame with metal arms
- transparent side shields
 good fit with anatomically shaped nose bridge and easily adjustable earpieces

| uvex RX bc 5523 | | |
|------------------|-------------------|-----------------|
| Art. no. | 6109252 | 6109253 |
| Ref. no. | 5523 1525 49/20 | 5523 7415 49/20 |
| Lens diameter | 49 mm | 49 mm |
| Bridge width | 20 mm | 20 mm |
| Colour | grey, translucent | green, grey |
| Extras | metal arms | metal arms |
| Marking on frame | W 166 FT CE | W 166 FT CE |
| | | |

Prescription safety spectacles

uvex RX bc plastic frames



uvex RX bc 5503

- plastic frames with classic lens shape
 transparent side shields with integrated brow guard
- · good fit with anatomically shaped nose bridge

| uvex RX bc 5503 | | | |
|------------------|-----------------|-----------------|-------------------------------|
| Art. no. | 6109219 | 6109203 | 6109204 |
| Ref. no. | 5503 1300 50/17 | 5503 1300 54/17 | 5503 7415 54/17 |
| Lens diameter | 50 mm | 54 mm | 54 mm |
| Bridge width | 17 mm | 17 mm | 17 mm |
| Colour | anthracite | anthracite | green, grey |
| Extras | | | metal arms with spring hinges |
| Marking on frame | W 166 FT CE | W 166 FT CE | W 166 FT CE |



uvex RX bc 5502

- close-fitting plastic frames
- side shields and integrated brow guard frame design
 specially shaped frames provide protection against particles from below · good fit with anatomically shaped nose bridge
- · individually adjustable side arms with four different lengths and adjustable soft-form comfort ear pieces

| uvex RX bc 5502 | |
|------------------|-----------------|
| Art. no. | 6108215 |
| Ref. no. | 5502 1725 56/15 |
| Lens diameter | 56 mm |
| Bridge width | 15 mm |
| Colour | grey |
| Marking on frame | W 166 F CE |



uvex RX bc 5506

- comfortable plastic frame
- side shields and integrated brow guard frame design
 good fit with anatomically shaped nose bridge

| uvex RX bc 5506 Art. no. 6109210 Ref. no. 5506 1725 56/18 |
|---|
| |
| Ref. no. 5506 1725 56/18 |
| |
| Lens diameter 56 mm |
| Bridge width 18 mm |
| Colour light grey, translucent |
| Marking on frame W 166 F CE |



uvex RX bc metal frames

Basic collection uvex RX bc metal

classic timeless virtually unrestricted prescription lenses







6109116

uvex RX bc 5109

• modern, rounded metal frame

• transparent side shields

 anatomically adjustable nose pads and ear-pieces ensure an exceptional fit

| uvex RX bc 5109 | |
|------------------|-----------------|
| Art. no. | 6109114 |
| Ref. no. | 5109 6100 50/19 |
| Lens diameter | 50 mm |
| Bridge width | 19 mm |
| Colour | gold |
| Marking on frame | W 166 FT CE |

uvex RX bc 5110

- classic, square metal frame
- transparent side shields

 anatomically adjustable nose pads and ear-pieces ensure an exceptional fit

| uvex RX bc 5110 | |
|------------------|-----------------|
| Art. no. | 6109115 |
| Ref. no. | 5110 1300 55/17 |
| Lens diameter | 55 mm |
| Bridge width | 17 mm |
| Colour | anthracite |
| Marking on frame | W 166 FT CE |
| | |

uvex RX bc 5111

- · large metal frame in a retro design featuring a double bridge
- transparent side shields
- anatomically adjustable nose pads and ear-pieces
 ensure an exceptional fit

| uvex RX bc 5111 | |
|------------------|-----------------|
| Art. no. | 6109116 |
| Ref. no. | 5111 1800 57/19 |
| Lens diameter | 57 mm |
| Bridge width | 19 mm |
| Colour | silver |
| Marking on frame | W 166 FT CE |



uvex RX bc metal frames

COCO GIOSIOO GIOSIOO









6109103

uvex RX bc 5102

• fashionable, aviator-style metal frame

- transparent side shields
- anatomically adjustable nose bridge and ear-pieces ensure an exceptional fit

| uvex RX bc 5102 | | | |
|------------------|-----------------|-----------------|--|
| Art. no. | 6109100 | 6109101 | |
| Ref. no. | 5102 1400 51/20 | 5102 1400 53/20 | |
| Lens diameter | 51 mm | 53 mm | |
| Bridge width | 20 mm | 20 mm | |
| Colour | gunmetal, matt | gunmetal, matt | |
| Marking on frame | W 166 FT CE | W 166 FT CE | |
| | | | |

uvex RX bc 5103

classic design metal frame with double bridge

• transparent side shields

 anatomically adjustable nose bridge and ear-pieces ensure an exceptional fit

| uvex RX bc 5103 | | |
|------------------|-----------------|-----------------|
| Art. no. | 6109104 | 6109105 |
| Ref. no. | 5103 1400 53/17 | 5103 1400 55/17 |
| Lens diameter | 53 mm | 55 mm |
| Bridge width | 17 mm | 17 mm |
| Colour | gunmetal, matt | gunmetal, matt |
| Marking on frame | W 166 FT CE | W 166 FT CE |
| | | |

uvex RX bc 5106

• classic design metal frame

• transparent side shields

 anatomically adjustable nose bridge and ear-pieces ensure an exceptional fit

| uvex RX bc 5106 | | | |
|------------------|-----------------|-----------------|--|
| Art. no. | 6109108 | 6109109 | |
| Ref. no. | 5106 1400 50/20 | 5106 1400 52/20 | |
| Lens diameter | 50 mm | 52 mm | |
| Bridge width | 20 mm | 20 mm | |
| Colour | gunmetal, matt | gunmetal, matt | |
| Marking on frame | W 166 FT CE | W 166 FT CE | |
| | | | |

uvex RX bc 5108

• slim, expressive metal frame

transparent side shields

 anatomically adjustable nose bridge and ear-pieces ensure an exceptional fit

| ~ | 0,000 | |
|---|-------|--|
| | | |
| | | |

| uvex RX bc 5108 | | |
|------------------|-----------------|-----------------|
| Art. no. | 6109112 | 6109113 |
| Ref. no. | 5108 3400 54/19 | 5108 3400 56/19 |
| Lens diameter | 54 mm | 56 mm |
| Bridge width | 19 mm | 19 mm |
| Colour | steel blue | steel blue |
| Marking on frame | W 166 FT CE | W 166 FT CE |
| | | |

uvex RX bc 5101

classic design metal frame with double bridge

· side shields made of wire mesh for good air circulation

- anatomically adjustable nose pads
- arms with sprung hinges and easily adjustable earpieces

| 6109103 |
|-----------------|
| 5101 1018 56/17 |
| 56 mm |
| 17 mm |
| black, silver |
| W 166 FT CE |
| |





Titanium collection uvex RX ti

lightweight allergy-neutral corrosion-resistant



6109404



uvex RX ti 5904

A

• thin, lightweight titanium frame

transparent side shields

· lightweight, allergy-neutral and corrosion-resistant

anatomically adjustable nose pads and ear-pieces ensure an exceptional fit

| uvex RX ti 5904 | |
|------------------|-----------------|
| Art. no. | 6109404 |
| Ref. no. | 5904 1900 52/19 |
| Lens | 52 mm |
| Bridge width | 19 mm |
| Colour | silver, matt |
| Marking on frame | W 166 FT CE |
| - | |

uvex RX ti 5905

· large titanium frame in a retro design featuring a double bridge

• transparent side shields

lightweight, allergy-neutral and corrosion-resistant

anatomically adjustable nose pads and ear-pieces ensure an exceptional fit

| 6109405 |
|-----------------|
| 5905 1900 57/19 |
| 57 mm |
| 19 mm |
| silver, matt |
| W 166 FT CE |
| |



uvex RX cb

custom bridge uvex RX cb

perfect fit for high cheekbones wide temples flat nose bridge



·

6109232

uvex RX cb 5580

- wide fitting plastic frame for the best fit
- · frame design with side shields and integrated brow guard
- · easily adjustable, soft-form ear pieces for extra comfort
- ideal for individuals with a flat nose bridge, high cheekbones and/or wide temples.
- tested for use with Asian headform 2M, DIS ISO 18526-4:2018

| uvex RX cb 5580 | |
|------------------|-----------------|
| Art. no. | 6109232 |
| Ref. no. | 5580 3015 57/14 |
| Lens | 57 mm |
| Bridge width | 14 mm |
| Colour | dark blue, grey |
| Marking on frame | W 166 F CE |
| | |

uvex RX cb 5581

- plastic frame with extra wide temple width
- frame design with side shields and integrated brow guard
- easily adjustable, soft-form ear pieces for extra comfort
- ideal for individuals with a flat nose bridge, high cheekbones and/or wide temples.
- tested for use with Asian headform 2M, DIS ISO 18526-4:2018

6109233

| uvex RX cb 5581 | | |
|------------------|-----------------|--|
| Art. no. | 6109233 | |
| Ref. no. | 5581 1542 58/14 | |
| Lens | 58 mm | |
| Bridge width | 14 mm | |
| Colour | grey, dark red | |
| Marking on frame | W 166 F CE | |



Prescription safety spectacles Lens options uvex RX bc for plastic and metal frames · uvex RX ti · uvex RX cb

| Focus type | | Lens type | Parameter for centering of the lenses |
|--|--------------------------------|--|---|
| Description | | | Specific height Box measure |
| Single vision | | | |
| - Correction of visual defect in far, in-between or near distance | | Single vision, Single vision HD | Single vision HD ≥ centre of lens Main line of sight |
| Certified prescription range | | | |
| Comfort lenses | | | |
| Nahcomfort – Version with expanded near vision – Ideal for workplace environments of 30 cm to | | Nahcomfort Standard, Nahcomfort Optima Versions see page 404 | min. 17 mm Main line of sight |
| approx. 2 m Distanzcomfort - Calculation of the individual correction for defined distances (1 m, 2 m or 4 m) | R | Distanzcomfort Optima | min. 17 mm Zero line of sight |
| Single vision Relax - To accommodate the prescription for the lower part of the lens, the prescription is increased by +0.5 of a diopter | F F+0.5 Cddt | Single vision Relax | min. 15 mm Zero line of sight |
| Certified prescription range | | | |
| Bifocal | | | |
| Correction of visual defect in far and reading distance Visible segment for near distance Steplike change from far distance to near distance at the edge of segment Bifocal: Instantly well-tolerated, visible edge of segment supports orientation | Bifocal | Width of segment: 28 mm, curved | |
| Certified prescription range | | | |
| Varifocals - Correction of visual defect in far, in-between and near distance - Gliding change from far distance to near distance | | Varifocal Standard - Standard area for far distance and near distance - Long, narrow canal of progression | min. 23 mm Zero line of sight |
| (progressive canal) – The non-visible gliding zone corrects in-between distances | F | Varifocal Pro Work – Large area for far distance – Wide canal of progression – Optimized area for reading distance | min. 20 mm Zero line of sight |
| | FN | Varifocal Piccolo - Suitable for flat frames - Large area for far distance and near distance - Shortened canal of progression | min. 17 mm Zero line of sight |
| | | Varifocal Top One - Very comfortable, large long-distance and close-up field of vision - Wide canal of progression for added convenience - Minimal blur in peripheral vision | min. 19 mm Zero line of sight |
| | Varifocal Optima, Optima HD | Varifocal Optima, Optima HD - Individual adjusted multifocal lens of latest generation - Wide field of view for any distance - Improved design - Almost no blurred zones in periphere area >> Version HD see page 404 | Optima min. 17mm Optima HD min. 16mm (depending on the corridor length) Zero line of sight |
| Certified prescription range | | | |



The overview shows the maximum prescription range which is approved and certified. Depending on the size of the frame and the lens material, further restrictions may apply.

▶ Please take into account the specifications relating to the line of sight when determining the vision point.

| | Material | | | Extras, optional | | | | | | |
|---|--|--|--|---|--|-----------------------|-------------|--------------------------|------|---|
| CR 39 | HI 1.6 | Plastic HI 1.67 | PC | Trivex | Silicate Hard glass | Normal AR | Super AR | UV blue protect | Tint | Variomatic brown |
| | | | | | HD not available | | | | | |
| | incl. hard coating only available with SAR recommended from +/- 4.0 dpt. | incl. hard coating only available with SAR recommended from +/- 6.0 dpt. | incl. hard coating | incl. hard coating | only available without AR or with SAR | only single vision | | only HI 1.67 or PC | | only Polycarbonate or Trivex |
| + 10.0 to - 10.0 at maximum v cyl. ± 8.0 dp | | | +9.5 to -12.0 dpt. at maximum value cyl. ±8.0 dpt. | +8.0 to -11.0 dpt. at maximum value cyl. ±7.0 dpt. | +7.0 to -6.0 dpt. at maximum value cyl. ±4.0 dpt. | | | | | +7.5 to -8.5 dpt. at maximum value cyl. ±6.0 dpt. |
| | | | | | | | | only | | |
| Standard/ Optima | only Optima | only Optima | Standard/ Optima | only Optima | - | • | • | HI 1.67 or PC | - | - |
| | | | | | - | • | - | only HI 1.67 or PC | - | - |
| • | | | | | - | | | only HI 1.67 or PC | - | - |
| +9.0 to -7.5 c at maximum v cyl. ±6.0 dp | alue at maximum value | + 9.0 to – 10.0 dpt. at maximum value cyl. ± 6.0 dpt. | +9.0 to -6.0 dpt. at maximum value cyl. ±6.0 dpt. | +7.0 to -6.0 dpt. at maximum value cyl. ±4.0 dpt. | | | | | | |
| | | | | | | | | | | |
| - | Bifocal only | - | | - | | - | | - | | - |
| +7.0 to -8.0 d at maximum v cyl. ±6.0 dp Add. +3.0 | alue at maximum value ot. cyl. ± 8.0 dpt. | | +10.0 to -10.0 dpt. at maximum value cyl. ±6.0 dpt. Add. +3.0 | | +6.0 to -6.0 dpt. at maximum value cyl. ±4.0 dpt. Add. +3.0 | | | | | |
| | | | | | | | | | | |
| • | • | • | • | - | • | • | • | - | • | only Polycarbonate |
| • | • | - | - | • | - | • | • | only HI 1.67 or PC | • | only Polycarbonate or Trivex |
| • | - | - | • | - | - | • | · | - | · | only Polycarbonate |
| | | | | - | • | | | only HI 1.67 or PC | • | only Polycarbonate |
| | only Optima and Optima HD | only Optima and Optima HD | • | only Optima and Optima HD | - | only Optima | | only HI 1.67 or PC | | only Polycarbonate or Trivex |
| +6.0 to -10.0 at maximum v cyl. ±6.0 dp Add. +3.0 | alue at maximum value ot. cyl. ± 6.0 dpt. | +10.0 to -12.0 dpt. at maximum value cyl. ±6.0 dpt. Add. +3.0 | +9.5 to -10.0 dpt. at maximum value cyl. ±6.0 dpt. Add. +3.0 | +6.0 to -13.0 dpt. at maximum value cyl. ±6.0 dpt. Add. +3.0 | +6.0 to -6.0 dpt. at maximum value cyl. ±4.0 dpt. Add. +3.0 | | | | | +7.5 to -10.0 dpt. at maximum value cyl. ±6.0 dpt. Add. +3.0 |

Prescription safety spectacles

comfort and design uvex RX cd

modern sporty protective functions integrated into frame design



uvex RX cd 5521 planet · uvex RX cd 5521

- the uvex RX cd 5521 planet frame is primarily made of high-quality, bio-based material; instead of crude oil, this material is based on the renewable raw material of the castor plant;
- the total percentage of the castor oil base is 38% • stylish plastic frame with reflective uvex logo
- transparent lens frame for an unrestricted field of view

386

- good fit thanks to anatomically shaped nose bridge
- sporty arms made from a combination of soft and hard components
- to ensure increased comfort and non-slip fit

| | uvex RX cd 5521 planet | uvex RX cd 5521 |
|------------------|------------------------|--------------------|
| Art. no. | 6109257* | 6109249* |
| Ref. no. | 5521 1369 54/22 | 5521 1813 54/22 |
| Lens diameter | 54 mm | 54 mm |
| Bridge width | 22 mm | 22 mm |
| Colour | anthracite, jade | silver, anthracite |
| Marking on frame | W 166 F CE | W 166 F CE |

uve



Please note the lens options for uvex RX cd on pages 392/393.

¹ Calculation method: IPCC 2021 GWP 100a (based on ISO 14067) SimaPro 9.5.00 Database ecoinvent 3.9.1 Scope: cradle to customer. The CO2 values stated apply to the calculation period and may be subject to permanent changes.

Prescription safety spectacles uvex RX cd



uvex RX cd 5524 planet

- modern, close-fitting plastic frame
- the frame is primarily made of high-quality, bio-based material. Instead of crude oil, this material is based on the renewable raw material of the castor plant
- the total percentage of the castor oil base for the frame is 38%
- translucent frame colour for an unobstructed field of vision
- frame design with integrated side shields and upper eye coverage • soft, adjustable nose bridge
- · easily adjustable soft-form comfort ear-pieces



protecting planet $\langle \!\!\! \! \! \rangle$ by using bio-based mater

| uvex RX cd 5524 planet | | |
|------------------------|-------------------------|---------|
| Art. no. | 6109254* | 61092 |
| Ref. no. | 5524 2513 53/16 | 5524 2 |
| Lens diameter | 53 mm | 57 mm |
| Bridge width | 16 mm | 16 mm |
| Colour | translucent, anthracite | translu |
| Marking on frame | W 166 F CE | W 166 |

255* 2513 57/16 lucent, anthracite 6 F CE





uvex RX cd 5514

close-fitting plastic frame

388

- transparent side shields and integrated brow guard frame design
- soft, adjustable nose bridge
- · easily adjustable soft-form comfort ear pieces

| Art. no. | 6109225* | 6109226* |
|------------------|-----------------|-----------------|
| Ref. no. | 5514 1033 53/18 | 5514 1045 55/18 |
| Lens diameter | 53 mm | 55 mm |
| Bridge width | 18 mm | 18 mm |
| Colour | black, blue | black, red |
| Marking on frame | W 166 F CE | W 166 F CE |

Please note the glazing options for uvex RX cd on pages 392/393.

uver BY od 5514

Prescription safety spectacles



uvex RX cd 5526

- plastic frame with sporty design
- the frame is primarily made of high-quality, bio-based material; instead of crude oil, this material is based on the renewable raw material of the castor plant; the total percentage of the castor oil base for the frame is 38%
- translucent lens frame for an unobstructed field of vision
- · good fit thanks to anatomically shaped nose bridge
- easily adjustable, soft ear-pieces with metal core



6109260

54 mm

18 mm

black, grey W 166 F CE

5526 1015 54/18


Art. no. Ref. no. Lens diameter Bridge width Colour Marking on frame 6109261 5526 1341 54/18 54 mm 18 mm anthracite, red W 166 F CE



Please note the glazing options for uvex RX cd on pages 392/393.

Prescription safety spectacles uvex RX cd 5522 uvex RX cd 5522 tight-fit-kit

FLEXIBLE / ROBUST / SAFE

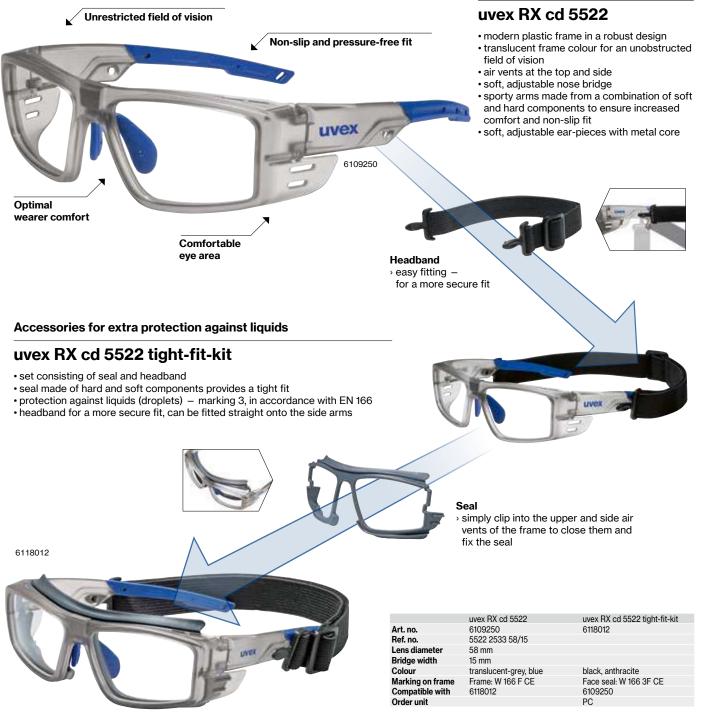

uvex RX cd 5522 (6109250) with uvex RX cd 5522 tight-fit-kit (6118012)

Please note the glazing options for uvex RX cd on pages 392/393.

Prescription safety spectacles

uvex RX cd



uvex RX cd 5518

- sporty frame design: attractive and durable
- metal-free
- comfortable soft arms (uvex duo component technology), non-slip fit without pressure points
- · good fit thanks to anatomically shaped nose bridge



| uvex RX cd 5518 | | |
|------------------|-----------------|------------------|
| Art. no. | 6109230* | 6109234* |
| Ref. no. | 5518 1341 54/22 | 5518 1333 54/22 |
| Lens diameter | 54 mm | 54 mm |
| Bridge width | 22 mm | 22 mm |
| Colour | anthracite, red | anthracite, blue |
| Marking on frame | W 166 F CE | W 166 F CE |
| | | |

Please note the glazing options for uvex RX cd on pages 392/393.



uvex RX cd 5505

- close-fitting plastic frames
- integrated side shields and brow guard for an exceptionally close fit
- specially shaped frames provide protection against particles from below
- · good fit with anatomically shaped nose bridge
- individually adjustable side arm length and angle for a customised fit and adjustable soft-form comfort ear pieces

| uvex RX cd 5505 | | |
|------------------|-----------------|-----------------|
| Art. no. | 6109208 | 6109209 |
| Ref. no. | 5505 2900 55/19 | 5505 2900 57/19 |
| Lens diameter | 55 mm | 57 mm |
| Bridge width | 19 mm | 19 mm |
| Colour | transparent | transparent |
| Marking on frame | W 166 F CE | W 166 F CE |
| | | |

Please note the glazing options for uvex RX cd on pages 392/393.





uvex RX cd 5505 with uvex RX cd seal

uvex RX cd 5505 seal

- foam seal frame for uvex RX cd 5505 for use when working with dust, chips or fluids
- complies with EN 166 "Protection against liquid droplets and splashes" (category "3")

| uvex RX cd 5505 seal | | |
|----------------------|-----------------|-----------------|
| Art. no. | 6118000 | 6118001 |
| Ref. no. | 5505 seal 55/19 | 5505 seal 57/19 |
| Lens diameter | 55 mm | 57 mm |
| Bridge width | 19 mm | 19 mm |
| Colour | black | black |
| Order unit | PC | PC |
| seal marking | W 166 3 F CE | W 166 3 F CE |
| - | | |



Prescription safety spectacles Lens options for uvex RX cd · uvex RX cf 5500 - uvex RX cf 5501

| | | | | | | Lens type | Parameter for centering of the lenses | |
|------------------------|-----------------------|---------------------------|------------------------|----------------------------------|------------------|---|--|--|
| Description | | | | | | | Specific height | |
| • | | | | | | | Box measure | |
| Single visio | n | | | | | | | |
| | | | | | | Single vision, Single vision HD | Single vision HD min. centre of lens | |
| | | | | | | | Main line of sight | |
| Prescription rat | nge | | | | | | | |
| Comfort len | ises | | | | | | | |
| Z | Z | R | F | | | Nahcomfort Standard, Nahcomfort Optima (Versions see page 404) | min. 17 mm Main line of sight | |
| | | | F+0,5 | | | Distanzcomfort Optima | min. 17 mm Zero line of sight | |
| Nahcomfort Standard | Nahcomfort Optima | Distanzcomfort Optima | Single vision Relax | | | Single vision Relax | min. 15 mm Zero line of sight | |
| Prescription ra | nge | | | | | | | |
| Bifocal | | | | | | | | |
| F N Bifocal | | | | | | Width of segment: 28 mm, curved | | |
| Prescription ra | nge | | | | | | | |
| Varifocals | | | | | | | | |
| F | F | F | E | F | | Varifocal Standard | min. 23 mm Zero line of sight | |
| Varifocal Standard | Varifocal Pro Work | N Varifocal Piccolo | Varifocal Top One | Varifocal | | Varifocal Pro Work | min. 20 mm Zero line of sight | |
| Standard | FIG WOR | FICCOIO | Top One | Optima Varifocal Optima HD | | Varifocal Piccolo | min. 17 mm Zero line of sight | |
| | | | | | | Varifocal Top One | min. 19 mm Zero line of sight | |
| | | | | Va | Varifocal Optima | min. 17 mm Zero line of sight | | |
| | | | | | | Varifocal Optima HD | min. 16 mm (depending on the corridor length) Zero line of sight | |
| Prescription rat | nge | | | | | | | |
| | | | | | | | | |
| 000 | | | | | | | | |



- In order to ensure optimum vision, uvex compensate the values in accordance to the frame wrap angle (FWA). The overview below provides information on the lens options for uvex RX cd frames. Please also ensure the frame fits correctly.
- ▶ Please take into account the specifications relating to the line of sight when determining the vision point.

| Material | | | | | Extras, optional | | | | |
|---|---|---|---|---|-----------------------|-------------|-------------------------------|---------|---|
| Plastic | | | | | | | | | |
| CR 39 | HI 1.6 | HI 1.67 | PC | Trivex | Normal AR | Super AR | UV blue protect | Tinting | Variomatic brown |
| | | | | | | | | | |
| | incl. hard coating only available with SAR | incl. hard coating only available with SAR | incl. hard coating | incl. hard coating | only single vision | | only HI 1.67 or PC | | only Polycarbonate or Trivex |
| +6.0 to -6.0 dpt. at maximum value cyl. ±4.0 dpt. | +6.0 to -6.0 dpt. at maximum value cyl. ±4.0 dpt. | +6.0 to -6.0 dpt. at maximum value cyl. ±4.0 dpt. | +6.0 to -6.0 dpt. at maximum value cyl. ±4.0 dpt. | | | | | | +6.0 to -6.0 dpt. at maximum value cyl. ±4.0 dpt. |
| | | | | | | | | | |
| Standard/Optima | only Optima | only Optima | Standard/Optima | only Optima | | | only Optima, HI 1.67 or PC | - | - |
| - | • | | | • | | • | only HI 1.67 or PC | - | - |
| - | • | - | • | - | | - | only HI 1.67 or PC | - | only Polycarbonate |
| +6.0 to -6.0 dpt. at maximum value cyl. ±4.0 dpt. | +6.0 to -6.0 dpt. at maximum value cyl. ±4.0 dpt. | +6.0 to -6.0 dpt. at maximum value cyl. ±4.0 dpt. | +6.0 to -6.0 dpt. at maximum value cyl. ±4.0 dpt. | +6.0 to -6.0 dpt. at maximum value cyl. ±4.0 dpt. | | | | | |
| | | | | | | | | | |
| • | Bifocal only | - | | - | - | | - | | - |
| +6,0 to -6,0 dpt. at maximum value cyl. ±4,0 dpt. | +6,0 to -6,0 dpt. at maximum value cyl. ±4,0 dpt. | | +6,0 to -6,0 dpt. at maximum value cyl. ±4,0 dpt. | | | | | | |
| | | | | | | | | | |
| • | • | • | • | - | • | | - | | only Polycarbonat |
| | • | | | • | | | only, HI 1.67 or PC | | only Polycarbonat or Trivex |
| • | • | • | • | - | - | • | - | | only Polycarbonat |
| | | | | - | | | only, HI 1.67 or PC | | only Polycarbonat |
| | | | | • | | | only, HI 1.67 or PC | | only Polycarbonat or Trivex |
| | | | | | only Optima | | only, HI 1.67 or PC | | only Polycarbonat or Trivex |
| +6.0 to -6.0 dpt. at maximum value cyl. ±4.0 dpt. | +6.0 to -6.0 dpt. at maximum value cyl. ±4.0 dpt. | +6.0 to -6.0 dpt. at maximum value cyl. ±4.0 dpt. | +6.0 to -6.0 dpt. at maximum value cyl. ±4.0 dpt. | +6.0 to -6.0 dpt. at maximum value cyl. ±4.0 dpt. | | | | | +6.0 to -6.0 dpt at maximum value cyl. ±4.0 dpt. |




sporty uvex RX sp


dynamic wrap-around design protective functions integrated in frame design

uvex anatomic sport lens

- we only use lenses with a base curve that is identical to the curvature of the frame.
- -prescription values are recalculated based on the angle of the lenses and taken into account during the glazing process.

protecting planet







uvex

- The uvex RX sp planet frame is primarily made of high-quality, bio-based material. Instead of crude oil, this material is based on the renewable raw material of the castor plant. The total percentage of the castor oil base is 38%.
- sporty, plastic "wraparound" design with curved lenses and anatomic sport glazing
- · side shield and integrated brow guard frame design
- good fit with anatomically shaped soft nose bridge
- sporty arms with a combination of soft and hard components ensure increased comfort and non-slip fit





| | www.DV on 5510 planet | Wer EF10 |
|------------------|------------------------|-------------------|
| | uvex RX sp 5513 planet | uvex RX sp 5513 |
| Art. no. | 6109256 | 6109222 |
| Ref. no. | 5513 1369 62/16 | 5513 1577 62/16 |
| Lens diameter | 62 mm | 62 mm |
| Bridge width | 16 mm | 16 mm |
| Colour | anthracite, jade | grey, light green |
| Marking on frame | W 166 F CE | W 166 F CE |

▶ Please note the glazing options for uvex RX sp on pages 398/399.

Prescription safety spectacles

uvex RX sp

uvex RX sp 5510

- sporty, plastic "wraparound" design with curved lenses and anatomic sport glazing
- side shield and integrated brow guard frame design
- good fit with anatomically shaped soft nose bridge
- sporty arms with a combination of soft and hard components ensure increased comfort and non-slip fit

| uvex RX sp 5510 | | |
|------------------|------------------------|--------------------|
| Art. no. | 6109216 | 6109217 |
| Ref. no. | 5510 1217 62/17 | 5510 1248 62/17 |
| Lens diameter | 62 mm | 62 mm |
| Bridge width | 17 mm | 17 mm |
| Colour | matt black, light grey | matt black, orange |
| Marking on frame | W 166 F CE | W 166 F CE |
| | | |

▶ Please note the glazing options for uvex RX sp on pages 398/399.

uvex RX sp 5512

- sporty, plastic "wraparound" design with curved lenses and anatomic sport glazing
- uvex tight-fit-kit consisting of headband and foam material available
- side shield and integrated brow guard frame design
- the arms can be replaced with a headband for a more secure fit when working in extreme conditions
- the foam material guarantees a close and firm fit.
- very good fit with anatomically adjustable, soft nose bridge
- sporty side arms with a combination of soft and hard components ensure increased comfort and non-slip fit

Applications in combination with the tight-fit-kit:

- working in extreme situations, such as overhead or in confined spaces
- working with fluids (drops) or chips and dust
- complies with EN 166 "Protection against liquid droplets and splashes" (category "3")

| uvex RX sp 5512 | | |
|-------------------------------|-----------------|--------------------|
| Art. no. | 6109220 | 6109221 |
| Ref. no. | 5512 5573 65/16 | 5512 1348 65/16 |
| Lens diameter | 65 mm | 65 mm |
| Bridge width | 16 mm | 16 mm |
| Colour | brown, olive | anthracite, orange |
| Marking on frame | W 166 F CE | W 166 F CE |
| | | |
| uvex RX sp 5512 tight-fit-kit | | |
| Art. no. | 6118004 | 6118005 |
| Colour | brown, olive | anthracite, orange |
| Order unit | PC | PC |
| tight-fit-kit marking | W 166 3 F CE | W 166 3 F CE |
| | | |

Please note the glazing options for uvex RX sp on pages 398/399.





6109220 assembled with uvex RX sp 5512 tight-fit-kit 6118004





6109221 assembled with uvex RX sp 5512 tight-fit-kit 6118005 395



6109221

6109216

6109217



uvex RX cf 9501

goggle with direct prescription lenses

close fit uvex RX cf

close-fitting all-round protection direct glazing solutions using RX insert

Recommended use/glazing

Lens material: PC*

- · Workplaces with a high risk of mechanical hazards
- such as metal-cutting shaping, turning, grinding and milling
- Mechanical strength "B", 120 m/s

Lens material: Trivex

- · Workplaces with a high risk of chemical hazards
- such as laboratories and those handling small quantities of chemicals
- Mechanical strength "F", 45 m/s

uvex RX cf 9501

- goggles with custom prescription
- direct prescription lenses provide exceptional optical quality without aberrations or loss of light
- · comfortable TPE frame, stays comfy even when worn for longer periods
- high level of mechanical strength ("B", 120 m/s)
- meets the requirements for additional markings 3 (liquids, droplets) and 4 (coarse dust)

| uvex RX cf 9501 | |
|------------------|------------------|
| Art. no. | 6109501 |
| Ref. no. | 9501 1333 61/14 |
| Lens diameter | 61 mm |
| Bridge width | 14 mm |
| Colour | anthracite, blue |
| Marking on frame | W 166 34 B CE |
| | |

Please note the glazing options for uvex RX cf 9501 on pages 398/399.



Direct prescription lenses

Prescription safety lenses are inserted directly into the goggle frame according to the individual prescription strength.



Sophisticated ventilation Direct and indirect air vents ensure optimum protection and excellent ventilation for "eye zone" comfort.



Flexible headband clip The flexible headband clip allows the goggle to adjust to different facial shapes for a customised fit. The comfortable fabric headband keeps the uvex RX cf 9501

For further information on lens materials and models, information can be found on pages 402 - 406.

Prescription safety spectacles



uvex RX cf 5500

- spectacles with all-round protection
- fixed RX insert for your individual prescription
- meets the requirements for additional markings 3 (liquids, droplets) and 4 (coarse dust)
- perfect fit providing reliable protection: The side arms can be adjusted to a variety of different lengths, allowing the glasses to be adapted to suit all facial shapes
- flexible soft components adapt to the wearer's face contours

| uvex RX cf 5500 | |
|-------------------------|----------------|
| Art. no. | 6108200 |
| RX insert lens diameter | 48 mm |
| RX insert bridge width | 20 mm |
| Colour | blue, grey |
| Marking on frame | W 166 34 F CE |
| Lenses | PC clear |
| Lens marking | 2C-1,2 W 1 FKN |

▶ Please note the glazing options for uvex RX cd on pages 392/393.



uvex RX cf 5501

- small goggles with fixed RX insert to suit your individual prescription
- meets the requirements for additional markings 3 (liquids, droplets) and 4 (coarse dust)
- highly compatible with other PPE
- low-volume frame design

indirect ventilation

| uvex RX cf 5501 | |
|-------------------------|----------------|
| Art. no. | 6108201 |
| RX insert lens diameter | 48 mm |
| RX insert bridge width | 20 mm |
| Colour | black, grey |
| Marking on frame | W 166 34 B CE |
| Lenses | PC clear |
| Lens marking | 2C-1,2 W 1 FKN |

▶ Please note the glazing options for uvex RX cd on pages 392/393.

Prescription safety spectacles Lens options for uvex RX sp models · Special lenses for uvex RX cf 9501

| uvex RX sp 5510 | | Important note | Lens type | Parameter for centering of the lenses |
|-----------------------------------|--|---|-----------------------------------|--|
| | Description | | | Specific height Box measure |
| | Single vision | | | Dox measure |
| | | for uvex RX sp 5510: Minimum PD ≥ 32.0 mm Fitting height ≥ centre of lens | Single vision Single vision HD | Main line of sight |
| | Comfort lenses | | | |
| | | for uvex RX sp 5510: | Nahcomfort Optima | min. 17 mm Main line of sight |
| | Distanz- Single | Minimum PD ≥ 32.0 mm Fitting height ≥ centre of lens | Distanzcomfort Optima | min. 17 mm Zero line of sight |
| | Nahcomfort comfort vision Optima Optima Relax Varifocals | | Single vision Relax | min. 15 mm Zero line of sight |
| | | | Varifocal Pro Work | min. 20 mm Zero line of sight |
| | NNN | for uvex RX sp 5510: Minimum PD ≥ 32.0 mm Fitting height ≥ centre of lens | Varifocal Optima | min. 17 mm Zero line of sight |
| | Varifocal Varifocal Optima Pro Work Varifocal Optima HD | | Varifocal Optima HD | min. 16 mm Zero line of sight |
| | Prescription range | | | |
| uvex RX sp 5512 · uvex RX sp 5513 | | | | |
| | Single vision | Minimum PD ≥ 32.0 mm Fitting height ≥ centre of lens | Single vision Single vision HD | Main line of sight |
| | Comfort lenses | | | |
| | Z R F | Minimum PD ≥ 32.0 mm Fitting height ≥ centre of lens | Nahcomfort Optima | min. 17 mm Main line of sight |
| | Distanz- Single | | Distanzcomfort Optima | min. 17 mm Zero line of sight |
| | Nahcomfort comfort vision Optima Optima Relax | | Single vision Relax | min. 15 mm Zero line of sight |
| | Varifocals | | Varifocal Pro Work | min. 20 mm Zero line of sight |
| | ŇNN | Minimum PD ≥ 32.0 mm Fitting height ≥ centre of lens | Varifocal Optima | min. 17 mm Zero line of sight |
| | Varifocal Varifocal Optima Pro Work Varifocal Optima HD | | Varifocal Optima HD | min. 16 mm Zero line of sight |
| | Prescription range | | | |
| uvex RX cf 9501 | | Important note | Lens type | Parameter for centering of the lenses |
| | Description | | | Specific height Box measure |
| | Single vision | | | DOX IIICASULE |
| | | When using PC or PC+ Minimum PD ≥ 32.0 mm When using Trivex Minimum PD ≥ 34.0 mm | Single vision Single vision HD | Main line of sight |
| | Varifocals | | | |
| | F F C T | When using PC or PC+ Minimum PD ≥ 32.0 mm | Varifocal Pro Work | min. 20 mm Zero line of sight |
| | NNN | Minimum PD ≥ 32.0 mm When using Trivex Minimum PD ≥ 34.0 mm | Varifocal Optima | min. 17 mm Zero line of sight |
| | Varifocal Varifocal Optima | wunimum PD 2 34.0 mm | | min. 16 mm |



In order to ensure optimum vision, uvex only uses the special uvex anatomic sport glazing. The overview below provides information on the lens options for uvex RX sp frames and uvex RX goggle. Please also ensure the frame fits correctly.

▶ Please take into account the specifications relating to the line of sight when determining the vision point.

| | | Material | | | | | Extras, | optional | |
|---|---|---|---|---|--------------|-------------|-----------------------|----------|---|
| 05.00 | | Plastic | 50 | <u>.</u> | Normal | Super | UV blue | | N |
| CR 39 | HI 1.6 | HI 1.67 | PC | Trivex | AR | AR | protect | Tint | Variomatic brown |
| | incl. hard coating only available with SAR | incl. hard coating only available with SAR | incl. hard coating | incl. hard coating | _ | _ | only HI 1.67 or PC | _ | only Polycarbonate or Trivex |
| • | • | | | - | • | | only HI 1.67 or PC | - | - |
| | | | | - | | | only HI 1.67 or PC | - | - |
| • | • | • | - | - | | - | only HI 1.67 or PC | - | - |
| | | | | | | | | | |
| • | • | • | • | • | • | • | only HI 1.67 or PC | • | only Polycarbonate or Trivex |
| • | • | • | • | • | • | • | only HI 1.67 or PC | • | only Polycarbonate or Trivex |
| • | • | • | • | • | • | - | only HI 1.67 or PC | • | only Polycarbonate or Trivex |
| + 5.0 to - 5.0 dpt. at maximum value cyl. ±2.0 dpt. | + 5.0 to - 5.0 dpt. at maximum value cyl. ±2.0 dpt. | + 5.0 to - 5.0 dpt. at maximum value cyl. ±2.0 dpt. | + 5.0 to - 5.0 dpt. at maximum value cyl. ±2.0 dpt. | + 5.0 to - 5.0 dpt. at maximum value cyl. ±2.0 dpt. | | | | | + 5.0 to – 5.0 dpt. at maximum value cyl. ±2.0 dpt. |
| | | | | | | | | | |
| | incl. hard coating | incl. hard coating only available with SAR | incl. hard coating | incl. hard coating | | | only HI 1.67 or PC | | only Polycarbonate or Trivex |
| • | | - | | - | • | - | only HI 1.67 or PC | - | - |
| • | • | | | - | | | only HI 1.67 or PC | - | - |
| • | • | • | • | - | • | • | only HI 1.67 or PC | - | - |
| | • | • | • | • | • | • | only HI 1.67 or PC | • | only Polycarbonate or Trivex |
| • | • | | • | • | • | • | only HI 1.67 or PC | • | only Polycarbonate or Trivex |
| • | • | • | • | • | • | • | only HI 1.67 or PC | • | only Polycarbonate or Trivex |
| + 3.5 to – 3.5 dpt. at maximum value cyl. ±2.0 dpt. | + 3.5 to – 3.5 dpt. at maximum value cyl. ±2.0 dpt. | + 3.5 to – 3.5 dpt. at maximum value cyl. ±2.0 dpt. | + 3.5 to – 3.5 dpt. at maximum value cyl. ±2.0 dpt. | + 3.5 to – 3.5 dpt. at maximum value cyl. ±2.0 dpt. | | | | | + 3.5 to – 3.5 dpt. at maximum value cyl. ±2.0 dpt. |
| | | Material | | | | | Extras, | optional | |
| CR 39 | HI 1.6 | Plastic HI 1.67 | PC/PC ⁺ | Trivex | Normal AR | Super AR | UV blue protect | Tint | Variomatic brown |
| - | - | — | • | | | | • | | • |
| - | - | - | incl. hard coating | incl. hard coating | | | only HI 1.67 or PC | | only Polycarbonate or Trivex |
| - | _ | - | • | • | • | | only HI 1.67 or PC | • | only Polycarbonate or Trivex |
| _ | _ | _ | • | • | • | | only HI 1.67 or PC | • | only Polycarbonate or Trivex |
| _ | _ | _ | • | • | • | | only HI 1.67 or PC | • | only Polycarbonate or Trivex |
| | | | + 3.50 to – 3.50 dpt. at maximum value cyl. ±2.0 dpt. | + 3.50 to - 3.50 dpt. at maximum value cyl. ±2.0 dpt. | | | | | + 3.5 to – 3.5 dpt. at maximum value cyl. ±2.0 dpt. |

Prescription safety spectacles uvex RX cd flip-up

COLU

comfort and design uvex RX cd flip-up

for special applications flip-up with non-prescription special lenses



6109235

uvex RX cd 5505 flip-up welding protection

- flip-up with welding protection lenses, non-prescription
 level of protection 5 (welding), suitable for autogenous welding


• filter technology with grey-tinted lenses provides reliable protection against UV and infrared radiation as well as ensuring perfect colour recognition

- Note: welding protection lenses do not provide sufficient protection against laser beams!
- · level of protection 5 in accordance with EN 169 (welding), mech. strength F in accordance with EN 166

| Ivex HX cd 5505 | flip-up welding protection |
|-----------------|----------------------------|
| Art no | 6109218 |

| Art. no. | 6109218 | 6109235 |
|-------------------|----------------------|----------------------|
| Ref. no. | 5505 9905 55/19 | 5505 9905 57/19 |
| Lens | 55 mm | 57 mm |
| Bridge width | 19 mm | 19 mm |
| Colour | black, green | black, green |
| Features: flip-up | | |
| Lens | PC grey, | PC grey, |
| | welding protection 5 | welding protection 5 |
| | uvex infradur plus | uvex infradur plus |
| Lens marking | 5 W1 FTK CE | 5 W1 FTK CE |
| Marking on frame | W 166 F CE | W 166 F CE |
| | | |

uvex i-3 add Perfect vision in every situation

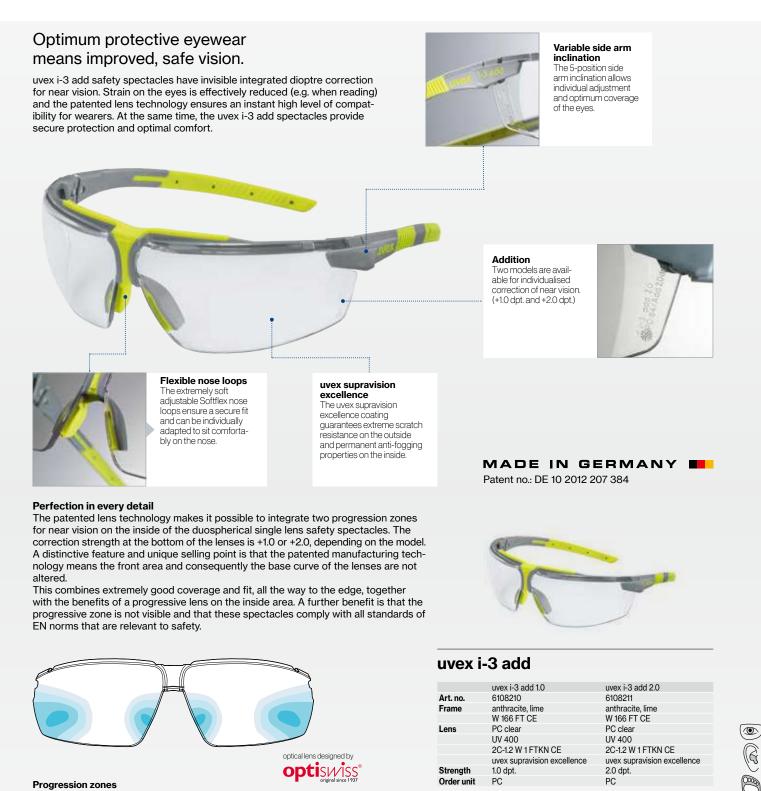

optical lens designed by optiswiss

Progression zones

This diagram of the lenses shows the large zone that does not feature any optical correction. The transparent, integrated optical correction starts in the region of the middle and the strength increases gradually towards the lower edge of the lenses. The correction strength of the spectacles is +1.0 or +2.0, depending on the model.

The free-form lens is manufactured in accordance with standard parameters and designed for a distance of approximately 64 mm between the eyes. These safety spectacles do not permanently replace prescription safety spectacles

Including soft spectacles case with microfibre cloth

1.0 dpt.

PC

Strength

Order unit

2C-1.2 W 1 FTKN CE

uvex supravision excellence

2C-1.2 W 1 FTKN CE

2.0 dpt.

PC:

uvex supravision excellence

Prescription safety spectacles


Certification and marking

Certification

Individually manufactured uvex prescription safety spectacles are tested and certified by independent testing institutes at regular intervals according to the requirements of EN 166.



Marking of lenses in accordance with EN 166

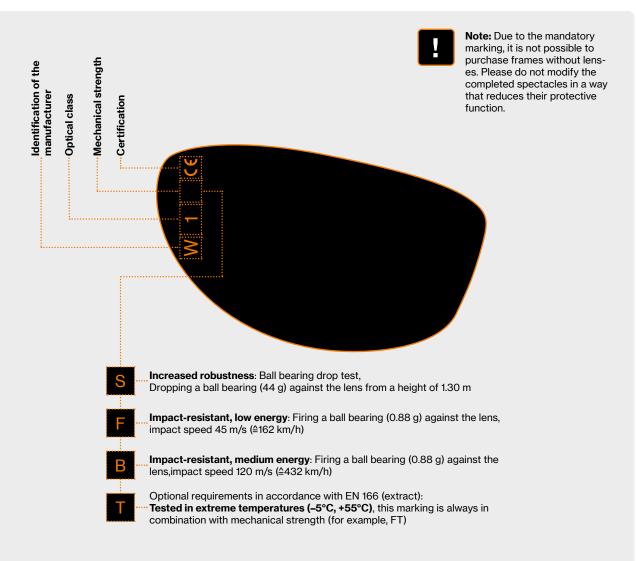

Prescription safety spectacles Certification and marking


Marking

- frame and lenses are permanently marked
- if the markings on the lens and frame are different, the lower mechanical strength applies to the entire eye protection device
- according to the PPE regulation, uvex prescription safety spectacles must be marked with the factory symbol and production date: MIM/YYYY



Marking in accordance with EN 166 on the lens and inside of the frame

Marking of the frame in accordance with EN 166

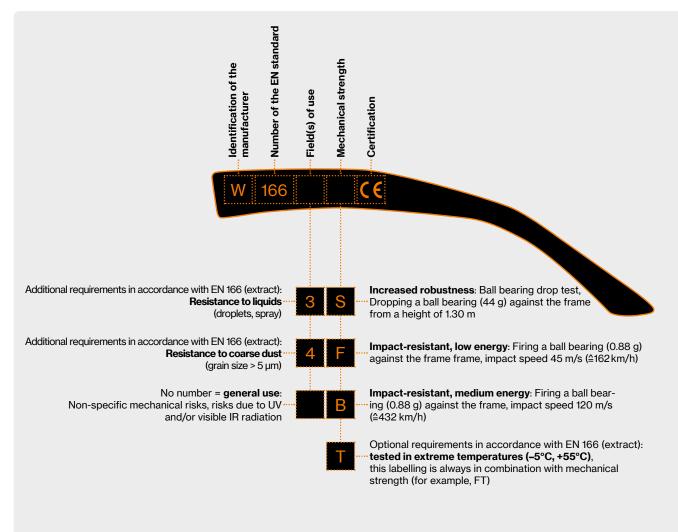

Prescription safety spectacles

Focus types

Single vision lenses

Single vision

defective vision caused by long-sightedness or short-sightedness is corrected

Single vision HD – the ultimate in customisation!

- free-form single-vision lens
- individual parameters such as cornea vertex distance, frame wrap angle and inclination are taken into account for production purposes.
- · calculation of dioptres to an accuracy of one hundredth





- · ideal for use at workstations with monitors
- comfort lenses relieve the eye when looking at objects close up and at intermediate distances thanks to their seamless correction areas
- comfort lenses are a good alternative if the prescription safety eyewear is only needed at workstations and distance vision (> 5 m distance) is not necessary.



Nahcomfort Standard, Nahcomfort Optima

- perfect solution for working distances between 30 cm and approx. 2 m
- the medium range of the lens surface is determined by the degression chosen and is designed for a distance of approx.
 60 cm to 80 cm
- three versions are available, depending on the required reading addition (optional based on the age of the wearer)
- all that is needed to place an order are details of the closerange values and the required design (type A, B, C)
- when ordering the Nahcomfort Optima option, the inner surface of the raw lenses is calculated and manufactured, taking into account the correction, the glass curve and the distance between the eyes

| Туре А | Туре В | Туре С |
|-----------------------|---------------------------|-----------------------|
| Degression** 0.75 dpt | Degression** 1.25 dpt | Degression** 1.75 dpt |
| Addition < 1.5 dpt. | Addition 1.5 to 2.25 dpt. | Addition > 2.25 dpt. |
| < 50 years | 50 to 55 years | > 55 years |

** Degression: Correction reduced, based on the close-range value!

Note:

Ideal for use in VDU spectacles. About 60% of degression is active at the centring cross, so the recommended adjustment applies on the main line of sight.

Distanzcomfort Optima

- perfect solution for working distances between 30 cm and around 1 m, 2 m or 4 m
- by specifying the viewing distance that is required at the workstation, the correction areas will be calculated individually
- all that is needed to place an order are details of the distance and close-range values (addition), the maximum viewing distance (one, two or four meters) as well as the centering parameters (pupillary distance and specific height)
- recommended adjustment: zero line of sight, distance values and addition

Single Vision Relax

- this type of lens is targeted at people over the age of 30
- an invisibly integrated change to the correction value of +0.5 dpt. in the lower area of the lens eases the strain on the eye when looking at near distances (accommodation support)
- the distance correction remains unchanged
- all that is needed to place an order the details of distance values and centring parameters (pupillary distance and specific height)
- we recommend Single Vision Relax lenses for professionals who use mobile devices (notebook, tablet, smartphone etc.) for their daily work

Prescription safety spectacles

Focus types

1) (CZ) (6)



Bifocal lenses Bifocal

- visibly ground segment for near vision ('reading field')
- instant wearer acceptance as visible edge helps eyes to adjust
- intermediate ranges are not corrected

Varifocal lenses

- gradual transition from distance to near vision, known as the progression zone
- the invisible progression zone also corrects intermediate distances
- clear vision at all viewing distances
- may require an initial adjustment phase

Varifocal Optima HD - the ultimate in customisation!

- free-form varifocal lens taking into account idividual parameters such as cornea vertex distance, frame wrap angle and inclination
- · calculation of dioptres to an accuracy of one hundredth

uvex RX lens consulting

Optimal selection of products - conveniently online


What are the advantages of the different lens types and coatings for innovative uvex prescription safety spectacles? Find the optimum product to meet requirements quickly and easily using the practical uvex RX app.





www.uvex-safety. com/en/uvex-rxlens-consulting/

Prescription safety spectacles

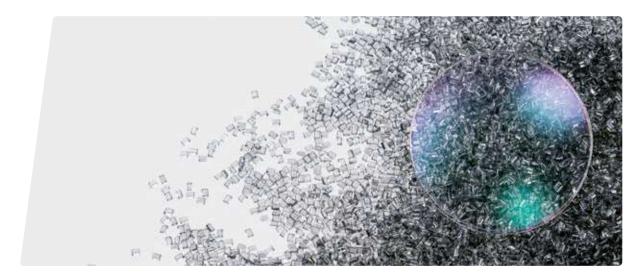

Polycarbonate

- •mechanical strength 'F' (45 m/sec)
- organic material with very high breaking strength
- only partially chemical-resistant
- PC⁺ polycarbonate with increased centre thickness and mechanical strength 'B' (120 m/sec), especially for the uvex RX goggle
- PC and PC⁺: Identification code: 2C-1.2 as per EN 170

Trivex™

- mechanical strength 'F' (45 m/sec)
- best all-round lens material
- excellent resistance to cleaning agents, oils and cosmetics and good scratch resistance
- · lightweight, suitable for even higher prescription values

CR39, modified (plastic)

- •mechanical strength 'S' (ball drop test)
- lightweight organic material suitable for chemicals and painting
- good scratch restistance due to hard coating (optional)

UV blue protect

A special absorber has been added to the lens material that completely filters out UV rays and reduces the blue light content.

- the lenses absorb UV radiation up to 400 nm at 100%, filter short-wave blue light until 410 nm almost completely and reduce the range from 410 nm to 420 nm around 86%.
- uvex UV blue protect lenses enhance contrast and effectively prevent signs of fatigue and age-related macular degeneration (AMD)
- •UV blue protect is optionally available for polycarbonate (PC) lenses and HI 1.67

HI (high index)

Organic lenses with high refractive index – 1.6 or 1.67 • mechanical strength 'S' (ball drop test) • organic material suitable for chemicals and painting

• the lens is thinner and more aesthetically pleasing


HI 1.6 recommended for a prescription > +/-4.0 dpt. HI 1.67 recommended for a prescription > +/-6.0 dpt.

Hard glass, modified

(crown glass, silicate, mineral glass, glass)

- mechanical strength 'S' (ball drop test)
- highly scratch-resistant surface suitable for working with chemicals and paints
- heavy, not recommended for prescription values greater than +/-4.0 dpt.
- spark penetration when welding or grinding

 the mechanical strength of the lenses is guaranteed – clear lenses with UV blue protect are marked 2C-1.2 according to EN 170

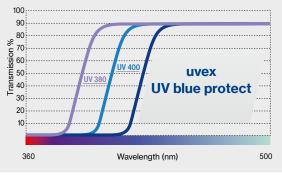

Prescription safety spectacles

Finishes

Anti-reflective coating

Anti-reflective coating is applied to the inside and outside of lenses by means of vapour deposition. It significantly reduces reflections on the surfaces. It offers a cosmetic advantage and increases light transmission.

Two qualities are available:

- normal anti-reflective coating
- super anti-reflective coating

| Normal anti-reflective coating | Super anti-reflective coating |
|--|---|
| Good reflection reduction | Maximum reflection reduction |
| Metal oxide is applied once to each surface | Metal oxide is applied several times to each surface |
| Residual reflection $\approx 4\%$ | Residual reflection < 2% |



Scratch-resistant coating

To guarantee an ideal surface hardness, all our plastic lenses are given a hard coating (optional for CR 39).



Tint


Tinted lenses provide effective protection against glare in areas with high light intensity (for example, sunlight)

Constant tinting

- available in brown and grey
- tinting levels: 15%, 25%, 65%, 75%

Variable tinting – Variomatic™

- lenses tint automatically depending on the UV radiation and temperature
- tinting of between approx. 8% and 80%, in brown
- available as prescription safety spectacles in polycarbonate and Trivex[™]

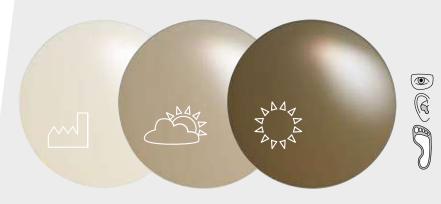

VDU Spectacles Individual eye protection at the screen



uvex VDU spectacles are specially designed for working at a screen, enabling problem-free vision at a computer workstation.

The special feature of VDU spectacles is the distance for which they have been optimised. Normally, the lens is designed for a viewing distance of approximately 30 cm (reading distance) to correct presbyopia. A screen is usually about 50 cm – 80 cm away from the human eye.

To be able to focus continuously at different distances, spectacle wearers are forced to adopt an unnatural head position and body posture. This can lead to a variety of posture-related symptoms, such as overexertion of the shoulder and neck muscles, fatigue symptoms or headaches. For most people who wear reading glasses or varifocals in their everyday lives, VDU spectacles are recommended if the main activity in their job requires viewing a computer screen and safety spectacles are not mandatory in the workplace.

uvex offers different lens materials, focus types and frames for VDU spectacles. The 'Made in uvex' quality system guarantees the best design from an optical and processing technology perspective. All materials used are free from harmful substances and are regularly inspected.

The collection

uvex offers different frames for VDU spectacles. Numerous models are available as metal, plastic or titanium frames.



VDU spectacles

Individual eye protection at the screen

uvex as a partner for individual VDU spectacles

The position of the screen, keyboard and documents in offices is a special visual requirement. uvex offers individual solutions in the area of VDU spectacles. Decades of experience and innovative technologies form the basis for the uvex products, which are manufactured according to the highest production standards. In addition to symptom-free vision at work, uvex also guarantees maximum comfort and quality. Employees will be happy to wear those VDU spectacles which fit perfectly and provide reliable support.

Our service - your benefits

uvex offers maximum service with maximum flexibility. Our specialists are happy to advise you with regard to professional and flexible solutions, tailored to the individual requirements of your company.

Our wide uvex collection enables us to find VDU spectacles for each of your employees.

uvex experts:

- on-site service from qualified opticians and master opticians
- qualified advisers in uvex customer service
- comprehensive uvex optical service partner network in Germany, Austria and Switzerland, as well as in other European countries

uvex flexibility:

- product consultation and adaptations on request.
- appointments are also possible during the early, late or night shift
- uvex online appointment tool optimises planning

uvex expertise:

- · decades of experience in optics and continuous development of products
- training courses/practical seminars for your employees (e.g. company doctors, occupational safety specialists)
- 'Made in uvex' quality: First-class products with an in-house value creation chain and a focus on production facilities in Germany/Europe



www.uvex-safety. com/en/ individual-ppe/ digital-servicetools/

digital service tools:

uvex RX lens consulting for the optimal product selection for your requirements
uvex centRX, the web-based centring tool for determining the necessary centring parameters for your custom prescription VDU spectacles order

The easy steps to your VDU spectacles



Scheduled appointment and consultation

Make an appointment by phone or email and get advice from uvex experts on the topic of VDU spectacles.

L +49 911 97361400

Customerservice.sbu-oh@uvex.de



Workplace analysis and product search

Our uvex specialists will be happy to present our uvex collection to you in person at your company, and will carry out a workplace analysis with you in order to find the optimal products for you and your employees.



Finished VDU spectacles

After consulting and selecting your personal product, either on-site or at one of the uvex optical service partners, the VDU spectacles will be ready for you in a timely manner.

Please contact us for further, non-binding information.

VDU spectacles

Focus types

Posture-related symptoms? The solution – uvex Nahcomfort lenses

Avoid posture-related symptoms with VDU spectacles that are individually adjusted to the wearer. Nahcomfort lenses are specially designed to suit computer-based workplaces and provide unrestricted vision at VDU workstations. The advantages are seamless, sharp vision from 30 cm to approx. 2 m. A clear view of keyboard, screen and documents with an ideal head position. This results in a marked reduction in posture-related symptoms, because the head and neck remain in a natural position.







Nahcomfort

- the wearer's usual reading prescription is found in the lower part of the lens.
- the prescription value gradually becomes weaker further up the lens (degression, in the upper part of the lens, vision is clear at a maximum distance of approx. 2 m). The transitions between the different zones are smooth, similar to varifocal lenses.
- all that is needed to place an order are details of the close-range values and the required design (type A, B, C).
- it is necessary to measure the specific height on the basis of the main line of sight. A minimum fitting height of 17 mm in the frame must be observed.

| Туре А | Туре В | Туре С |
|-----------------------|----------------------------|-----------------------|
| Degression** 0.75 dpt | Degression** 1.25 dpt | Degression** 1.75 dpt |
| Addition < 1.5 dpt. | Addition 1.75 to 2.25 dpt. | Addition > 2.25 dpt. |
| < 50 years | 50 to 55 years | > 55 years |

VDU spectacles

uvex UV blue

- surface finish consisting of different layers. It includes a layer that filters short-wave visible light in the blue-violet range with increased effect.
- effective protection against the symptoms of fatigue and headaches associated predominantly with long periods of working at a monitor and/or with digital media.
- the uvex UV blue layer system also includes a super anti-reflection coating, a scratch-resistant coating and an easy-care layer.



Tint

Tinted lenses provide effective protection against glare in areas with high light intensity (for example, sunlight)

Constant tinting

- available in brown and grey
- tinting levels: 15%, 25%, 65%, 75%

Variable tinting – Variomatic™

- lenses tint automatically, depending on the UV radiation and temperature
- tinting of between approx. 8% and 80% in brown or grey
- available with lens material CR 39



Super anti-reflection incl. easy-care layer

Anti-reflective coating is applied to the inside and outside of lenses by means of vapour deposition. It significantly reduces reflections on the surfaces. It offers a cosmetic advantage and increases light transmission. The easy-care layer makes the glasses easier to clean.

- Maximum reflection reduction
- Metal oxide is applied several times to each surface
- Residual reflection < 2%





VDU spectacles Metal frames

VDU spectacles Metal frames

ideal for VDU work, for use in workplaces where it is not mandatory to wear safety spectacles designs from classic to modern











| | uvex RX 3119 | uvex RX 3119 | uvex RX 3120 | uvex RX 3120 | uvex RX 3121 |
|---------------|------------------|-----------------|-----------------|-----------------|-------------------|
| Art. no. | 6110062 | 6110063 | 6110064 | 6110065 | 6110066 |
| Ref. no. | 3119 6300 50/19 | 3119 1200 50/19 | 3120 1800 55/17 | 3120 3026 55/17 | 3121 1300 57/19 |
| Lens diameter | 50 mm | 50 mm | 55 mm | 55 mm | 57 mm |
| Bridge width | 19 mm | 19 mm | 17 mm | 17 mm | 19 mm |
| Colour | rose gold, shiny | black, matt | silver, shiny | dark blue, matt | anthracite, shiny |
| Extras | Spring hinge | Spring hinge | Spring hinge | Spring hinge | Spring hinge |



VDU spectacles Metal frames



uvex RX 3122 6110067

59 mm

18 mm

3122 7014 59/18

dark green, gun Spring hinge

uvex RX 3112 6110050 3112 1233 54/17

54 mm 17 mm

black, blue Spring hinge

Art. no. Ref. no. Lens diameter

Bridge width Colour Extras uvex RX 3118 6110056 3118 7190 55/17

petrol, vintage Spring hinge

55 mm

17 mm

uvex RX 3124 6110069 3124 1800 53/16

53 mm

16 mm

silver Spring hinge

uvex RX 3123 6110068 3123 1436 52/21 52 mm

21 mm

gun, blue Spring hinge



VDU spectacles Plastic frames

VDU spectacles Plastic frames

ideal for screen work, in workplaces where it is not mandatory to wear safety spectacles designs from classic to modern













| | uvex RX 3516 | uvex RX 3517 | uvex RX 3518 | uvex RX 3519 | uvex RX 3520 |
|---------------|-------------------|-----------------|-------------------|-----------------|-----------------|
| Art. no. | 6110073 | 6110074 | 6110075 | 6110076 | 6110077 |
| Ref. no. | 3516 1525 52/16 | 3517 5400 55/20 | 3518 1525 49/21 | 3519 1000 51/21 | 3520 5500 52/18 |
| Lens diameter | 52 mm | 55 mm | 49 mm | 51 mm | 52 mm |
| Bridge width | 16 mm | 20 mm | 21 mm | 21 mm | 18 mm |
| Colour | grey, translucent | havanna | grey, translucent | black | brown |
| Extras | Spring hinge | | | | Spring hinge |
| | | | | | |



VDU spectacles Plastic frames





VDU spectacles Titanium frames

Titanium uvex RX ti

ideal for screen work, in workplaces where it is not mandatory to wear safety spectacles lightweight allergy-neutral







| | uvex RX ti 3902 | uvex RX ti 3903 | uvex RX ti 3904 |
|---------------|-------------------|-----------------------|-----------------|
| | UVEX FIX II 3902 | | uvex nx II 3904 |
| Art. no. | 6110070 | 6110071 | 6110072 |
| Ref. no. | 3902 1830 55/18 | 3903 3035 49/21 | 3904 1900 53/17 |
| Lens diameter | 55 mm | 49 mm | 53 mm |
| Bridge width | 18 mm | 21 mm | 17 mm |
| Colour | silver, dark blue | dark blue, light blue | silver, matt |
| Extras | Spring hinge | | |



uvex high-fit

UVex high-fit hearing protection otoplastics Customised hearing protection from uvex

MADE FOR YOUR EARS MADE IN UVEX

uvex hearing protection otoplastics are customised to fit the wearer's ear canal and provide the best possible protection in very noisy environments.

uvex high-fit hearing protection otoplastics are tested, certified and permitted for use in very noisy environments in accordance with EN 352. This hearing protection offers maximum wearer comfort over long periods thanks to its highly customised and pressure-free fit. uvex offers a wide range of otoplastics in various materials and designs that provide different levels of insulation.

All materials used are free of hazardous substances and are tested regularly. The customised otoplastics have a service life of around five years, facilitating a commitment to sustainable retail.

The collection

uvex high-fit otoplastics are customised to the wearer and available in various versions (material/design/filter strength), as well as detectable variants.

uvex flex otoplastics



- · flexible otoplastics hearing protection
- made of soft silicone or silicon-free thermoplastic material
- exceptional wearer comfort thanks to the materials adapting to the user's ear canal
- available in various designs

The classifications are defined as follows:

- S Signal hearing in railway track superstructure construction
- V Signal hearing in road traffic
- X extremely linear attenuation hearing protection. Suitable for people with hearing loss and musicians.
- W Warning signal hearing, general

uvex duro otoplastics



- sturdy otoplastics hearing protection
- made of silicone-free acrylic material
- · comfortable, smooth surface
- available in different designs and as active otoplastics hearing protection

E – Signal hearing for locomotive drivers in railway operations

- E1 Exceptionally well suited, particularly suitable for persons with impaired hearing
 E2 – Suitable

Appropriate information can be found in the individual products

uvex otoplastics headsets



- Headset solutions for communication and telephone calls in noisy workplaces
- for connecting to uvex high-fit RS otoplastics hearing protection
- available in different versions (wired or wireless)

Abbreviations:

HC: half-concha otoplastics
FC: full-concha otoplastics
u-cut: U-shape (material removal in the ear canal)
RS: real sound
C-com: wired headset
B-com: wireless headset
B-com BM: wireless headset with gooseneck microphone

uvex high-fit hearing protection otoplastics

Customised hearing protection from uvex

uvex as a partner for customised protective equipment

Noise-induced hearing loss is one of the most common occupational illnesses, usually developing slowly and painlessly. Noise does not just affect our hearing – it also has a negative effect on the human body as a whole. With its wide range of hearing protection otoplastics, uvex offers protection with maximum comfort and quality.



Ear moulding: Experts from uvex visit your premises to make moulds of your employees' ears, then uvex uses these moulds to create customised hearing protection.

Function testing: In the prevention guideline "Use of hearing protection earmolds", the DGUV defines a professional functional test before the product is first used but at the latest after six months.

We recommend testing the products at least every three years to ensure that the otoplastics offer the required level of protection.

Our service - your benefits

uvex offers maximum service with maximum flexibility.

Our extensive uvex otoplastics collection offers suitable hearing protection otoplastics for every employee.



uvex experts:

- specialists in on-site service
- qualified advisors in uvex customer service
- · comprehensive uvex acoustic service partner network throughout Germany

uvex flexibility:

- on-site product consultation and customisation on request
- · appointments for early, late or night shifts also available
- optimal planning via the uvex online appointment portal

uvex knowledge:

- decades of experience in acoustics and products under continuous development
- training courses/practical seminars can be provided for your employees (e.g. company doctors, occupational safety specialists)
- 'made in uvex' quality: commitment to a comprehensive quality system with a focus on production facilities in Germany/Europe

Steps to customised hearing protection



Appointment and consultation

Make an appointment by email and receive advice from uvex experts on the topic of customised hearing protection.

☑ high-fit@uvex.de



Workplace analysis and product identification

Our uvex specialists will be happy to present our uvex collection to you at your premises so you can find the ideal products to protect your employees.




Production of otoplastics

Once the ear moulding step has been carried out at your premises or with a uvex acoustic service partner, the otoplastics are promptly delivered and are subject to a final function test, which is typically carried out before the product is first used.

uvex C-com · uvex B-com otoplastic headsets

uvex high-fit otoplastic headsets

free choice of otoplastics design and material half- or full-concha acrylic or silicone linear filter element compatible with uvex otoplastic headsets

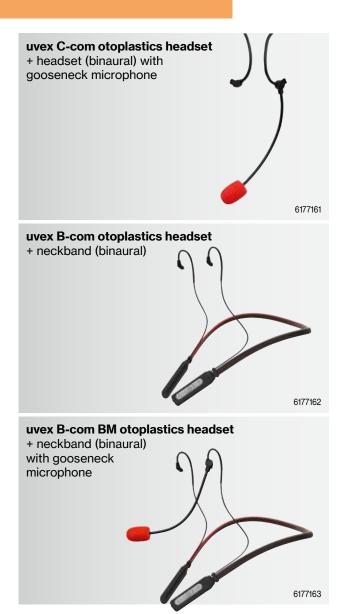

uvex C-com · uvex B-com · uvex B-com BM

- · specially developed headset with directional microphone
- available as a wired headset with a jack connection and gooseneck microphone, or as a stereo wireless headset with or without gooseneck microphone
- · ideal for telephony and communication in very noisy environments
- · excellent voice and sound quality in very noisy environments
- volume can be controlled via the integrated remote control
- make hands-free phone calls in the workplace or at the wheel
- practical and secure when worn with uvex high-fit RS otoplastic hearing protection and ear hooks

Areas of application:

Workplaces with high communication requirements, musicians, telephony

| | uvex C-com | uvex B-com | uvex B-com BM |
|-----------------|--------------------------|----------------------|---------------|
| Art. no. | 6177161 | 6177162 | 6177163 |
| Standard | EN 352-2;9 | EN 352-2;9 | EN 352-2;9 |
| Compatible with | uvex high-fit flex RS, u | vex high-fit duro RS | |
| Order unit | PC | PC | PC |

| | Individual adjustment to the ear shape |
|-------|--|
|))@((| Protection against noise during telephone calls |
| | Maximum wearer comfort |
| | Communication in noisy workplaces |
| | Hands-free working |


uvex

uvex high-fit **RS** otoplastics





Both half- and full-concha designs are available in silicone and acrylic

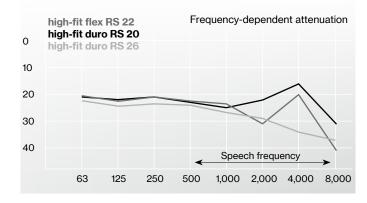

uvex high-fit flex RS · uvex high-fit duro RS

- otoplastic hearing protection tailor-made to fit the wearer's ear canal
- new linear filter technology in different filter strengths
- optimal linear hearing protection over the entire frequency range
- available in silicone or acrylic • available in half- or full-concha designs
- compatible with uvex communication headsets

Areas of application:

Workplaces with high communication requirements, musicians, telephony

| workplaces with hig | gricominanication requ | allemento, musici | and, telephony |
|--------------------------|---------------------------|-------------------|----------------|
| uvex high-fit flex RS 22 | HC | FC | FC detec |
| Art. no. | 6171022 | 6171052 | 6171142 |
| Standard | EN 352-2 | EN 352-2 | EN 352-2 |
| Marking | S, W, X, E1 | S, W, X, E1 | S, W, X, E1 |
| SNR | 22 dB (grey) | 22 dB (grey) | 22 dB (grey) |
| HML value | H 21 dB; M 20 dB; L 19 dB | | |
| Colour | transparent | transparent | transparent |
| Order unit | PR | PR | PR |
| | - | | |
| uvex high-fit duro RS 20 | | FC | FC detec |
| Art. no. | 6171020 | 6171050 | 6171140 |
| Standard | EN 352-2 | EN 352-2 | EN 352-2 |
| Marking | S, W, X, V, E1 | S, W, X, V, E1 | S, W, X, V, E1 |
| SNR | 20 dB (black) | 20 dB (black) | 20 dB (black) |
| HML value | H 18 dB; M 20 dB; L 18 dB | | |
| Colour | transparent | transparent | transparent |
| Order unit | PR | PR | PR |
| | | | |
| uvex high-fit duro RS 26 | | FC | FC detec |
| Art. no. | 6171026 | 6171056 | 6171146 |
| Standard | EN 352-2 | EN 352-2 | EN 352-2 |
| Marking | S, W, V, E2 | S, W, V, E2 | S, W, V, E2 |
| SNR | 26 dB (grey) | 26 dB (grey) | 26 dB (grey) |
| HML value | H 28 dB; M 23 dB; L 20 dB | | |
| Colour | transparent | transparent | transparent |
| Order unit | PR | PR | PR |
| | | | |

We will be happy to change the filter element for you if and when necessary.

uvex otoplastics are made of transparent materials. They are marked left and right with an engraving for ease of fitting and also come with different coloured cord holders.

For an additional fee, we can manufacture your otoplastics in black, white, orange, purple, green, pink



uvex high-fit flex RS otoplastics are also available in red and/or blue upon request, at no extra cost







uvex high-fit flex LS

- otoplastic hearing protection individually adjusted to the ear canal with laser-produced stainless steel filter
- best possible protection due to the perfect fit and a high level of wearer acceptance
- high protection capacity, up to 30 dB SNR, can also be chosen
- high level of wearer comfort due to the soft silicone material
- · easy handling with comfortable grip
- antibacterial nano-coating

| uvex high-fit fle | ex LS | | |
|-------------------|---------------------------|---------------------------|---------------------------|
| Art. no. | 6170223 | 6170226 | 6170230 |
| Standard | EN 352-2 | EN 352-2 | EN 352-2 |
| Marking | W | S, W, V, X, E1 | S, W, V, E1 |
| SNR | 23 dB (LS filter) | 26 dB (LS filter) | 30 dB (LS filter) |
| HML value | H 25 dB; M 20 dB; L 18 dB | H 27 dB; M 22 dB; L 21 dB | H 31 dB; M 27 dB; L 25 dB |
| Colour | transparent | transparent | transparent |
| Order unit | PR | PR | PR |

Frequency-dependent attenuation high-fit flex LS 23 high-fit flex LS 26 0 high-fit flex LS 30 10 20 30 40 Speech frequency 63 125 250 500 1,000 2,000 4,000 8,000 ▶ We will be happy to change the filter element for you if and when necessary.

uvex otoplastics are made of transparent materials. They are marked left and right with an engraving for ease of fitting and also come with different coloured cord holders.

For an additional fee, we can manufacture your otoplastics in black, white, orange, purple, green, pink



uvex high-fit flex LS otoplastics are also available in red and/or blue upon request, at no extra cost








uvex high-fit flex · uvex high-fit flex detec

- otoplastic hearing protection individually adjusted to the ear canal
- best possible protection due to the perfect fit and a high level of wearer acceptance
- available in different filter strengths
- high level of wearer comfort with soft silicone material
- · easy handling with comfortable grip
- antibacterial nano-coating
- detectable variants with a metal ball bearing and a detectable blue cord to ensure they can be found by metal detectors.

| and the second s | . / | | |
|--|---------------------------|---------------------------|---------------------------|
| uvex high-fit flex | x / detec | | |
| Art. no. | 6170023 | 6170026 | 6170031 |
| Art. no. detec | 6170423 | 6170426 | 6170431 |
| Standard | EN 352-2 | EN 352-2 | EN 352-2 |
| Marking | - | S, W, E2 | S, W, E1 |
| SNR | 23 dB (green) | 26 dB (black) | 31 dB (yellow) |
| HML value | H 28 dB; M 21 dB; L 15 dB | H 29 dB; M 23 dB; L 18 dB | H 31 dB; M 28 dB; L 27 dB |
| Colour | transparent | transparent | transparent |
| Order unit | PR | PR | PR |
| | | | |

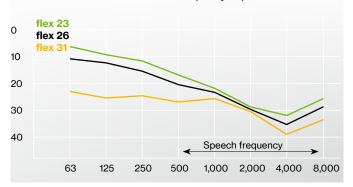

Frequency-dependent attenuation

▶ We will be happy to change the filter element for you if and when necessary.

uvex otoplastics are made of transparent materials. They are marked left and right with an engraving for ease of fitting and also come with different coloured cord holders.

For an additional fee, we can manufacture your otoplastics in black, white, orange, purple, green, pink



uvex high-fit flex RS otoplastics are also available in red and/or blue upon request, at no extra cost



UVEX high-fit Soft silicone otoplastics

uvex high-fit Soft silicone otoplastics

very light u-cut design extremely flexible and comfortable various designs can be selected



uvex high-fit u-cut com4


- otoplastic hearing protection customised to the wearer's auditory canal
- soft silicone material (dermatologically tested)
- removable otoplastics for the auditory canal offer maximum flexibility
 ideal for leisure activities thanks to small auditory canal design
- without grip • with anti-bacterial nano-coating

Areas of application:

 sleeping, flying, shared office spaces, phone calls, concerts, work areas without designated noise areas

Please note that our u-cut com4 model with an SNR of 15 dB is not suitable or certified for use in designated noise areas.

| uvex high-fit u-cut com- | 4 | | |
|--------------------------|-------------|-------------|-------------|
| Art. no. | 6170315 | 6170320 | 6170326 |
| Standard | EN 352-2 | EN 352-2 | EN 352-2 |
| | | | S, W, E2 |
| SNR | 15 dB | 20 dB | 26 dB |
| Colour | transparent | transparent | transparent |
| Order unit | PR | PR | PR |

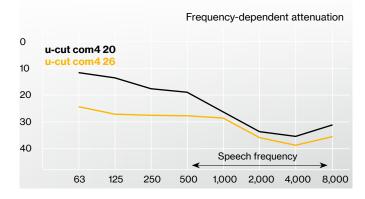

uvex otoplastics are made of transparent materials. They are marked left and right with an engraving for ease of fitting and also come with different coloured cord holders.

For an additional fee, we can manufacture your otoplastics in black, white, orange, purple, green, pink



uvex high-fit otoplastics are also available in red and/or blue upon request, at no extra cost





UVEX high-fit Soft silicone otoplastics






uvex high-fit u-cut HC

- uvex high-fit u-cut in half-concha or full-concha design according to custom ear impression
- · soft silicone material (dermatologically tested)
- · removable otoplastics for the auditory canal offer
- maximum flexibility and can therefore compensate
- for strong jaw movements
- due to the special design, these otoplastics are softer, lighter and
- more flexible in the auditory canal and in the outer ear, offering
- maximum wearer comfort
- with anti-bacterial nano-coating

Areas of application:

 for use in any high-temperature area and by people with pressuresensitive ears.

| uvex high-fit u-cut 20 | HC | FC |
|------------------------|---------------------------|---------------------------|
| Art. no. | 6170720 | 6170703 |
| Standard | EN 352-2 | EN 352-2 |
| Marking | - | - |
| SNR | 20 dB (black) | 20 dB (black) |
| HML value | H 25 dB; M 17 dB; L 12 dB | H 25 dB; M 17dB; L 12 dB |
| Colour | transparent | transparent |
| Order unit | PR | PR |
| | | |
| uvex high-fit u-cut 26 | HC | FC |
| Art. no. | 6170726 | 6170704 |
| Standard | EN 352-2 | EN 352-2 |
| Marking | S, W, E2 | S, W, E2 |
| SNR | 26 dB (yellow) | 26 dB (yellow) |
| HML value | H 28 dB; M 23 dB; L 21 dB | H 28 dB; M 23 dB; L 21 dB |
| Colour | transparent | transparent |
| Order unit | PR | PR |
| | | |

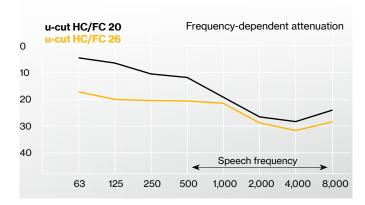

We will be happy to change the filter element for you if and when necessary.

uvex otoplastics are made of transparent materials. They are marked left and right with an engraving for ease of fitting and also come with different coloured cord holders.

For an additional fee, we can manufacture your otoplastics in black, white, orange, purple, green, pink



uvex high-fit otoplastics are also available in red and/or blue upon request, at no extra cost








uvex high-fit temp flex

- otoplastic hearing protection individually adjusted to the ear canal
- fully silicone-free
- best possible protection due to the perfect fit and a high level of wearer
 acceptance
- available in different filter strengths
- easy handling with comfortable grip
- adapts perfectly to the anatomy of the wearer: on insertion, the otoplastic is dimensionally stable; the material gets softer after a few minutes due to the temperature in the ear canal

Areas of application:

· ideally suitable for the paint-processing industry

| 6170524 | 6170527 |
|---------------------------|--|
| EN 352-2 | EN 352-2 |
| - | S, W, E2 |
| 24 dB (black) | 27 dB (yellow) |
| H 28 dB; M 21 dB; L 16 dB | H 30 dB; M 24 dB; L 21 dB |
| transparent | transparent |
| PR | PR |
| | EN 352-2 - 24 dB (black) H 28 dB; M 21 dB; L 16 dB transparent |

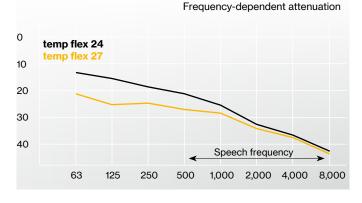

We will be happy to change the filter element for you if and when necessary.

uvex otoplastics are made of transparent materials. They are marked left and right with an engraving for ease of fitting and also come with different coloured cord holders.





uvex high-fit duro · uvex high-fit duro detec

- otoplastic hearing protection individually adjusted to the ear canal made from dimensionally stable duroplast material
- fully silicone-free
- detectable variants with a metal ball bearing and a detectable blue cord to ensure they can be identified by metal detectors.
- best possible protection with perfect fit and high level of wearer acceptance
- available in different filter strengths
- smooth, even surface
- · easy handling with comfortable grip
- antibacterial nano-coating

Areas of application:

- ideally suitable for the paint-processing industry and for areas with very fine dust
- uvex high-fit flex detec ideally suited for sectors in the food industry

| uvex high-fit du | Iro | | |
|------------------|---------------------------|---------------------------|---------------------------|
| Art. no. | 6170825 | 6170828 | 6170832 |
| Art. no. detec | 6170425 | 6170418 | 6170432 |
| Standard | EN 352-2 | EN 352-2 | EN 352-2 |
| Marking | - | - | S, W, V, E1 |
| SNR | 25 dB | 28 dB | 32 dB |
| HML value | H 30 dB; M 21 dB; L 15 dB | H 32 dB; M 24 dB; L 18 dB | H 33 dB; M 29 dB; L 27 dB |
| Colour | transparent | transparent | transparent |
| Order unit | PR | PR | PR |


uvex otoplastics are made of transparent materials. They are marked left and right with an engraving for ease of fitting and also come with different coloured cord holders.


For an additional fee, we can manufacture your otoplastics in red and blue





Frequency-dependent attenuation

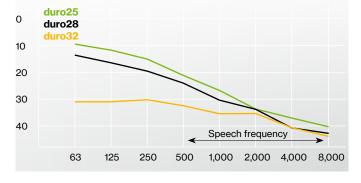

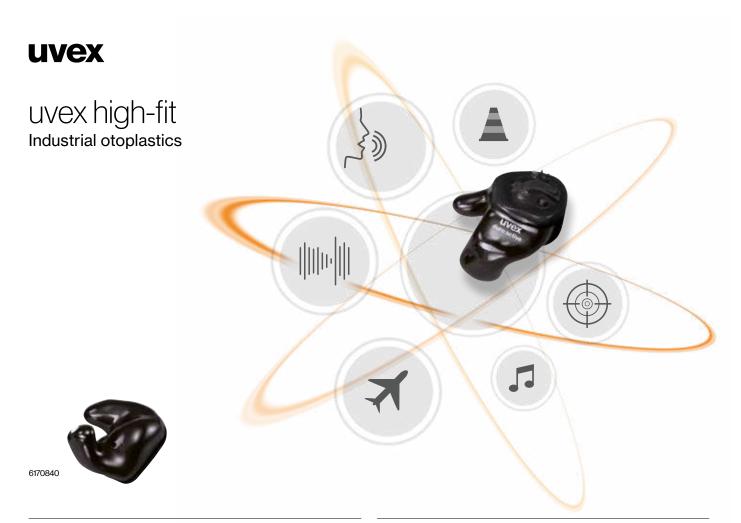


uvex high-fit duro active


- $\mbox{ \ \ }$ active otoplastic hearing protection tailor-made to the individual's ear canal
- · finely tuned and highly sensitive microphones
- best directional and ambient acoustics
- very high level of passive insulation
- outstanding high-tech amplifier technology for impulse noise
- protection in the event of a shot or bang (up to 164 dB)
- electronic limitation closes in less than 10 milliseconds
- cerumen filter system protects against moisture and sweat
- assists the wearer in situations where hearing and communication may be difficult, such as when communicating in very noisy workplaces or where early detection of quiet sounds is required

Areas of application:

Workplaces with high communication requirements, very loud environments, employees with hearing loss or those affected by impulse sounds

| uvex high-fit duro active | | |
|---------------------------|--------------------|--|
| Art. no. | 6170840 | |
| Norm | EN 352-2, EN 352-7 | |
| Standard | 26 dB | |
| Colour | black | |
| | | |



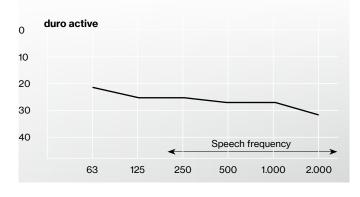

Included

- \bullet active otoplastic hearing protection tailor-made to the individual's ear canal
- hard shell case
- 1 blister pack of zinc-air batteries, size 312
- 1 blister pack of earwax filters
- uvex cleaning cloths for otoplastics
- user information

F



| Replacement batteries | |
|-----------------------------|---|
| Art. no. | 6177157 |
| Туре | 1 PC blister pack of 6 zinc-air batteries, type 312 |
| Order quantity multiples | 10 PC |
| | |
| Replacement cerumen filters | |
| Art. no. | 6177158 |
| Туре | 1 PC blister pack of 8 filters |
| Order quantity multiples | 5 PC |
| | |

uvex OTOCheck

Instructions for checking the function of your equipment online

uvex OTOCheck allows you to check the function of your uvex otoplastic hearing protection online in a quick and easy process. After completing the straightforward registration process, you will be able to access an overview of your otoplastics orders and view the status of your function tests using the simple traffic light system.

Function testing:

In the prevention guideline "Use of hearing protection earmolds", the DGUV defines a professional functional test before the product is first used but at the latest after six months. We recommend testing the products at least every three years to ensure that the otoplastics offer the required level of protection.



Your benefits at a glance:

- Check the function of your equipment using a straightforward, digital process
- ✓ Simple registration
- uvex
- Create multiple user profiles on one account
- Clear data management for your otoplastics orders
- Check the status of function tests that have already been completed
- U Documentation of all test reports for quality assurance purposes



What you need for uvex OTOCheck:

- A computer, tablet or laptop

We recommend headphones that are suitable for uvex OTOCheck (article number 6178121). Please get in touch with us and we will be happy to advise you.

 $\left(\begin{array}{c} \\ \\ \end{array} \right) \left(\begin{array}{c} \\ \end{array} \right)$

UVEX high-fit Special features



Included

uvex high-fit otoplastics are supplied in a zipped case, including textile cord, cleaning rod, cleaning cloths and user information.

Silicone otoplastics are delivered with a tube of audinell gel.

uvex click case

• small click case for otoplastics

 uvex click case
 6177115

 Art. no.
 6177115

 Order quantity multiples
 10 PC

uvex clear otoplastics

 silicone-free towelettes for quick and easy cleaning of hearing protection otoplastic, suitable for all otoplastic materials
 packaging: 30 per box

| uvex clear otoplastics | |
|------------------------|---------------------|
| Art. no. | 6177116 |
| Order unit | PC |
| Contents | 30 towlettes per PC |

uvex high-fit band

- neck handle for hearing protection otoplastics in zip-up case
- easy to attach the otoplastic to the band using colour-coded connector sleeves
- no disruptive transmission noise because the band prevents the cord rubbing on clothing

| Band | |
|------------|---------|
| Art. no. | 6177112 |
| Order unit | PC |
| | |

430

band significantly relieves strain
comfortable to wear around the neck during breaks

Areas of application: • ideal for activities with frequent and/or fast head movements

uvex high-fit replacement kits

Detectable replacement kit for:

- uvex high-fit flex detec
- uvex high-fit duro detec
- Detectable replacement kit for: • uvex high-fit flex com detec

Fabric cord replacement kit

 Art. no.
 6177156

 Design
 comprising 900 mm textile cord and a pair of fastening sleeves (red/blue)

 Order quantity multiples
 10 PC

Detectable replacement kit Art. no. 6177111 Design consists of an elastic cord 800 mm (blue, detectable) and a pair of connector sleeves (blue, detectable) Order quantity multiples 10 PC



uvex medicare

UVEX MEDICARE Orthopaedic solutions for uvex safety shoes



The customised solutions provided by uvex medicare solve foot-related medical problems in the workplace and offer individual, expertly designed orthopaedic solutions.


uvex medicare supplies orthopaedic insoles as well as orthopaedic shoe adjustments for uvex safety shoes.

The orthopaedic uvex medicare solutions are tested with uvex safety shoes and certified in accordance with DIN EN ISO 20345. German Social Accident Insurance (DGUV) regulation 112-191 and Austrian ÖNORM Z 1259 describe that a fully certified orthopaedic solution must be used at working places. Wearing privately purchased orthopaedic insoles in safety shoes is therefore not permitted.

All of the materials uvex uses are free of hazardous substances and are tested regularly.

The collection

uvex orthopaedic comfortable customised inserts/uvex orthopaedic adjustments

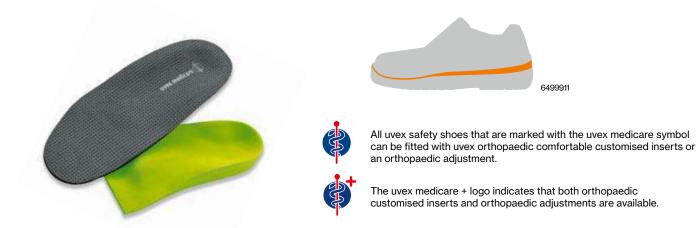

uvex medicare

Orthopaedic solutions for uvex safety shoes

uvex as a partner for customised protective equipment

Scientific studies prove that well over half the adult population suffers from orthopaedic problems such as flat feet, skewfoot, splayfoot or fallen arches. These conditions have an undisputed effect on the entire musculoskeletal system and physical performance.

With our orthopaedic uvex medicare solutions for uvex safety shoes and the uvex motion 3XL, we offer various orthopaedic protection solutions that are tailored to each individual employee. Maximum comfort and quality guaranteed.

Our service – your benefits

uvex offers maximum service with maximum flexibility. Our experts are happy to advise you on professional and flexible solutions, tailored to the individual requirements of your company.

uvex experts:

- specialists in on-site service
- qualified advisors in uvex customer service
- comprehensive uvex orthopaedics service partner network throughout Germany

uvex flexibility:

- · on-site product consultation and customisation on request
- · appointments for early, late or night shifts also available
- optimal planning via the uvex online appointment portal

uvex knowledge:

- · decades of experience in orthopaedics and products under continuous development
- training courses/practical seminars can be provided for your employees (e.g. company doctors, occupational safety specialists)
- · 'made in uvex' quality: commitment to a comprehensive quality system with a focus on production facilities in Germany/Europe

Steps to orthopaedic solutions for uvex safety shoes

Appointment and consultation

Make an appointment by email and receive advice from uvex experts.

☐ medicare@uvex.de



Workplace analysis and product identification

Our uvex experts will be happy to introduce you to our uvex medicare programme at your premises. Each orthopaedic medicare solution is designed using a medical diagnosis and a blueprint of the foot.

Together, we can find the ideal products for you so you can protect your employees.



Complete orthopaedic solution

Delivery is quick and easy.

Contact us for more information with no obligation.



uvex medicare


Personal insocks are not permitted in safety shoes.

Orthopaedic solutions for uvex safety shoes

Our feet are extremely important for our daily life after all they help us to stand and move from A to B. It is therefore particularly important to protect our feet in working life - whether that's because we're running, kneeling, working on a machine or in order to prevent an occupational accident. The protective features of safety shoes, such as ESD protection, protective caps etc., are tested and certified at regular intervals by independent test institutes in accordance with the requirements of DIN EN ISO 20345.

In order to ensure that all safety-related protective features are still guaranteed in the event of an orthopaedic change to the safety shoe, orthopaedic insocks must only be used in combination with tested, orthopaedic materials.

This means that personal orthopaedic insocks are not allowed in safety shoes. All uvex medicare products have therefore been tested and certified in combination with uvex safety shoes.

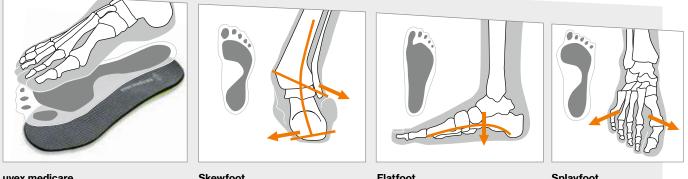

uvex medicare

Skewfoot




Splayfoot



How do I get an orthopaedic adjustment for uvex safety shoes?

uvex requires the footprint of your feet. This can be taken by our field service on site or you can use our uvex medicare footprint set - a convenient, simple and flexible way to self-record the footprint. All order details can be found on the order form in the folder.

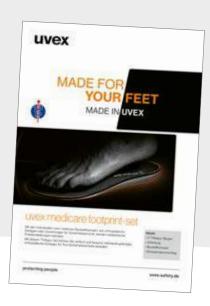

uvex medicare

Instructions



Separate the white sheet from the clear protective film and place the film over the blueprint, making sure that there are no wrinkles.



Place this on a flat surface and place your foot in the middle of it, putting your full body weight onto it. Draw around the foot with a pen.



Peel off the transparent film and remove the blueprint. Now place the film with your footprint on the chequered backing sheet and smooth it out, ensuring that there are no creases.

Repeat the process for your other foot.



Watch our How-to video for a clear explanation of the individual steps.

Simply scan the QR code.

uvex medicare

Comfortable customised inserts -Insert technology for tailor-made treatment



All products suitable for orthopaedic foot protection are indicated in this catalogue with the uvex medicare symbol.

uvex medicare logo Certified for orthopaedic inserts uvex medicare + logo Certified for orthopaedic inserts and shoe adjustments

EVA soft-foam technology

Various Medical Concepts

Applicable - depending on classification:

- · conventional orthopaedics
- sensorimotor function

· supports correct biomechanical foot rolling · does not require to be 'broken in' and high wearer comfort



- optimum moisture absorption and release
- excellent shock absorption in high-strain zones such as the ball and heel of the foot
- smooth surface
- excellent abrasion resistance

Orthopaedic Adjustment

- modular concept
- adapts to assist natural movement

Supporting Core

- 2 levels of shore hardness (medium/soft) selected according to requirements: Individually adaptable to body type and support requirements
- high support, guiding and shock absorption properties through soft, raised heel shell

Orthopaedic uvex comfort custom insole 6499902 Art. no.




uvex medicare

Orthopaedic shoe adjustments – Professional and discreet

6499911

6499913



6499914



6499915

Orthopaedic shoe adjustments

Shoe lift

A shoe lift is required to balance legs of different length. A shoe lift should never exceed 3 cm.

Roller sole

A roller sole eases the burden on the feet during your stride. The precise effect is governed by the location of the pressure point. This helps adjust the length of your stride.

Butterfly roller

A butterfly roller reduces the burden on sensitive metatarsal bones by dissipating the pressure caused by each stride. By moving the pressure point, you can create an extra rocking effect.

| shoe adjustments |
|--|
| 6499911 |
| orthopaedic shoe lift |
| up to 1 cm per side |
| |
| 6499912 |
| shoe lift per additional cm |
| (up to max. 3 cm) per side |
| |
| |
| 6499913 |
| rocker sole |
| |
| 6499914 |
| butterfly roller |
| |
| 6499915 |
| external or internal edge lift |
| |
| 6499907 |
| sole stiffener (only as addition in connection |
| with a shoe adjustment initial position) |
| |

Outer and inner sole wedges

By using a wedge, you can adjust the slope beneath the feet in a standing position and correct the line of your stride when walking.





You can find more information at uvex-academy.com







For further information and to register visit uvex-academy.com, phone +49 911 9736-1710 or e-mail academy@uvex.de

uvex academy

Prescription spectacles and workplace safety

The common key features of prescription safety spectacles are that they compensate the wearer's defective vision and protect the eyes from mechanical and optical influences. This seminar will enable participants to act as a competent representative within the company for prescription safety spectacles right through to fitting.

- Information regarding legal regulations, test specifications and standards
- Sharing knowledge about prescription safety spectacles
- Explanation of the different types of lens and frame materials available, their specific features and properties
- Explanation of the various focus types and their best use
- Assessment of the risks in the respective workplace and selection of the most appropriate prescription safety spectacles



· Ability to determine the nec-

prescription spectacles

tion safety spectacles

Those responsible for the

work-related health and safety

of employees within a compa-

ny and/or those who are to fit

prescription safety spectacles,

doctors and their support staff.

such as safety officers, company

Target group

essary parameters for fitting

· Practical demonstration of se-

lection, consultation, and fitting

of prescription safety glasses

care and handling of prescrip-

Instruction regarding the best



uvex academy



Workwear Protective Clothing



Product system planet series > Protective clothing and workwear

uvex has developed the **protecting planet** icon, to help raise awareness of its commitment to achieving increased sustainability. Based on the brand claim, **protecting people**, our sustainable approach integrates three core interlinked pillars – **ecology, economy** and **social responsibility**, that are incorporated throughout the business to improve our sustainability performance.

This explains the comprehensive audit, measurement and evaluation management process uvex undertakes along the entire value chain to ensure its products are as sustainable as possible.

UVex collection 26 planet

Calculation date 08/2023



protecting planet

Clothing

- > all K26 planet products are made from natural fibres
- > from hemp, maize, bamboo and algae, through to the already
- well-known organic cotton and lyocell
- > the accessories used are also of natural origin: homboo buttons and a user logs badge made of a
- bamboo buttons and a uvex logo badge made of apple leather

orotecting plane



70103



protecting planet

by using environmentally-friendly packaging

Packaging

individual packaging in polybags made from post-consumer waste



protecting planet

by saving water // by saving energy

Production

- use of renewable energy
 short transport routes and less environmental impact thanks to being 75 percent produced in Europe
- > little water is used in the cultivation and production process of hemp and algae

The uvex brand is our responsibility

We have been producing and selling high-quality products for the protection of people in sport, leisure and work for **over 90 years**. And if you want to protect people, **you have to take responsibility**.

It is precisely from this mission that our obligation derives to act in a **sustainable**, **social and socially-responsible** manner.

uvex workwear

Organisational measures:

Leasing laundry suitability:

A large part of our range, recognisable by the "INDUSTRIAL WASH" symbol, has been specially developed for the high demands of leasing out workwear. These garments remain in circulation permanently until they wear out. Industrial laundering can significantly reduce water, energy and detergent consumption.

Use of high-quality materials:

The use of high-quality materials in combination with professional workmanship ensures the longevity of our products.

Manufacturing expertise:

"Designed and made in Europe" are the foundations of our quality promise. We help reduce CO₂ with our short transport routes.

Networks with our partners:

We maintain long-term business relationships to ensure compliance with our social standards. Some of our production facilities have been trusted and reliable partners for decades.

Waste prevention:

By using software-supported layer optimisation in fabric cutting, we reduce waste to a minimum.



Sustainable packaging

Polybags made from recycled polyethylene

Sustainable materials



TENCEL[™] and recycled polyester for sustainability¹ The TENCEL[™] lyocell fibres, made from the renewable raw wood material, contribute to ecological balance through their complete integration into the natural cycle. The raw material comes from near-natural forests and sustainably managed plantations. Production takes place in a closed manufacturing process, in which pulp is converted into cellulose fibres with high resource efficiency and a low ecological impact. The fibre properties are characterised by breathability, colour stability and low bacterial growth.

Other sustainable materials

The K26 planet collection uses only materials of natural origin. Fibre components such as hemp, algae, bamboo and organic cotton are used. The hemp plant is very resistant and requires little water in cultivation. This is reflected in the fact that the materials have a high tear resistance and durability. The algae fibres have an impressive level of skin compatibility, as they absorb a lot of nutrients from the seas.



uvex suXXeed greencycle planet

Sustainable workwear through and through

With the uvex suXXeed greencycle planet collection, we have succeeded in creating the very first biodegradable workwear. Suitable for both men and women working in warehouses, offices or for recreation, the collection offers a timeless look and even has Cradle to Cradle™ certification.



Worker shirt

Art. no. 88812* anthracite Size S to 6XL 48% cotton, 48% polyester, 4% elastane, approx. 230 g/m² Material

Description: • biodegradable polyester and elastane • regular fit • button panel in the front centre • turndown collar • one breast pocket with glasses and pen loop • cuffs with button fastening • Cradle to Cradle™ gold certified while stocks last

Bermuda



Description: • biodegradable polyester and elastane regular fit • ergonomic cut • crotch insert • elasticated waistband at rear, buttoned fly • left side pocket with button fastening • folding rule pocket, as well as pen pocket on the right • back pockets • uvex logo engraved • Cradle to Cradle[™] gold certified * while stocks last



Cargo trousers

men


Art. no. 88868* anthracite Size 42 to 64, 90 to 110

women

| Art. no. | 88876* anthracite | |
|--------------|--|---------------------------------|
| Size | 34 to 54 | |
| Material | 48% cotton, 48% polyester, approx. 230g/m ² | 4% elastane, |
| | ₩ 🏹 🖄 🖾 🖻 N | DUSTRIALWASHOO |
| egular fit • | n: • biodegradable polyester a • ergonomic cut • crotch insert at rear, buttoned fly • left side | elasticated |

D be h button fastening • folding rule pocket, as well as pen pocket on the right • back pockets • uvex logo engraved • Cradle to Cradle™ gold certified while stocks last

T-shirt



while stocks last



German


Sustainability Award Design 2023

uvex collection 26 – planet

الغذالا



protecting planet





protecting planet

Do something good in everyday office life!

Our business products made of 100% biobased accessories and materials leave nothing to be desired in terms of sustainability. Natural colours and a stylish business design make them stand out.

In addition, there is a focus on resourcesaving production, through reduced water use and the use of renewable energies.

75% of this collection is produced in Europe, reinforcing the "Made in uvex" protecting planet slogan for office workwear.



Jacket

men

Art. no 70105 olive

Sizes S to 4XL


women - loose fit

| Art. no | 70104 olive |
|---------|--|
| | XS to 3XL 86% organic cotton, 14% hemp, approx. 265 g/m ² |
| | $\boxtimes \& \boxtimes \blacksquare \boxtimes$ |

Description: • fashionable shirt jacket in loose fit • material with a velvety soft outside made of organic cotton and hemp fibres, which have a cooling effect • front button panel with bamboo buttons • two chest pockets with flaps • two side welt pockets • two inside pockets • inside adjustment cord at waist height (for women) • uvex badge made from apple scraps • OEKO-TEX® organic cotton



Polo shirt



Description: • sporty polo shirt with open placket fitted for women • the material is made of a new fibre mix • bamboo, maize and algae fibres provide a comfortable feel • in addition, the algae fibres are skin-friendly and moisture-regulating • bamboo fibres boast excellent moisture absorption, a soft feel and good breathability • polylactide is obtained from maize and wicks the absorbed moisture/ sweat to the outside • OEKO-TEX® Standard 100

Chinos men

| Art. no | 70103 graphite | |
|----------|--|--|
| Sizes | S to 4XL | |
| Material | 90% organic cotton, 10% hemp, approx. 200 g/m ² | |
| | $\boxtimes \& \boxtimes \blacksquare \boxtimes$ | |

Description: • straight-cut chinos made of organically grown cotton and hemp fibres, the latter has a cooling effect on the skin • with side pockets • two back piped pockets • front zip and uvex badge made from apple scraps • bamboo button • OEKO-TEX® organic cotton

Trousers





Description: straight-cut pleated trousers made of organically grown cotton and hemp fibres, the latter has a cooling effect on the skin • with side pockets • high-cut waistband • side seam zip and uvex badge made from apple scraps • OEKO-TEX® organic cotton

uvex collection 26

Whether indoors or outdoors with uvex 24/7/365 for work. sports & leisure

uvex has been protecting people since 1926 at work, in sport and for leisure. Collection 26's trendy colours and special materials effectively blend recreational design elements with quality work clothing features.

In any weather. Durable. Urban. At work and at play.



Polo shirt

| men | |
|-------------|--|
| Art. no. | 88360 black 88361 white |
| | S to 4XL 70% cotton, 30% polyester pique, approx. 200 g/m ² |
| | $\boxtimes \land \boxtimes \boxminus \otimes \boxtimes$ |
| Description | e - accual note chirt in a comfortable motorial |

Description: • casual polo shirt in a comfortable material mix • clean loose fit • OEKO-TEX® Standard 100



Rain jacket





Description: • light and functional with small pack size waterproof zip and hood for rainy days in the city "high-rise" arm design • tailored (women) • breathability MVP 8,000 g/m²/24 h • 10,000 mm water column



Parka me


| men | | | |
|----------|----------------|-----|-------------------------------|
| Art. no. | 88352 88323 | | |
| Size | S to 4XL | | |
| women | | | |
| Art. no. | 88353 | | dark blue |
| | XS to 3XL | 100 |)% nylon, lining and padding. |

Ма 100% polyester, approx. 170 g/m² ፵☆◙≂₽

Description: • warming, wind-resistant and water-resistant • clean urban look • padding for optimal heat insulation • preformed tailored fit (women) for maximum freedom of movement \cdot pockets with zip \cdot breathability MVP 10,000 g/ m²/24 h \cdot 10,000 mm water column



Functional trousers



Description: • stylish and ultra-light • abrasion-resistant on the outside • soft brushed on the inside • chino shape with intelligent 3D pattern design • pockets with zip



uvex suXXeed family

One design, one fit, one range.

From head to toe, from underwear to arc protection, from recreation to protective clothing: The uvex suXXeed family's comprehensive range guarantees something for everyone. Whether you are looking for professional and protective clothing suitable for leasing or a sustainable leisure style, the uvex suXXeed collections are as extensive and flexible as the tasks for which they were created.

Flexibility and comfort are guaranteed thanks to different fit shapes and perfectly matched materials. The cuts and the 360° performance fit ensure a perfect fit and, thanks to the different models for men and women, anyone can get a feel for the extraordinary workwear up close.

Want some variety? Thanks to the selected colours and materials, all products in the collection are perfectly adapted to the most diverse requirements of workplaces. However, with well-matched items in the line, there is nothing to stop you mixing and matching and piecing together favourites yourself. Ensuring safety meets style.




uvex suXXeed

uvex suXXeed basic

uvex suXXeed craft

uvex suXXeed greencycle planet uvex suXXeed multifunction high-vis

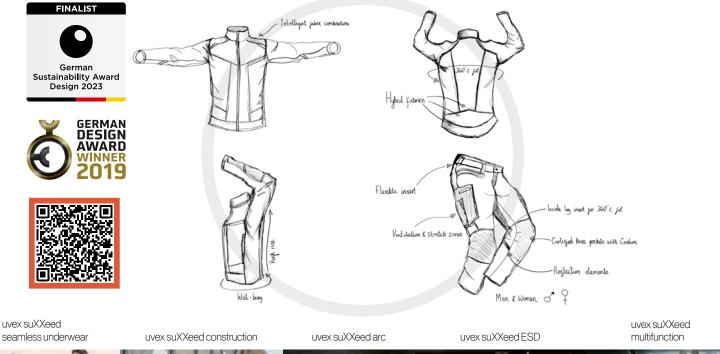




uvex suXXeed craft

Robust and sustainable. In all weather conditions.

The workwear is robust and, along with special weatherproof clothing, is suitable for outdoor use. Whether you are a craftsperson or a service technician, the various pockets offer space for your tools. The four-way stretch material ensures freedom of movement and is a sustainable solution with the partly recycled polyester.



Trousers



thigh pockets each reinforced with CORDURA® • integrated ruler, mobile phone and tool pocket • knee reinforce-ment made of CORDURA® and kneepad pockets on the inside (art. 9868900) · reflex details

Fleece jacket

men Art. r

| rt. no. | 88932 | beige |
|---------|-----------|---------------|
| | 88933 | anthracite |
| | 88935 | ultramarine |
| | 88936 | graphite |
| | 70363 | midnight blue |
| Size | XS to 6XL | |

100% polyester, approx. 260 g/m² Material


Description: • fashionable fleece jacket with microfleece • optimal protection against wind and wet weather when combined with all-weather jacket (7321) • stand-up collar visible front zip • two integrated side pockets • one chest pocket on the left with zip • sleeve hem with soft edging • elongated back • width-adjustable waistband • OEKO-TEX® Standard 100

women

| Art. no. | 88855 88857 88856 70362 | white graphite anthracite midnight blue |
|----------|----------------------------------|--|
| | XS to 4XL | er (recycled), approx. 315 g/m² |
| Materia | | |

🖤 💥 🛛 🞘 🛇 | INDUSTRIAL**WASH** 🗨 **Description:** • fashionable fleece jacket with Sherpa fleece • stand-up collar • stretch inserts in contrasting colours • visible front zip • two integrated side pockets • elongated back • elasticated hem

All-weather jacket



Description: • optimal protection against wind and wet weather when combined with fleece jacket (7329) • width-adjustable, roll-up hood • width-adjustable hem and cuffs • one chest and two side pockets with zips • one inside pocket • breathability of 7000 MVP • water column of 8000 mm • OEKO-TEX® Standard 100

Softshell jacket



• one chest pocket on the left with vertical opening and concealed zip • two side pockets with zip • reflex details • water column of 8000 mm • OEKO-TEX® Standard 100




uvex suXXeed industry

Excellence without compromise

Comfortable to wear, sporty design, excellent materials, concealed closures, suitable for industrial laundering. We do not compromise with suXXeed industry. You don't have to either. With your own logo, different styles and colour combinations, you can customise your employees' work clothing.






Size 19 to 26. 34 to 54 49% cotton, 49% polyester, 2% elastane, approx. 260 g/m² Material

Description: • two-way stretch material • 3D pattern design • elasticated waistband • two back/thigh pockets • back pockets reinforced with Cordura® • double ruler pocket made of Cordura® • mobile phone/tool pocket • all zips concealed • stretch inserts on the knees • sewn-on knee-pad pockets • reflex details • slim leg hems • OEKO-TEX® Standard 100


Long-sleeve

men



ultramarine/anthracite anthracite/graphite red/graphite midnight blue/anthracite graphite/anthracite light grey/anthracite

women



Description: • sporty long-sleeved shirt • accentuated side seams • optimal moisture management • excellent care/ washing options • OEKO-TEX® Standard 100

T-shirt n

| nen | | |
|----------|---|--|
| Art. no. | 88913 88914 88921 88922 88923 88923 88924 | |
| Size | S to 6XL | |

ultramarine/anthracite anthracite/graphite red/graphite midnight blue/anthracite graphite/anthracite light grey/anthracite

women

| omen | | |
|------------------|---|---|
| Art. no. | 88906 88907 88908 88909 88909 88910 88911 | ultramarine/anthracite anthracite/graphite red/graphite midnight blue/anthracite graphite/anthracite light grey/anthracite |
| Size Material | XS to 4XL 50% cotton, 50% approx. 160 g/m ² 100 100 100 | bolyester, ⊠ INDUSTRIALWASH●● |

Description: • sporty T-shirt • tailored (women) • accentu-ated side seams • optimal moisture management • excel-lent care/washing options • OEKO-TEX® Standard 100



uvex suXXeed

The classic for any wearer. Women too.

Crafts and industry, regular and slim fit, women's and men's clothing – these don't have to be opposites. The uvex suXXeed collection combines the best of different worlds with its 360°-fit and casual design. Unusual material combinations and an excellent fit offer a solution for those who do not want to compromise when it comes to their work clothes.



Cargo trousers men – regular fit

men – regular fit

| Art. no. | | midnight blue graphite |
|----------|-------------|---------------------------|
| Size | 23 to 32, 4 | 2 to 66, 90 to 118 |

women – regular fit

| Art. no. | 89686midnight blue89688graphite |
|----------|---|
| | 19 to 26, 34 to 54 65% polyester, 35% cotton, approx. 245 g/m ² |
| | |

Description: • flexible waistband • ventilation zones with stretch insert at the back of thighs • two back and thigh pockets each reinforced with CORDURA® • integrated folding rule, mobile phone and tool pocket • knee reinforcement made of CORDURA® (men and women) and knee pockets inside (men) for knee pads (art. 9868900) • reflex details • OEKO-TEX® Standard 100

Cargo trousers

men – slim fit

Art. no. 89659 midnight blue 89665 graphite

Size 23 to 32, 42 to 66, 90 to 118

women - slim fit

| Art. no. | 88288midnight blue88287graphite |
|----------|--|
| | 19 to 26, 34 to 54 60% cotton, 20% polyester, 20% elastane, approx. 280 g/m ² |
| | $\square \land \square \blacksquare \square$ |
| | • • • • • • • • • • • • • • • • • • • |

Description: • casual slim-fit with additional elastic component for even greater freedom of movement • Flex waistband • ventilation zones with stretch insert at the back of thighs • two back and thigh pockets each reinforced with CORDURA® • integrated folding rule, mobile phone and tool pocket • narrow leg hems • reflex details • OEKO-TEX® Standard 100

Realworker Jacket

| men | | | | |
|------------------|---|--|--|--|
| Art. no. | 89466 89467midnight blue graphite | | | |
| Size | S to 6XL | | | |
| women | | | | |
| Art. no. | 89474midnight blue89653graphite | | | |
| Size Material | XS to 4XL 1. outer fabric: 95% polyester, 5% elastane, approx. 230 g/m ² 2. outer fabric: 92% polyester, 8% elastane 3. outer fabric: 65% polyester, 35% cotton, approx. 245 g/m ² | | | |

 $\boxtimes \& \boxtimes \boxtimes \boxtimes$

Description: • combination of robust mixed fabrics, softshell material and stretch inserts in the back for optimal wearing comfort • new fit with "high rise" arm construction and additional stretch for even greater freedom of movement • one breast and two side pockets for work utensils • one inner pocket on the left with hook-and-loop fastening • reflex details • OEKO-TEX® Standard 100 (art. no. 89653)



uvex suXXeed seamless underwear

Exceptional protection beneath the clothing

It's not just clothing for day-to-day working life that's important. What's beneath also matters on cold days. No side seams, but with functional zones that support each movement. Due to the regulating properties and different lengths, suitable for everyone, from skiers to construction workers.



7/8 trousers

women

 Art. no.
 88306
 ■ black

 Size
 XS/S to 3XL/4XL

 Material
 55% polypropylene, 40% lyocell, 5% elastane, approx. 200 g/m²

 Image: Size of the state of the st

Description: • with TENCEL[™] without irritating seams • for use at work or for leisure • suitable for yoga • quick-drying, antibacterial and odour-neutralizing • OEKO-TEX® Standard 100

Long trousers

men

| Art. no. | 88302 I black |
|----------|---|
| | S, M/L to 5XL/6XL 60% polypropylene, 28% wool, 8% polyamide, 4% elastane, approx. 250 g/m ² |
| | $\boxtimes \bigotimes \boxtimes \boxtimes \boxtimes \bigotimes$ |

Description: • for use at work or for leisure • without irritating seams • material mix with wool • quick-drying, odour-neutralizing, warming and moisture-regulating • intelligent zone concept for increased freedom of movement • OEKO-TEX® Standard 100 Long-sleeved shirt

Art. no. 88301 ■ black Size S, M/L to 5XL/6XL

women

 Art. no.
 88305
 ■ black

 Size
 XS/S to 3XL/4XL

 Material
 60% polypropylene, 28% wool, 8% polyamide, 4% elastane, approx. 250 g/m²

 Image: Control of the state of the s

Description: • without irritating seams • optimal support through intelligent material combination with wool • for use at work or for leisure • quick-drying, odour-neutralizing, warming and moisture-regulating • intelligent zone concept for increased freedom of movement • OEKO-TEX® Standard 100

TENCEL[™] is a registered brand of the Lenzing group. Dryarn[®] is a registered brand of Aquafil AG. Further information on OEKO-TEX[®] Standard 100 certification can be found at uvex-safety.de/zertifikate and on page 457. _

uvex suXXeed arc uvex suXXeed multifunction

For those working on live components

The suXXeed arc and suXXeed multifunction collections are based on the highest safety standards for heavy duty and dangerous work. In addition to protection against heat and flames, they offer extended protection against arcing. This makes the collections ideal for working on electrically charged components with perfect fitting when performing any movement thanks to 3D cutting guide.



Dungarees uvex suXXeed arc


Art. no. 88494 graphite

Size 42 to 66, 90 to 110, 23 to 32 **Material** see jacket

Description: • maximum protection when working in extreme conditions • particularly soft and skin-friendly wearing comfort • double-layer construction in the front area • integrated stretch zones on the sides for greater freedom of movement • flame-retardant reflex strips • orange coloured pictogrammes for differentiation

Dungarees

uvex suXXeed multifunction



Description: • maximum protection when working in extreme conditions • in uvex suXXeed design • integrated stretch zones for greater freedom of movement • inside knee pockets for knee pads • flame-retardant reflective strips



EN ISO 11611 EN ISO 11612 IEC 61482-2 EN 1149-5

A1, B1, C1, E2, F1

檺

4

Trousers uvex suXXeed arc

Art. no. 88493 graphite

Size 42 to 66, 90 to 110, 23 to 32 Material see jacket

Description: • for maximum protection requirements in hazardous environments • particularly soft and skin-friendly wearing comfort • double-layer construction in the front area • crotch insert for maximum freedom of movement • two leg and side pockets • with inner knee pockets • flame-retardant reflex strips • orange coloured pictogrammes for differentiation

Trousers

uvex suXXeed multifunction

 Art. no.
 88283 88284
 midnight blue graphite

 Size
 23 to 32, 42 to 66, 90 to 110

Material see jacket

Description: • suitable for the highest protection requirements in hazardous areas, in uvex suXXeed design • inside knee pockets for knee pads • flame-retardant reflective strips


Art. no. 88492 graphite

4

Description: • multifunctional and for the highest protection requirements • ergonomic cutting guide • double-layer construction in the front area and sleeves • integrated stretch zones for greater freedom of movement under the arms and in the back • "high-rise" sleeve construction • flame-retardant reflex strips • orange coloured pictogrammes for quick differentiation of protection classes • maximum protection in combination with long-sleeved shirt or poloshirt (89312, 89409, 89798)

Jacket

uvex suXXeed multifunction



Description: • uvex suXXeed design is multifunctional and suitable for the toughest protection requirements • flame-retardant fabric and the use of para-aramid and polyester fibres ensure high durability and multifunctional protection against molten iron E2 • particularly soft and very comfortable to wear • integrated stretch fabric panels for more freedom of movement • high-rise sleeve design • flame-retardant reflective stripes

▶ Note: This protective clothing must always be worn as a suit in combination with jacket and trousers or dungarees.

193

EN 13034

uvex protection perfect multifunction

PPE with everything you need.

EN ISO 11611

EN 1149-5

4

Whether it's chemicals, arcing, heat, flames, metal splashes or everything at once, uvex protection perfect multifunction has all industrial dangers covered. To describe the collection as all-rounders would be an understatement– with their stretch inserts, the garments move with the body, protecting everything.

A1, B1, C1, E2, F1

EN ISO 11612 IEC 61482-2

檺

APC= 1





Dungarees

| Art. no. | 17251cornflower blue17252dark grey |
|----------|------------------------------------|
| Size | 40/42 to 64/66, 90/94 to 106/110 |
| Material | See trousers |


Description: • Bib, leg, back and folding rule pocket with closure • stretch zones on the knee externally for greater freedom of movement • flame-retardant fabric • flame-retardant reflective strips • inside knee pockets for knee pads

Trousers



Description: • Leg, back and folding rule pocket with closure option • stretch zones on the knee externally for greater freedom of movement • flame-retardant fabric • flame-retardant reflective strips • inside knee pockets for knee pads • thanks to high cotton content, particularly soft and skin-friendly comfort

Jacket



Description: • Front panel with concealed zip and rip-tape fastening • chest, napoleon and side pockets with closure • flame-retardant fabric • flame-retardant reflective strips • stretch inserts in the back shoulder area • width-adjustable sleeve hem with rip-tape fastening • thanks to high cotton content, particularly soft and skin-friendly comfort

▶ Note: This protective clothing must always be worn as a suit in combination with jacket and trousers or dungarees.






uvex suXXeed construction


Full body sun protection for all outdoor workers

On construction sites, many hidden dangers lurk. Not just obvious injury hazards, but sunburn and skin cancer. That's why we've included UV protection in the uvex suXXeed construction collection. In addition to sun protection, the line offers a perfect fit thanks to its 3D fit and is partly made of sustainable materials.





Waist jacket



Description: • high-rise arm design • 3D cut guide • two side pockets • front centre zip • two inner pockets • reflective tape • UV protection certified according to UV standard 801 with UPF 80 • OEKO-TEX® Standard 100



Trousers

EN ISO 20471

 Art. no.
 88267
 ■ signal orange

 88268
 ■ signal yellow

 Size
 23 to 32, 42 to 66, 90 to 110

 Material
 50% cotton, 50% polyester, approx. 270 g/m²

 Image: Size
 Image: Size

 88268
 Image: Size

 88268
 Image: Size


 900
 Image:

Description: • crotch insert for greater freedom of movement • stretch waistband with patent button • inside leg pocket • left and right side pocket with flap and press stud fastening • UV protection certified according to UV Standard 801 with UPF 80 • OEKO-TEX® Standard 100


EN ISO 20471 EN ISO 20471



Polo shirt



long-sleeved



Description: • polo collar with button panel • 50% recycled polyester • reflective strips all around • tested according to DIN EN 13758-1 with UPF 30 (classified according to AS/ NZS 4399) • longsleeve from size L onwards: additionally BG Bau eligible • OEKO-TEX® Standard 100

uve

uvex cut quatroflex

Protects when work gets sharp

Glass fibre is not just good for fast internet. In the uvex cut collection, the cut-resistant fibre provides maximum protection against sharp edges, glass and blades. Inside, the clothes are lined with bamboo yarn and are pleasantly soft. This collection is therefore robust and comfortable at the same time, even after multiple industrial cleans.

The knitted cut protection fabric protects against superficial mechanical injuries and achieves performance level D according to EN 388:2019, tested according to ISO 13997:1999.



uvex cut quatroflex polo shirt

| Art. no. | 17266 black/anthracite (sleeves) | |
|------------------------|---|--|
| Size Material | XS to 5XL 1st material: 55% cotton, 45% polyester, approx. 185 g/m ² 2nd material: 42% polyamide, 22% polyethyl- ene, 22% viscose, 12% fibreglass, 2% elastane | |
| | | |
| Description: see below | | |

| Size | XS to 5XL |
|------------|--|
| Material | 1st material: 55% cotton, 45% polyester, approx. 185 g/m ² 2nd material: 42% polyamide, 22% polyethyl- ene, 22% viscose, 12% fibreglass, 2% elastane |
| | |
| escription | : see below |

Art. no. 17267 black/anthracite (sleeves) Size S to 5XL Material 1st material: 54% modacrylic, 44% cotton, 2% antistatic fibres, approx. 195 g/m² 2nd material: 42% polyamide, 22% polyethyl-ene, 22% viscose, 12% fibreglass, 2% elastane

Description: • slim fit • sleeves made from cut-resistant material of the highest cut protection class combined with heat-resistant body material made from breathable functional fibres • panel with three buttons • functional, highly elastic strip in the elbow area • integrated cuffs on sleeves without irritating seams • protection and wearer comfort guaranteed even after repeated washing • cut protection material: extremely durable on the outside, pleasantly cool on the inside

Trousers with functional fabric

Art. no. 17865 black 23 to 32, 42 to 64, 90 to 110 Size 1st material: 65% polyethylene, Material 35% polvester 2nd material: 65% polyester, 35% cotton, approx. 245 g/m² $\boxtimes \& \boxtimes \boxtimes \boxtimes \boxtimes$

Description: • high content of cut-protection fabric on the front leg and calf for optimal protection against superficial, mechanical injuries • achieves cut level C • sporty fit • two slant pockets • two back pockets • one ruler pocket includ-ing pen pocket on the left thigh • concealed waist button

uvex cut quatroflex trousers



Description: • casual cut • functional, highly elastic strip in the knee area • integrated inserts to allow crosswise stretch along the side seam • waistband elasticated at the back • two back pockets • protection and wearer comfort guaranteed even after repeated washing • cut protection material: extremely durable on the outside, pleasantly cool on the inside



outside, pleasantly cool on the inside

| ALC: NO. | 1/208 | blac | k/anthracite (sleeves) | |
|-----------------------------|--|--|------------------------|--|
| Size | XS to 4XL | | | |
| Material | 1st material: 50% cotton, 50% polyester, approx. 160 g/m ² | | | |
| | 2nd material: 42% polyamide, 22% polyethyl- ene, 22% viscose, 12% fibreglass, 2% elastane | | | |
| | ¥~~ 🖄 🖸 |) B B B B B B B B B B B B B B B B B B B | | |
| cut-protect • functional | Description: • slim fit made from single-jersey fabric with cut-protection sleeves of the highest cut protection class • functional, highly elastic strip in the elbow area • integrated cuffs on sleeves without irritating seams • protection | | | |

and wearer comfort guaranteed even after repeated washing • cut protection material: extremely durable on the

uvex suXXeed ESD

A DESCRIPTION OF THE PARTY OF T

Exceptional protection for man and machine

The uvex suXXeed ESD collection prevents electrostatic discharge of the wearer or wearer to a machine. This protects sensitive electronic components. With the usual 3D fit and high-rise arm construction, perfect fitting is always ensured, both in women's and men's versions. By the way, ESD means electrostatic discharge.



Seamless shirt

| 1 | m | ١e | er | l |
|---|---|----|----|---|
| | | | | |

| Art. no. | 88264 black |
|----------|-----------------|
| Size | XS/S to 3XL/4XL |
| women | |
| Art. no. | 88264 Islack |
| | |

 Size
 XS, S/M to XXL/3XL, 4XL

 Material
 91% polypropylene, 7% polyamide, 2% silver

 Image: Size of the size

Description: • ESD suitable with antistatic fibres • quick-drying, antibacterial, odour-neutralising using innovative Dryarn® fibre • seamless processing for full well-being • OEKO-TEX® Standard 100



Trousers


Art. no. 88263 graphite

- Size 23 to 32, 42 to 66, 90 to 110 Material 66,5% polyester, 32% cotton.
 - erial 66.5% polyester, 32% cotton, 1.5% anti-static fibres, approx. 245 g/m²

Description: • maximum protection with antistatic fibres for optimal charge reduction and conductivity • crotch insert for greater freedom of movement • stretch waistband with patent button • concealed waist button • left side pocket with flap and press stud fastening • OEKO-TEX® Standard 100



E .IV



Description: • with anti-static fibres for optimal charge reduction and conductivity • ergonomic 3D cutting guide • "high rise" arm design • breast pocket on the left, two side pockets • stand-up collar • OEKO-TEX® Standard 100

OEKO-TEX[®] Standard 100 Certificates Sustainability

Textiles tested in accordance with the criteria of OEKO-TEX® Standard 100 ensure that no amount of substances are present that affect human health. Only products that meet the very strict requirements and undergo ongoing checks are awarded OEKO-TEX® certification. Products are shown below.



STANDARD

STANDARD 100

S20-0516 Hohenstein HTTI

S20-0516 HOHENSTEIN HTTI applicable to the following items:

520-0516 HohensteinHTT

70107, 70108, 70109, 70110, 70356, 70360, 70362, 70363, 88260, 88261, 88263, 88264, 88264, 88265, 88266, 88267, 88268, 88277, 88278, 88279, 88280, 88287, 88288, 88301, 88302, 88305, 88306, 88360, 88361, 88324, 88325, 88326, 88327, 88328, 88594, 88595, 88596, 88597, 88598, 88636, 88637, 88638, 88639, 88640, 88641, 88741, 88742, 88743, 88744, 88751, 88754, 88755, 88756, 88757, 88758, 88824, 88825, 88826, 88827, 88828, 88906, 88907, 88908, 88909, 88910, 88911, 88913, 88914, 88921, 88922, 88923, 88924, 88932, 88933, 88935 88936, 89307, 89308, 89653, 89659, 89665, 89668, 89669

OEKO-TEX® STANDARD 100 for recycled materials under 24.HDE.31919 in certification: 89686, 89688





Benefit from our knowledge







The uvex academy provides qualified education and training in the fields of personal protective equipment (PPE) and health and safety at work.

 All uvex academy training sessions are offered in-house or as company seminars Seminars in accordance with your individual specifications can be developed on request



You can find more information at **uvex-academy.com**




uvex academy





Outstanding innovations and designs

The uvex brand has an outstanding reputation worldwide. Perfection, innovation and excellent quality – we want to offer our customers nothing less with our products. We receive confirmation from renowned institutes in the form of awards and prizes, letting us know that we have struck the right chord and are on the right track.

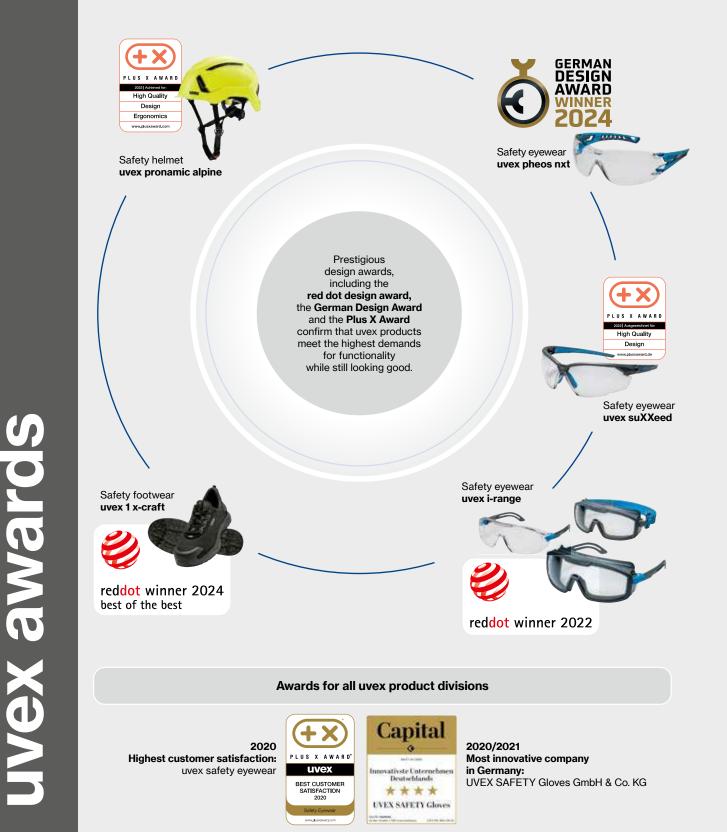

FUROPF

UVEX ARBEITSSCHUTZ GMBH Würzburger Straße 181-189 90766 Fürth GERMANY

- +49 911 9736 360 тı
- +49 911 9736 460
- F serviceteam@uvex.de
- uvex-safety.de

UVEX HECKEL s.a.s. 44 rue d'Engwiller La Walck 67350 Val de Moder

FRANCE Т· +33 3 88 07 61 08

- E +33 3 88 72 51 06
- contact.france@uvex-heckel.fr E.
- uvex-heckel fr Ŀ

UVEX SAFETY Polska sp. z o.o. sp.k. Większyce, ul. Głogowska 3A 47-208 Reńska Wieś

- POLAND +48 77 482 62 58
- Т· +48 77 482 62 57
- uvex@uvex-integra.pl E:
- uvex-safety.pl

UVEX SAFETY Textiles GmbH Robert-Schumann-Straße 33 08236 Ellefeld GERMANY

- T. +49 3745 740-0
- +49 3745 740-100 E corporatefashion@uvex.de
- uvex-safety.de

UVEX SAFETY (UK) LTD

uvex House Farnham Trading Estate Farnham Surrey GU9 9NW UNITED KINGDOM Тŀ +44 1252 73 12 00 safetv@uvex.co.uk E:

uvex-safety.co.uk

UVEX Safety CZ, k.s. Na Jamách 394 516 01 Rychnov nad Kněžnou CZECH REPUBLIC +420 494 531 331 Т·

- +420 494 533 395 F
- info@uvex.cz
- uvex-safety.cz

ASIA · PACIFIC · AUSTRALIA

UVEX (GUANGZHOU) SAFETY COITD

No. 3, Building ShenLan Industrial Zone ShiBei Avenue Dashi Panyu Guangzhou Guangdong CHINĂ 511430

- Т· +86 20 3479 2338
- +86 20 3479 1098
- E info@uvex.com.cn uvex com cn -t-

For Indonesia **UVEX SAFETY SINGAPORE** PTE LTD

Representative Office Indonesia Pondok Indah Office Tower 3, 17th Floor Jl. Sultan Iskandar Muda, Kav. V-TA Pondok Indah, Jakarta 12310 **INDONESIA**

- +6221 2953 8910 Т·
- sales@uvex-safety.com.sg E
- uvex-safety.co.id/id

UVEX SAFETY SINGAPORE PTF I TD

#03-112/113. German Centre SINGAPORE 609916

- +65 6162 8138 T:
- Е sales@uvexsafety.com.sg uvex-safety.com.sg

For Malaysia: **UVEX SAFETY SINGAPORE**

PTE LTD Representative Office Malaysia

Regional Office Malaysia 1 Sentral, Level 16,

- Jalan Stesen Sentral 5, KL Sentral, Kuala Lumpur 50470 MALAYSIA
- +603 2092 9261 T:
 - sales@uvex-safety.com.sg uvex-safety.com.my
- Perth

UVEX Safety New Zealand Pty Ltd

- Тŀ E

+61 8 9209 1444

- info@uvex.co.nz
- uvex-safety.co.nz

Pfarrgasse 25 4600 Wels AUSTRIA +43 7242 210 745 +43 7242 210 745-28 safety@uvex.at uvex-safety.at

UVEX SAFETY Austria GmbH

T.

E

UVEX Arbeitsschutz (Schweiz) AG Uferstrasse 90 - postbox 4019 Basel SWITZERLAND +41 61 638 84 44 T:

- info@uvex.ch uvex-safety.ch
 - heckel-safety.ch

UVEX Safety Scandinavia AB Nordanväg 7 28235 Tyringe SWEDEN

- M٠ +45 21466656 E: nordic@uvex.de
- uvex-safety.se

UVEX Safety Hungaria Bt. Terstyánszky u. 23. 2083 Solymár HUNGARY

T. +36 26 560093 +36 30 4773135 M: e.boros@uvex.de E:

- uvex-safety.hu
 - **AFRICA · MIDDLE EAST** AND INDIA

uvex safety South Africa (Pty) Ltd 2 Kubu Avenue,

Riverhorse Valley, Effingham, Durban, 4051 SOUTH AFRICA

+27 31 569 67 80 T: F info@uvex.co.za

uvex.co.za

UVEX ARBEITSSCHUTZ GMBH **Dubai Office**

B6-606 HQ Building Dubai Silicon Oasis Dubai

IΔF

- Middle East & India: T: +971 4 372 4753
- sales@uvex.co.za
- uvex-safety.ae/en/

UVEX SAFETY AUSTRALIA LIMITED PARTNERSHIP Unit 3 Riverside Centre 25 International Business Park Rd,

UVEX SAFETY Gloves

Elso-Klöver-Straße 6

21337 Lüneburg Postfach 24 47 · 21314 Lüneburg

+49 4131 9502-0

+49 4131 84338

gloves@uvex.de uvex-safety.de

UVEX Safety Italia S.R.L.

+39 011 4536511

+39 011 7399522

info@uvex-safety.it

+421 517 732 138

+421 918 964 591

uvex-safety.sk

uvex@uvex-safety.sk

uvex-safetv.it

UVEX Safety SK k.s.

Jesenná 1

SLOVAKIA

Тŀ

M:

E

080 05 Prešov

Corso Grosseto 437

10151 Torino

ITALY

T:

E

GmbH & Co. KG

GERMANY

T.

E.

AUSTRALIA

+61 2 9891 1700 +61 2 9891 1788

info@uvex.com.au

1800 815 790 Brisbane

Adelaide

+64 800 698 839

- 24-28 River Road West Parramatta NSW 2150 T:
 - E uvex-safety.com.au Ъ.

Sydney Melbourne

+61733948414 +61 8 8376 0732

+61 3 9832 0851

| uvex Safety Eyewear | | | 13 |
|---|------------|---|------------|
| Coating technology | 20 | Infrared protection | 68 |
| Labelling and norms | 24 | Welding protection | 70 |
| Lens tinting Safety spectacles | 26 30 | Accessories Cord/case mix | 73 76 |
| Safety spectacles Overspecs | 57 | Applications | 70 |
| Safety goggles | 60 | Safety eyewear – Overview | 78 |
| uvex Hearing Protection | | | 81 |
| All ears when it comes to safety | 84 | Banded ear protection | 98 |
| Size, fit and uvex xact-fit test | 86 | uvex earmuff range | 99 |
| Disposable hearing protection plugs Reusable ear plugs | 88 94 | Helmet earmuffs Accessories | 106 112 |
| Detectable | 96 | Hearing protection – Overview | 114 |
| uvex Safety Helmets | | | 115 |
| Standards at a glance | 120 | Visors and face protection | 148 |
| Safety helmets | 122 | Face protection system | 156 |
| Accessories | 139 | Impact caps | 159 |
| Head torchs | 141 | Safety helmets – Overview | 163 |
| Visor lenses, certification and norms | 146 | | |
| uvex Breathing Protection | | | 165 |
| Respirator advisor | 170 | Respirators uvex silv-Air e | 177 |
| The uvex breathing protection navigator | 171 | Respirators uvex silv-Air c | 180 |
| Applications Combination options with uvex safety eyewear | 172 173 | Pictograms – Functions | 184 185 |
| Respirators uvex silv-Air premium | 173 | Breathing protection – Overview | 100 |
| uvex Disposable Coveralls | | | 187 |
| Guide to standards and products | 188 | Accessories | 197 |
| Disposable coverall type 3B | 190 | Protection against infectious diseases | 198 |
| Disposable coverall type 4B | 193 | Guide to standards and products | 199 |
| Disposable coveralls type Typ 5/6 | 194 | Guidelines for use | 200 |
| uvex Safety Gloves | | | 201 |
| Standards | 212 | Chemical risks | 253 |
| in the food industry | 212 | Disposable safety gloves | 262 |
| Mechanical risks uvex glove expert | 216 252 | Hexarmor® safety gloves Safety gloves – Overview | 264 279 |
| uvex Safety Footwear | <u></u> | | 281 |
| Areas of application | 288 | Safety footwear medium areas of application | 328 |
| uvex multiple width system | 289 | Safety footwear heavy areas of application | 343 |
| Technologies | 290 | Heckel safety shoes | 352 |
| Pictogram overview Standards and labels, ESD | 292 296 | Accessories: insocks | 358 362 |
| Safety footwear light areas of application | 298 | Safety footwear – Overview | 302 |
| uvex Individual PPE | | | 365 |
| Prescription safety eyewear | 371 | IndividueTailor-made hearing protection uvex high-fit | 417 |
| VDU spectacles | 408 | Orthopedic foot protection uvex medicare | 431 |
| uvex Workwear | | | 439 |
| uvex suXXeed greencycle planet collection | 444 | uvex suXXeed arc collection | 452 |
| uvex collection 26 planet | 445 | uvex suXXeed multifunction collection | 452 |
| uvex suXXeed craft collection uvex suXXeed industry collection | 448 | uvex protection perfect multifunction collection | 453 |
| TVEX SUX ARECHIOUSITY CONRCTION | 449 | uvex suXXeed construction collection | 454 |
| uvex suXXeed collection | 450 | uvex cut collection | 455 |





made2perform

Thank you for your interest in our online catalogue! By not using a printed paper version, we were able to save valuable resources. uvex protecting people – and the environment.

Resources saved: 51 t



109.854 kg









7

English Version

UVEX ARBEITSSCHUTZ GMBH Wuerzburger Straße 181-189 90766 Fuerth GERMANY

T: +49 911 9736-0

- F: +49 911 9736-1760
- E: safety@uvex.de
- I: uvex-safety.com

protecting people