

uvex

Winners at Work

uvex D500 foam

uvex phynomic C5

protecting people

Equipment



for Winners

Get on the winner's podium with uvex!

All over the world, uvex products are helping to turn athletes into winners. Only with the right equipment can these professionals completely focus on their performance and overcome the challenge ahead.

As the world's most successful provider of equipment to top performing athletes, uvex continues to demonstrate how crucial the right equipment is for success.

In both sports and the industrial workplace, high demands are placed on people and equipment, but armed with the right equipment and safe in the knowledge they are protected, and look good, they can perform to the best of their ability

and become a

“Winner at Work”.

Next Level

uvex D500 foam

Uncompromisingly robust
without loss of comfort

Made with the latest generation of patented uvex Bamboo TwinFlex® technology, the uvex D500 foam glove combines comfort features such as maximum flexibility, perfect fit and dexterity with outstanding cut protection performance to EN 388:2016 (level D) standard. The glove is highly resistant to abrasion, for prolonged product life and exceptional cost efficiency.

- very high cut protection (level D)
- regular fit





Cut Protection

uvex phynomic C5

The perfect combination of
tactile feel and cut protection

The uvex phynomic C5 is an exceptionally lightweight, all-round cut protection safety glove (level C) with touch-sensitive feel ideally suited to high precision mechanical activities. The glove boasts excellent abrasion resistance thanks to the breathable, damp-resistant aqua-polymer foam coating. The glove is free from accelerators and has been independently dermatologically tested making it suitable for allergy sufferers.

- very high cut protection (level C)
- slim fit

High-tech for added safety

The latest generation of Bamboo TwinFlex® technology

uvex boosts cut protection to the next level. The comfort class together with cut protection helps increase wearer acceptance – particularly when carrying out demanding activities. The unique combination of natural bamboo and




high-tech protective fibres ensures a high level of wearer comfort and good climate control while also providing effective protection. After all, a safety glove can only help to prevent accidents if the user actually wears it.

- robust and comfortable
- bamboo – environmentally friendly, renewable raw material
- cooling effect
- soft fit

Bamboo TwinFlex® protection function
Cut-resistant glass fibres and abrasion-resistant polyamide guarantee optimum mechanical protection (level D).

Comfort function
Silky, comfortable bamboo yarn for a soft feel and perfect climate control combined with innovative DSM Dyneema® Diamond fibres provides a further significant boost to tear and cut resistance.

Bamboo TwinFlex® technology¹ (Cut protection level D)

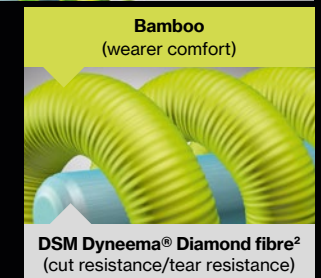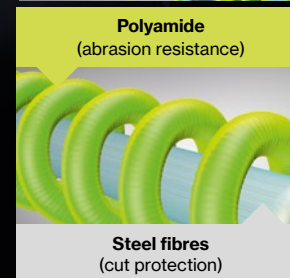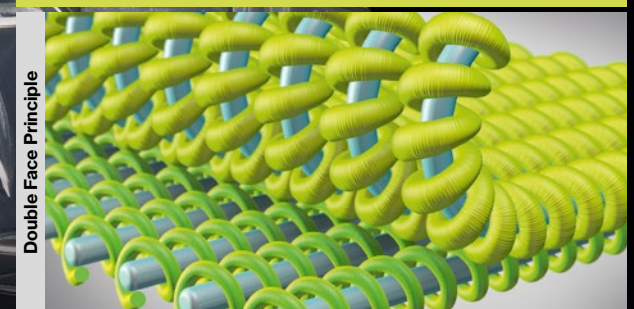

¹ Bamboo TwinFlex® technology is a registered brand of UVEX SAFETY Gloves GmbH & Co. KG., Germany



Innovation for added precision

DSM Dyneema® Diamond technology

Thanks to innovative DSM Dyneema® Diamond fibres with integrated micro-particles, we've been able to create a significantly thinner and more touch-sensitive cut protection safety glove.

uvex combines this high-performance fibre with comfortable elastane fibres to produce a lightweight cut protection safety glove (level C) with outstanding tactile feel.

DSM Dyneema® Diamond technology²



² DSM Dyneema® Diamond is a registered trademark of Royal DSM N.V.



uvex D500 foam

Art. no.	60604
Design	knitted cuff
Standard	EN 388 (4 X 4 2 D)
Material	bamboo-rayon, Dyneema® Diamond, steel, polyamide
Coating	palm and fingertips with high-performance elastomer (HPE) and SoftGrip foam coating
Suitable for	dry areas and slightly damp areas
Colour	lime, anthracite
Sizes	7 to 11



MADE IN GERMANY 

climazone



EN 388:2016



4 X 4 2 D



uvex phynomic C5

Art. no.	60081
Design	knitted cuff
Standard	EN 388 (4 X 4 2 C)
Material	Dyneema® Diamond technology, polyamide, elastane
Coating	palm and fingertips with aqua-polymer foam coating
Suitable for	dry areas and slightly damp areas
Colour	blue, grey
Sizes	6 to 12



climazone



MADE IN GERMANY

pure standard



EN 388:2016



4 X 4 2 C

Cut protection reclassified

Modification to the EN 388 standard for cut protection gloves

Protection classes for cut protection gloves were previously assigned in Europe in accordance with standard EN 388:2003.

Due to the continuous development of technical materials – so-called 'high-performance fibres' – it has become necessary to adjust the methods used to test and classify cut protective gloves. These changes have been implemented in standard EN 388:2016. In addition to the coup-test in accordance with EN 388:2003 the new test method in accordance to ISO 13997 has been introduced.

EN 388:2016



4 X 3 2 D


- ↑ Cut resistance in accordance with ISO 13997 (A to F)
- ↑ Puncture resistance (0 to 4)
- ↑ Tear resistance (0 to 4)
- ↑ Coup test cut resistance (0 to 5; X=not applicable or not tested)
- ↑ Abrasion resistance (0 to 4)



Differences between both test methods

Test procedure in accordance with EN 388:2003

- Cut resistance test using the coup test.
- Rotating circular knife moves back and forth at a constant force (5 newtons) on the test material and rotates counter to the movement.
- The index value results from the number of cycles required to the point at which the test piece is cut through, and from the degree of wear of the blade.
- Five measurements are performed in this way on each test piece. The average of the five index values confirms the corresponding performance class for the cut protection level of a safety glove.

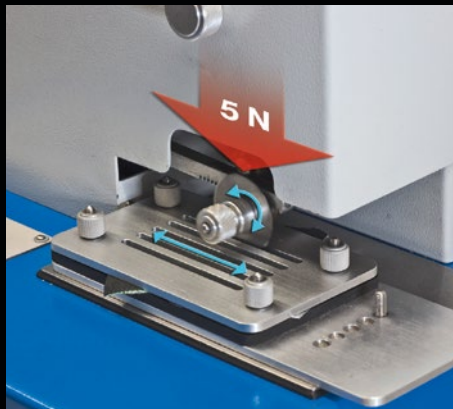

performance class	1	2	3	4	5
index	≥ 1.2	≥ 2.5	≥ 5	≥ 10	≥ 20

No correlation can be made between the two test procedures and performance rating. The glove still offers the same high level of cut protection

in practice; the only change is to the standard-based classification of its performance.

Test procedure in accordance with EN 388:2016/ISO 13997

- Relates to cut protection gloves made from materials that cause the blades to become blunt (i.e. glass and steel fibres).
- Additional test procedure in accordance with ISO 13997: Determination of resistance of the glove to cutting by a sharp object through single contact under higher force.
- Here, a long, straight blade is drawn once over the test piece. The minimum force required to cut through the test piece after 20 millimetres is determined in the process.
- The result is given in newtons (N) and assigned to a cut protection class.



performance class	A	B	C	D	E	F
Newton value	≥ 2	≥ 5	≥ 10	≥ 15	≥ 22	≥ 30

As a leading manufacturer of cut-protection products, we have state-of-the-art measurement technology for both

standards in our own testing laboratory, and are well placed to address questions on most matters at anytime.



uvex

A win for your team
uvex D500 foam uvex phynomic C5

UVEX SAFETY AUSTRALIA LIMITED
PARTNERSHIP

Unit 3 Riverside Centre
24-28 River Road West
Parramatta NSW 2150
AUSTRALIA

Tel.: +612 9891 1700

Fax: +612 9891 1788

E-Mail: info@uvex.com.au

Internet: uvex-safety.com.au



twitter.com/uvexsafetygroup



facebook.com/uvexsafetygroup



youtube.com/uvexsafetygroup



instagram.com/uvexsafety



linkedin.com/company/uvex-safety-australia

Rights of technical changes reserved

protecting people