


Accessories




98749.46


98749.48



98750.46

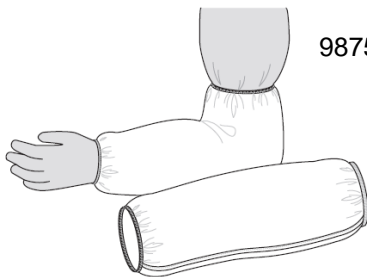

98753.00

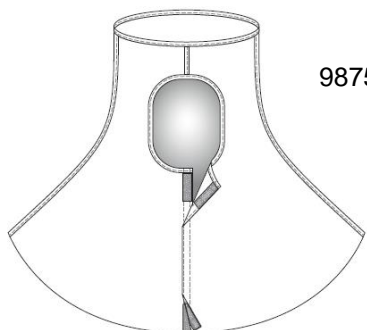


98752.00



NOT CERTIFIED PRODUCTS !

Overshoes

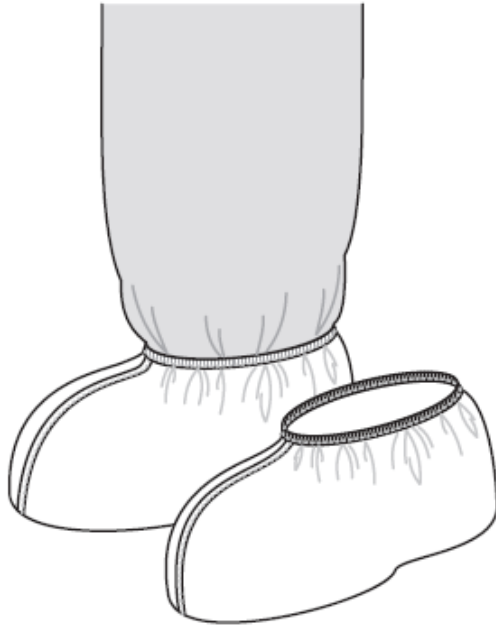

Modell:	9863
Article No.:	98749
Size:	42-46 and 46-48
Material:	Polypropylene spunbound laminated with Polyethylene film,
Colour:	white
Order Unit:	BG
Content	100 PR, loose

PSA-Category

certified according to



Areas of application:

- handling chemicals in dust and powder form
- varnishing and protection against paint splashes
- fiberglass production and processing
- industrial cleaning and maintenance
- automotive industry
- grinding and polishing
- cement manufacture
- mining and quarrying
- demolition and refurbishment
- working with asbestos
- wood and metal processing
- construction industry
- cleanroom applications
- pharmaceutical industry

Product description:

- breathable, soft and skin friendly material on the inside
- high mechanical resistance
- particle tight and limited spray tight
- highly compatible to uvex coveralls
- elastic bands at shoe opening for optimal fit
- free of silicon and paint wetting impairment substances

Overboots



Modell:	9864
Article No.:	98750
Size:	42-46
Material:	Polypropylene spunbound laminated with Polyethylene film,
Colour:	white
Order Unit:	BG
Content	50 PR, loose

PSA-Category

certified according to




Areas of application:

- handling chemicals in dust and powder form
- varnishing and protection against paint splashes
- fiberglass production and processing
- industrial cleaning and maintenance
- automotive industry
- grinding and polishing
- cement manufacture
- mining and quarrying
- demolition and refurbishment
- working with asbestos
- wood and metal processing
- construction industry
- cleanroom applications
- pharmaceutical industry

Product description:

- breathable, soft and skin friendly material on the inside
- high mechanical resistance
- particle tight and limited spray tight
- highly compatible to uvex coveralls
- additional ribbon for secure fastening of the overboots
- elastic bands at boot opening for optimal fit
- free of silicon and paint wetting impairment substances

Gauntlets

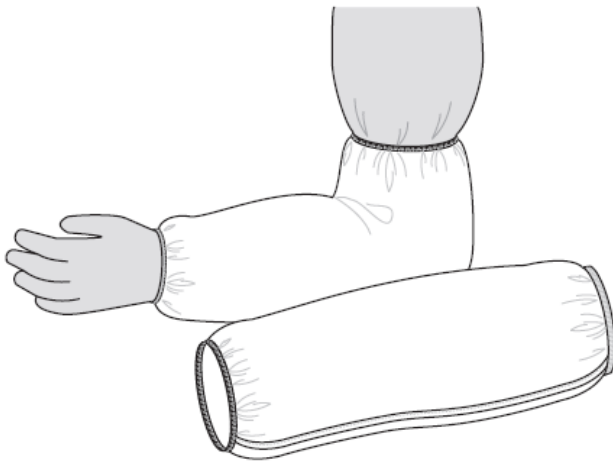

Modell:	9862
Article No.:	98753.00
Size:	One size fits all
Material:	Polypropylene spunbound laminated with Polyethylene film,
Colour:	white
Order Unit:	BG
Content	50 PR, loose

PSA-Category

certified according to




Areas of application:

- handling chemicals in dust and powder form
- varnishing and protection against paint splashes
- fiberglass production and processing
- industrial cleaning and maintenance
- automotive industry
- grinding and polishing
- cement manufacture
- mining and quarrying
- demolition and refurbishment
- working with asbestos
- wood and metal processing
- construction industry
- cleanroom applications
- pharmaceutical industry

Product description:

- breathable, soft and skin friendly material on the inside
- high mechanical resistance
- particle tight and limited spray tight
- highly compatible to uvex coveralls
- elastic bands on both ends for optimal fit
- free of silicon and paint wetting impairment substances

Hood

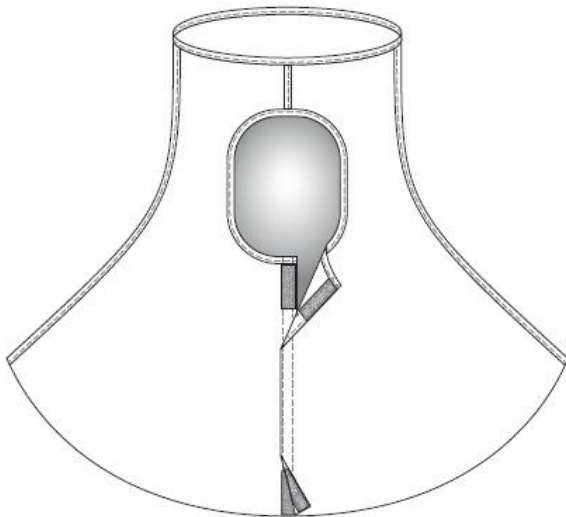

Modell:	9861
Article No.:	98752.00
Size:	One size fits all
Material:	Polypropylene spunbound laminated with Polyethylene film,
Colour:	white
Order Unit:	BG
Content	100 PC, loose

PSA-Category

certified according to



Areas of application:

- handling chemicals in dust and powder form
- varnishing and protection against paint splashes
- fiberglass production and processing
- industrial cleaning and maintenance
- automotive industry
- grinding and polishing
- cement manufacture
- mining and quarrying
- demolition and refurbishment
- working with asbestos
- wood and metal processing
- construction industry
- cleanroom applications
- pharmaceutical industry

Product description:

- breathable, soft and skin friendly material on the inside
- high mechanical resistance
- particle tight and limited spray tight
- highly compatible to uvex coveralls
- the hood is highly compatible with filtering face mask
- velcro fastening for easy handling
- free of silicon and paint wetting impairment substances

Performance data*:

Material properties	unit	value laminate	class	value SMS	class
EN 14325 Fabric physical test results					
EN 530 Abrasion resistance	cycles	>100<500	2 of 6	>10<100	1 of 6
EN ISO 7854 Flex cracking resistance	cycles	>40.000<100.000	5 of 6	>15.000<40.000	4 of 6
EN ISO 9073-4 Tear resistance (MD)	N	>40<60	1 of 6	>20<40	2 of 6
EN ISO 9073-4 Tear resistance (CD)	N	>10<20		>20<40	
EN ISO 13934-1 Tensile strength (MD)	N	>100<250	1 of 6	>100<250	1 of 6
EN ISO 13934-1 Tensile strength (CD)	N	>30<60		>30<60	
EN 863 Puncture resistance	N	>5<10	1 of 6	>5<10	1 of 6
EN ISO 13938-1 Burst resistance	kPa	>160<320	3 of 6	passed	
EN 13274-4 Resistance to ignition		passed		passed	
BS EN 20811 Hydrostatic head (water pressure test)	cm	232			
EN 31092/ISO 11092 Thermal resistance R _{ct}	m ² *K/W	16,3*10 ⁻³			
EN 31092/ISO 11092 Water Vapour resistance R _{et}	m ² *Pa/W	13,3			
EN 1149-5 Electrostatic Properties		passed		passed	
EN 14325/EN 6530 Repellence of liquids					
Sulphuric acid (30%)	%	>95	3 of 3	>95	3 of 3
Sodium hydroxide (10%)	%	>95	3 of 3	>95	3 of 3
n-heptane (undiluted)	%	>90<95	2 of 3	0	-
Isopropanol	%	>95	3 of 3	23,10	-
EN 14325/EN 6530 Resistance to penetration by liquids					
Sulphuric acid (30%)	%	>1<5	3 of 3	0	3 of 3
Sodium hydroxide (10%)	%	>1<5	3 of 3	0	3 of 3
n-heptane (undiluted)	%	>1<5	3 of 3	>10	1 of 3
Isopropanol	%	>1<5	3 of 3	>10	1 of 3

NOT CERTIFIZIED PRODUCT!!

The technical dates are based on the specifications of the uvex 5/6 comfort (Mod. 9877) coverall → the products are made of the main material used in this coverall.

* Tested under laboratory conditions: temperature (20 ± 2)°C and (65 ± 5)% relative humidity

** Particle size according to details on testing substance as mentioned in EN136, 8.16.3.2.2: "particle size description must be 0,02µm - 2µm EAD with a MMD of 0,6µm"