uvex




# Safety Footwear

protecting people

uvex

# uvex ultimate line

Our motto **made 2 perform** drives us: We develop and manufacture products for maximum performance — without compromising on safety, comfort, quality and sustainability.

Our products perform impressively — whether it's at work, in sport or during leisure. **made 2 perform** is more than just a promise — it is our motivation for users, athletes, employees and everyone who wants to achieve their best.

made 2 perform

## uvex 3 MACSOLE® BOA®

Strong companion for heavy-duty applications

**ESD**
Electrostatic charge dissipation in accordance with the EN 61340-4-3 and EN 61340-5-1 standards

**clima** zone
Optimised breathability for dry and sweat-free feet

**BOA®**
One-handed continuous tightening for a precise fit

**ankle**pro
Shock-absorbing foam minimises impact in the ankle area




**bionom** x
Ergonomic design for improved performance through comfort

i-**PURE**nrj planet
Midsole for better endurance due to shock absorption and energy return

MADE IN ITALY

**MACSOLE®**
Innovative rubber outsole to prevent slipping on extremely hot or cold surfaces

68642


**waterstop**
Increased water resistance keeps feet dry for longer in wet environments

**uvex medicare**
Certified for orthopaedic innersoles

**multiple fit** system
Optimised fit for various foot shapes



MACSOLE® is a registered trademark of UVEX HECKEL s.a.s. • Boa® and Boa® Fit System are registered trademarks of Boa Technology Inc., USA.

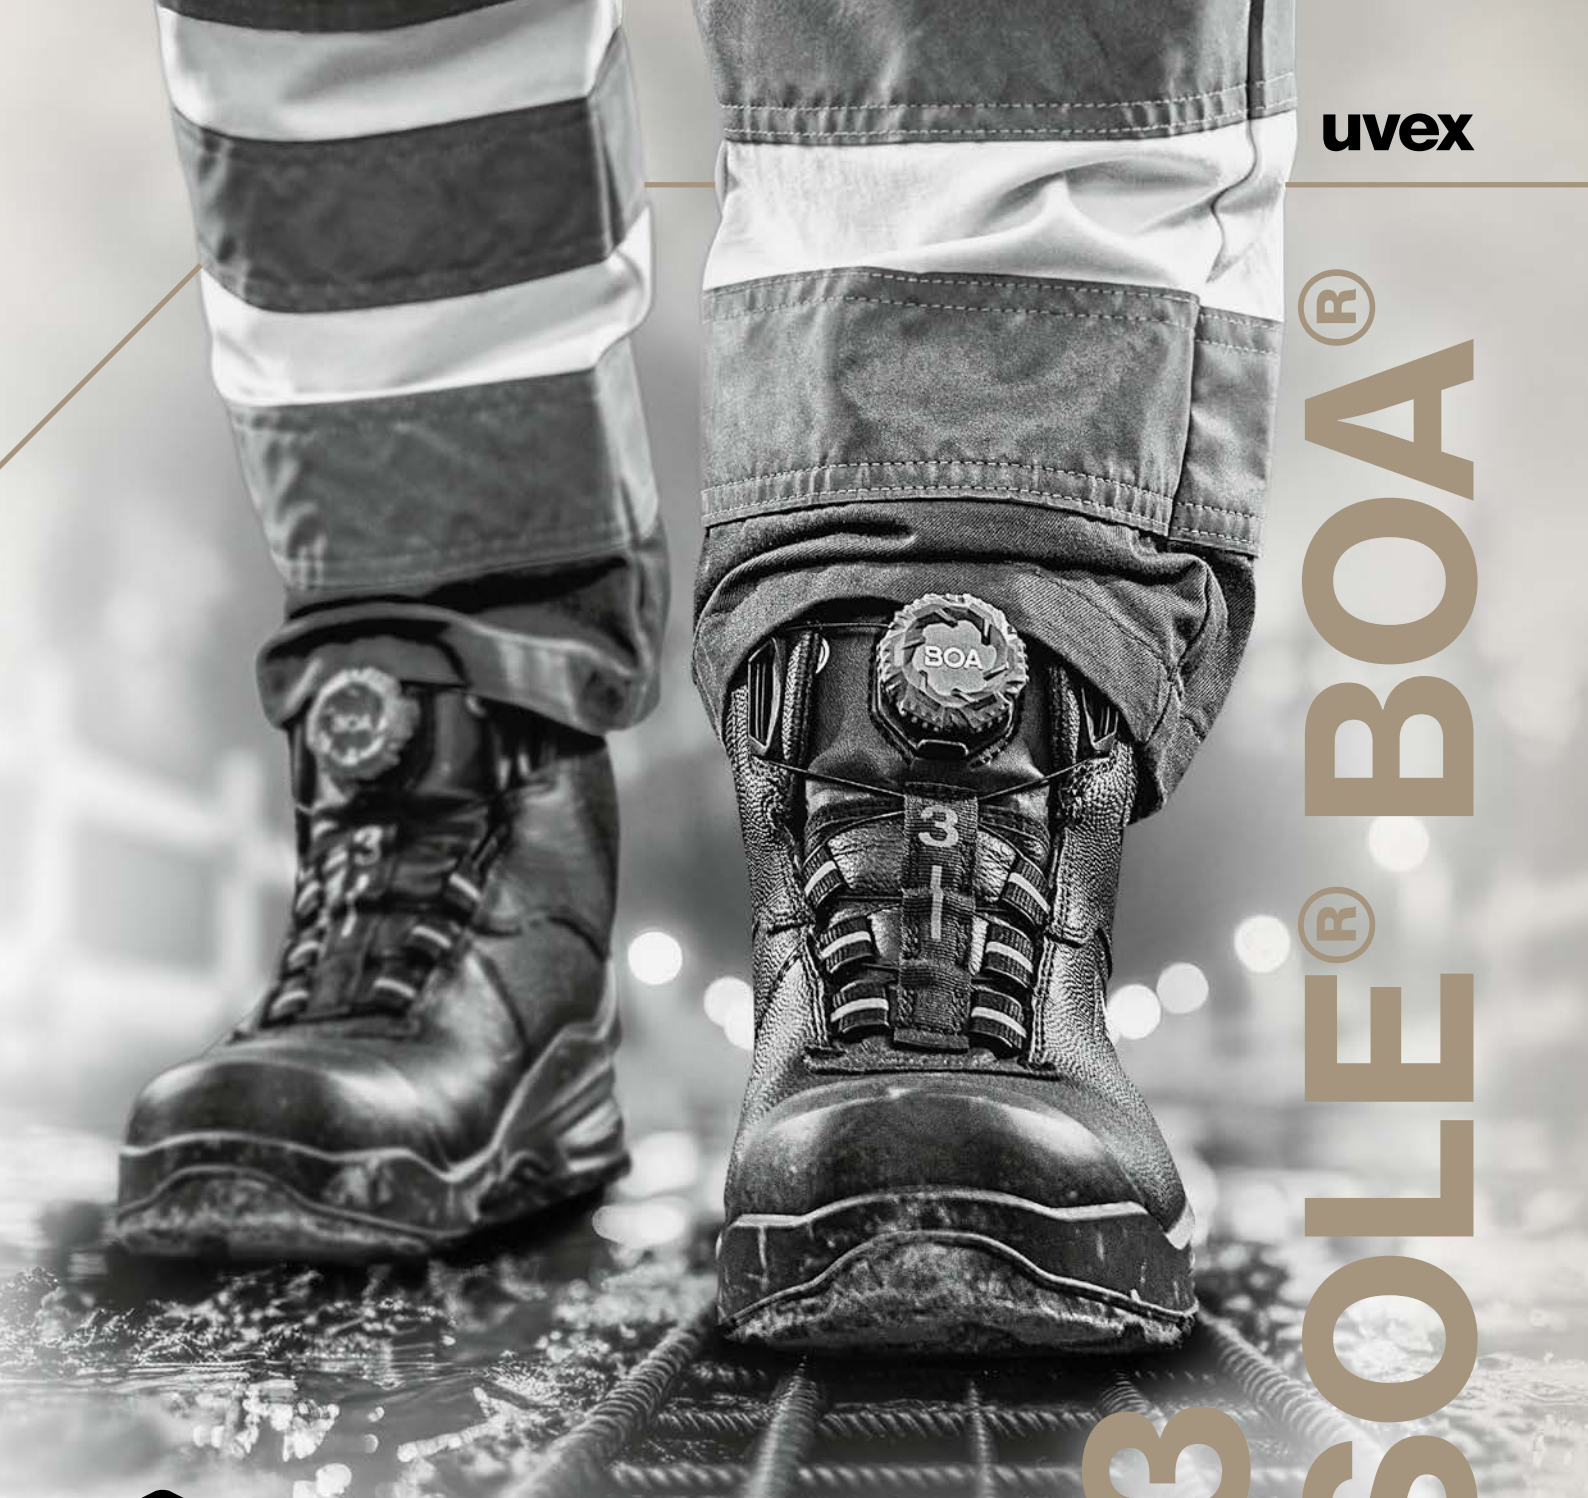


uvex

# uvex 3 MACSOLE® BOA®

$CO_2$ footprint:
**19.93**/22.68 kg $CO_2$e 10/2025 (68642), calculation method
see page 342

**The uvex 3, but even more robust**
The MACSOLE® rubber outsole provides the S3S boots with even stronger support for heavy-duty applications, as it is particularly resistant to heat, chemicals and cuts. In addition, the MACSOLE® rubber sole technology features an unparalleled level of slip resistance, even in cold conditions.

The **made 2 perform** motto represents clear goals: maximum performance, uncompromising safety – measurable, tangible and designed for everyone who wants to achieve more.

**Further information can be found at:**

uvex

## Sustainability mission at uvex safety

# protecting planet




Every step we take leaves behind a carbon footprint. It's shaped by our consumption and influenced by even the smallest decisions we make each day. With uvex safety shoes, we can reduce this footprint — safely and surely. How?

For example, the **uvex 1 x-craft planet** is the perfect combination of the innovations of the uvex 1 x-craft product family and the sustainable materials: The midsole contains 15% recycled PU granulate, while the outsole contains 10%. What's more, the upper is made from recycled and bio-based materials such as PET bottles and bamboo.

Its carbon footprint is 6.09/8.06 kg $CO_2e$ (06/2025).

**responsible performance**
increased transparency about the product

### Material
Products featuring this symbol contain bio-based materials, materials that can be composted at home or recycled materials. Recycled materials covers both post-consumer recycling materials (PCR) and post-industrial recycling materials (PIR).

### Packaging
Product packaging featuring this symbol is made of, for example, 100% recycled materials or materials that can be composted at home.

### Circular economy
Products featuring this symbol are, for example, designed to last for a particularly long time, recyclable, intended to be used a second time or able to be repaired.

### Carbon footprint
The product-specific greenhouse gas emissions are calculated on the basis of the DIN EN ISO 14067 standard. The values are shown in the following notation:
"Carbon footprint: **[cradle-to-customer value]**/[cradle-to-grave value] kg $CO_2e$ calculation date (article number)"
Compared to the cradle-to-customer value, the cradle-to-grave value also takes into account emissions from disposal and, if necessary, a usage phase.
**Calculation method:** IPCC 2021 GWP100a (in accordance with ISO 14067); **Database/software:** company-specific calculation based on SimaPro und ecoinvent; **Functional unit:** single product; for products used in pairs: pair; **Scope:** cradle-to-grave; **Unit:** kg $CO_2e$ • These $CO_2$ values are valid at the time of calculation and may be subject to change.

**More detailed information can be found at**
uvex-safety.com/en/uvex-safety-group/sustainability/goals/

uvex



**Protecting people is our mission**

"protecting planet" is the natural continuation of this mission when it comes to treating people, society and nature responsibly. The safety footwear product group has embodied its motto, responsible performance, for over ten years. Since 2011, we have implemented numerous projects to reduce the amount of PU waste generated, for example.

Since the end of 2022, we have been able to turn surplus PU into granulate and reuse it in soles (midsoles, TPU outsoles) for 89 models. The goal is to continuously increase the proportion of recycled and bio-based materials in the product portfolio.

# uvex safety footwear

**Waste prevention**
through continuous process and tool optimisation

**Use of water-based release agents**
confirmed via automotive and supplier industries



**uvex overperformance**
defined standards that exceed test requirements; extended product service life

**PU waste management**
for recycling and saving polyurethane waste



**Carbon footprint**
continuous calculation of the $CO_2$footprints

**Leather Working Group**
cooperation exclusively with LWG-certified leather suppliers

**100%**
**of our models**
are made from at least one partially recycled component

**By 2030**
20% of each product's weight will come from bio-based or recycled materials

**ISO 14001 and ISO 45001 certified**
Production at the uvex Cagi site in Italy

**Shoe box**
with 95% recycled content

**100%**
**green electricity**
including from solar panels at the uvex Cagi production site

GOLD | Top 5%
ecovadis
Sustainability Rating
SEP 2026

**uvex Cagi Srl**

**Restricted substances list**
increased protection due to stricter chemical limit values than REACH



uvex

# Safety footwear for the highest demands

## uvex safety footwear competence center




**Innovation:**
One of the most state-of-the-art production facilities in Europe

Laser roughing cell provides excellent-quality rough contours for optimal sole adhesion.

## uvex competence center for safety footwear in Ceva (CN), Italy

Development expertise, state-of-the-art robot-controlled production systems and optimised process structures to meet the highest ecological standards guarantee the first-class and sustainable quality of our safety shoes.

The production in Italy, which is one of the most modern production facilities for safety shoes in Europe, ensures efficient, resource-saving production and short distances from manufacturer to user.

## Expertise


- production of direct-injected safety shoes with outsoles made of polyurethane, thermoplastic polyurethane and rubber
- innovative production technologies, e.g. for using rebound properties
- six DESMA direct-injection machines for producing uvex outsoles, with DESMA AMIR system (automated material handling with integrated robots)
- extensively equipped test laboratory for quality and production assurance and for product development




**Specialisation:**
Direct injection of uvex safety shoe soles



For further information, please refer to the following pages of the catalogue or contact the uvex experts directly.

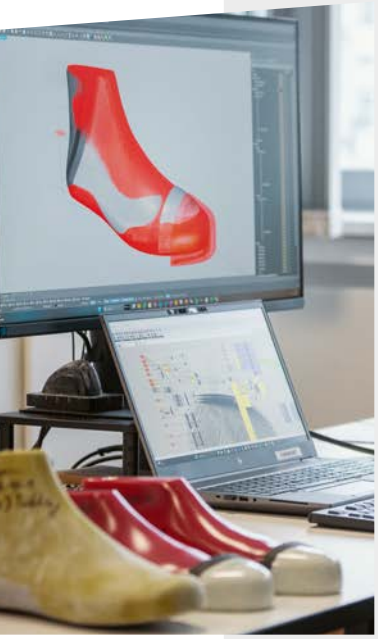





**Competence:**
In-house expertise throughout
the entire product development process

## Expertise at uvex headquarters in Fürth, Germany

- product design and development
- biomechanics
- model building and prototyping
- quality and international manufacturing support
- supply chain management
- commercial processing
- process engineering
- training, product management and marketing







# Safety Footwear

Areas of application: light · medium · heavy













## light
### areas of application

'Light' covers all areas of application where work is primarily carried out indoors and without significant demands on the physical properties of the outsole. Examples include assembly workplaces, as well as storage and logistics areas.
We recommend products from the uvex 1 x-craft, uvex 1 G2, uvex 1, uvex 1 x-tended support, uvex 1 sport, uvex 1 sport white, uvex 1 x-cite and uvex 1 business product groups.

## medium
### areas of application

'Medium' applications usually take place both indoors and outdoors, with the outsole needing to be significantly more robust. Typical users include manual labourers, public sector employers and people working the chemical industry.
We recommend products from the uvex 2, uvex 2 MACSOLE®, uvex 2 construction, uvex 2 xenova® and uvex 2 trend product groups.

## heavy
### areas of application

'Heavy' applications involve external influences that place extensive demands on the shoe, its durability and stability. They are usually found in heavy mechanical engineering and in the construction industry, especially in building and civil engineering.
We recommend products from the uvex 3, uvex 3 quatro, uvex 3 foundry and uvex 3 MACSOLE® product groups.



MACSOLE® is a registered trademark of UVEX HECKEL s.a.s.

# uvex shoe — your fit

uvex combines the efficiency of standard sizing with the precision of a custom fit – individual, fast, and hassle-free. Shoe size, four widths and semi-orthopaedic innersoles provide ten customisation options. This means that a single shoe model offers between 150 and 200 variants, plus orthopaedic innersoles and shoe adjustments. uvex offers a wide assortment of products, with sizes from 34 to 52. Additionally, sizes 34 to 40 are produced using a women's last. Different fastening systems – ranging from classic laces and hook-and-loop closures, elastic laces and zip fastening to the BOA® Fit System – influence fit and comfort to meet a wide range of requirements.

## Multiple widths system

In addition to length, width also plays a crucial role in the fit. The uvex multiple fit system offers different widths within each shoe size, defining the internal volume to ensure an optimal fit – whether the feet are narrow or wide.
For easy fitting, the multiple fit system uses colour codes: Red indicates width 10 (narrow), blue indicates width 12 (wide) and orange indicates width 14 (extra wide). Width 11 corresponds to the standard width. The different fits are based on the measurement of the widest part of the foot. While the foot is under load, a measurement is taken of either the circumference of the foot at the base joint of the big toe and the base joint of the little toe, or alternatively the width of the foot at this point (see opposite). The classification of sizes and the corresponding values are detailed in the table below (all measurements in mm). The required width can be determined from the table according to the wearer's foot length.





All measurements in mm.

| uvex shoe size | Foot length | UK size | Width 10 (narrow) | Width 11 (standard) | Width 12 (wide) | Width 14 (extra wide) |
|---|---|---|---|---|---|---|
| | | | Circumference up to | | | |
| 34 | 203-210 | 2 | 212 | 218 | 224 | 236 |
| 35 | 211-217 | 3 | 216.5 | 222.5 | 228.5 | 240.5 |
| 36 | 218-225 | 3.5 | 221 | 227 | 233 | 245 |
| 37 | 226-232 | 4 | 225.5 | 231.5 | 237.5 | 249.5 |
| 38 | 233-240 | 5 | 230 | 236 | 242 | 254 |
| 39 | 241-247 | 6 | 234.5 | 240.5 | 246.5 | 258.5 |
| 40 | 248-255 | 6.5 | 239 | 245 | 251 | 263 |
| 41 | 256-262 | 7 | 243.5 | 249.5 | 255.5 | 267.5 |
| 42 | 263-270 | 8 | 248 | 254 | 260 | 272 |
| 43 | 271-277 | 9 | 252.5 | 258.5 | 264.5 | 276.5 |
| 44 | 278-285 | 10 | 257 | 263 | 269 | 281 |
| 45 | 286-292 | 10.5 | 261.5 | 267.5 | 273.5 | 285.5 |
| 46 | 293-300 | 11 | 266 | 272 | 278 | 290 |
| 47 | 301-307 | 12 | 270.5 | 276.5 | 282.5 | 294.5 |
| 48 | 308-315 | 13 | 275 | 281 | 287 | 299 |
| 49 | 316-322 | 14 | 279.5 | 285.5 | 291.5 | 303.5 |
| 50 | 323-330 | 14.5 | 284 | 290 | 296 | 308 |
| 51 | 331-337 | 15 | 288.5 | 294.5 | 300.5 | 312.5 |
| 52 | 338-345 | 16 | 293 | 299 | 305 | 317 |

## Arch support

With semi-orthopaedic innersoles, uvex offers arch support for maximum comfort and stability.
They reduce fatigue, prevent pressure points and improve body posture.
The preventive use of semi-orthopaedic innersoles can help to correct mild to moderate foot misalignment.

The **uvex tune-up** and **SECOSOL® COMPLETE+** semi-orthopaedic innersoles come in three different profiles (LOW, MEDIUM, HIGH) to support the arch.
Both variants are certified for the majority of uvex safety shoes (page 413).





## medicare

In cases of severe foot misalignment, orthopaedic innersoles and adjustments ensure that uvex safety shoes provide an optimal fit – even for individuals with problem feet – and are ideally suited to meet the wearer's specific biomechanical needs. The certification of uvex safety footwear for orthopaedic adjustments enables the footwear to be supplied with custom-made orthopaedic innersoles and adjustments. They are made to measure and customised with millimetre precision (page 422-426).

## Finding the perfect fit

uvex offers a range of services to determine the relevant parameters for the perfect fit. In addition to proven methods, uvex also offers digital foot measurement using an app and a pressure-sensing plate. Using the data, the system will make a personalised recommendation for the shoe size, width, and, if required, a supportive innersole. Orthopaedic innersoles are produced using the measurement data, with no need for additional measurements.

uvex


# Safety Footwear

## Technologies




## **clima** zone

**Optimised breathability for dry and sweat-free feet**
Breathable materials, reduced layers, glue dot bonding instead of full-surface adhesion and a functional design ensure air circulation for long-lasting comfort.

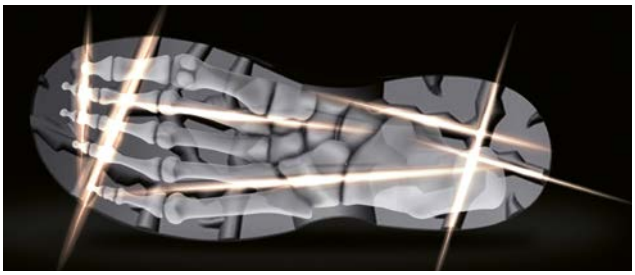

## **bionom** x

**Ergonomic design for improved performance through comfort**
The ergonomic design based on biomechanical principles optimises the interaction between shoes, floor and body to facilitate natural movement.




## **flex** zone

**Comfortable flexibility for unrestricted movement when kneeling**
The integrated flex grooves in the midsole design increases forefoot flexibility and improves comfort, especially during tasks that require kneeling.




## x-**dry** knit

**Breathable functional material for dry and sweat-free feet**
The breathable and water-repellent knitted upper minimises sweating and keeps the feet dry.




## **ankle** pro

**Shock-absorbing foam minimises impact in the ankle area**
Absorbent foam protects the ankle area against external impacts.

## **lace** lock

**Stabilising fastening system for increased stability in the shoe**
The locking lacing hook fixes the laces in place, preventing them from loosening and ensuring more stability in the shoe.



## i-**PURE**nrj planet

**Sustainable midsole for better endurance due to shock absorption and energy return**
The innovative PU midsole material redefines cushioning and energy return, reducing fatigue. It consists of up to 20% recycled PU from our in-house production processes.



## **work** zone

**Maximum durability for a long service life due to less wear**
Durable and extremely abrasion-resistant materials protect the shoe from wear in the relevant area of application and ensure a long service life.



## **water** stop

**Increased water resistance keeps feet dry for longer when working in wet environments**
The special tanning technique used for the leather upper protects against water penetration for four times longer than the safety footwear standard requires — without additional chemical treatments.



## x-**tended** grip planet

**Sustainable grip for reduced risk of slipping and less wear**
The TPU outsole with up to 10% recycled PU granulate increases abrasion resistance and provides grip on smooth and wet surfaces.



MAC sole

**Innovative rubber outsole to prevent slipping on extremely hot or cold surfaces**
In addition to extraordinary slip resistance and abrasion resistance, the flexible sole with innovative rubber compound is extremely resistant to cold, heat and chemicals.

Using up to 30% recycled rubber in the form of devulcanised powder and granulate saves resources and prevents waste without impacting performance.

The special geometric structure between the tread blocks on the outsole reduces the weight by up to 20%.

uvex

# Safety Footwear

Technologies · Pictogram overview

uvex technologies to go

**Professionals choose uvex.**



i-**PURE**nrj

Professionals don‘t get tired.
**Energy to go.**




**bionom** x

Professionals don‘t compromise on comfort.
**Ergonomics to go.**



**clima** zone

Professionals don‘t sweat.
**Coolness to go.**

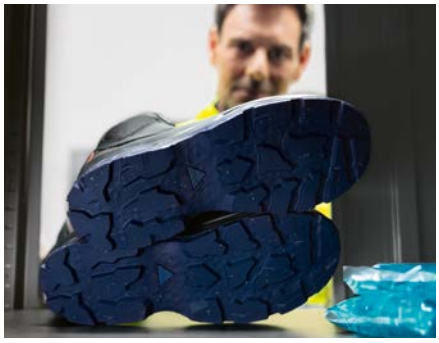

**MACSOLE®**


Professionals don‘t lose their cool.
**Heat shield to go.**



**MACSOLE®**

Professionals don‘t lose grip.
**Grip to go.**

## Pictogram overview



**uvex medicare**
Certified for orthopaedic adjustments in accordance with EN ISO 20345:2022, German DGUV regulation 112-191 and/or Austrian ÖNORM Z 1259.

**uvex medicare** = certified for orthopaedic innersoles
**uvex medicare +** = certified for orthopaedic innersoles and shoe adjustments



**Silicone-free**
Free of silicones, plasticisers and other paint wetting impairment substances in accordance with automotive industry tests.



**Snowflake**
Shoes with cold-insulating lining material that keeps the foot warm for longer.




**100% vegan**
All leather-free models are proven to be produced without animal components or products.

DIALED IN.
PRECISION FIT.

uvex
Technologies

## The BOA® Fit System.

The BOA® Fit System delivers mico-adjustable, precision fit, engineered and guaranteed to perform in the toughest conditions. The system delivers superior fit solutions and proven performance advantages and consists of three integral parts: a micro-adjustable dial, a super-strong lightweight lace and low friction lace guides.

## The BOA® benefits.

**Fit to perform.**
Dial in your precise fit quickly and effortlessly. Even micro adjustments can be made quickly and easily on the fly, so you can always get the job done.

**Confidence in all conditions.**
The BOA® Fit System is extremely durable and has been tested under the toughest conditions. It will work as hard as you do so you can stay focused and confident in any environment – without ever having to remove your gloves.

**Stay secure and focused.**
BOA®'s precision engineered laces stay contained in the dial cartridge, out our your way and out of machinery.

## Fit for life with BOA®.

The BOA® Fit System dials and laces are guaranteed for the lifetime of the product on which they are integrated.

## How it works.

push in to engage

turn to tighten

pull up for quick release





The BOA® Fit Systems contain recycled polycarbonate. Reported recycled content includes ISO 14021/GRI 301 recycled polycarbonate plus internal production regrind.

# sympatex®


## Excellent comfort whatever the weather: waterproof, breathable, windproof

There is nothing more unpleasant than wet and cold clothing and shoes. Sympatex has therefore developed a special membrane which absorbs the water vapour and removes it to the outside. This keeps the foot warm and dry even in extreme situations.

And the best thing about it is that the higher the physical activity, the more efficient the sympatex membrane works. Shoes with a sympatex membrane also provide effective protection from low temperatures and rain.

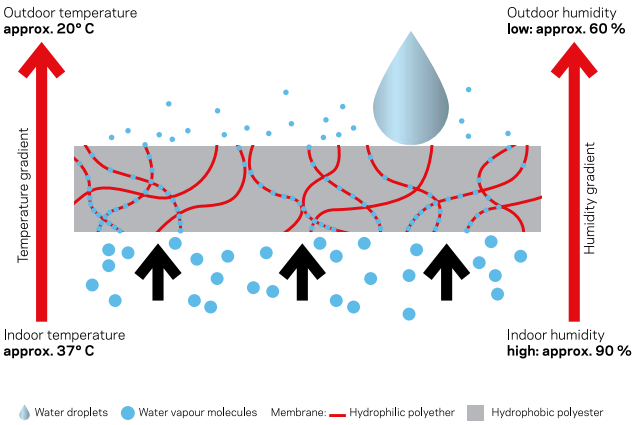


100% WATERPROOF
100% WINDPROOF
OPTIMALLY BREATHABLE
DURABLE
PFC-FREE
PTFE-FREE

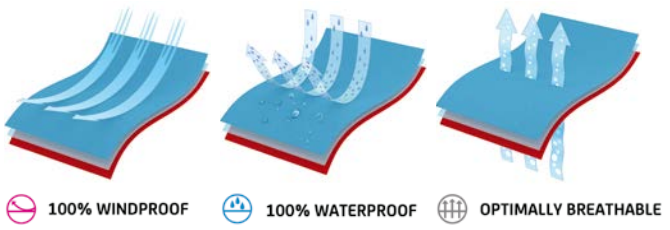


**www.sympatex.com**


Boa® and Boa® Fit System are registered trademarks of Boa Technology Inc., USA.
sympatex® is a registered trademark of sympatex Technologies GmbH.

uvex

# Safety Footwear

Standards · Labels

## Labelling

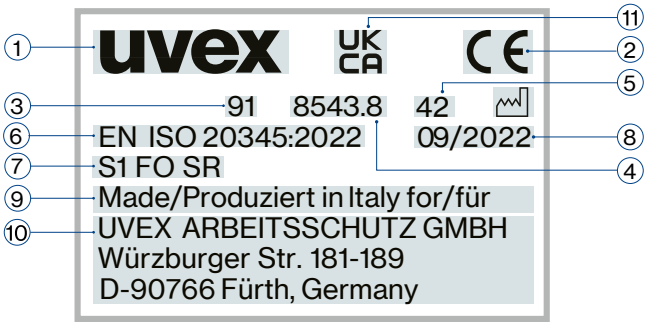


**The labelling on the shoe contains the following information**

(1) Manufacturer (2) CE symbol (3) Manufacturer's type designation
(4) Article number (5) Size
(6) Number of European standard
(7) Symbol for protection
(8) Date of manufacture
(9) Country of Manufacture (10) Postal address of the manufacturer
(11) UKCA symbol

**Basic and additional requirements for safety shoes (in accordance with EN ISO 20345:2022, marking S) and occupational shoes (in accordance with EN ISO 20347:2022, marking O)**

| Symbol | Requirement | Category | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | SB | S1 | S2 | S3 | S3L | S3S | S5 | S6 | S7 | S7L | S7S | O1 | O2 |
| - | Basic requirements | X | X | X | X | X | X | X | X | X | X | X | X | X |
| - | Toe cap, tested via 200 joule impact test and 15 kilonewton compression test | X | X | X | X | X | X | X | X | X | X | X | - | - |
| - | Footwear made of leather or other materials, not including solid rubber or total polymers | O | X | X | X | X | X | - | X | X | X | X | X | X |
| - | Footwear made of solid rubber or total polymers | O | - | - | - | - | - | X | - | - | - | - | - | - |
| - | Slip resistance on ceramic tile floors with SLS | X | X | X | X | X | X | X | X | X | X | X | X | X |
| - | Closed seat region | O | X | X | X | X | X | X | X | X | X | X | X | X |
| A | Antistatic footwear | O | X | X | X | X | X | X | X | X | X | X | X | X |
| E | Energy absorption of seat region | O | X | X | X | X | X | X | X | X | X | X | X | X |
| WPA | Water penetration and absorption of upper material | O | - | X | X | X | X | - | X | X | X | X | - | X |
| WR | Whole shoe waterproof | O | O | O | O | O | O | - | X | X | X | X | O | O |
| P | Perforation resistance, metallic insert | O | O | O | X | - | - | X | O | X | - | - | O | O |
| PL | Perforation resistance, non-metallic insert, tested with a 4.5 mm test nail | O | O | O | - | X | - | - | O | - | X | - | O | O |
| PS | Perforation resistance, non-metallic insert, tested with a 3.0 mm test nail | O | O | O | - | - | X | - | O | - | - | X | O | O |
| - | Treaded sole | O | O | O | X | X | X | X | O | X | X | X | O | O |

**Additional requirements for special applications**

| Symbol | Requirement |
|---|---|
| FO | Fuel resistance and oil resistance |
| SR | Slip resistance on ceramic tile floors with glycerol |
| HI | Heat insulation of the sole complex |
| CI | Cold insulation of the sole complex |
| HRO | Heat resistance of the outsole |
| M | Metatarsal protection |
| AN | Ankle protection |
| CR | Cut resistance of the upper part of the shoe |
| SC | Abrasion resistance of optional overcaps |
| LG | Outsoles provide hold on ladders |

X = Requirement must be fulfilled O = Requirement may be fulfilled, but is not mandatory - = Requirement cannot be fulfilled

## Perforation resistance

The perforation resistance of the footwear has been measured in a laboratory using standardised nails and forces. Nails with a smaller diameter and higher static or dynamic loads increase the risk of perforation. Under these conditions, additional protective measures should be considered. Three generic types of perforation-resistant insole boards are currently available for PPE footwear. These include types made of metal materials and of non-metallic materials, which must be chosen by means of an activity-based risk assessment. All types offer protection against perforation risks, but each has different additional advantages or disadvantages, including the following:

**Metal (P e.g. S1 P, S3):**
Is less affected by the shape of the sharp object/hazard (i.e. diameter, geometry, sharpness) due to the processes used in shoe manufacturing, however, it may not be possible to cover the entire bottom of the foot.

**Non-metal (PS or PL or category e.g. S1 PS, S3L):**
May be lighter and more flexible and may cover a larger area, but perforation resistance may vary more depending on the shape of the sharp object/hazard (i.e. diameter, geometry, sharpness). In terms of the protection obtained, two types are available. Type PS may offer better protection against objects with a smaller diameter than type PL.

## Electrostatic


Controlling unwelcome electrostatic charge is becoming an increasingly important role in industry, as more and more employees come into contact with processes, materials or objects which are sensitive to electrostatic charge. It is often necessary to use safety footwear as part of a system to conduct electrostatic charge in such workplaces.

Independent of various measuring methods, volume resistance between 100 kiloohms ($1.0 \times 10^5$ ohms) and 100 megaohms ($1 \times 10^8$ ohms) is required to fulfil the various relevant standards (e.g. EN ISO 20345, EN 61340).

All ESD-certified products in this catalogue feature the ESD symbol.




These products are also suitable in accordance with the specification for footwear in the German Technical Rules for Hazardous Substances (TRGS) 727 “Avoiding risks of ignition resulting from electrostatic charges.”

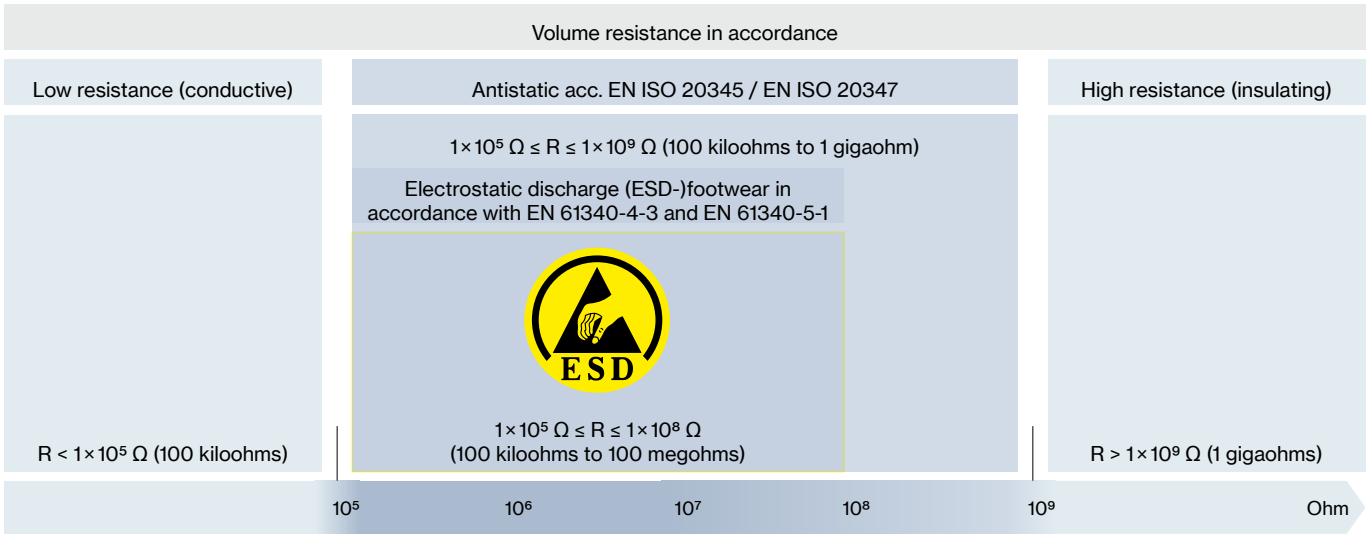


R = electrical resistance




# Safety Footwear

light areas of application



uvex

# Safety Footwear

## uvex 1 x-craft planet

reddot winner 2024
best of the best



68081
68082
68083

**clima** zone i-**PURE**nrj planet x-**tended** grip planet

## uvex 1 x-craft planet · Shoe S1 PL

The uvex 1 x-craft planet is the perfect combination of the innovations of the uvex 1 x-craft product family and the sustainable materials: Midsole with 15% and outsole with 10% recycled granulate from residues, upper made of recycled and bio-based materials such as PET bottles and bamboo. It consists of approximately 28% recycled materials in total, in accordance with DIN EN ISO 14021:2016.

- uvex i-PUREnrj planet midsole with shock-absorption and energy-return features
- abrasion-resistant uvex x-tended grip planet TPU outsole
- foamed polyurethane scuffcap
- foamed polyurethane heel basket
- 100% metal-free protective toe cap
- flexible textile penetration resistance
- lightweight and breathable uvex x-dry knit planet textile upper
- breathable distance mesh lining
- elastic laces
- ESD certified
- sizes 35 to 40 produced using a womens' last
- suitable for people allergic to chrome
- removable antistatic comfortable innersole (Art. no.: 95797-0)

| uvex 1 x-craft planet | Shoe |
|---|---|
| **Art. no. Width 10** | 68081 |
| **Art. no. Width 11** | **68082** |
| **Art. no. Width 12** | 68083 |
| **Standard EN ISO 20345:2022** | S1 PL FO SC SR |
| **Upper** | textile |
| **Lining** | distance mesh lining |
| **Fastening** | elastic laces |
| **Sizes** | 35 to 52 |
| **Order unit** | PR |

$CO_2$ footprint:
**6.09**/8.06 kg
$CO_2e$ 06/2025 (6808),
calculation method
see page 342

Recycled content and bio-based content: The outer shoe material is made of 100% recycled PET bottles, the lining is made of 52% recycled polyamide and 18% bio-based bamboo, certified in accordance with OEKO-TEX® STANDARD 100, the midsole is made of 15% recycled PU waste (PIR) from our production processes, The outsole is made of 10% recycled PU waste (PIR) from our production processed, the innersole is made of 73% recycled material (PU foam, GRS-certified polyester), the penetration resistance is made of 80% recycled polyester, the laces are made from 100% recycled polyester

You can find more information on uvex medicare on pages 422 to 426

uvex

# uvex 1 x-craft pro



## the next level



Reliable comfort thanks to a flex-zone within the i-PUREnrj planet midsole and bionom x sole design



workzone with direct injected scuffcap and PUtek upper for extreme durability



Breathability thanks to perforated tongue and lightweight ripstop upper



Sporty look with pull tab and high-quality 3D details on the upper













You can find more information at www.uvex-safety.com/en/x-craft/



uvex

# Safety Footwear

## uvex 1 x-craft pro

reddot winner 2024
best of the best



68001
68002
68003
68004



68011
68012
68013
68014

**clima** zone i-**PURE**nrj planet x-**tended** grip planet

## uvex 1 x-craft pro · Shoe S1 PL · Lace-up boot S1 PL

Designed for makers. Full support and flexibility are guaranteed by the sole with uvex bionom x and integrated flexzone in the forefoot area. Thanks to the dynamic scuffcap, technological upper materials and perforated tongue design, the range offers added abrasion resistance, protection and breathability. Whether sustainability, comfort, sportiness or innovation, the uvex 1 x-craft is simply the next level safety shoe.

- uvex i-PUREnrj planet midsole with shock-absorption and energy-return features
- abrasion-resistant uvex x-tended grip planet TPU outsole
- foamed polyurethane scuffcap
- foamed polyurethane heel basket
- 100% metal-free protective toe cap
- flexible textile penetration resistance
- breathable, lightweight and tear-resistant ripstop upper
- durable, robust and flexible PUtek upper in the forefoot area
- breathable distance mesh lining
- ESD certified
- sizes 35 to 40 produced using a womens' last
- metal-free (Art. no.: 6801)
- suitable for people allergic to chrome
- removable antistatic comfortable innersole (Art. no.: 95797-0)

| uvex 1 x-craft pro | Shoe | Lace-up boot |
|---|---|---|
| **Art. no. Width 10** | 68001 | 68011 |
| **Art. no. Width 11** | **68002** | **68012** |
| **Art. no. Width 12** | 68003 | 68013 |
| **Art. no. Width 14** | 68004 | 68014 |
| **Standard EN ISO 20345:2022** | S1 PL FO SC SR | S1 PL FO SC SR |
| **Upper** | textile/ripstop | textile/ripstop |
| **Lining** | distance mesh lining | distance mesh lining |
| **Fastening** | elastic laces | shoe laces |
| **Sizes** | 35 to 52 | 35 to 52 |
| **Order unit** | PR | PR |

$CO_2$ footprint:
**7.14**/9.28 kg $CO_2$e 10/2025 (6800),
**8.02**/10.34 kg $CO_2$e 10/2025 (6801),
calculation method see page 342

Recycled content: The midsole consists of 15% recycled PU waste (PIR) from our production processes, the outsole consists of 10% recycled PU waste (PIR) from our production processes, the innersole consists of 73% recycled material (PU foam, GRS-certified polyester), the penetration resistance consists of 80% recycled polyester

You can find more information on uvex medicare on pages 422 to 426

uvex

# Safety Footwear

## uvex 1 x-craft



68161
68162
68163



68171
68172
68173



68181
68182
68183

**clima** zone i-**PURE**nrj planet

## uvex 1 x-craft · Shoe S1 PS / S3S · Lace-up boot S3S

- uvex i-PUREnrj planet midsole with shock-absorption and energy-return features
- PU outsole
- foamed polyurethane scuffcap
- foamed polyurethane heel basket
- 100 % metal-free protective toe cap
- flexible textile penetration resistance, tested with 3 mm nail
- breathable, lightweight and tear-resistant ripstop upper (Art. no.: 6816)
- durable, robust and flexible PUtek upper in the forefoot area (Art. no.: 6816)
- lightweight and breathable microvelour upper (Art. no.: 6817, 6818)
- breathable distance mesh lining
- ESD certified
- sizes 35 to 40 produced using a womens' last
- suitable for people allergic to chrome
- removable antistatic comfortable innersole (Art. no.: 95797-9)

| uvex 1 x-craft | Shoe | Shoe | Lace-up boot |
|---|---|---|---|
| **Art. no. Width 10** | 68161 | 68171 | 68181 |
| **Art. no. Width 11** | **68162** | **68172** | **68182** |
| **Art. no. Width 12** | 68163 | 68173 | 68183 |
| **Standard EN ISO 20345:2022** | S1 PS FO SC SR | S3S FO SC SR | S3S FO SC SR |
| **Upper** | textile/ripstop | microvelour | microvelour |
| **Lining** | distance mesh lining | distance mesh lining | distance mesh lining |
| **Fastening** | BOA® Fit System | BOA® Fit System | BOA® Fit System |
| **Sizes** | 35 to 52 | 35 to 52 | 35 to 52 |
| **Order unit** | PR | PR | PR |

$CO_2$ footprint:
**8.08**/10.32 kg $CO_2$e 10/2025 (6816),
**8.03**/10.26 kg $CO_2$e 10/2025 (6817),
**8.80**/11.18 kg $CO_2$e 10/2025 (6818),
calculation method see page 342


Recycled content: The midsole consists of 15% recycled PU waste (PIR) from our production processes, the innersole consists of 73% recycled material (PU foam, GRS-certified polyester), the penetration resistance consists of 21% recycled polyester (GRS certified), the BOA® Fit System consists of 48% (6816, 6817) and 45% (6818) recycled polycarbonate

You can find more information on uvex medicare on pages 422 to 426



BOA® and BOA® Fit System are registered trademarks of Boa Technology Inc., USA

# D3O® Metatarsal protection

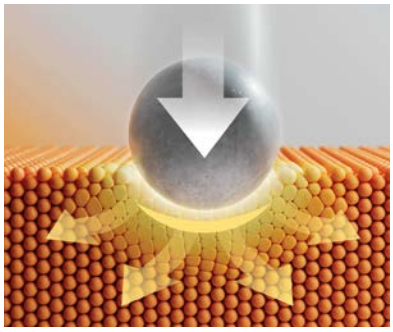

## Advanced Impact Protection

D3O® offers advanced impact protection thanks to a range of patented, proprietary and reimagined materials.

D3O® Ghost™ Met Guards provide an ergonomic solution guaranteeing safe metatarsal protection against impacts, without restricting freedom of movement and ensuring high levels of comfort.

Non-sacrificial smart material stiffens to dissipate high impact energies and mitigate injury/damage.



**Breathability**
The segmented geometries offer breathability and air circulation.

**Integrated metatarsal protection**
M additional requirement according to EN ISO 20345 standard

**Thin and lightweight**
Enhanced protection with reduced weight

**Soft and flexible**
The protective component moulds to the shape of the foot, giving the wearer complete freedom of movement.



68061
68062
68063

clima zone i-PUREnrj planet D3O®

## uvex 1 x-craft pro · Shoe S1 PS

- uvex i-PUREnrj planet midsole with shock-absorption and energy-return features
- PU outsole
- foamed polyurethane scuffcap
- foamed polyurethane heel basket
- 100 % metal-free protective toe cap
- flexible textile penetration resistance, tested with 3 mm nail
- integrated and flexible D3O® metatarsal protection with 100 J energy absorption
- breathable, lightweight and tear-resistant ripstop upper
- durable, robust and flexible PUtek upper in the forefoot area
- breathable distance mesh lining
- ESD certified
- sizes 35 to 40 produced using a womens' last
- suitable for people allergic to chrome
- removable antistatic comfortable innersole (Art. no.: 95797-9)


| uvex 1 x-craft pro | Shoe |
|---|---|
| **Art. no. Width 10** | 68061 |
| **Art. no. Width 11** | **68062** |
| **Art. no. Width 12** | 68063 |
| **Standard EN ISO 20345:2022** | S1 PS FO M SC SR |
| **Upper** | textile/ripstop |
| **Lining** | distance mesh lining |
| **Fastening** | elastic laces |
| **Sizes** | 35 to 52 |
| **Order unit** | PR |

$CO_2$ footprint:
**8.71**/11.03 kg $CO_2$e 10/2025 (6806), calculation method see page 342

Recycled content: The midsole consists of 15% recycled PU waste (PIR) from our production processes, the innersole consists of 73% recycled material (PU foam, GRS-certified polyester), the penetration resistance consists of 21% recycled polyester (GRS certified), the D3O® material consists of 5.52% recycled polyester

You can find more information on uvex medicare on pages 422 to 426

D3O® is a registered trademark of Design Blue Limited.

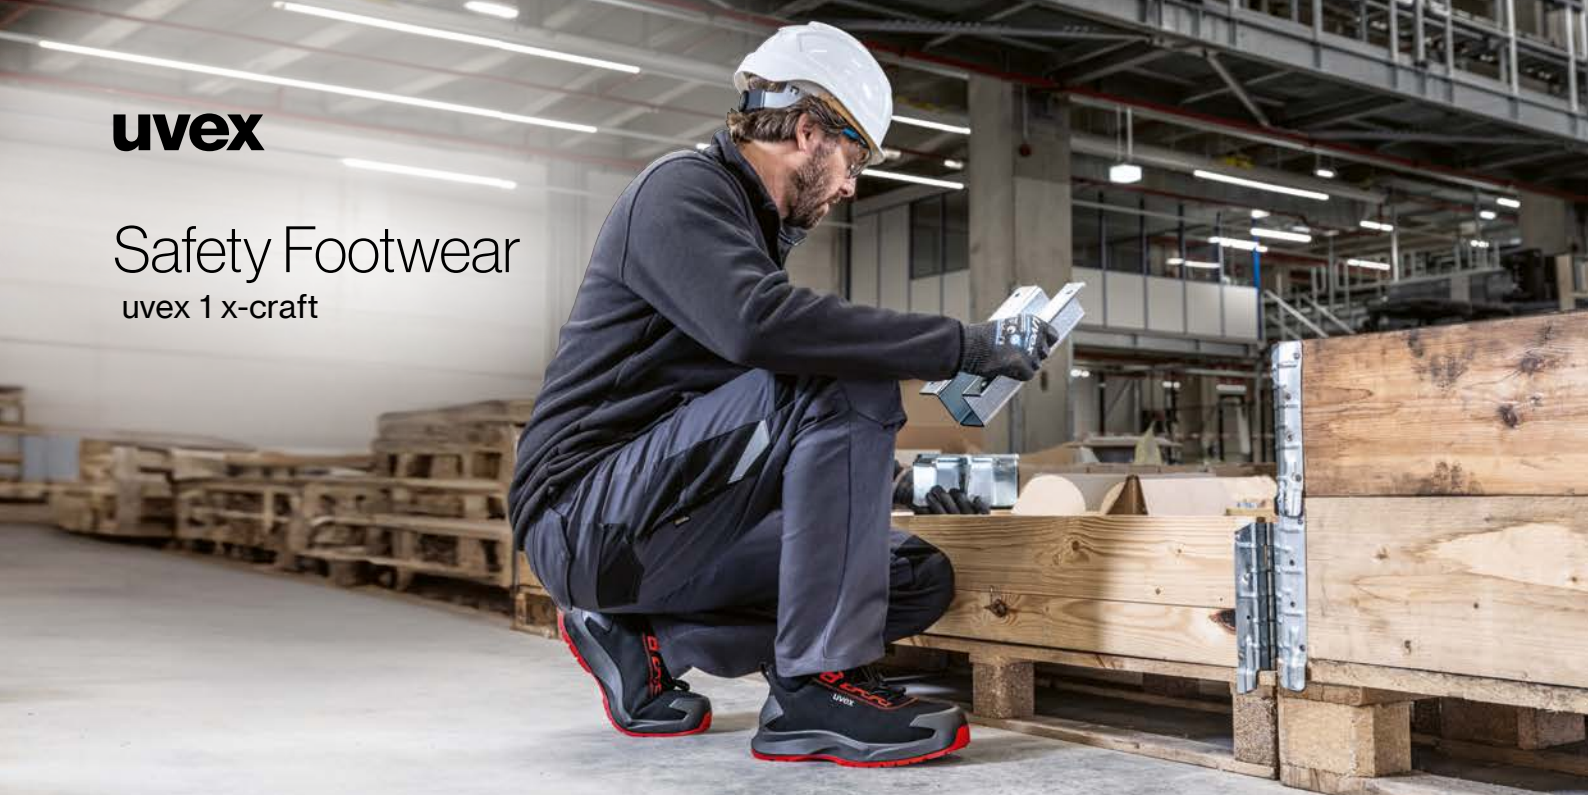

# Safety Footwear

## uvex 1 x-craft



68121
68122
68123
68124



68021
68022
68023
68024



68031
68032
68033
68034



68041
68042
68043
68044

reddot winner 2024
best of the best

**clima** zone i-**PURE**nrj planet

## uvex 1 x-craft · Sandal S1 PL · Perforated shoe S1 PL · Shoe S3L · Lace-up boot S3L

- uvex i-PUREnrj planet midsole with shock-absorption and energy-return features
- PU outsole
- foamed polyurethane scuffcap
- foamed polyurethane heel basket
- 100% metal-free protective toe cap
- flexible textile penetration resistance
- lightweight and breathable microvelour upper
- breathable distance mesh lining
- ESD certified
- sizes 35 to 40 produced using a womens' last
- metal-free (Art. no.: 6804)
- suitable for people allergic to chrome
- removable antistatic comfortable innersole (Art. no.: 95797-0)

| uvex 1 x-craft | Sandal | Perforated Shoe | Shoe | Lace-up boot |
|---|---|---|---|---|
| **Art. no. Width 10** | 68121 | 68021 | 68031 | 68041 |
| **Art. no. Width 11** | **68122** | **68022** | **68032** | **68042** |
| **Art. no. Width 12** | 68123 | 68023 | 68033 | 68043 |
| **Art. no. Width 14** | 68124 | 68024 | 68034 | 68044 |
| **Standard EN ISO 20345:2022** | S1 PL FO SC SR | S1 PL FO SC SR | S3L FO SC SR | S3L FO SC SR |
| **Upper** | microvelour | microvelour | microvelour | microvelour |
| **Lining** | distance mesh lining | distance mesh lining | distance mesh lining | distance mesh lining |
| **Fastening** | elastic laces | elastic laces | elastic laces | shoe laces |
| **Sizes** | 35 to 52 | 35 to 52 | 35 to 52 | 35 to 52 |
| **Order unit** | PR | PR | PR | PR |

$CO_2$ footprint:
**7.20**/9.32 kg $CO_2$e 10/2025 (6812),
**7.16**/9.28 kg $CO_2$e 10/2025 (6802),
**7.19**/9.31 kg $CO_2$e 06/2025 (6803),
**7.98**/10.26 kg $CO_2$e 06/2025 (6804),
calculation method see page 342

Recycled content: The midsole consists of 15% recycled PU waste (PIR) from our production processes, the innersole consists of 73% recycled material (PU foam, GRS-certified polyester), the penetration resistance consists of 80% recycled polyester

You can find more information on uvex medicare on pages 422 to 426



uvex

# Safety Footwear

## uvex 1 x-craft

reddot winner 2024
best of the best



68137
68138
68139
68130



68147
68148
68149
68140



68157
68158
68159
68150

**clima** zone i-**PURE**nrj planet

## uvex 1 x-craft · Perforated shoe S1 · Shoe S2 · Lace-up boot S2

- uvex i-PUREnrj planet midsole with shock-absorption and energy-return features
- PU outsole
- foamed polyurethane scuffcap
- foamed polyurethane heel basket
- 100% metal-free protective toe cap
- lightweight and breathable microvelour upper
- breathable distance mesh lining
- ESD certified
- sizes 35 to 40 produced using a womens' last
- metal-free (Art. no.: 6815)
- suitable for people allergic to chrome
- removable antistatic comfortable innersole (Art. no.: 95797-0)

| uvex 1 x-craft | Perforated Shoe | Shoe | Lace-up boot |
|---|---|---|---|
| **Art. no. Width 10** | 68137 | 68147 | 68157 |
| **Art. no. Width 11** | **68138** | **68148** | **68158** |
| **Art. no. Width 12** | 68139 | 68149 | 68159 |
| **Art. no. Width 14** | 68130 | 68140 | 68150 |
| **Standard EN ISO 20345:2022** | S1 FO SC SR | S2 FO SC SR | S2 FO SC SR |
| **Upper** | microvelour | microvelour | microvelour |
| **Lining** | distance mesh lining | distance mesh lining | distance mesh lining |
| **Fastening** | elastic laces | elastic laces | shoe laces |
| **Sizes** | 35 to 52 | 35 to 52 | 35 to 52 |
| **Order unit** | PR | PR | PR |

$CO_2$ footprint:
**7.08**/9.17 kg $CO_2$e 10/2025 (6813),
**7.11**/9.20 kg $CO_2$e 10/2025 (6814),
**7.89**/10,14 kg $CO_2$e 10/2025 (6815),
calculation method see page 342

Recycled content: The midsole consists of 15% recycled PU waste (PIR) from our production processes, the insole board consists of 38% recycled polyester, the innersole consists of 73% recycled material (PU foam, GRS-certified polyester)

You can find more information on uvex medicare on pages 422 to 426

uvex

# uvex 1 G2

# Science. Not Fiction.
# uvex i-PUREnrj Technology

## Cushioning. Stability. Energy Return.

The future is full of energy with the pioneering uvex 1 G2. uvex's innovative new polyurethane sole technology – uvex PUREnrj – returns the landing energy over the entire sole unit back to the wearer. It redefines shock absorption and stability, with noticeably greater comfort and significantly lower fatigue in the feet for a working day that is brimming with energy – from beginning to end.



Water-repellent and breathable knitted upper material.




**Better endurance due to shock absorption and energy return**

**21%**

less perceived fatigue compared to standard polyurethane soles

68341
68342
68343
68344

| uvex 1 G2 | Shoe |
|---|---|
| **Art. no. Width 10** | 68341 |
| **Art. no. Width 11** | **68342** |
| **Art. no. Width 12** | 68343 |
| **Art. no. Width 14** | 68344 |
| **Standard EN ISO 20345:2022** | S1 PL FO SR |
| **Upper** | textile |
| **Lining** | distance mesh lining |
| **Fastening** | elastic laces |
| **Sizes** | 35 to 52 |
| **Order unit** | PR |

**Abrasion and Slip restistance optimised**



**TPU-polyurethane outsole**

$CO_2$ footprint:
**7.02**/8.94 kg $CO_2e$ 06/2025 (6834),
calculation method see page 342




68361
68362
68363
68364




68371
68372
68373
68374




68381
68382
68383
68384




68401
68402
68403




68391
68392
68393
68394

**clima** zone i-**PURE**nrj planet x-**tended** grip planet

## uvex 1 G2 · Sandal S1 PL · Perforated shoe S1 PL · Shoe S3L · Lace-up boot S3L

- uvex i-PUREnrj planet midsole with shock-absorption and energy-return features
- abrasion-resistant uvex x-tended grip planet TPU outsole
- foamed polyurethane heel basket
- 100% metal-free protective toe cap
- flexible textile penetration resistance
- lightweight and breathable microvelour upper
- TPU scuffcap
- breathable distance mesh lining
- ESD certified
- dust tongue (Art. no.: 6837, 6838, 6839, 6840)
- sizes 35 to 40 produced using a womens' last
- metal-free (Art. no.: 6836, 6839)
- suitable for people allergic to chrome
- removable antistatic comfortable innersole (Art. no.: 94907-0)

| uvex 1 G2 | Sandal | Perforated shoe | Shoe | Shoe | Lace-up boot |
|---|---|---|---|---|---|
| **Art. no. Width 10** | 68361 | 68371 | 68381 | 68401 | 68391 |
| **Art. no. Width 11** | **68362** | **68372** | **68382** | **68402** | **68392** |
| **Art. no. Width 12** | 68363 | 68373 | 68383 | 68403 | 68393 |
| **Art. no. Width 14** | 68364 | 68374 | 68384 | – | 68394 |
| **Standard EN ISO 20345:2022** | S1 PL FO SC SR | S1 PL FO SC SR | S3L FO SC SR | S3L FO SC SR | S3L FO SC SR |
| **Upper** | microvelour | microvelour | microvelour | microvelour | microvelour |
| **Lining** | distance mesh lining | distance mesh lining | distance mesh lining | distance mesh lining | distance mesh lining |
| **Fastening** | hook-and-loop fastening | elastic laces | elastic laces | BOA® Fit System | shoe laces |
| **Sizes** | 35 to 52 | 35 to 52 | 35 to 52 | 35 to 52 | 35 to 52 |
| **Order unit** | PR | PR | PR | PR | PR |

$CO_2$ footprint:
**6.86**/8.80 kg $CO_2$e 06/2025 (6836),
**6.78**/8.73 kg $CO_2$e 06/2025 (6837),
**6.80**/8.76 kg $CO_2$e 06/2025 (6838),
**7.17**/9.18 kg $CO_2$e 06/2025 (6840),
**7.08**/9.08 kg $CO_2$e 06/2025 (6839),
calculation method see page 342

Recycled content: The midsole consists of 15% recycled PU waste (PIR) from our production processes, the outsole consists of 10% recycled PU waste (PIR) from our production processes, the innersole consists of 74% recycled material (PU foam, GRS-certified polyester), the BOA® Fit System consists of 51% recycled polycarbonate (6840)

You can find more information on uvex medicare on pages 422 to 426

BOA® and BOA® Fit System are registered trademarks of Boa Technology Inc., USA

# Safety Footwear

## uvex 1 G2



68427
68428
68429
68420



68437
68438
68439
68430



68447
68448
68449
68440

**clima** zone i-**PURE**nrj planet x-**tended** grip planet

## uvex 1 G2 · Sandal S1 · Perforated shoe S1 · Shoe S2

- uvex i-PUREnrj planet midsole with shock-absorption and energy-return features
- abrasion-resistant uvex x-tended grip planet TPU outsole
- foamed polyurethane heel basket
- 100% metal-free protective toe cap
- lightweight and breathable microvelour upper
- breathable distance mesh lining
- ESD certified
- dust tongue (Art. no.: 6843, 6844)
- sizes 35 to 40 produced using a womens' last
- metal-free (Art. no.: 6842)
- suitable for people allergic to chrome
- removable antistatic comfortable innersole (Art. no.: 94907-0)

| uvex 1 G2 | Sandal | Perforated shoe | Shoe |
|---|---|---|---|
| **Art. no. Width 10** | 68427 | 68437 | 68447 |
| **Art. no. Width 11** | **68428** | **68438** | **68448** |
| **Art. no. Width 12** | 68429 | 68439 | 68449 |
| **Art. no. Width 14** | 68420 | 68430 | 68440 |
| **Standard EN ISO 20345:2022** | S1 FO SR | S1 FO SR | S2 FO SR |
| **Upper** | microvelour | microvelour | microvelour |
| **Lining** | distance mesh lining | distance mesh lining | distance mesh lining |
| **Fastening** | hook-and-loop fastening | elastic laces | elastic laces |
| **Sizes** | 35 to 52 | 35 to 52 | 35 to 52 |
| **Order unit** | PR | PR | PR |

$CO_2$ footprint:
**6.15**/8.00 kg $CO_2$e 06/2025 (6842),
**6.14**/8.00 kg $CO_2$e 06/2025 (6843),
**6.19**/8.06 kg $CO_2$e 06/2025 (6844),
calculation method see page 342

Recycled content: The midsole consists of 15% recycled PU waste (PIR) from our production processes, the outsole consists of 10% recycled PU waste (PIR) from our production processes, the insole board consists of 38% recycled polyester, the innersole consists of 74% recycled material (PU foam, GRS-certified polyester)

You can find more information on uvex medicare on pages 422 to 426



# Safety Footwear

## uvex 1 G2



68487
68488
68489



68467
68468
68469



68527
68528
68529



68537
68538
68539



**clima** zone i-**PURE**nrj planet x-**dry** knit

## uvex 1 G2 · Sandal S1 · Perforated shoe S1 · Shoe S1 · Lace-up boot S1

- uvex i-PUREnrj planet midsole with shock-absorption and energy-return features
- PU outsole
- foamed polyurethane heel basket
- 100% metal-free protective toe cap
- lightweight and breathable microvelour upper (Art. no.: 6846, 6848)
- lightweight and breathable uvex x-dry knit textile upper (Art. no.: 6852, 6853)
- TPU scuffcap (Art. no.: 6852, 6853)
- breathable distance mesh lining
- ESD certified
- dust tongue (Art. no.: 6846, 6852, 6853)
- sizes 35 to 40 produced using a womens' last
- metal-free (Art. no.: 6848, 6853)
- suitable for people allergic to chrome
- removable antistatic comfortable innersole (Art. no.: 94907-9)

| uvex 1 G2 | Sandal | Perforated shoe | Shoe | Lace-up boot |
|---|---|---|---|---|
| **Art. no. Width 10** | 68487 | 68467 | 68527 | 68537 |
| **Art. no. Width 11** | **68488** | **68468** | **68528** | **68538** |
| **Art. no. Width 12** | 68489 | 68469 | 68529 | 68539 |
| **Standard EN ISO 20345:2022** | S1 FO SR | S1 FO SR | S1 FO SR | S1 FO SR |
| **Upper** | microvelour | microvelour | textile | textile |
| **Lining** | distance mesh lining | distance mesh lining | distance mesh lining | distance mesh lining |
| **Fastening** | hook-and-loop fastening | elastic laces | elastic laces | shoe laces |
| **Sizes** | 35 to 52 | 35 to 52 | 35 to 52 | 35 to 52 |
| **Order unit** | PR | PR | PR | PR |

$CO_2$ footprint:
**6.22**/8.07 kg $CO_2$e 06/2025 (6848),
**6.22**/8.08 kg $CO_2$e 06/2025 (6846),
**6.51**/8.35 kg $CO_2$e 09/2025 (6852),
**6.77**/8.65 kg $CO_2$e 06/2025 (6853),
calculation method see page 342

Recycled content: The midsole consists of 15% recycled PU waste (PIR) from our production processes, the insole board consists of 38% recycled polyester, the innersole consists of 74% recycled material (PU foam, GRS-certified polyester)

You can find more information on uvex medicare on pages 422 to 426

uvex

# Safety Footwear

## uvex 1 G2










**clima** zone i-**PURE**nrj planet

### uvex 1 G2 · Sandal S1 · Perforated shoe S1 · Perforated lace-up boot S1

- uvex i-PUREnrj planet midsole with shock-absorption and energy-return features
- PU outsole
- foamed polyurethane heel basket
- 100% metal-free protective toe cap
- lightweight and breathable microvelour upper
- breathable distance mesh lining
- ESD certified
- dust tongue (Art. no.: 6829, 6831)
- sizes 35 to 40 produced using a womens' last
- metal-free (Art. no.: 6828, 6831)
- suitable for people allergic to chrome
- removable antistatic comfortable innersole (Art. no.: 94907-0)

| uvex 1 G2 | Sandal | Perforated shoe | Perforated lace-up boot |
|---|---|---|---|
| **Art. no. Width 10** | 68287 | 68297 | 68317 |
| **Art. no. Width 11** | **68288** | **68298** | **68318** |
| **Art. no. Width 12** | 68289 | 68299 | 68319 |
| **Art. no. Width 14** | 68280 | 68290 | 68310 |
| **Standard EN ISO 20345:2022** | S1 FO SR | S1 FO SR | S1 FO SR |
| **Upper** | microvelour | microvelour | microvelour |
| **Lining** | distance mesh lining | distance mesh lining | distance mesh lining |
| **Fastening** | hook-and-loop fastening | elastic laces | shoe laces |
| **Sizes** | 35 to 52 | 35 to 52 | 35 to 52 |
| **Order unit** | PR | PR | PR |

$CO_2$ footprint:
**6.22**/8.07 kg $CO_2e$ 06/2025 (6828),
**6.22**/8.08 kg $CO_2e$ 06/2025 (6829),
**6.49**/8.40 kg $CO_2e$ 06/2025 (6831),
calculation method see page 342

Recycled content: The midsole consists of 15% recycled PU waste (PIR) from our production processes, the insole board consists of 38% recycled polyester, the innersole consists of 74% recycled material (PU foam, GRS-certified polyester)

You can find more information on uvex medicare on pages 422 to 426



uvex

# Safety Footwear

## uvex 1 G2



68307
68308
68309
68300



68497
68498
68499



68507
68508
68509

**clima** zone i-**PURE**nrj planet

## uvex 1 G2 · Shoe S2 · Lace-up boot S2

- uvex i-PUREnrj planet midsole with shock-absorption and energy-return features
- PU outsole
- foamed polyurethane heel basket
- 100% metal-free protective toe cap
- lightweight and breathable microvelour upper
- breathable distance mesh lining
- ESD certified
- dust tongue
- sizes 35 to 40 produced using a womens' last
- metal-free (Art. no.: 6850)
- suitable for people allergic to chrome
- removable antistatic comfortable innersole (Art. no.: 94907-0)

| uvex 1 G2 | Shoe | Shoe | Lace-up boot |
|---|---|---|---|
| **Art. no. Width 10** | 68307 | 68497 | 68507 |
| **Art. no. Width 11** | **68308** | **68498** | **68508** |
| **Art. no. Width 12** | 68309 | 68499 | 68509 |
| **Art. no. Width 14** | 68300 | – | – |
| **Standard EN ISO 20345:2022** | S2 FO SR | S2 FO SR | S2 FO SR |
| **Upper** | microvelour | microvelour | microvelour |
| **Lining** | distance mesh lining | distance mesh lining | distance mesh lining |
| **Fastening** | elastic laces | elastic laces | shoe laces |
| **Sizes** | 35 to 52 | 35 to 52 | 35 to 52 |
| **Order unit** | PR | PR | PR |

$CO_2$ footprint:
**6.27**/8.14 kg $CO_2$e 06/2025 (6830, 6849),
**6.52**/8.43 kg $CO_2$e 06/2025 (6850),
calculation method see page 342

Recycled content: The midsole consists of 15% recycled PU waste (PIR) from our production processes, the insole board consists of 38% recycled polyester, the innersole consists of 74% recycled material (PU foam, GRS-certified polyester)

You can find more information on uvex medicare on pages 422 to 426




uvex

uvex 1 sport

# Winners at work

## Designed for Individuals

**Sporty design** meets sophisticated **functionality**: The uvex 1 sport is a youthful and stylish shoe that also offers first-class **wearer comfort**. Thanks to its low weight, climate-optimised high-tech materials and ergonomic outsole, the uvex 1 sport is the ideal footwear for the working day and beyond.

More information can be found on our website at uvex-safety.com/en/uvex1sport


68907
68908
68909
68900


68917
68918
68919
68910


68949
68940


68937
68938
68939
68930


68927
68928
68929
68920


68957
68958
68959
68950


65987
65988
65989
65980



clima zone i-PUREnrj planet

## uvex 1 sport · Sandal S1 · Shoe S1/S2 · Perforated boot with hook-and-loop fastening S1 · Lace-up boot S1/S2

- uvex i-PUREnrj planet midsole with shock-absorption and energy-return features
- shock-absorbing PU midsole (Art. no.: 6598)
- PU outsole
- 100% metal-free protective toe cap
- lightweight and breathable microvelour upper (Art. no.: 6892, 6894, 6895)
- lightweight and breathable textile upper (Art. no.: 6890, 6891, 6893, 6598)
- TPU scuffcap (Art. no.: 6890, 6891, 6893, 6598)
- breathable distance mesh lining
- ESD certified
- dust tongue (Art. no.: 6892, 6895)
- sizes 35 to 40 produced using a womens' last
- metal-free
- suitable for people allergic to chrome
- removable antistatic comfortable innersole (Art. no.: 95797-0)

| uvex 1 sport | Sandal | Shoe | Perforated boot with hook-and-loop fastening | Lace-up boot | Shoe | Lace-up boot | Shoe |
|---|---|---|---|---|---|---|---|
| **Art. no. Width 10** | 68907 | 68917 | – | 68937 | 68927 | 68957 | 65987 |
| **Art. no. Width 11** | **68908** | **68918** | – | **68938** | **68928** | **68958** | **65988** |
| **Art. no. Width 12** | 68909 | 68919 | 68949 | 68939 | 68929 | 68959 | 65989 |
| **Art. no. Width 14** | 68900 | 68910 | 68940 | 68930 | 68920 | 68950 | 65980 |
| **Standard EN ISO 20345:2022** | S1 FO SC SR | S1 FO SC SR | S1 FO SR | S1 FO SC SR | S2 FO SR | S2 FO SR | S1 FO SC SR |
| **Upper** | textile | textile | microvelour | textile | microvelour | microvelour | textile |
| **Lining** | distance mesh lining | distance mesh lining | distance mesh lining | distance mesh lining | distance mesh lining | distance mesh lining | distance mesh lining |
| **Fastening** | hook-and-loop fastening | shoe laces | hook-and-loop fastening | shoe laces | shoe laces | shoe laces | shoe laces |
| **Sizes** | 35 to 52 | 35 to 52 | 35 to 52 | 35 to 52 | 35 to 52 | 35 to 52 | 35 to 52 |
| **Order unit** | PR | PR | PR | PR | PR | PR | PR |

$CO_2$ footprint:
**7.50**/9.51 kg $CO_2e$ 01/2026 (6890),
**7.14**/9.11 kg $CO_2e$ 06/2025 (6891),
**7.91**/10.05 kg $CO_2e$ 06/2025 (6894),
**7.71**/9.75 kg $CO_2e$ 06/2025 (6893),
**7.07**/9.11 kg $CO_2e$ 06/2025 (6892),
**7.48**/9.56 kg $CO_2e$ 06/2025 (6895),
calculation method see page 342

Recycled content: The midsole consists of 10% recycled PU waste (PIR) from our production processes (excluding 6598), the insole board consists of 38% recycled polyester, the innersole consists of 73% recycled material (PU foam, GRS-certified polyester), the heel cap consists of 8% recycled TPR (65987-0)

You can find more information on uvex medicare on pages 422 to 426

uvex

# Safety Footwear

## uvex 1 sport



68961
68962
68963
68964



68971
68972
68973
68974



68991
68992
68993
68994



68891
68892
68893
68894



68981
68982
68983
68984

**clima** zone i-**PURE**nrj planet

## uvex 1 sport · Sandal S1 PS · Perforated Shoe S1 PS · Perforated Lace-up boot S1 PS · Shoe S1PS/S3S

- uvex i-PUREnrj planet midsole with shock-absorption and energy-return features
- PU outsole
- 100% metal-free protective toe cap
- flexible textile penetration resistance, tested with 3 mm nail
- lightweight and breathable microvelour upper (Art. no.: 6896, 6897, 6899, 6898)
- lightweight and breathable textile upper (Art. no.: 6889)
- TPU scuffcap
- breathable distance mesh lining
- ESD certified
- sizes 35 to 40 produced using a womens' last
- metal-free
- suitable for people allergic to chrome
- removable antistatic comfortable innersole (Art. no.: 95797-0)

| uvex 1 sport | Sandal | Perforated Shoe | Perforated Lace-up boot | Shoe | Shoe |
|---|---|---|---|---|---|
| **Art. no. Width 10** | 68961 | 68971 | 68991 | 68891 | 68981 |
| **Art. no. Width 11** | **68962** | **68972** | **68992** | **68892** | **68982** |
| **Art. no. Width 12** | 68963 | 68973 | 68993 | 68893 | 68983 |
| **Art. no. Width 14** | 68964 | 68974 | 68994 | 68894 | 68984 |
| **Standard EN ISO 20345:2022** | S1 PS FO SC SR | S1 PS FO SC SR | S1 PS FO SC SR | S1 PS FO SC SR | S3S FO SC SR |
| **Upper** | microvelour | microvelour | microvelour | textile | microvelour |
| **Lining** | distance mesh lining | distance mesh lining | distance mesh lining | distance mesh lining | distance mesh lining |
| **Fastening** | hook-and-loop fastening | shoe laces | shoe laces | shoe laces | shoe laces |
| **Sizes** | 35 to 52 | 35 to 52 | 35 to 52 | 35 to 52 | 35 to 52 |
| **Order unit** | PR | PR | PR | PR | PR |

$CO_2$ footprint:
**7.56**/9.69 kg $CO_2$e 12/2025 (6896),
**7.30**/9.41 kg $CO_2$e 12/2025 (6897),
**7.88**/10.06 kg $CO_2$e 12/2025 (6899),
**7.48**/9.52 kg $CO_2$e 02/2026 (6889),
**7.35**/9.46 kg $CO_2$e 02/2026 (6898),
calculation method see page 342

Recycled content: The midsole consists of 10% recycled PU waste (PIR) from our production processes, the innersole consists of 73% recycled material (PU foam, GRS-certified polyester), the penetration resistance consists of 21% recycled polyester (GRS certified)

You can find more information on uvex medicare on pages 422 to 426



# Occupational shoes

## uvex 1 sport NC



65937
65938
65939

clima zone

## uvex 1 sport NC · Shoe O1

- shock-absorbing PU midsole
- PU outsole
- lightweight and breathable textile upper
- TPU scuffcap
- breathable distance mesh lining
- ESD certified
- sizes 35 to 40 produced using a womens' last
- metal-free
- suitable for people allergic to chrome
- removable antistatic comfortable innersole (Art. no.: 95177-9)

| uvex 1 sport NC | Shoe |
|---|---|
| **Art. no. Width 10** | 65937 |
| **Art. no. Width 11** | **65938** |
| **Art. no. Width 12** | 65939 |
| **Art. no. Width 14** | – |
| **Standard EN ISO 20347:2022** | O1 FO SC SR |
| **Upper** | textile |
| **Lining** | distance mesh lining |
| **Fastening** | shoe laces |
| **Sizes** | 35 to 52 |
| **Order unit** | PR |

$CO_2$ footprint:
**6.44**/8.21 kg $CO_2$e 06/2025 (6593),
calculation method see page 342

Recycled content: The insole board consists of 38% recycled polyester, the innersole consists of 50% recycled material (PU foam, GRS-certified polyester), the heel cap is made from 8% recycled TPR

You can find more information on uvex medicare on pages 422 to 426



# Safety Footwear

## uvex 1 sport white



65837
65838
65839



65807
65808
65809



65817
65818
65819



65821
65822
65823



65847
65848
65849



clima zone

## uvex 1 sport white · Shoe S1/S2/S3L · Boot with hook-and-loop fastening S2

The uvex 1 sport white safety shoe line combines a sporty design, optimal comfort and sophisticated functionality for working in areas where hygiene is important or foodstuffs are handled. The almost seamless upper finish prevents unwanted contaminants from getting inside the shoe when working in sensitive hygienic areas. From a technical point of view, the work shoes are certified as washable on a gentle cycle at 40°C. The removable comfortable climatic innersoles are washable at 30°C. uvex 1 sport white – pure sporty comfort for areas where hygiene is important, clean room applications, the food industry, the pharmaceutical industry, industrial kitchens and hospitality.

- shock-absorbing PU midsole (Art. no.: 6580, 6581, 6582, 6583)
- uvex i-PUREnrj planet midsole with shock-absorption and energy-return features (Art. no.: 6584)
- PU outsole
- 100% metal-free protective toe cap
- flexible textile penetration resistance (Art. no.: 6582)
- hydrophobic microfibre upper
- breathable distance mesh lining
- ESD certified
- dust tongue (Art. no.: 6582)
- sizes 35 to 40 produced using a womens' last
- metal-free
- suitable for people allergic to chrome
- removable antistatic comfortable innersole (Art. no.: 95797-9)

| uvex 1 sport white | Shoe | Shoe | Shoe | Shoe | Boot with hook-and-loop fastening |
|---|---|---|---|---|---|
| **Art. no. Width 10** | 65837 | 65807 | 65817 | 65821 | 65847 |
| **Art. no. Width 11** | **65838** | **65808** | **65818** | **65822** | **65848** |
| **Art. no. Width 12** | 65839 | 65809 | 65819 | 65823 | 65849 |
| **Standard EN ISO 20345:2022** | S1 FO SR | S2 FO CI SR | S2 FO CI SR | S3L FO SR | S2 FO CI SR |
| **Upper** | microfibre | microfibre | microfibre | microfibre | microfibre |
| **Lining** | distance mesh lining | distance mesh lining | distance mesh lining | distance mesh lining | distance mesh lining |
| **Fastening** | plastic closure/hook-and-loop | hook-and-loop fastening | – | shoe laces | hook-and-loop |
| **Sizes** | 35 to 52 | 35 to 52 | 35 to 52 | 35 to 52 | 35 to 52 |
| **Order unit** | PR | PR | PR | PR | PR |

Recycled content: The midsole consists of 10% recycled PU waste (PIR) from our production processes (6584), the insole board consists of 38% recycled polyester (6580, 6581, 6583, 6584), the innersole consists of 73% recycled material (PU foam, GRS-certified polyester), the heel cap is made from 8% recycled TPR

You can find more information on uvex medicare on pages 422 to 426

uvex

uvex 1 x-cite

# Dress up for safety

## Safety and style without compromise



uvex

# Safety Footwear

## uvex 1 x-cite

GERMAN DESIGN AWARD WINNER 2025

reddot winner 2025



86401
86402
86403



86471
86472
86473



86421
86422
86423

clima zone

## uvex 1 x-cite · Shoe S3L · Chelsea boot S3L · Lace-up boot S3L

Do you need to head straight from the meeting room to the production line? Or from the office to the construction site? uvex combines trends from the fashion world with essential protective features and is uncompromising in terms of style and safety. The elegant look of the footwear can be perfectly combined with stylish business outfits. Their first-class wearer comfort never fails to impress, from morning to night.

- PU outsole
- composite toe cap with carbon
- flexible textile penetration resistance
- hydrophobic leather upper
- breathable textile lining
- ESD certified
- metal-free (Art. no.: 8640, 8647)
- removable antistatic comfortable innersole (Art. no.: 86397-9)

| uvex 1 x-cite | Shoe | Chelsea boot | Lace-up boot |
|---|---|---|---|
| **Art. no. Width 10** | 86401 | 86471 | 86421 |
| **Art. no. Width 11** | **86402** | **86472** | **86422** |
| **Art. no. Width 12** | 86403 | 86473 | 86423 |
| **Standard EN ISO 20345:2022** | S3L FO SR | S3L FO SR | S3L FO SR |
| **Upper** | water-repellent leather | water-repellent leather | water-repellent leather |
| **Lining** | textile | textile | textile |
| **Fastening** | shoe laces | – | shoe laces; zip |
| **Sizes** | 34 to 44 | 34 to 44 | 34 to 44 |
| **Order unit** | PR | PR | PR |

$CO_2$ footprint:
**12.95**/14.60 kg $CO_2$e 09/2025 (8640),
**14.63**/16.32 kg $CO_2$e 03/2026 (8647),
**17.79**/19.59 kg $CO_2$e 03/2026 (8642),
calculation method see page 342

Recycled content: The innersole consists of 43% recycled PU foam, penetration resistance is made from 80% recycled polyester

You can find more information on uvex medicare on pages 422 to 426


uvex

uvex

# Safety Footwear

## uvex 1 business



84481
84482
84483



84301
84302
84303



84281
84282
84283



84697
84698
84699



84271
84272
84273



clima zone

## uvex 1 business · Shoe S2/S3L · Lace-up boot S3L

- PU outsole
- steel protective toe cap
- flexible textile penetration resistance (Art. no.: 8427, 8428, 8430, 8448)
- lightweight and breathable microvelour upper (Art. no.: 8427, 8428, 8430, 8469)
- hydrophobic leather upper (Art. no.: 8448)
- breathable textile lining
- ESD certified
- suitable for people allergic to chrome (Art. no.: 8427, 8428, 8430, 8469)
- removable antistatic comfortable innersole (Art. no.: 95157-9)

| uvex 1 business | Shoe | Shoe | Shoe | Shoe | Lace-up boot |
|---|---|---|---|---|---|
| **Art. no. Width 10** | 84481 | 84301 | 84281 | 84697 | 84271 |
| **Art. no. Width 11** | **84482** | **84302** | **84282** | **84698** | **84272** |
| **Art. no. Width 12** | 84483 | 84303 | 84283 | 84699 | 84273 |
| **Standard EN ISO 20345:2022** | S3L FO SR | S3L FO SR | S3L FO SR | S2 FO SR | S3L FO SR |
| **Upper** | water-repellent leather | microvelour | microvelour | microvelour | microvelour |
| **Lining** | textile | textile | textile | textile | textile |
| **Fastening** | shoe laces | shoe laces | shoe laces | shoe laces | shoe laces |
| **Sizes** | 35 to 52 | 39 to 52 | 39 to 52 | 39 to 52 | 39 to 52 |
| **Order unit** | PR | PR | PR | PR | PR |

Recycled content: The insole board consists of 38% recycled polyester (8469), the innersole consists of 73% recycled material PU foam, the heel cap is made from 100% recycled TPR

You can find more information on uvex medicare on pages 422 to 426






**100% more shock absorption.**
**Comfort in 3 dimensions.**



**Outstanding stability.**
**Reliable support and safety.**



**uvex monoskin shaft design.**
**Pressure-free, comfortable fit.**



**uvex climazone standard.**
**Temperature and climate control.**

## Outstanding flexibility. Optimum wearer comfort.

The ergonomic design of the outsole supports the natural movement and flexibility of the feet



uvex

# Safety Footwear

## uvex 1
















clima zone

## uvex 1 · Sandal S1 · Perforated shoe S1 · Perforated lace-up boot S1

The uvex 1 safety shoe provides robust protection for light applications. Its ergonomic design and seam-free construction prevent pressure points and provide optimal foot protection. The dual-density polyurethane sole offers both shock absorption and comfort. The timeless design is characterised by clean lines and a simplified look.

- shock-absorbing PU midsole
- PU outsole
- foamed polyurethane heel basket
- 100% metal-free protective toe cap
- lightweight and breathable microvelour upper
- breathable distance mesh lining
- ESD certified
- sizes 35 to 40 produced using a womens' last
- metal-free (Art. no.: 8542, 8547)
- suitable for people allergic to chrome
- removable antistatic comfortable innersole (Art. no.: 95347-0)

| uvex 1 | Sandal | Perforated shoe | Perforated shoe | Perforated shoe | Perforated lace-up boot |
|---|---|---|---|---|---|
| **Art. no. Width 10** | 85427 | 85437 | 85467 | 65657 | 85477 |
| **Art. no. Width 11** | **85428** | **85438** | **85468** | **65658** | **85478** |
| **Art. no. Width 12** | 85429 | 85439 | 85469 | 65659 | 85479 |
| **Art. no. Width 14** | 85420 | 85430 | – | – | – |
| **Standard EN ISO 20345:2022** | S1 FO SR | S1 FO SR | S1 FO SR | S1 FO SR | S1 FO SR |
| **Upper** | microvelour | microvelour | microvelour | microvelour | microvelour |
| **Lining** | distance mesh lining | distance mesh lining | distance mesh lining | distance mesh lining | distance mesh lining |
| **Fastening** | hook-and-loop fastening | elastic laces | elastic laces | BOA® Fit System | shoe laces |
| **Sizes** | 35 to 52 | 35 to 52 | 35 to 52 | 35 to 52 | 35 to 52 |
| **Order unit** | PR | PR | PR | PR | PR |

$CO_2$ footprint:
**6.83**/9.00 kg $CO_2$e 01/2026 (8542),
**6.61**/8.67 kg $CO_2$e 11/2025 (8543, 8546),
**6.99**/9.11 kg $CO_2$e 11/2025 (6565),
**6.82**/8.92 kg $CO_2$e 11/2025 (8547),
calculation method see page 342

Recycled content: The insole board consists of 38% recycled polyester, the innersole consists of 74% recycled material (PU foam, GRS-certified polyester), the BOA® Fit System consists of 47% recycled polycarbonate (6565)

You can find more information on uvex medicare on pages 422 to 426



BOA® and BOA® Fit System are registered trademarks of Boa Technology Inc., USA



85447
85448
85449
85440



65667
65668
65669



85457
85458
85459
85450

clima zone

## uvex 1 · Shoe S2 · Lace-up boot S2

- shock-absorbing PU midsole
- PU outsole
- foamed polyurethane heel basket
- 100% metal-free protective toe cap
- lightweight and breathable microvelour upper
- breathable distance mesh lining
- ESD certified
- sizes 35 to 40 produced using a womens' last
- metal-free (Art. no.: 8545)
- suitable for people allergic to chrome
- removable antistatic comfortable innersole (Art. no.: 95347-0)

| uvex 1 | Shoe | Shoe | Lace-up boot |
|---|---|---|---|
| **Art. no. Width 10** | 85447 | 65667 | 85457 |
| **Art. no. Width 11** | **85448** | **65668** | **85458** |
| **Art. no. Width 12** | 85449 | 65669 | 85459 |
| **Art. no. Width 14** | 85440 | – | 85450 |
| **Standard EN ISO 20345:2022** | S2 FO SR | S2 FO SR | S2 FO SR |
| **Upper** | microvelour | microvelour | microvelour |
| **Lining** | distance mesh lining | distance mesh lining | distance mesh lining |
| **Fastening** | elastic laces | BOA® Fit System | shoe laces |
| **Sizes** | 35 to 52 | 35 to 52 | 35 to 52 |
| **Order unit** | PR | PR | PR |

$CO_2$ footprint:
**6.64**/8.70 kg $CO_2$e 06/2025 (8544),
**7.02**/9.14 kg $CO_2$e 11/2025 (6566),
**6.85**/8.95 kg $CO_2$e 06/2025 (8545),
calculation method see page 342

Recycled content: The insole board consists of 38% recycled polyester, the innersole consists of 74% recycled material (PU foam, GRS-certified poly–ester), the BOA® Fit System consists of 47% recycled polycarbonate (6566)

You can find more information on uvex medicare on pages 422 to 426

BOA® and BOA® Fit System are registered trademarks of Boa Technology Inc., USA



# Safety Footwear

## uvex 1 ladies



85607
85608



85617
85618



85627
85628

clima zone

## uvex 1 ladies · Sandal S1 · Perforated shoe S1 · Shoe S2

- shock-absorbing PU midsole
- PU outsole
- foamed polyurethane heel basket
- 100% metal-free protective toe cap
- lightweight and breathable microvelour upper
- breathable distance mesh lining
- ESD certified
- sizes 35 to 40 produced using a womens‘ last
- metal-free (Art. no.: 8560)
- suitable for people allergic to chrome
- removable antistatic comfortable innersole (Art. no.: 95347-0)

| uvex 1 | Sandal | Perforated shoe | Shoe |
|---|---|---|---|
| **Art. no. Width 10** | 85607 | 85617 | 85627 |
| **Art. no. Width 11** | **85608** | **85618** | **85628** |
| **Standard EN ISO 20345:2022** | S1 FO SR | S1 FO SR | S2 FO SR |
| **Upper** | microvelour | microvelour | microvelour |
| **Lining** | distance mesh lining | distance mesh lining | distance mesh lining |
| **Fastening** | hook-and-loop fastening | elastic laces | elastic laces |
| **Sizes** | 35 to 43 | 35 to 43 | 35 to 43 |
| **Order unit** | PR | PR | PR |

Recycled content: The insole board consists of 38% recycled polyester, the innersole consists of 74% recycled material (PU foam, GRS-certified polyester)

You can find more information on uvex medicare on pages 422 to 426

# Safety Footwear

## uvex 1 x-tended support



85361
85362
85363



85127
85128
85129

85117
85118
85119



85141
85142
85143

85191
85192
85193



65681
65682
65683

clima zone

## uvex 1 x-tended support · Sandal S1 PL · Perforated Shoe S1 PL/S1

- shock-absorbing PU midsole
- PU outsole
- foamed polyurethane scuffcap (Art. no.: 8514, 8519, 8536, 6568)
- foamed polyurethane heel basket
- 100% metal-free protective toe cap
- flexible textile penetration resistance (Art. no.: 8514, 8519, 8536, 6568)
- lightweight and breathable microvelour upper
- breathable distance mesh lining
- ESD certified
- dust tongue (not Art. no.: 8536)
- sizes 35 to 40 produced using a womens' last
- metal-free (Art. no.: 8536)
- suitable for people allergic to chrome
- removable antistatic comfortable innersole (Art. no.: 95347-0)

| uvex 1 x-tended support | Sandal | Perforated shoe | Perforated shoe | Perforated shoe | Perforated shoe | Perforated shoe |
|---|---|---|---|---|---|---|
| **Art. no. Width 10** | 85361 | 85127 | 85117 | 85141 | 85191 | 65681 |
| **Art. no. Width 11** | **85362** | **85128** | **85118** | **85142** | **85192** | **65682** |
| **Art. no. Width 12** | 85363 | 85129 | 85119 | 85143 | 85193 | 65683 |
| **Standard EN ISO 20345:2022** | S1 PL FO SC SR | S1 FO SR | S1 FO SR | S1 PL FO SC SR | S1 PL FO SC SR | S1 PL FO SC SR |
| **Upper** | microvelour | microvelour | microvelour | microvelour | microvelour | microvelour |
| **Lining** | distance mesh lining | distance mesh lining | distance mesh lining | distance mesh lining | distance mesh lining | distance mesh lining |
| **Fastening** | hook-and-loop fastening | elastic laces | elastic laces | elastic laces | elastic laces | BOA® Fit System |
| **Sizes** | 35 to 52 | 35 to 52 | 35 to 52 | 35 to 52 | 35 to 52 | 35 to 52 |
| **Order unit** | PR | PR | PR | PR | PR | PR |

$CO_2$ footprint:
**7.48**/9.59 kg $CO_2e$ 06/2025 (8519),
calculation method see page 342

Recycled content: The insole board consists of 38% recycled polyester (8511, 8512), the innersole consists of 74% recycled material (PU foam, GRS-certified polyester), the BOA® Fit System consists of 48% recycled polycarbonate (6568)

You can find more information on uvex medicare on pages 422 to 426

BOA® and BOA® Fit System are registered trademarks of Boa Technology Inc., USA

uvex

# Safety Footwear

## uvex 1 x-tended support



85161
85162
85163



65671
65672
65673



85171
85172
85173

clima zone

## uvex 1 x-tended support · Shoe S3L · Lace-up boot S3L

- shock-absorbing PU midsole
- PU outsole
- foamed polyurethane scuffcap
- foamed polyurethane heel basket
- 100% metal-free protective toe cap
- flexible textile penetration resistance
- lightweight and breathable microvelour upper
- breathable distance mesh lining
- ESD certified
- dust tongue
- sizes 35 to 40 produced using a womens' last
- metal-free (Art. no.: 8517)
- suitable for people allergic to chrome
- removable antistatic comfortable innersole (Art. no.: 95347-0)

| uvex 1 x-tended support | Shoe | Shoe | Lace-up boot |
|---|---|---|---|
| **Art. no. Width 10** | 85161 | 65671 | 85171 |
| **Art. no. Width 11** | **85162** | **65672** | **85172** |
| **Art. no. Width 12** | 85163 | 65673 | 85173 |
| **Standard EN ISO 20345:2022** | S3L FO SC SR | S3L FO SC SR | S3L FO SC SR |
| **Upper** | microvelour | microvelour | microvelour |
| **Lining** | distance mesh lining | distance mesh lining | distance mesh lining |
| **Fastening** | elastic laces | BOA® Fit System | shoe laces |
| **Sizes** | 35 to 52 | 35 to 52 | 35 to 52 |
| **Order unit** | PR | PR | PR |

$CO_2$ footprint:
**7.31**/9.42 kg $CO_2e$ 03/2026 (8516),
calculation method see page 342

Recycled content: Innersole consists of 74% recycled material (PU foam, GRS-certified polyester), the BOA® Fit System consists of 48% recycled polycarbonate (6567)

You can find more information on uvex medicare on pages 422 to 426



BOA® and BOA® Fit System are registered trademarks of Boa Technology Inc., USA




# Safety Footwear

medium areas of application

uvex

## uvex 2



# Pushing the Limits!

**Website**

### Superior performance across all disciplines

The innovative uvex 2 safety shoe series does not shy away from any challenge among medium applications: robust upper materials and a deep sole profile ensure maximum performance in your everyday work. The lightweight design, flexible sole and breathability ensure comfort all day long.



**Full sole flexibility and certified grip on ladders (LG)**



**Quick-release laces can be adjusted to fit any foot**



**Directly moulded PU scuffcap reliably protects the upper**



**High stability thanks to integrated heel basket**



uvex

# Safety Footwear

## uvex 2



65021
65022
65023
65024



65031
65032
65033
65034

clima zone

## uvex 2 · Shoe S3L · Lace-up boot S3L

- shock-absorbing PU midsole
- PU outsole
- foamed polyurethane scuffcap
- foamed polyurethane heel basket
- 100% metal-free protective toe cap
- flexible textile penetration resistance
- hydrophobic leather upper
- breathable distance mesh lining
- reflective elements
- ESD certified
- certified grip on ladders (LG)
- dust tongue
- sizes 35 to 40 produced using a womens' last
- metal-free (Art. no.: 6503)
- removable antistatic comfortable innersole (Art. no.: 95347-0)

| uvex 2 | Shoe | Lace-up boot |
|---|---|---|
| **Art. no. Width 10** | 65021 | 65031 |
| **Art. no. Width 11** | **65022** | **65032** |
| **Art. no. Width 12** | 65023 | 65033 |
| **Art. no. Width 14** | 65024 | 65034 |
| **Standard EN ISO 20345:2022** | S3L FO LG SC SR | S3L FO LG SC SR |
| **Upper** | water-repellent, full-grain smooth leather | water-repellent, full-grain smooth leather |
| **Lining** | distance mesh lining | distance mesh lining |
| **Fastening** | elastic laces | shoe laces |
| **Sizes** | 35 to 52 | 35 to 52 |
| **Order unit** | PR | PR |

$CO_2$ footprint:
**12.68**/14.91 $CO_2$e 06/2025 (6502),
**15.60**/17.95 kg $CO_2$e 06/2025 (6503),
calculation method see page 342

Recycled content: Innersole consists of 74% recycled material (PU foam, GRS-certified polyester)

You can find more information on uvex medicare on pages 422 to 426

uvex

# Safety Footwear

## uvex 2



65001
65002
65003
65004



65011
65012
65013
65014



65081
65082
65083
65084



65091
65092
65093
65094

clima zone

## uvex 2 · Sandal S1 PL · Perforated shoe S1 PL · Shoe S3L · Lace-up boot S3L

- shock-absorbing PU midsole
- PU outsole
- foamed polyurethane scuffcap
- foamed polyurethane heel basket
- 100% metal-free protective toe cap
- flexible textile penetration resistance
- lightweight and breathable microvelour upper
- breathable distance mesh lining
- reflective elements
- ESD certified
- certified grip on ladders (LG)
- dust tongue (Art. no.: 6501, 6508, 6509)
- sizes 35 to 40 produced using a womens' last
- metal-free (Art. no.: 6500, 6509)
- suitable for people allergic to chrome
- removable antistatic comfortable innersole (Art. no.: 95347-0)

| uvex 2 | Sandal | Perforated Shoe | Shoe | Lace-up boot |
|---|---|---|---|---|
| **Art. no. Width 10** | 65001 | 65011 | 65081 | 65091 |
| **Art. no. Width 11** | **65002** | **65012** | **65082** | **65092** |
| **Art. no. Width 12** | 65003 | 65013 | 65083 | 65093 |
| **Art. no. Width 14** | 65004 | 65014 | 65084 | 65094 |
| **Standard EN ISO 20345:2022** | S1 PL FO LG SC SR | S1 PL FO LG SC SR | S3L FO LG SC SR | S3L FO LG SC SR |
| **Upper** | microvelour | microvelour | microvelour | microvelour |
| **Lining** | distance mesh lining | distance mesh lining | distance mesh lining | distance mesh lining |
| **Fastening** | hook-and-loop fastening | elastic laces | elastic laces | shoe laces |
| **Sizes** | 35 to 52 | 35 to 52 | 35 to 52 | 35 to 52 |
| **Order unit** | PR | PR | PR | PR |

$CO_2$ footprint:
**8.20**/10.52 kg $CO_2$e 02/2026 (6500),
**7.90**/10.16 kg $CO_2$e 02/2026 (6501),
**7.94**/10.21 kg $CO_2$e 02/2026 (6508),
**8.09**/10.38 kg $CO_2$e 02/2026 (6509),
calculation method see page 342

Recycled content: Innersole consists of 74% recycled material (PU foam, GRS-certified polyester)

You can find more information on uvex medicare on pages 422 to 426



65221
65222
65223
65224



65311
65312
65313



65231
65232
65233
65234



65321
65322
65323



65363



65303



clima zone

## uvex 2 MACSOLE® · Shoe S3L · Lace-up boot S3L

All the advantages of the uvex 2 safety shoe range combined with a MACSOLE® rubber outsole: The uvex 2 MACSOLE® is characterised by outstanding resistance to heat, chemicals and cuts. In addition, the MACSOLE® rubber sole technology features an unparalleled level of slip resistance, even in cold conditions.

- shock-absorbing PU midsole
- heat-, chemical- and cut-resistant uvex MACSOLE® rubber outsole
- foamed polyurethane scuffcap
- foamed polyurethane heel basket
- 100% metal-free protective toe cap
- flexible textile penetration resistance
- hydrophobic leather upper
- breathable distance mesh lining (Art. no.: 6522, 6523, 6531, 6532)
- warm winter lining (Art. no.: 6530, 6536)
- reflective elements
- ESD certified
- certified grip on ladders (LG)
- dust tongue
- sizes 35 to 40 produced using a womens' last
- metal-free (Art. no.: 6523, 6530)
- removable antistatic comfortable innersole (Art. no.: 95347-0)

| uvex 2 MACSOLE® | Shoe | Shoe | Lace-up boot | Lace-up boot | Winter lace-up boot | Winter lace-up boot |
|---|---|---|---|---|---|---|
| **Art. no. Width 10** | 65221 | 65311 | 65231 | 65321 | – | – |
| **Art. no. Width 11** | **65222** | **65312** | **65232** | **65322** | – | – |
| **Art. no. Width 12** | 65223 | 65313 | 65233 | 65323 | 65363 | 65303 |
| **Art. no. Width 14** | 65224 | – | 65234 | – | – | – |
| **Standard EN ISO 20345:2022** | S3L FO LG HI HRO SC SR | S3L FO LG HI HRO SC SR | S3L FO LG HI HRO SC SR | S3L FO LG HI HRO SC SR | S3L FO LG CI HI HRO SC SR | S3L FO LG CI HI HRO SC SR |
| **Upper** | water-repellent, full-grain smooth leather | water-repellent, full-grain smooth leather | water-repellent, full-grain smooth leather | water-repellent, full-grain smooth leather | water-repellent, full-grain smooth leather | water-repellent, full-grain smooth leather |
| **Lining** | distance mesh lining | distance mesh lining | distance mesh lining | distance mesh lining | distance mesh lining | distance mesh lining |
| **Fastening** | elastic laces | BOA® Fit System | shoe laces | BOA® Fit System | BOA® Fit System | shoe laces |
| **Sizes** | 35 to 52 | 35 to 52 | 35 to 52 | 35 to 52 | 35 to 52 | 35 to 52 |
| **Order unit** | PR | PR | PR | PR | PR | PR |

$CO_2$ footprint:
**17.52**/20,18 kg $CO_2$e 02/2026 (6536),
**16.35**/18,95 kg $CO_2$e 02/2026 (6530),
calculation method see page 342

Recycled content: Innersole consists of 74% recycled material (PU foam, GRS-certified polyester), the BOA® Fit System consists of 37% (6536), 38% (6531), and 39% (6532) recycled polycarbonate

You can find more information on uvex medicare on pages 422 to 426

LG-certified products will be available from April 2027

MACSOLE® is a registered trademark of UVEX HECKEL s.a.s. BOA® and BOA® Fit System are registered trademarks of Boa Technology Inc., USA

uvex

# Safety Footwear

## uvex 2 MACSOLE®






65241
65242
65243

sympatex®



65251
65252
65253

sympatex®



65281
65282
65283
65284

clima zone



65291
65292
65293
65294

MAC sole

## uvex 2 MACSOLE® · Shoe S7L/S3L · Lace-up boot S7L/S3L

- shock-absorbing PU midsole
- heat-, chemical- and cut-resistant uvex MACSOLE® rubber outsole
- foamed polyurethane scuffcap
- foamed polyurethane heel basket
- 100% metal-free protective toe cap
- flexible textile penetration resistance
- lightweight and breathable microvelour upper
- breathable distance mesh lining (Art. no.: 6528, 6529)
- waterproof sympatex® lining (Art. no.: 6524, 6525)
- reflective elements
- ESD certified
- certified grip on ladders (LG)
- dust tongue
- sizes 35 to 40 produced using a womens' last
- metal-free (Art. no.: 6525, 6529)
- suitable for people allergic to chrome
- removable antistatic comfortable innersole (Art. no.: 95347-0)

| uvex 2 MACSOLE® | Shoe | Lace-up boot | Shoe | Lace-up boot |
|---|---|---|---|---|
| **Art. no. Width 10** | 65241 | 65251 | 65281 | 65291 |
| **Art. no. Width 11** | **65242** | **65252** | **65282** | **65292** |
| **Art. no. Width 12** | 65243 | 65253 | 65283 | 65293 |
| **Art. no. Width 14** | – | – | 65284 | 65294 |
| **Standard EN ISO 20345:2022** | S7L FO LG HI HRO SC SR | S7L FO LG HI HRO SC SR | S3L FO LG HI HRO SC SR | S3L FO LG HI HRO SC SR |
| **Upper** | microvelour | microvelour | microvelour | microvelour |
| **Lining** | sympatex® laminate | sympatex® laminate | distance mesh lining | distance mesh lining |
| **Fastening** | elastic laces | shoe laces | elastic laces | shoe laces |
| **Sizes** | 35 to 52 | 35 to 52 | 35 to 52 | 35 to 52 |
| **Order unit** | PR | PR | PR | PR |

$CO_2$ footprint:
**7.36**/9.71 kg $CO_2$e 02/2026 (6528),
**7.50**/9.87 kg $CO_2$e 02/2026 (6529),
calculation method see page 342

Recycled content: Innersole consists of 74% recycled material (PU foam, GRS-certified polyester)

LG-certified products will be available from April 2027

You can find more information on uvex medicare on pages 422 to 426



MACSOLE® is a registered trademark of UVEX HECKEL s.a.s. sympatex® is a registered trademark of sympatex Technologies GmbH.



# Safety Footwear

## uvex 2 construction



65101
65102
65103



clima zone

## uvex 2 construction · Lace-up boot S3

The new uvex 2 construction was developed to meet the specific challenges of the construction industry. The construction and engineering industries really put workers and their footwear to the test. In addition to high mechanical stress, extreme weather conditions are often a factor too. Thanks to their intelligent design and innovative technologies, the uvex 2 construction models offer reliable protection, stability and exceptional comfort.

- shock-absorbing PU midsole
- PU outsole
- foamed polyurethane scuffcap
- foamed polyurethane heel basket
- 100% metal-free protective toe cap
- steel penetration resistance
- water-resistant uvex waterstop leather upper
- breathable distance mesh lining
- certified grip on ladders (LG)
- reflective elements
- dust tongue
- sizes 35 to 40 produced using a womens' last
- removable antistatic comfortable innersole (Art. no.: 95347-0)

| uvex 2 construction | Lace-up boot |
|---|---|
| **Art. no. Width 10** | 65101 |
| **Art. no. Width 11** | **65102** |
| **Art. no. Width 12** | 65103 |
| **Standard EN ISO 20345:2022** | S3 FO LG SC SR |
| **Upper** | water repellent leather |
| **Lining** | textile |
| **Fastening** | shoe laces |
| **Sizes** | 35 to 52 |
| **Order unit** | PR |

Recycled content: The insole board consists of 38% recycled polyester, the innersole consists of 60% recycled PU foam

You can find more information on uvex medicare on pages 422 to 426

uvex

uvex 2 xenova®

# Comfortable all-rounder
# Improved comfort.
# Guaranteed protection.


You can find more information at www.uvex-safety.com/uvex2xenova



**Metal-free protective toe cap and optional metal-free penetration resistance**



**Breathable upper**

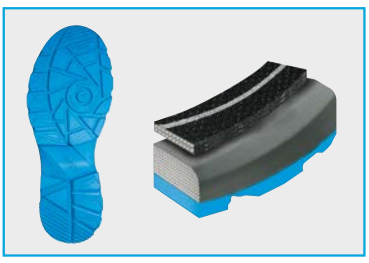

**Lightweight and robust dual-density polyurethane sole**



uvex

# Safety Footwear

## uvex 2 xenova®



**S1 PL** 95531 95532 95533 **S1** 95537 95538 95539



95547 95548 95549



95581 95582 95583 BOA



95577 95578 95579

clima zone

## uvex 2 xenova® · Sandal S1 PL/S1 · Perforated shoe S1/S1 PL · Shoe S2

Improved comfort, guaranteed protection and an attractive design: All of this is offered by the new and completely metal-free uvex 2 xenova® safety shoes. An improved fit, lighter weight and optimum shock absorption, breathability and padding significantly increase wearer comfort. The combination of protection, style and comfort makes the new uvex 2 xenova® a popular all-rounder for indoor and outdoor work, for example in mechanical and plant engineering, metalworking or handicraft work.

- shock-absorbing PU midsole
- PU outsole
- 100% metal-free protective toe cap
- flexible textile penetration resistance (Art. no.: 95531-3, 9558)
- lightweight and breathable microvelour upper
- breathable distance mesh lining
- reflective elements
- ESD certified
- dust tongue (Art. no.: 9554, 9557, 9558)
- sizes 35 to 40 produced using a womens' last
- metal-free (Art. no.: 9553, 9554, 9557)
- suitable for people allergic to chrome
- removable antistatic comfortable innersole (Art. no.: 95347-9)

| uvex 2 xenova® | Sandal | Sandal | Perforated shoe | Perforated shoe | Shoe |
|---|---|---|---|---|---|
| **Art. no. Width 10** | 95531 | 95537 | 95547 | 95581 | 95577 |
| **Art. no. Width 11** | **95532** | **95538** | **95548** | **95582** | **95578** |
| **Art. no. Width 12** | 95533 | 95539 | 95549 | 95583 | 95579 |
| **Standard EN ISO 20345:2022** | S1 PL FO SR | S1 FO SR | S1 FO SR | S1 PL FO SR | S2 FO SR |
| **Upper** | microvelour | microvelour | microvelour | microvelour | microvelour |
| **Lining** | distance mesh lining | distance mesh lining | distance mesh lining | distance mesh lining | distance mesh lining |
| **Fastening** | hook-and-loop fastening | hook-and-loop fastening | shoe laces | BOA® Fit System | shoe laces |
| **Sizes** | 35 to 52 | 35 to 52 | 35 to 52 | 35 to 52 | 35 to 52 |
| **Order unit** | PR | PR | PR | PR | PR |

Recycled content: The midsole consists of 15% recycled PU waste (PIR) from our production processes, the insole board consists of 38% recycled polyester (95537-9, 9554, 9557), the innersole consists of 74% recycled material (PU foam, GRS-certified polyester), the heel cap is made from 8% recycled TPR, the BOA® Fit System consists of 38% recycled polycarbonate (9558)

You can find more information on uvex medicare on pages 422 to 426

uvex

# Safety Footwear

## uvex 2 xenova®



95557
95558
95559



95551
95552
95553



95561
95562
95563



95691
95692
95693

BOA

clima zone

## uvex 2 xenova® · Shoe S2/S3L · Lace-up boot S3L

- shock-absorbing PU midsole
- PU outsole
- 100% metal-free protective toe cap
- flexible textile penetration resistance (Art. no.: 95551-3, 9556, 9569)
- hydrophobic leather upper
- scuffcap with PU coating (Art. no.: 95551-3, 9556, 9569)
- breathable distance mesh lining
- reflective elements
- ESD certified
- dust tongue
- sizes 35 to 40 produced using a womens' last
- metal-free (Art. no.: 9555, 9556)
- removable antistatic comfortable innersole (Art. no.: 95347-0)

| uvex 2 xenova® | Shoe | Shoe | Lace-up boot | Lace-up boot |
|---|---|---|---|---|
| **Art. no. Width 10** | 95557 | 95551 | 95561 | 95691 |
| **Art. no. Width 11** | **95558** | **95552** | **95562** | **95692** |
| **Art. no. Width 12** | 95559 | 95553 | 95563 | 95693 |
| **Standard EN ISO 20345:2022** | S2 FO SR | S3L FO SC SR | S3L FO SC SR | S3L FO SC SR |
| **Upper** | water-repellent, full-grain leather | water-repellent, full-grain leather | water-repellent, full-grain leather | water-repellent, full-grain leather |
| **Lining** | distance mesh lining | distance mesh lining | distance mesh lining | distance mesh lining |
| **Fastening** | shoe laces | shoe laces | shoe laces | BOA® Fit System |
| **Sizes** | 35 to 52 | 35 to 52 | 35 to 52 | 35 to 52 |
| **Order unit** | PR | PR | PR | PR |

Recycled content: The midsole consists of 15% recycled PU waste (PIR) from our production processes, the insole board consists of 38% recycled polyester (9555), the innersole consists of 74% recycled material (PU foam, GRS-certified polyester), the heel cap is made from 8% recycled TPR, the BOA® Fit System consists of 40% recycled polycarbonate (9569)

You can find more information on uvex medicare on pages 422 to 426



BOA® and BOA® Fit System are registered trademarks of Boa Technology Inc., USA

uvex

uvex 2 trend




You can find more information at uvex-safety.com/en/uvex-2-trend

# Safety is trend

## Reliable quality and comfort

Assembly, production, indoors or outdoors — uvex 2 trend safety shoes offer **well-established technologies** in a powerful entry-level collection for medium areas of application. The anti-twist heel cap enhances the robust protective elements, providing extra ankle support with every step. The variety of materials and features ensures the ideal model for **a wide range of applications.** Reduced weight and the polyurethane outsole provide a comfortable fit.

# Safety Footwear

## uvex 2 trend



69031
69032
69033



69041
69042
69043



clima zone

## uvex 2 trend · Shoe S1 PS · Lace-up boot S1 PS

- shock-absorbing PU midsole
- PU outsole
- steel protective toe cap
- flexible textile penetration resistance, tested with 3 mm nail
- lightweight and breathable textile upper
- TPU scuffcap
- reflective elements
- sizes 35 to 40 produced using a womens' last
- removable antistatic comfortable innersole (Art. no.: 95187-9)

| uvex 2 trend | Shoe | Lace-up boot |
|---|---|---|
| **Art. no. Width 10** | 69031 | 69041 |
| **Art. no. Width 11** | **69032** | **69042** |
| **Art. no. Width 12** | 69033 | 69043 |
| **Norm EN ISO 20345:2022** | S1 PS FO SC SR | S1 PS FO SC SR |
| **Upper** | textile | textile |
| **Lining** | textile | textile |
| **Fastening** | shoe laces | shoe laces |
| **Sizes** | 35 to 52 | 35 to 52 |
| **Order unit** | PR | PR |

$CO_2$ footprint:
**8.42**/10.45 kg $CO_2$e 10/2025 (6903),
**8.90**/11.05 kg $CO_2$e 10/2025 (6904),
calculation method see page 342

Recycled content: The midsole consists of 10% recycled PU waste (PIR) from our production processes, the innersole consists of 60% recycled PU foam, the penetration resistance consists of 21% recycled polyester (GRS certified)

You can find more information on uvex medicare on pages 422 to 426



69411
69412
69413



69421
69422
69423



69311
69312
69313



69321
69322
69323

clima zone

## uvex 2 trend · Shoe S3S · Lace-up boot S3S

- shock-absorbing PU midsole
- PU outsole
- steel protective toe cap
- flexible textile penetration resistance, tested with 3 mm nail
- lightweight and breathable microvelour upper (Art. no.: 6941, 6942)
- hydrophobic leather upper (Art. no.: 6931, 6932)
- TPU scuffcap (Art. no.: 6941, 6942)
- breathable distance mesh lining
- reflective elements
- dust tongue
- sizes 35 to 40 produced using a womens' last
- removable antistatic comfortable innersole (Art. no.: 95187-9)

| uvex 2 trend | Shoe | Lace-up boot | Shoe | Lace-up boot |
|---|---|---|---|---|
| **Art. no. Width 10** | 69411 | 69421 | 69311 | 69321 |
| **Art. no. Width 11** | **69412** | **69422** | **69312** | **69322** |
| **Art. no. Width 12** | 69413 | 69423 | 69313 | 69323 |
| **Norm EN ISO 20345:2022** | S3S FO SC SR | S3S FO SC SR | S3S FO SR | S3S FO SR |
| **Upper** | microvelour | microvelour | water repellent leather | water repellent leather |
| **Lining** | distance mesh lining | distance mesh lining | distance mesh lining | distance mesh lining |
| **Fastening** | shoe laces | shoe laces | shoe laces | shoe laces |
| **Sizes** | 35 to 52 | 35 to 52 | 35 to 52 | 35 to 52 |
| **Order unit** | PR | PR | PR | PR |

$CO_2$ footprint:
**7.61**/9.64 kg $CO_2$e 10/2025 (6941),
**7.95**/10.03 kg $CO_2$e 10/2025 (6942),
**15.05**/17.16 kg $CO_2$e 10/2025 (6931),
**15.74**/17.91 kg $CO_2$e 10/2025 (6932),
calculation method see page 342

Recycled content: The midsole consists of 10% recycled PU waste (PIR) from our production processes, the innersole consists of 60% recycled PU foam, the penetration resistance consists of 21% recycled polyester (GRS certified)

You can find more information on uvex medicare on pages 422 to 426

uvex

# Safety Footwear

## uvex 2 trend






**S1 P** | 69361 69362 69363 **S1** | 69367 69368 69369




69381 69382 69383 BOA

clima zone

## uvex 2 trend · Sandal S1 P/S1 · Perforated shoe S1 P

- shock-absorbing PU midsole
- PU outsole
- steel protective toe cap
- steel penetration resistance (Art. no.: 69361-3, 6938)
- lightweight and breathable microvelour upper
- breathable distance mesh lining
- reflective elements
- ESD certified
- dust tongue (Art. no.: 6938)
- sizes 35 to 40 produced using a womens' last
- suitable for people allergic to chrome
- removable antistatic comfortable innersole (Art. no.: 95187-9)

| uvex 2 trend | Sandal | Sandal | Perforated shoe |
|---|---|---|---|
| **Art. no. Width 10** | 69361 | 69367 | 69381 |
| **Art. no. Width 11** | **69362** | **69368** | **69382** |
| **Art. no. Width 12** | 69363 | 69369 | 69383 |
| **Standard EN ISO 20345:2022** | S1 P FO SR | S1 FO SR | S1 P FO SR |
| **Upper** | microvelour | microvelour | microvelour |
| **Lining** | distance mesh lining | distance mesh lining | distance mesh lining |
| **Fastening** | hook-and-loop fastening | hook-and-loop fastening | BOA® Fit System |
| **Sizes** | 35 to 52 | 35 to 52 | 35 to 52 |
| **Order unit** | PR | PR | PR |

Recycled content: The midsole consists of 10% recycled PU waste (PIR) from our production processes, the insole board consists of 38% recycled polyester, the innersole consists of 60% recycled PU foam, the heel cap is made from 100% recycled TPR, the BOA® Fit System consists of 37% recycled polycarbonate (6938)

You can find more information on uvex medicare on pages 422 to 426



BOA® and BOA® Fit System are registered trademarks of Boa Technology Inc., USA

# Safety Footwear

## uvex 2 trend



**S1 P** 69371 69372 69373 **S1** 69377 69378 69379



69477 69478 69479



69397 69398 69399



69497 69498 69499



69097 69098 69099

clima zone

## uvex 2 trend · Perforated shoe S1 P/S1 · Shoe S2

- shock-absorbing PU midsole
- PU outsole
- steel protective toe cap
- steel penetration resistance (Art. no.: 69371-3)
- lightweight and breathable microvelour upper
- breathable distance mesh lining
- reflective elements
- ESD certified
- dust tongue
- sizes 35 to 40 produced using a womens' last
- suitable for people allergic to chrome
- removable antistatic comfortable innersole (Art. no.: 95187-9)

| uvex 2 trend | Perforated shoe | Perforated shoe | Perforated shoe | Shoe | Shoe | Shoe |
|---|---|---|---|---|---|---|
| **Art. no. Width 10** | 69371 | 69377 | 69477 | 69397 | 69497 | 69097 |
| **Art. no. Width 11** | **69372** | **69378** | **69478** | **69398** | **69498** | **69098** |
| **Art. no. Width 12** | 69373 | 69379 | 69479 | 69399 | 69499 | 69099 |
| **Standard EN ISO 20345:2022** | S1 P FO SR | S1 FO SR | S1 FO SR | S2 FO SR | S2 FO SR | S2 FO SR |
| **Upper** | microvelour | microvelour | microvelour | microvelour | microvelour | microvelour |
| **Lining** | distance mesh lining | distance mesh lining | distance mesh lining | distance mesh lining | distance mesh lining | distance mesh lining |
| **Fastening** | shoe laces | shoe laces | shoe laces | shoe laces | shoe laces | shoe laces |
| **Sizes** | 35 to 52 | 35 to 52 | 35 to 52 | 35 to 52 | 35 to 52 | 35 to 52 |
| **Order unit** | PR | PR | PR | PR | PR | PR |

Recycled content: The midsole consists of 10% recycled PU waste (PIR) from our production processes, the insole board consists of 38% recycled polyester, the innersole consists of 60% recycled PU foam, the heel cap is made from 100% recycled TPR

You can find more information on uvex medicare on pages 422 to 426

uvex

# Safety Footwear

## uvex 2 trend




69347
69348
69349




69341
69342
69343






69481
69482
69483

BOA




69357
69358
69359




69351
69352
69353

clima zone

ESD

## uvex 2 trend · Shoe S2/S3 · Lace-up boot S2/S3

- shock-absorbing PU midsole
- PU outsole
- foamed polyurethane scuffcap (Art. no.: 69341-3, 69351-3)
- steel protective toe cap
- steel penetration resistance (Art. no.: 69341-3, 69351-3, 69481-3)
- hydrophobic leather upper (Art. no.: 6934, 6935)
- lightweight and breathable microvelour upper (Art. no.: 6948)
- breathable distance mesh lining
- reflective elements
- ESD certified
- dust tongue
- sizes 35 to 40 produced using a womens' last
- suitable for people allergic to chrome (Art. no.: 6948)
- removable antistatic comfortable innersole (Art. no.: 95187-9)

| uvex 2 trend | Shoe | Shoe | Shoe | Lace-up boot | Lace-up boot |
|---|---|---|---|---|---|
| **Art. no. Width 10** | 69347 | 69341 | 69481 | 69357 | 69351 |
| **Art. no. Width 11** | **69348** | **69342** | **69482** | **69358** | **69352** |
| **Art. no. Width 12** | 69349 | 69343 | 69483 | 69359 | 69353 |
| **Standard EN ISO 20345:2022** | S2 FO SR | S3 FO SR | S3 FO SR | S2 FO SR | S3 FO SR |
| **Upper** | full-grain soft leather | full-grain soft leather | mikrovelour | full-grain soft leather | full-grain soft leather |
| **Lining** | distance mesh lining | distance mesh lining | distance mesh lining | distance mesh lining | distance mesh lining |
| **Fastening** | shoe laces | shoe laces | BOA® Fit System | shoe laces | shoe laces |
| **Sizes** | 35 to 52 | 35 to 52 | 35 to 52 | 35 to 52 | 35 to 52 |
| **Order unit** | PR | PR | PR | PR | PR |

Recycled content: The midsole consists of 5% (69341-3, 69351-3)/10% (69347-9, 6948, 69357-9) recycled PU waste (PIR) from our production processes, the insole board consists of 38% recycled polyester, the innersole consists of 60% recycled PU foam, the heel cap is made from 100% recycled TPR, the BOA® Fit System consists of 37% recycled polycarbonate (6948)

You can find more information on uvex medicare on pages 422 to 426



BOA® and BOA® Fit System are registered trademarks of Boa Technology Inc., USA







# Safety Footwear

heavy areas of application

uvex

# uvex 3 – safety and comfort made easy.

# Hard work. Easy going.

reddot winner 2022



**uvex anklepro**
Protection against impacts in the ankle area



**uvex lacelock**
Optimised lacing for increased stability with locking lace hooks



**uvex waterstop Technologie**
Reliable protection against water penetration for four times longer



68721
68722
68723





68751
68752
68753

reddot winner 2022

**bionom** x **clima** zone i-**PURE**nrj planet

## uvex 3 · Lace-up boot S3 · High lace-up boot S3

- uvex i-PUREnrj planet midsole with shock-absorption and energy-return features
- PU outsole
- foamed polyurethane scuffcap
- foamed polyurethane heel basket
- 100% metal-free protective toe cap
- steel penetration resistance
- water-resistant uvex waterstop leather upper
- breathable textile lining
- uvex anklepro ankle protection
- uvex lacelock fastening hook
- reflective elements
- ESD certified
- dust tongue
- sizes 36 to 40 produced using a womens' last
- removable antistatic comfortable innersole (Art. no.: 86937-9)

▶ **uvex recommends footwear with steel midsoles for demanding applications such as construction and construction-related industries.**

| uvex 3 | Lace-up boot | High lace-up boot |
|---|---|---|
| **Art. no. Width 10** | 68721 | 68751 |
| **Art. no. Width 11** | **68722** | **68752** |
| **Art. no. Width 12** | 68723 | 68753 |
| **Standard EN ISO 20345:2022** | S3 FO CI SC SR | S3 FO CI SC SR |
| **Upper** | water repellent leather | water repellent leather |
| **Lining** | textile | textile |
| **Fastening** | shoe laces | shoe laces |
| **Sizes** | 36 to 52 | 36 to 52 |
| **Order unit** | PR | PR |

$CO_2$ footprint:
**19.66**/22.29 kg $CO_2$e 10/2025 (6872), calculation method see page 342

Recycled content: The midsole consists of 10% recycled PU waste (PIR) from our production processes, the insole board consists of 38% recycled polyester, the innersole consists of 72% recycled material (PU foam, GRS-certified polyester)

You can find more information on uvex medicare on pages 422 to 426

uvex

# Safety Footwear

## uvex 3

reddot winner 2022




**bionom** x **clima** zone i-**PURE**nrj planet

## uvex 3 · Shoe S3L · Lace-up boot S3L · High lace-up boot S3L CI · High zip-up boot S3L CI

The uvex 3 is the ideal companion for heavy-duty applications. It combines the necessary robustness with a sporty and dynamic design. The uvex bionom x design ensures that upper and outsole offer optimum wearer comfort. Additional features also provide outstanding protection.

- uvex i-PUREnrj planet midsole with shock-absorption and energy-return features
- PU outsole
- foamed polyurethane scuffcap
- foamed polyurethane heel basket
- 100% metal-free protective toe cap
- flexible textile penetration resistance
- water-resistant uvex waterstop leather upper
- breathable textile lining
- uvex anklepro ankle protection (Art. no.: 6874)
- uvex lacelock fastening hook (Art. no.: 6874)
- reflective elements
- ESD certified
- dust tongue
- sizes 36 to 40 produced using a womens' last
- metal-free (Art. no.: 6871)
- removable antistatic comfortable innersole (Art. no.: 86937-9)

| uvex 3 | Shoe | Lace-up boot | High lace-up boot | High zip-up boot |
|---|---|---|---|---|
| **Art. no. Width 10** | 68711 | 68741 | 68771 | 68781 |
| **Art. no. Width 11** | **68712** | **68742** | **68772** | **68782** |
| **Art. no. Width 12** | 68713 | 68743 | 68773 | 68783 |
| **Standard EN ISO 20345:2022** | S3L FO CI SC SR | S3L FO CI SC SR | S3L FO CI SC SR | S3L FO CI SC SR |
| **Upper** | water repellent leather | water repellent leather | water repellent leather | water repellent leather |
| **Lining** | textile | textile | warm lining | warm lining |
| **Fastening** | shoe laces | shoe laces | shoe laces | zip |
| **Sizes** | 36 to 52 | 36 to 52 | 36 to 52 | 36 to 52 |
| **Order unit** | PR | PR | PR | PR |

Recycled content: The midsole consists of 10% recycled PU waste (PIR) from our production processes, the innersole consists of 72% recycled material (PU foam, GRS-certified polyester)

You can find more information on uvex medicare on pages 422 to 426



# Facing the Challenge



68791
68792
68793



68811
68812
68813



68821
68822
68823

**bionom** x **clima** zone i-**PURE**nrj planet

## uvex 3 quatro · Lace-up boot S3 · High lace-up boot S3 · High zip-up boot S3

Made from durable materials, the uvex 3 quatro meets the challenges of the day. Its versatility ensures reliable performance – on demanding construction sites as well as in challenging industrial environments. The sole technology offers outstanding comfort thanks to shock absorption, optimised energy return and ergonomics for long working days.

- uvex i-PUREnrj planet midsole with shock-absorption and energy-return features
- PU outsole
- foamed polyurethane scuffcap
- foamed polyurethane heel basket
- 100% metal-free protective toe cap
- steel penetration resistance
- hydrophobic leather upper
- textile distance mesh lining (Art. no.: 6879)
- warm textile lining (Art. no.: 6881, 6882)
- reflective elements
- ESD certified
- dust tongue (Art. no.: 6879, 6881)
- sizes 36 to 40 produced using a womens' last
- removable antistatic comfortable innersole (Art. no.: 86937-9)

| uvex 3 quatro | Lace-up boot | High lace-up boot | High zip-up boot |
|---|---|---|---|
| **Art. no. Width 10** | 68791 | 68811 | 68821 |
| **Art. no. Width 11** | **68792** | **68812** | **68822** |
| **Art. no. Width 12** | 68793 | 68813 | 68823 |
| **Standard EN ISO 20345:2022** | S3 FO CI SC SR | S3 FO CI SC SR | S3 FO CI SC SR |
| **Upper** | water repellent leather | water repellent leather | water repellent leather |
| **Lining** | textile | warm lining | warm lining |
| **Fastening** | shoe laces | shoe laces | zip |
| **Sizes** | 36 to 52 | 36 to 52 | 36 to 52 |
| **Order unit** | PR | PR | PR |

$CO_2$ footprint:
**14.99**/17.50 kg $CO_2$e 10/2025 (6879),
**17.01**/19.55 kg $CO_2$e 10/2025 (6881),
**22.79**/25.53 kg $CO_2$e 10/2025 (6882),
calculation method see page 342


Recycled content: The midsole consists of 10% recycled PU waste (PIR) from our production processes, the insole board consists of 38% recycled polyester, the innersole consists of 72% recycled material (PU foam, GRS-certified polyester)

You can find more information on uvex medicare on pages 422 to 426

uvex

uvex 3 Macsole®

# Sustainable rubber technology

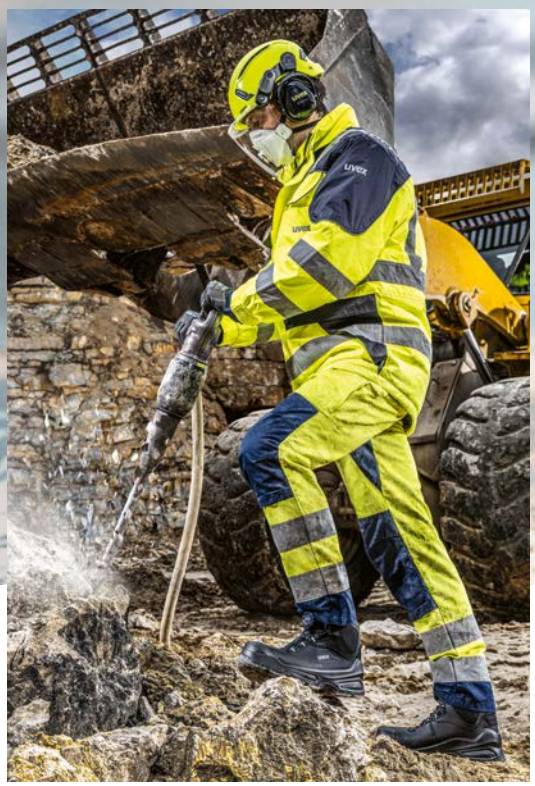



MAC sole

planet up to

**30%**

recycled rubber

Global Recycled Standard

#Weave
SEE THE LIGHTER SIDE

**10%**

less weight



Contact heat resistant short-term up to 300° Celsius and heat-insulating



Prevents slipping on extremely hot or cold surfaces



Cut-resistant and largely chemical-resistant

# Safety Footwear

## uvex 3 MACSOLE®



68641
68642
68643



68601
68602
68603



68621
68622
68623 sympatex®



68611
68612
68613



68631
68632
68633 sympatex®

**bionom** x **clima** zone i-**PURE**nrj planet

## uvex 3 MACSOLE® · Lace-up boot S3S / S3/S7 · Shoe S3/S7

The uvex 3, but even more robust. The MACSOLE® rubber outsole provides even stronger support for heavy-duty applications, making it particularly resistant to heat, chemicals and cuts. In addition, the MACSOLE® rubber sole technology features an unparalleled level of slip resistance, even in cold conditions.

- uvex i-PUREnrj planet midsole with shock-absorption and energy-return features
- heat-, chemical- and cut-resistant uvex MACSOLE® rubber outsole
- foamed polyurethane scuffcap
- foamed polyurethane heel basket
- 100% metal-free protective toe cap
- steel penetration resistance (Art. no.: 6860, 6861, 6862, 6863)
- textile penetration resistance, tested with 3 mm nail (Art. no.: 6864)
- hydrophobic leather upper (Art. no.: 6862, 6863)
- water-resistant uvex waterstop leather upper (Art. no.: 6860, 6861, 6864)
- waterproof Sympatex lining (Art. no.: 6862, 6863)
- breathable textile lining (Art. no.: 6860, 6861, 6864)
- uvex anklepro ankle protection (Art. no.: 6861, 6863, 6864)
- uvex lacelock fastening hook (Art. no.: 6861, 6863)
- reflective elements
- ESD certified
- dust tongue
- sizes 36 to 40 produced using a womens' last
- removable antistatic comfortable innersole (Art. no.: 86937-9)

| uvex 3 MACSOLE® | Lace-up boot | Shoe | Lace-up boot | Shoe | Lace-up boot |
|---|---|---|---|---|---|
| **Art. no. Width 10** | 68641 | 68601 | 68611 | 68621 | 68631 |
| **Art. no. Width 11** | **68642** | **68602** | **68612** | **68622** | **68632** |
| **Art. no. Width 12** | 68643 | 68603 | 68613 | 68623 | 68633 |
| **Standard EN ISO 20345:2022** | S3S FO CI HI HRO SC SR | S3 FO CI HI HRO SC SR | S3 FO CI HI HRO SC SR | S7 FO CI HI HRO SC SR | S7 FO CI HI HRO SC SR |
| **Upper** | water repellent leather | water repellent leather | water repellent leather | water repellent leather | water repellent leather |
| **Lining** | textile | textile | textile | sympatex® laminate | sympatex® laminate |
| **Fastening** | BOA® Fit System | shoe laces | shoe laces | shoe laces | shoe laces |
| **Sizes** | 36 to 52 | 36 to 52 | 36 to 52 | 36 to 52 | 36 to 52 |
| **Order unit** | PR | PR | PR | PR | PR |

$CO_2$ footprint:
**19.93**/22.68 kg $CO_2$e 10/2025 (6864),
**20.58**/23.57 kg $CO_2$e 10/2025 (6863),
calculation method see page 342

Recycled content: The midsole consists of 10% recycled PU waste (PIR) from our production processes, the outsole consists of 30% recycled rubber waste (GRS certified), the insole board consists of 38% recycled polyester (6860, 6861, 6862, 6863), the innersole consists of 72% recycled material (PU foam, GRS-certified polyester), the penetration resistance consists of 21% recycled polyester (GRS certified) (6864), the BOA® Fit System consists of 40% recycled polycarbonate (6864)

You can find more information on uvex medicare on pages 422 to 426

MACSOLE® is a registered trademark of UVEX HECKEL s.a.s. sympatex® is a registered trademark of sympatex Technologies GmbH.
Boa® and Boa® Fit System are registered trademarks of Boa Technology Inc., USA.



# Safety Footwear

## uvex 3 MACSOLE® welder

Hot work.

Easy





68661
68662
68663



clima zone

## uvex 3 MACSOLE® welder · Lace-up boot S3 WG

Designed for high-heat environments,
the sole incorporates specialised insulating materials to protect against extreme temperatures. The steel midsole provides reliable penetration resistance and added protection from external hazards. The ergonomic fit makes these shoes the perfect companion for strenuous work.

- uvex i-PUREnrj planet midsole with shock-absorption and energy-return features
- heat-, chemical- and cut-resistant uvex MACSOLE® rubber outsole
- foamed polyurethane scuffcap
- foamed polyurethane heel basket
- 100% metal-free protective toe cap
- steel penetration resistance
- heat-resistant seams
- hydrophobic leather upper
- elastic laces, concealed with leather
- breathable textile lining
- reflective elements
- ESD certified
- dust tongue
- sizes 36 to 40 produced using a womens' last
- removable antistatic comfortable innersole (Art. no.: 86937-9)

| uvex 3 MACSOLE® welder | Lace-up boot |
|---|---|
| **Art. no. Width 10** | 68661 |
| **Art. no. Width 11** | **68662** |
| **Art. no. Width 12** | 68663 |
| **Standard EN ISO 20349-2:2017 + A1:2020** | S3 WG CI HI HRO SRC |
| **Upper** | hydrophobic leather |
| **Lining** | textile |
| **Fastening** | concealed elastic laces |
| **Sizes** | 36 to 52 |
| **Order unit** | PR |

$CO_2$ footprint:
**19.03**/21.64 kg $CO_2$e 10/2025 (6866),
calculation method see page 342

Recycled content: The midsole consists of 10% recycled PU waste (PIR) from our production processes, the outsole consists of 30% recycled rubber waste (GRS certified), the insole board consists of 38% recycled polyester, the innersole consists of 72% recycled material (PU foam, GRS-certified polyester)

You can find more information on uvex medicare on pages 422 to 426



MACSOLE® is a registered trademark of UVEX HECKEL s.a.s.




going.







65731
65732
65733



## uvex 3 foundry · Boot S3 Fe Al

Designed for high-heat environments,
the sole incorporates specialised insulating materials to protect against extreme temperatures. The steel midsole provides reliable penetration resistance and added protection from external hazards. The ergonomic fit makes these shoes the perfect companion for strenuous work.

- heat-, chemical- and cut-resistant rubber sole
- shock-absorbing EVA inserts in the rubber sole at the heel and forefoot
- rubber scuffcap
- 100% metal-free protective toe cap
- steel penetration resistance
- special upper construction to prevent the penetration of molten metal
- heat-resistant seams
- hydrophobic leather upper
- quick-release strap closure for quickly taking off the footwear in case of contact with molten metal
- breathable textile lining
- reflective elements
- cover and dust tongue
- removable antistatic comfortable innersole (Art. no.: 86197-9)

| uvex 3 foundry | Boot |
|---|---|
| **Art. no. Width 10** | 65731 |
| **Art. no. Width 11** | **65732** |
| **Art. no. Width 12** | 65733 |
| **Standard EN ISO 20349-1:2017 + A1:2020** | S3 Fe Al Cl HI HRO SRC |
| **Upper** | hydrophobic leather |
| **Lining** | textile |
| **Fastening** | quick release fastener |
| **Sizes** | 36 to 51 |
| **Order unit** | PR |

$CO_2$ footprint:
**28.24**/31.44 kg $CO_2$e 09/2025 (6573),
calculation method see page 342

Recycled content: The insole board consists of 38% recycled polyester, the innersole consists of 73% recycled material (PU foam, GRS-certified polyester)

You can find more information on uvex medicare on pages 422 to 426



# Heckel safety shoes

## Performance with style

**A brand of the uvex group**
Heckel, headquartered in France, has been a specialist in safety footwear since 1970 and is among the pioneers of the industry. Heckel has been part of the uvex group since 2001 and its products are distributed in over 30 countries.

**Performance with style**
Heckel stands for performance. When wearing Heckel safety shoes, users know they are fully protected and ready for the most extreme conditions. By not compromising on the quality and testing of our products, we guarantee the performance of our safety shoes and the protection of the professionals who wear them. Heckel safety shoes protect against mechanical and chemical risks as well as heat, cold and moisture, while emphasising style.

**MACSOLE® technology**
Being a true specialist in rubber soles, Heckel has been developing its own technology for more than 20 years: MACSOLE®. Made from an exclusive mixture of nitrile rubbers, MACSOLE® soles offer unrivalled performance in slip resistance, durability and comfort.

HECKEL
PERFORMANCE WITH STYLE

# MACSOLE® ADVENTURE 3.0




MAC sole
ADVENTURE 3.0



**Resistant and durable**
MACSOLE® ADVENTURE 3.0 rubber soles guarantee unrivalled performance in slip resistance and durability and are also resistant to contact heat.



**Designed for outdoor use**
With a scuffcap made from highly abrasion-resistant rubber and the Agile Ankle Guard support system, these safety shoes are suitable for outdoor work and difficult surfaces.




**Comfortable & wear-resistant**
The natural elastic properties of rubber combined with innovative MACABSORB technology ensure shock absorption that is 85% higher than the standard for durable wearer comfort.

# Safety Footwear

SR



67323

HRO



67313

ADVENTURE 3.0

**MACCROSSROAD 3.0 LOW + HIGH** S3L FO CI HI HRO SC SR

MACSOLE® ADVENTURE 3.0 rubber **sole** with EVA MACABSORB inserts at the heel and forefoot | liquid-resistant oiled full-grain leather **upper** with Agile Ankle Guard reinforced heel and sides | polyester 3D mesh **lining** | non-metallic **toe cap** | non-metallic **penetration-resistant sole** | **hygienic innersole** made from 85% recycled PU foam with shock absorption at the front and heel

Areas of application: heavy application

Removable innersole made wholly or partly from recycled materials
Free from harmful substances according to our restricted substances list

$CO_2$ footprint:
**11.94**/14.94 $CO_2$e 06/2025 (6731),
calculation method see page 342

| | MACCROSSROAD 3.0 LOW | MACCROSSROAD 3.0 HIGH |
|---|---|---|
| **Art. no. Width 10** | 67322 | 67312 |
| **Art. no. Width 11** | 67323 | 67313 |
| **Art. no. Width 12** | 67324 | 67314 |
| **Standard EN ISO 20345:2022** | S3L FO LG CI HI HRO SC SR | S3L FO LG CI HI HRO SC SR |
| **Colours** | black, lime | black, lime |
| **Sizes** | 36 to 48 | 35 to 51 |
| **Weight** | 650 g | 700 g |
| **Order unit** | PR | PR |

LG-certified products will be available from April 2027

# M



67353

D30®



# BOA



67363



67373



BOA

**MACCROSSROAD 3.0 HIGH META** S3L FO LG CI HI HRO M SC SR + **HIGH BOA** S3L FO LG CI HI HRO SC SR + **LOW BOA** S3L FO LG CI HI HRO SC SR

MAC sole ADVENTURE 3.0

MACSOLE® ADVENTURE 3.0 rubber **sole** with EVA MACABSORB inserts at the heel and forefoot | liquid-resistant oiled full-grain leather **upper** with Agile Ankle Guard reinforced heel and sides | BOA® Fit System easy, quick fastening solution with personalised adjustment (BOA) | D30 100 J energy absorption highly flexible (META) **metatarsal protection** | polyester 3D mesh **lining** | non-metallic **toe cap** | non-metallic **penetration-resistant sole** | **hygienic innersole** made from 85% recycled PU foam with shock absorption at the front and heel

Areas of application: heavy application

Removable innersole made wholly or partly from recycled materials
Free from harmful substances according to our restricted substances list

$CO_2$ footprint:
**12.96**/16.09 kg $CO_2e$ 04/2026 (6735),
**12.19**/15.26 kg $CO_2e$ 04/2025 (6736),
calculation method see page 342

| | MACCROSSROAD 3.0 HIGH META | MACCROSSROAD 3.0 HIGH BOA | MACCROSSROAD 3.0 LOW BOA |
|---|---|---|---|
| **Art. no. Width 10** | 67352 | 67362 | 67372 |
| **Art. no. Width 11** | 67353 | 67363 | 67373 |
| **Art. no. Width 12** | 67354 | 67364 | 67374 |
| **Standard EN ISO 20345:2022** | S3L FO LG CI HI HRO M SC SR | S3L FO LG CI HI HRO SC SR | S3L FO LG CI HI HRO SC SR |
| **Colours** | black, lime | black, blue | black, blue |
| **Sizes** | 36 to 48 | 36 to 48 | 36 to 48 |
| **Weight** | 740 g | 700 g | 670 g |
| **Order unit** | PR | PR | PR |

LG-certified products will be available from April 2027

BOA® and BOA® Fit System are registered trademarks of Boa Technology Inc., USA

uvex

# Safety Footwear

## Accessories · Innersoles




### Multiple fit system

In addition to foot length, foot width also plays a decisive role in ensuring that the shoe fits perfectly. The uvex multiple fit system offers different widths within each shoe size, defining the internal volume of the shoe to ensure an optimal fit – whether the feet are narrow or wide. For easy fitting, the multiple fit system uses colour codes: Red indicates width 10 (narrow), blue indicates width 12 (wide) and orange indicates width 14 (extra wide). Width 11 corresponds to the standard width.













Example image. Deviations are possible, depending on the selected variant.

clima zone


## Replacement innersoles

- improved full-surface shock absorption
- ultra-breathable, moisture-absorbing and quick-drying materials
- shock absorption zones support natural movement of the foot
- non-irritating, comfortable surface structure
- antistatic properties
- arch support
- washable, hand wash at 30°C

| Accessories – innersoles | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| **Art. no. Width 10** | 94907 | 95797 | 95177 | 95157 | 95187 | 95347 | 86937 | 86397 | 86197 |
| **Art. no. Width 11** | **94908** | **95798** | **95178** | **95158** | **95188** | **95348** | **86938** | **86398** | **86198** |
| **Art. no. Width 12** | 94909 | 95799 | 95179 | 95159 | 95189 | 95349 | 86939 | 86399 | 86199 |
| **Art. no. Width 14** | 94900 | 95790 | – | – | – | 95340 | – | – | – |
| **Version** | for uvex 1 G2, uvex 1 G2 planet | for uvex 1 x-craft, uvex 1 sport, uvex 1 sport white | for uvex 1 sport NC | for uvex 1 business | for uvex 2 trend | for uvex 1, uvex 2, uvex 2 construction, uvex 2 MACSOLE®, uvex 2 xenova® | for uvex 3, uvex 3 MACSOLE®, uvex 3 MACSOLE® welder, uvex 3 quatro | for uvex 1 x-cite | for uvex 3 foundry |
| **Sizes** | 35 to 52 | 35 to 52 | 35 to 52 | 35 to 52 | 35 to 52 | 35 to 52 | 36 to 52 | 34 to 44 | 36 to 51 |
| **Order unit** | PR | PR | PR | PR | PR | PR | PR | PR | PR |



**LOW**
Art. no. 95281
Art. no. 95284
Art. no. 95287
Sizes 35 to 52



**MEDIUM**
Art. no. 95282
Art. no. 95285
Art. no. 95288
Sizes 35 to 52



**HIGH**
Art. no. 95283
Art. no. 95286
Art. no. 95289
Sizes 35 to 52

clima zone

## uvex tune-up for support and comfort

Antistatic innersole concept for use in safety footwear. Designed to increase wearer comfort and enhance ergonomics by providing optimum support for the arches of the feet, helping to reduce foot fatigue.

- three different arch support versions: LOW, MEDIUM and HIGH
- very good cushioning for comfort underfoot
- reduces symptoms of fatigue
- prevents pressure points
- non-irritating, comfortable surface structure
- breathable and moisture-absorbing
- anti-bacterial
- antistatic
- suitable for ESD footwear
- hand-washable at 30°C
- certified for use in the following uvex safety shoes

| Accessories – Innersoles | uvex tune-up comfortable innersole | uvex tune-up comfortable innersole | uvex tune-up comfortable innersole |
|---|---|---|---|
| **Art. no. arch support low** | 95281 | 95284 | 95287 |
| **Art. no. arch support medium** | **95282** | **95285** | **95288** |
| **Art. no. arch support high** | 95283 | 95286 | 95289 |
| **Version certified in accordance with** | uvex 1, uvex 2, uvex 2 MACSOLE® | uvex 1 x-craft, | uvex 1 G2, uvex 2 trend, |
| **EN ISO 20345 for the safety shoe types** | uvex 2 xenova® | uvex 1 sport | uvex 3, uvex 3 quatro |
| **Sizes** | 35 to 52 | 35 to 52 | 35 to 52 |
| **Order unit** | PR | PR | PR |



**LOW** 94790



**MEDIUM** 94791



**HIGH** 94792

SECOSOL® COMPLETE+

## SECOSOL® COMPLETE+ for support and stability

SECOSOL® COMPLETE+ is an ergonomically designed comfort innersole for safety shoes. It stabilises the foot, supports a healthy body position and thereby prevents knee and back discomfort. It is certified in accordance with EN ISO 20345/47:2022 for selected uvex shoe models.

- stabilises the arch in three different designs: LOW, MID and HIGH
- reduces stress symptoms
- reduces impact forces thanks to the integrated shock absorber
- relieves strain on the forefoot thanks to the integrated pad
- provides optimal level of support and improves body static
- breathable and moisture-absorbing
- antistatic
- suitable for ESD footwear
- certified for the following uvex safety shoes

| Accessories – Innersoles | SECOSOL® COMPLETE+ |
|---|---|
| **Art. no. arch support low** | 94790 |
| **Art. no. arch support medium** | **94791** |
| **Art. no. arch support high** | 94792 |
| **Version certified in accordance with** | uvex 1 , uvex 1 G2 , uvex 1 x-craft , uvex 1 sport, uvex 1 sport NC, uvex 2, |
| **EN ISO 20345/47 for the safety shoe types** | uvex 2 MACSOLE®, uvex 2 trend, uvex 3, uvex 3 quatro |
| **Sizes** | 35 to 50 |
| **Order unit** | PR |




## uvex nano shoe add in

footwear disinfectant against foot odour and athlete's foot


**The principle**
uvex nano shoe 'add in' uses specially developed technology which releases controlled doses of active ingredients with long-lasting effect:
The uvex nano shoe 'add in' disinfectant contains antimicrobial and antifungal active ingredients which eliminate bacteria and fungus over the longer term. Although this expertise owes its origins to chemical nano-technology, the uvex nano shoe 'add in' does not contain any actual nano particles: The formula contains only active ingredients which are approved for use for a number of years and can be found in cosmetics (formaldehyde-free, phenol-free).

**How it works**
- Odour prevention:
  Regular application of uvex nano shoe 'add in' in new shoes will prevent any build-up of odour from the outset. Unlike deodorants, which simply cover sweaty smells, this product deals with the underlying causes: bacteria.
- Ongoing deodorization:
  Application of uvex nano shoe 'add in' will return footwear that has already been well worn to odour-neutral conditions.
- Kills fungi:
  Filamentous or yeast fungi are among the most common causes of skin diseases (such as athlete's foot) affecting the feet. uvex nano shoe 'add in' kills existing fungi and prevents reoccurrence.

**Use**
- uvex nano shoe add in is optimised for use in the interior of the shoe. Shake before use. Hold the spray head inside the shoe and spray on approximately five to ten pumps of the uvex nano shoe add in. Only wear shoes that have dried fully. (Allow shoes to dry for at least 15 minutes).

**Application**
- 1–2 times a week.

The nano shoe add in working principle
Controlled release of germicidal agents to protect against foot odour and athletes foot

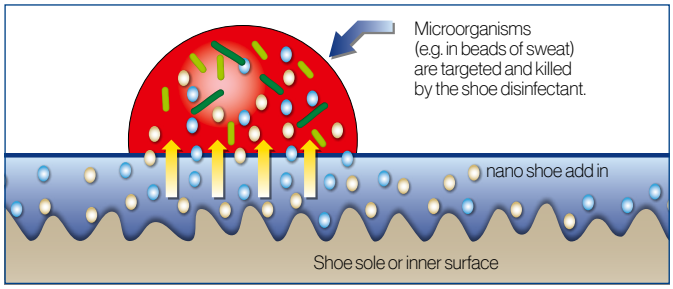


| uvex nano shoe add in | |
|---|---|
| **Art. no.** | 9698300 |
| **Content** | 125 ml |
| **Order unit** | PC |

## Collonil ORGANIC COVER

Footwear impregnation for protection against moisture penetration and stains




- Effective protection against dirt, dust and moisture
- Ideal for smooth/full-grain leather, synthetic, textile and high-tech materials as well as shoes with membrane
- Suitable for use in enclosed spaces
- Gentle material care with natural ingredients including sunflower wax
- Vegan
- PFC-free/fluorine-free, tested according to DIN 14582
- In an pump atomiser, without propellant gases
- The containers are made of polyethylene (PE) with at least 50% recycled content
- No dangerous materials, no hazard warnings on the back

**Use**
- Shake the bottle before use, hold it upright and spray it in short bursts from approx. 20 cm away. Distribute the liquid evenly using a sponge or cloth. Then leave it to take effect and allow to dry thoroughly before putting on. The product must dry for at least 24 hours. Roughen suede with a brush, if necessary. Polishing smooth leather increases the water-repellent effect. Repeated application increases the protection.

| Collonil ORGANIC COVER | |
|---|---|
| **Art. no.** | 9698500 |
| **Content** | 200 ml |
| **Order unit** | PC |



94756



94766



98754

## NORA safety boots S5

General features:
- long PVC safety boot

Protection features:
- free of plasticisers included on the SVHC Candidate List of the REACH Regulation
- resistant to oil, grease, fuel, alkalis, acids and disinfectants
- with steel toecap and midsole
- toe and heel reinforcements plus ankle protection
- antistatic

Comfort features:
- anatomically shaped lasts, prevent foot fatigue
- leg height 33 cm (for size 42 boot)
- long shaft, can be shortened
- anatomically shaped insole board
- pull-off aid

## uvex tricot liner socks

- kind to the skin
- extremely high level of moisture absorption
- washable at up to 30 °C
- elastic

| NORA safety boots S5 | | |
|---|---|---|
| **Art. no.** | 94756 | 94766 |
| **Standard EN ISO 20345:2022** | S5 FO SR | S5 FO SR |
| **Upper** | PVC | PVC |
| **Sizes** | 37 to 48 | 36 to 47 |
| **Order unit** | PR | PR |

| uvex tricot liner socks | |
|---|---|
| **Art. no.** | 98754 |
| **Sizes** | 39/40 to 47/48 |
| **Material** | 70% polyester, 30% wool |
| **Order unit** | PR |

# Safety Footwear

## New products

**uvex 1 x-craft**

page 360

S1 PL 68121-4

page 358

S3S 68171-3

page 358

S3S 68181-3

**uvex 1 x-craft pro**

page 358

S1 PS 68161-3

page 359

S1 PS 68061-3

**uvex 1 sport**

page 369

S1 68907-0

page 369

S1 68917-0

page 369

S2 68927-0

page 369

S1 68937-0

page 369

S1 68949-0

page 369

S2 68957-0

page 370

S1 PS 68961-4

page 370

S1 PS 68971-4

page 370

S1 PS 68991-4

page 370

S1 PS 68891-4

page 370

S3 S 68981-4

**uvex 1 sport white**

page 372

S2 65847-9

# Safety Footwear

## New products

**uvex 2 trend**

page 394

S1 PS 69031-3

page 394

S1 PS 69041-3

page 395

S3S 69411-3

page 395

S3S 69421-3

page 395

S3S 69311-3

page 395

S3S 69321-3

**uvex 3 quatro**

page 403

S3 68791-3

page 403

S3 68811-3

page 403

S3 68821-3

**uvex 3 MACSOLE®**

page 405

S3S 68641-3

**uvex 3 MACSOLE® welder**

page 406

S3 WG 68661-3

**uvex 3 foundry**

page 407

S3 Fe Al 65731-3

uvex

# Safety Footwear

## Overview

| Art. no. | Collection | Replacement innersole | Page |
|---|---|---|---|
| 65001 | uvex 2 | 95347 | 386 |
| 65002 | uvex 2 | 95348 | 386 |
| 65003 | uvex 2 | 95349 | 386 |
| 65004 | uvex 2 | 95340 | 386 |
| 65011 | uvex 2 | 95347 | 386 |
| 65012 | uvex 2 | 95348 | 386 |
| 65013 | uvex 2 | 95349 | 386 |
| 65014 | uvex 2 | 95340 | 386 |
| 65021 | uvex 2 | 95347 | 385 |
| 65022 | uvex 2 | 95348 | 385 |
| 65023 | uvex 2 | 95349 | 385 |
| 65024 | uvex 2 | 95350 | 385 |
| 65031 | uvex 2 | 95347 | 385 |
| 65032 | uvex 2 | 95348 | 385 |
| 65033 | uvex 2 | 95349 | 385 |
| 65034 | uvex 2 | 95350 | 385 |
| 65081 | uvex 2 | 95347 | 386 |
| 65082 | uvex 2 | 95348 | 386 |
| 65083 | uvex 2 | 95349 | 386 |
| 65084 | uvex 2 | 95340 | 386 |
| 65091 | uvex 2 | 95347 | 386 |
| 65092 | uvex 2 | 95348 | 386 |
| 65093 | uvex 2 | 95349 | 386 |
| 65094 | uvex 2 | 95340 | 386 |
| 65101 | uvex 2 construction | 95347 | 389 |
| 65102 | uvex 2 construction | 95348 | 389 |
| 65103 | uvex 2 construction | 95349 | 389 |
| 65221 | uvex 2 MACSOLE® | 95347 | 387 |
| 65222 | uvex 2 MACSOLE® | 95348 | 387 |
| 65223 | uvex 2 MACSOLE® | 95349 | 387 |
| 65224 | uvex 2 MACSOLE® | 95340 | 387 |
| 65231 | uvex 2 MACSOLE® | 95347 | 387 |
| 65232 | uvex 2 MACSOLE® | 95348 | 387 |
| 65233 | uvex 2 MACSOLE® | 95349 | 387 |
| 65234 | uvex 2 MACSOLE® | 95340 | 387 |
| 65241 | uvex 2 STX MACSOLE® | 95347 | 388 |
| 65242 | uvex 2 STX MACSOLE® | 95348 | 388 |
| 65243 | uvex 2 STX MACSOLE® | 95349 | 388 |
| 65251 | uvex 2 STX MACSOLE® | 95347 | 388 |
| 65252 | uvex 2 STX MACSOLE® | 95348 | 388 |
| 65253 | uvex 2 STX MACSOLE® | 95349 | 388 |
| 65281 | uvex 2 MACSOLE® | 95347 | 388 |
| 65282 | uvex 2 MACSOLE® | 95348 | 388 |
| 65283 | uvex 2 MACSOLE® | 95349 | 388 |
| 65284 | uvex 2 MACSOLE® | 95340 | 388 |
| 65291 | uvex 2 MACSOLE® | 95347 | 388 |
| 65292 | uvex 2 MACSOLE® | 95348 | 388 |
| 65293 | uvex 2 MACSOLE® | 95349 | 388 |
| 65294 | uvex 2 MACSOLE® | 95340 | 388 |
| 65303 | uvex 2 MACSOLE® | 95349 | 387 |
| 65311 | uvex 2 MACSOLE® | 95347 | 387 |
| 65312 | uvex 2 MACSOLE® | 95348 | 387 |
| 65313 | uvex 2 MACSOLE® | 95349 | 387 |
| 65321 | uvex 2 MACSOLE® | 95347 | 387 |
| 65322 | uvex 2 MACSOLE® | 95348 | 387 |
| 65323 | uvex 2 MACSOLE® | 95349 | 387 |
| 65363 | uvex 2 MACSOLE® | 95349 | 387 |
| 65657 | uvex 1 | 95347 | 378 |
| 65658 | uvex 1 | 95348 | 378 |
| 65659 | uvex 1 | 95349 | 378 |
| 65667 | uvex 1 | 95347 | 379 |
| 65668 | uvex 1 | 95348 | 379 |
| 65669 | uvex 1 | 95349 | 379 |
| 65671 | uvex 1 x-tended support | 95347 | 382 |
| 65672 | uvex 1 x-tended support | 95348 | 382 |
| 65673 | uvex 1 x-tended support | 95349 | 382 |
| 65681 | uvex 1 x-tended support | 95347 | 381 |
| 65682 | uvex 1 x-tended support | 95348 | 381 |
| 65683 | uvex 1 x-tended support | 95349 | 381 |
| 65731 | uvex 3 foundry | 86197 | 407 |
| 65732 | uvex 3 foundry | 86198 | 407 |
| 65733 | uvex 3 foundry | 86199 | 407 |
| 65807 | uvex 1 sport white | 95797 | 372 |
| 65808 | uvex 1 sport white | 95798 | 372 |
| 65809 | uvex 1 sport white | 95799 | 372 |
| 65817 | uvex 1 sport white | 95797 | 372 |
| 65818 | uvex 1 sport white | 95798 | 372 |
| 65819 | uvex 1 sport white | 95799 | 372 |
| 65821 | uvex 1 sport white | 95797 | 372 |
| 65822 | uvex 1 sport white | 95798 | 372 |
| 65823 | uvex 1 sport white | 95799 | 372 |
| 65837 | uvex 1 sport white | 95797 | 372 |
| 65838 | uvex 1 sport white | 95798 | 372 |
| 65839 | uvex 1 sport white | 95799 | 372 |
| 65847 | uvex 1 sport white | 95797 | 372 |
| 65848 | uvex 1 sport white | 95798 | 372 |
| 65849 | uvex 1 sport white | 95799 | 372 |
| 65937 | uvex 1 sport NC | 95177 | 371 |
| 65938 | uvex 1 sport NC | 95178 | 371 |
| 65939 | uvex 1 sport NC | 95179 | 371 |
| 65980 | uvex 1 sport | 95790 | 369 |
| 65987 | uvex 1 sport | 95797 | 369 |
| 65988 | uvex 1 sport | 95798 | 369 |
| 65989 | uvex 1 sport | 95799 | 369 |
| 68001 | uvex 1 x-craft pro | 95797 | 357 |
| 68002 | uvex 1 x-craft pro | 95798 | 357 |
| 68003 | uvex 1 x-craft pro | 95799 | 357 |
| 68004 | uvex 1 x-craft pro | 95790 | 357 |
| 68011 | uvex 1 x-craft pro | 95797 | 357 |
| 68012 | uvex 1 x-craft pro | 95798 | 357 |
| 68013 | uvex 1 x-craft pro | 95799 | 357 |
| 68014 | uvex 1 x-craft pro | 95790 | 357 |
| 68021 | uvex 1 x-craft | 95797 | 360 |
| 68022 | uvex 1 x-craft | 95798 | 360 |
| 68023 | uvex 1 x-craft | 95799 | 360 |
| 68024 | uvex 1 x-craft | 95790 | 360 |
| 68031 | uvex 1 x-craft | 95797 | 360 |
| 68032 | uvex 1 x-craft | 95798 | 360 |
| 68033 | uvex 1 x-craft | 95799 | 360 |
| 68034 | uvex 1 x-craft | 95790 | 360 |
| 68041 | uvex 1 x-craft | 95797 | 360 |
| 68042 | uvex 1 x-craft | 95798 | 360 |
| 68043 | uvex 1 x-craft | 95799 | 360 |
| 68044 | uvex 1 x-craft | 95790 | 360 |
| 68061 | uvex 1 x-craft pro | 95797 | 359 |
| 68062 | uvex 1 x-craft pro | 95798 | 359 |
| 68063 | uvex 1 x-craft pro | 95799 | 359 |
| 68081 | uvex 1 x-craft planet | 95797 | 355 |
| 68082 | uvex 1 x-craft planet | 95798 | 355 |
| 68083 | uvex 1 x-craft planet | 95799 | 355 |
| 68121 | uvex 1 x-craft | 95797 | 360 |
| 68122 | uvex 1 x-craft | 95798 | 360 |
| 68123 | uvex 1 x-craft | 95799 | 360 |
| 68124 | uvex 1 x-craft | 95790 | 360 |
| 68130 | uvex 1 x-craft | 95790 | 361 |
| 68137 | uvex 1 x-craft | 95797 | 361 |
| 68138 | uvex 1 x-craft | 95798 | 361 |
| 68139 | uvex 1 x-craft | 95799 | 361 |
| 68140 | uvex 1 x-craft | 95790 | 361 |
| 68147 | uvex 1 x-craft | 95797 | 361 |
| 68148 | uvex 1 x-craft | 95798 | 361 |
| 68149 | uvex 1 x-craft | 95799 | 361 |
| 68150 | uvex 1 x-craft | 95790 | 361 |
| 68157 | uvex 1 x-craft | 95797 | 361 |
| 68158 | uvex 1 x-craft | 95798 | 361 |
| 68159 | uvex 1 x-craft | 95799 | 361 |
| 68161 | uvex 1 x-craft | 95797 | 358 |
| 68162 | uvex 1 x-craft | 95798 | 358 |
| 68163 | uvex 1 x-craft | 95799 | 358 |
| 68171 | uvex 1 x-craft | 95797 | 358 |
| 68172 | uvex 1 x-craft | 95798 | 358 |
| 68173 | uvex 1 x-craft | 95799 | 358 |
| 68181 | uvex 1 x-craft | 95797 | 358 |
| 68182 | uvex 1 x-craft | 95798 | 358 |
| 68183 | uvex 1 x-craft | 95799 | 358 |
| 68280 | uvex 1 G2 | 94900 | 366 |
| 68287 | uvex 1 G2 | 94907 | 366 |
| 68288 | uvex 1 G2 | 94908 | 366 |
| 68289 | uvex 1 G2 | 94909 | 366 |
| 68290 | uvex 1 G2 | 94900 | 366 |
| 68297 | uvex 1 G2 | 94907 | 366 |
| 68298 | uvex 1 G2 | 94908 | 366 |
| 68299 | uvex 1 G2 | 94909 | 366 |
| 68300 | uvex 1 G2 | 94900 | 367 |
| 68307 | uvex 1 G2 | 94907 | 367 |
| 68308 | uvex 1 G2 | 94908 | 367 |
| 68309 | uvex 1 G2 | 94909 | 367 |
| 68310 | uvex 1 G2 | 94900 | 366 |
| 68317 | uvex 1 G2 | 94907 | 366 |
| 68318 | uvex 1 G2 | 94908 | 366 |
| 68319 | uvex 1 G2 | 94909 | 366 |
| 68341 | uvex 1 G2 | 94907 | 362 |
| 68342 | uvex 1 G2 | 94908 | 362 |
| 68343 | uvex 1 G2 | 94909 | 362 |
| 68344 | uvex 1 G2 | 94900 | 362 |
| 68361 | uvex 1 G2 | 94907 | 363 |
| 68362 | uvex 1 G2 | 94908 | 363 |
| 68363 | uvex 1 G2 | 94909 | 363 |
| 68364 | uvex 1 G2 | 94900 | 363 |
| 68371 | uvex 1 G2 | 94907 | 363 |
| 68372 | uvex 1 G2 | 94908 | 363 |
| 68373 | uvex 1 G2 | 94909 | 363 |
| 68374 | uvex 1 G2 | 94900 | 363 |
| 68381 | uvex 1 G2 | 94907 | 363 |
| 68382 | uvex 1 G2 | 94908 | 363 |
| 68383 | uvex 1 G2 | 94909 | 363 |
| 68384 | uvex 1 G2 | 94900 | 363 |
| 68391 | uvex 1 G2 | 94907 | 363 |
| 68392 | uvex 1 G2 | 94908 | 363 |
| 68393 | uvex 1 G2 | 94909 | 363 |
| 68394 | uvex 1 G2 | 94900 | 363 |
| 68401 | uvex 1 G2 | 94907 | 363 |
| 68402 | uvex 1 G2 | 94908 | 363 |
| 68403 | uvex 1 G2 | 94909 | 363 |
| 68420 | uvex 1 G2 | 94900 | 364 |
| 68427 | uvex 1 G2 | 94907 | 364 |
| 68428 | uvex 1 G2 | 94908 | 364 |
| 68429 | uvex 1 G2 | 94909 | 364 |
| 68430 | uvex 1 G2 | 94900 | 364 |
| 68437 | uvex 1 G2 | 94907 | 364 |
| 68438 | uvex 1 G2 | 94908 | 364 |
| 68439 | uvex 1 G2 | 94909 | 364 |
| 68440 | uvex 1 G2 | 94900 | 364 |
| 68447 | uvex 1 G2 | 94907 | 364 |
| 68448 | uvex 1 G2 | 94908 | 364 |
| 68449 | uvex 1 G2 | 94909 | 364 |
| 68467 | uvex 1 G2 | 94907 | 365 |
| 68468 | uvex 1 G2 | 94908 | 365 |
| 68469 | uvex 1 G2 | 94909 | 365 |
| 68487 | uvex 1 G2 | 94907 | 365 |
| 68488 | uvex 1 G2 | 94908 | 365 |
| 68489 | uvex 1 G2 | 94909 | 365 |
| 68497 | uvex 1 G2 | 94907 | 367 |
| 68498 | uvex 1 G2 | 94908 | 367 |
| 68499 | uvex 1 G2 | 94909 | 367 |
| 68507 | uvex 1 G2 | 94907 | 367 |
| 68508 | uvex 1 G2 | 94908 | 367 |
| 68509 | uvex 1 G2 | 94909 | 367 |
| 68527 | uvex 1 G2 | 94907 | 365 |
| 68528 | uvex 1 G2 | 94908 | 365 |
| 68529 | uvex 1 G2 | 94909 | 365 |
| 68537 | uvex 1 G2 | 94907 | 365 |
| 68538 | uvex 1 G2 | 94908 | 365 |
| 68539 | uvex 1 G2 | 94909 | 365 |
| 68601 | uvex 3 MACSOLE® | 86937 | 405 |
| 68602 | uvex 3 MACSOLE® | 86938 | 405 |
| 68603 | uvex 3 MACSOLE® | 86939 | 405 |
| 68611 | uvex 3 MACSOLE® | 86937 | 405 |
| 68612 | uvex 3 MACSOLE® | 86938 | 405 |
| 68613 | uvex 3 MACSOLE® | 86939 | 405 |
| 68621 | uvex 3 MACSOLE® | 86937 | 405 |
| 68622 | uvex 3 MACSOLE® | 86938 | 405 |
| 68623 | uvex 3 MACSOLE® | 86939 | 405 |
| 68631 | uvex 3 MACSOLE® | 86937 | 405 |
| 68632 | uvex 3 MACSOLE® | 86938 | 405 |
| 68633 | uvex 3 MACSOLE® | 86939 | 405 |
| 68641 | uvex 3 MACSOLE® | 86937 | 405 |
| 68642 | uvex 3 MACSOLE® | 86938 | 405 |
| 68643 | uvex 3 MACSOLE® | 86939 | 405 |
| 68661 | uvex 3 MACSOLE® welder | 86937 | 406 |
| 68662 | uvex 3 MACSOLE® welder | 86938 | 406 |
| 68663 | uvex 3 MACSOLE® welder | 86939 | 406 |
| 68711 | uvex 3 | 86937 | 402 |
| 68712 | uvex 3 | 86938 | 402 |
| 68713 | uvex 3 | 86939 | 402 |
| 68721 | uvex 3 | 86937 | 401 |
| 68722 | uvex 3 | 86938 | 401 |
| 68723 | uvex 3 | 86939 | 401 |
| 68741 | uvex 3 | 86937 | 402 |
| 68742 | uvex 3 | 86938 | 402 |
| 68743 | uvex 3 | 86939 | 402 |
| 68751 | uvex 3 | 86937 | 401 |
| 68752 | uvex 3 | 86938 | 401 |
| 68753 | uvex 3 | 86939 | 401 |
| 68771 | uvex 3 | 86937 | 402 |
| 68772 | uvex 3 | 86938 | 402 |
| 68773 | uvex 3 | 86939 | 402 |
| 68781 | uvex 3 | 86937 | 402 |
| 68782 | uvex 3 | 86938 | 402 |
| 68783 | uvex 3 | 86939 | 402 |
| 68791 | uvex 3 quatro | 86937 | 403 |
| 68792 | uvex 3 quatro | 86938 | 403 |
| 68793 | uvex 3 quatro | 86939 | 403 |
| 68811 | uvex 3 quatro | 86937 | 403 |
| 68812 | uvex 3 quatro | 86938 | 403 |
| 68813 | uvex 3 quatro | 86939 | 403 |
| 68821 | uvex 3 quatro | 86937 | 403 |
| 68822 | uvex 3 quatro | 86938 | 403 |
| 68823 | uvex 3 quatro | 86939 | 403 |
| 68891 | uvex 1 sport | 95797 | 370 |
| 68892 | uvex 1 sport | 95798 | 370 |
| 68893 | uvex 1 sport | 95799 | 370 |
| 68894 | uvex 1 sport | 95790 | 370 |
| 68900 | uvex 1 sport | 95790 | 369 |
| 68907 | uvex 1 sport | 95797 | 369 |
| 68908 | uvex 1 sport | 95798 | 369 |
| 68909 | uvex 1 sport | 95799 | 369 |

# Safety Footwear

## Overview

| Art. no. | Collection | Replacement innersole | Page |
|---|---|---|---|
| 68910 | uvex 1 sport | 95790 | 369 |
| 68917 | uvex 1 sport | 95797 | 369 |
| 68918 | uvex 1 sport | 95798 | 369 |
| 68919 | uvex 1 sport | 95799 | 369 |
| 68920 | uvex 1 sport | 95790 | 369 |
| 68927 | uvex 1 sport | 95797 | 369 |
| 68928 | uvex 1 sport | 95798 | 369 |
| 68929 | uvex 1 sport | 95799 | 369 |
| 68930 | uvex 1 sport | 95790 | 369 |
| 68937 | uvex 1 sport | 95797 | 369 |
| 68938 | uvex 1 sport | 95798 | 369 |
| 68939 | uvex 1 sport | 95799 | 369 |
| 68940 | uvex 1 sport | 95790 | 369 |
| 68949 | uvex 1 sport | 95799 | 369 |
| 68950 | uvex 1 sport | 95790 | 369 |
| 68957 | uvex 1 sport | 95797 | 369 |
| 68958 | uvex 1 sport | 95798 | 369 |
| 68959 | uvex 1 sport | 95799 | 369 |
| 68961 | uvex 1 sport | 95797 | 370 |
| 68962 | uvex 1 sport | 95798 | 370 |
| 68963 | uvex 1 sport | 95799 | 370 |
| 68964 | uvex 1 sport | 95790 | 370 |
| 68971 | uvex 1 sport | 95797 | 370 |
| 68972 | uvex 1 sport | 95798 | 370 |
| 68973 | uvex 1 sport | 95799 | 370 |
| 68974 | uvex 1 sport | 95790 | 370 |
| 68981 | uvex 1 sport | 95797 | 370 |
| 68982 | uvex 1 sport | 95798 | 370 |
| 68983 | uvex 1 sport | 95799 | 370 |
| 68984 | uvex 1 sport | 95790 | 370 |
| 68991 | uvex 1 sport | 95797 | 370 |
| 68992 | uvex 1 sport | 95798 | 370 |
| 68993 | uvex 1 sport | 95799 | 370 |
| 68994 | uvex 1 sport | 95790 | 370 |
| 69031 | uvex 2 trend | 95187 | 394 |
| 69032 | uvex 2 trend | 95188 | 394 |
| 69033 | uvex 2 trend | 95189 | 394 |
| 69041 | uvex 2 trend | 95187 | 394 |
| 69042 | uvex 2 trend | 95188 | 394 |
| 69043 | uvex 2 trend | 95189 | 394 |
| 69097 | uvex 2 trend | 95187 | 397 |
| 69098 | uvex 2 trend | 95188 | 397 |
| 69099 | uvex 2 trend | 95189 | 397 |
| 69311 | uvex 2 trend | 95187 | 395 |
| 69312 | uvex 2 trend | 95188 | 395 |
| 69313 | uvex 2 trend | 95189 | 395 |
| 69321 | uvex 2 trend | 95187 | 395 |
| 69322 | uvex 2 trend | 95188 | 395 |
| 69323 | uvex 2 trend | 95189 | 395 |
| 69341 | uvex 2 trend | 95187 | 398 |
| 69342 | uvex 2 trend | 95188 | 398 |
| 69343 | uvex 2 trend | 95189 | 398 |
| 69347 | uvex 2 trend | 95187 | 398 |
| 69348 | uvex 2 trend | 95188 | 398 |
| 69349 | uvex 2 trend | 95189 | 398 |
| 69351 | uvex 2 trend | 95187 | 398 |
| 69352 | uvex 2 trend | 95188 | 398 |
| 69353 | uvex 2 trend | 95189 | 398 |
| 69357 | uvex 2 trend | 95187 | 398 |
| 69358 | uvex 2 trend | 95188 | 398 |
| 69359 | uvex 2 trend | 95189 | 398 |
| 69361 | uvex 2 trend | 95187 | 396 |
| 69362 | uvex 2 trend | 95188 | 396 |
| 69363 | uvex 2 trend | 95189 | 396 |
| 69367 | uvex 2 trend | 95187 | 396 |
| 69368 | uvex 2 trend | 95188 | 396 |
| 69369 | uvex 2 trend | 95189 | 396 |
| 69371 | uvex 2 trend | 95187 | 397 |
| 69372 | uvex 2 trend | 95188 | 397 |
| 69373 | uvex 2 trend | 95189 | 397 |
| 69377 | uvex 2 trend | 95187 | 397 |
| 69378 | uvex 2 trend | 95188 | 397 |
| 69379 | uvex 2 trend | 95189 | 397 |
| 69381 | uvex 2 trend | 95187 | 396 |
| 69382 | uvex 2 trend | 95188 | 396 |
| 69383 | uvex 2 trend | 95189 | 396 |
| 69397 | uvex 2 trend | 95187 | 397 |
| 69398 | uvex 2 trend | 95188 | 397 |
| 69399 | uvex 2 trend | 95189 | 397 |
| 69411 | uvex 2 trend | 95187 | 395 |
| 69412 | uvex 2 trend | 95188 | 395 |
| 69413 | uvex 2 trend | 95189 | 395 |
| 69421 | uvex 2 trend | 95187 | 395 |
| 69422 | uvex 2 trend | 95188 | 395 |
| 69423 | uvex 2 trend | 95189 | 395 |
| 69477 | uvex 2 trend | 95187 | 397 |
| 69478 | uvex 2 trend | 95188 | 397 |
| 69479 | uvex 2 trend | 95189 | 397 |
| 69481 | uvex 2 trend | 95187 | 398 |

| Art. no. | Collection | Replacement innersole | Page |
|---|---|---|---|
| 69482 | uvex 2 trend | 95188 | 398 |
| 69483 | uvex 2 trend | 95189 | 398 |
| 69497 | uvex 2 trend | 95187 | 397 |
| 69498 | uvex 2 trend | 95188 | 397 |
| 69499 | uvex 2 trend | 95189 | 397 |
| 84271 | uvex 1 business | 95157 | 376 |
| 84272 | uvex 1 business | 95158 | 376 |
| 84273 | uvex 1 business | 95159 | 376 |
| 84281 | uvex 1 business | 95157 | 376 |
| 84282 | uvex 1 business | 95158 | 376 |
| 84283 | uvex 1 business | 95159 | 376 |
| 84301 | uvex 1 business | 95157 | 376 |
| 84302 | uvex 1 business | 95158 | 376 |
| 84303 | uvex 1 business | 95159 | 376 |
| 84481 | uvex 1 business | 95157 | 376 |
| 84482 | uvex 1 business | 95158 | 376 |
| 84483 | uvex 1 business | 95159 | 376 |
| 84697 | uvex 1 business | 95157 | 376 |
| 84698 | uvex 1 business | 95158 | 376 |
| 84699 | uvex 1 business | 95159 | 376 |
| 85117 | uvex 1 x-tended support | 95347 | 381 |
| 85118 | uvex 1 x-tended support | 95348 | 381 |
| 85119 | uvex 1 x-tended support | 95349 | 381 |
| 85127 | uvex 1 x-tended support | 95347 | 381 |
| 85128 | uvex 1 x-tended support | 95348 | 381 |
| 85129 | uvex 1 x-tended support | 95349 | 381 |
| 85141 | uvex 1 x-tended support | 95347 | 381 |
| 85142 | uvex 1 x-tended support | 95348 | 381 |
| 85143 | uvex 1 x-tended support | 95349 | 381 |
| 85161 | uvex 1 x-tended support | 95347 | 382 |
| 85162 | uvex 1 x-tended support | 95348 | 382 |
| 85163 | uvex 1 x-tended support | 95349 | 382 |
| 85171 | uvex 1 x-tended support | 95347 | 382 |
| 85172 | uvex 1 x-tended support | 95348 | 382 |
| 85173 | uvex 1 x-tended support | 95349 | 382 |
| 85191 | uvex 1 x-tended support | 95347 | 381 |
| 85192 | uvex 1 x-tended support | 95348 | 381 |
| 85193 | uvex 1 x-tended support | 95349 | 381 |
| 85361 | uvex 1 x-tended support | 95347 | 381 |
| 85362 | uvex 1 x-tended support | 95348 | 381 |
| 85363 | uvex 1 x-tended support | 95349 | 381 |
| 85420 | uvex 1 | 95340 | 378 |
| 85427 | uvex 1 | 95347 | 378 |
| 85428 | uvex 1 | 95348 | 378 |
| 85429 | uvex 1 | 95349 | 378 |
| 85430 | uvex 1 | 95340 | 378 |
| 85437 | uvex 1 | 95347 | 378 |
| 85438 | uvex 1 | 95348 | 378 |
| 85439 | uvex 1 | 95349 | 378 |
| 85440 | uvex 1 | 95340 | 379 |
| 85447 | uvex 1 | 95347 | 379 |
| 85448 | uvex 1 | 95348 | 379 |
| 85449 | uvex 1 | 95349 | 379 |
| 85450 | uvex 1 | 95340 | 379 |
| 85457 | uvex 1 | 95347 | 379 |
| 85458 | uvex 1 | 95348 | 379 |
| 85459 | uvex 1 | 95349 | 379 |
| 85467 | uvex 1 | 95347 | 378 |
| 85468 | uvex 1 | 95348 | 378 |
| 85469 | uvex 1 | 95349 | 378 |
| 85477 | uvex 1 | 95347 | 378 |
| 85478 | uvex 1 | 95348 | 378 |
| 85479 | uvex 1 | 95349 | 378 |
| 85607 | uvex 1 ladies | 95347 | 380 |
| 85608 | uvex 1 ladies | 95348 | 380 |
| 85617 | uvex 1 ladies | 95347 | 380 |
| 85618 | uvex 1 ladies | 95348 | 380 |
| 85627 | uvex 1 ladies | 95347 | 380 |
| 85628 | uvex 1 ladies | 95348 | 380 |
| 86197 | Innersoles | – | 412 |
| 86198 | Innersoles | – | 412 |
| 86199 | Innersoles | – | 412 |
| 86397 | Innersoles | – | 412 |
| 86398 | Innersoles | – | 412 |
| 86399 | Innersoles | – | 412 |
| 86401 | uvex 1 x-cite | 86397 | 374 |
| 86402 | uvex 1 x-cite | 86398 | 374 |
| 86403 | uvex 1 x-cite | 86399 | 374 |
| 86421 | uvex 1 x-cite | 86397 | 374 |
| 86422 | uvex 1 x-cite | 86398 | 374 |
| 86423 | uvex 1 x-cite | 86399 | 374 |
| 86471 | uvex 1 x-cite | 86397 | 374 |
| 86472 | uvex 1 x-cite | 86398 | 374 |
| 86473 | uvex 1 x-cite | 86399 | 374 |
| 86937 | Innersoles | – | 412 |
| 86938 | Innersoles | – | 412 |
| 86939 | Innersoles | – | 412 |
| 94756 | NORA safety boots | – | 415 |
| 94766 | NORA safety boots | – | 415 |

| Art. no. | Collection | Replacement innersole | Page |
|---|---|---|---|
| 94790 | SECOSOL® COMPLETE+ | Innersoles | 413 |
| 94791 | SECOSOL® COMPLETE+ | Innersoles | 413 |
| 94792 | SECOSOL® COMPLETE+ | Innersoles | 413 |
| 94900 | Innersoles | – | 412 |
| 94907 | Innersoles | – | 412 |
| 94908 | Innersoles | – | 412 |
| 94909 | Innersoles | – | 412 |
| 95157 | Innersoles | – | 412 |
| 95158 | Innersoles | – | 412 |
| 95159 | Innersoles | – | 412 |
| 95177 | Innersoles | – | 412 |
| 95178 | Innersoles | – | 412 |
| 95179 | Innersoles | – | 412 |
| 95187 | Innersoles | – | 412 |
| 95188 | Innersoles | – | 412 |
| 95189 | Innersoles | – | 412 |
| 95281 | Innersoles | – | 413 |
| 95282 | Innersoles | – | 413 |
| 95283 | Innersoles | – | 413 |
| 95284 | Innersoles | – | 413 |
| 95285 | Innersoles | – | 413 |
| 95286 | Innersoles | – | 413 |
| 95287 | Innersoles | – | 413 |
| 95288 | Innersoles | – | 413 |
| 95289 | Innersoles | – | 413 |
| 95340 | Innersoles | – | 412 |
| 95347 | Innersoles | – | 412 |
| 95348 | Innersoles | – | 412 |
| 95349 | Innersoles | – | 412 |
| 95531 | uvex 2 xenova® | 95347 | 391 |
| 95532 | uvex 2 xenova® | 95348 | 391 |
| 95533 | uvex 2 xenova® | 95349 | 391 |
| 95537 | uvex 2 xenova® | 95347 | 391 |
| 95538 | uvex 2 xenova® | 95348 | 391 |
| 95539 | uvex 2 xenova® | 95349 | 391 |
| 95547 | uvex 2 xenova® | 95347 | 391 |
| 95548 | uvex 2 xenova® | 95348 | 391 |
| 95549 | uvex 2 xenova® | 95349 | 391 |
| 95551 | uvex 2 xenova® | 95347 | 392 |
| 95552 | uvex 2 xenova® | 95348 | 392 |
| 95553 | uvex 2 xenova® | 95349 | 392 |
| 95557 | uvex 2 xenova® | 95347 | 392 |
| 95558 | uvex 2 xenova® | 95348 | 392 |
| 95559 | uvex 2 xenova® | 95349 | 392 |
| 95561 | uvex 2 xenova® | 95347 | 392 |
| 95562 | uvex 2 xenova® | 95348 | 392 |
| 95563 | uvex 2 xenova® | 95349 | 392 |
| 95577 | uvex 2 xenova® | 95347 | 391 |
| 95578 | uvex 2 xenova® | 95348 | 391 |
| 95579 | uvex 2 xenova® | 95349 | 391 |
| 95581 | uvex 2 xenova® | 95347 | 391 |
| 95582 | uvex 2 xenova® | 95348 | 391 |
| 95583 | uvex 2 xenova® | 95349 | 391 |
| 95691 | uvex 2 xenova® | 95347 | 392 |
| 95692 | uvex 2 xenova® | 95348 | 392 |
| 95693 | uvex 2 xenova® | 95349 | 392 |
| 95790 | Innersoles | – | 412 |
| 95797 | Innersoles | – | 412 |
| 95798 | Innersoles | – | 412 |
| 95799 | Innersoles | – | 412 |
| 9698300 | uvex nano shoe add in | – | 414 |
| 9698500 | Collonil ORGANIC COVER | – | 414 |
| 98754 | uvex tricot liner socks | – | 415 |

HECKEL
PERFORMANCE WITH STYLE

| Art. no. | Collection | Page |
|---|---|---|
| 67312 | MACCROSSROAD 3.0 HIGH | 410 |
| 67313 | MACCROSSROAD 3.0 HIGH | 410 |
| 67314 | MACCROSSROAD 3.0 HIGH | 410 |
| 67322 | MACCROSSROAD 3.0 LOW | 410 |
| 67323 | MACCROSSROAD 3.0 LOW | 410 |
| 67324 | MACCROSSROAD 3.0 LOW | 410 |
| 67352 | MACCROSSROAD 3.0 HIGH META | 411 |
| 67353 | MACCROSSROAD 3.0 HIGH META | 411 |
| 67354 | MACCROSSROAD 3.0 HIGH META | 411 |
| 67362 | MACCROSSROAD 3.0 HIGH BOA | 411 |
| 67363 | MACCROSSROAD 3.0 HIGH BOA | 411 |
| 67364 | MACCROSSROAD 3.0 HIGH BOA | 411 |
| 67372 | MACCROSSROAD 3.0 LOW BOA | 411 |
| 67373 | MACCROSSROAD 3.0 LOW BOA | 411 |
| 67374 | MACCROSSROAD 3.0 LOW BOA | 411 |




More information
can be found at
uvex-academy.com

# Our new website –
# Your direct access to the uvex academy







## Enhanced clarity. Enhanced service. Enhanced knowledge.

With the relaunch of our website, we've re-designed the uvex academy in a fully digital format – thoughtfully tailored to meet the needs of our customers. The result is a modern, user-friendly platform that makes it easier than ever to access all of our training offerings.

**Your benefits at a glance:**

- Intuitive navigation: Find the right training course quickly – whether it's occupational safety, laser protection or individual seminars.
- Direct booking options: Simply register for courses or request an individual offer.
- Flexible learning: Discover our new formats, such as FlexLearn courses, live online courses and in-person courses – choose what suits your needs.
- Transparent information: All content, dates and contact persons at a glance – clearly structured and accessible at any time.

For more information or to book a place, please visit
**uvex-academy.com**, call **+49 911 9736-1710** or email **academy@uvex.de**






# uvex medicare

uvex

# uvex medicare


Personal innersoles are not permitted in safety shoes.




## Orthopaedic solutions for uvex safety shoes

Orthopaedic innersoles and adjustments from uvex medicare ensure that uvex safety shoes provide an optimal fit – even for individuals with problem feet – and are ideally suited to meet the wearer's specific biomechanical needs. They are made to measure and customised with millimetre precision.

In order to ensure that all safety-related protective features are still guaranteed in the event of an orthopaedic change to the safety shoe, orthopaedic innersoles must only be used in combination with tested, orthopaedic materials. German Social Accident Insurance (DGUV) regulation 112-191 and Austrian ÖNORM Z 1259 describe how a fully certified orthopaedic solution must be used in most situations. **This means that personal orthopaedic insoles are not allowed in safety shoes. All uvex medicare products have therefore been tested and certified in combination with uvex safety shoes in accordance with DIN EN ISO 20345.**

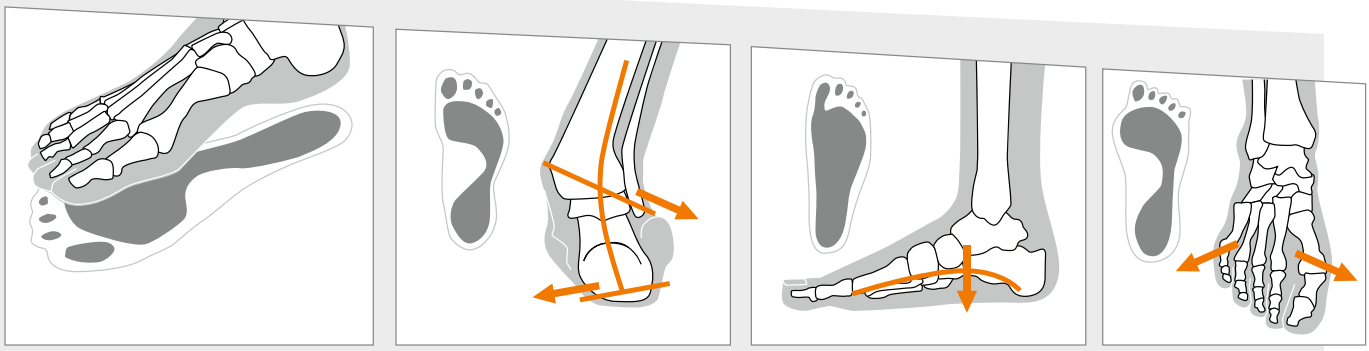

**uvex medicare** | **Skewfoot** | **Flatfoot** | **Splayfoot**

# MADE FOR **YOUR FEET**





## How do I get an orthopaedic adjustment for uvex safety shoes?

uvex requires the footprint of your feet. Our field service can take care of this or you can use our uvex medicare footprint set – a convenient, simple and flexible way to self-record the footprint. All order details can be found on the order form in the folder. In addition, we offer a digital foot measurement service using an app or a pressure-sensing plate. The length, width and arch of the foot are measured on site. Based on the data, a custom recommendation is made for shoe size, width and, if necessary, a suitable innersole. Orthopaedic innersoles are produced using the measurement data, with no need for additional measurements.




## Instructions

1



Separate the white sheet from the clear protective film and place the film over the blueprint, making sure that there are no wrinkles.

2



Place this on a flat surface and place your foot in the middle of it, putting your full body weight onto it.
Draw around the foot with a pen.

3



Peel off the transparent film and remove the blueprint. Now place the film with your footprint on the chequered backing sheet and smooth it out, ensuring that there are no creases.

Repeat the process for your other foot.

Watch our How-to video for a clear explanation of the individual steps.

Simply scan the QR code.



Please note the Austrian regulation ÖNORM Z 1259 regarding footprints.

uvex

# uvex medicare

## Comfortable customised innersoles – Innersole technology for tailor-made treatment



All uvex safety shoes that are marked with the **uvex medicare symbol** can be fitted with uvex orthopaedic comfortable customised innersoles.

The **uvex medicare + logo** indicates that both orthopaedic customised innersoles and orthopaedic adjustments are available.

## EVA soft-foam technology

**Various Medical Concepts**
Applicable – depending on classification:

- conventional orthopaedics
- sensorimotor function
- Spiraldynamik®
- supports correct biomechanical foot rolling
- does not require to be 'broken in' and high wearer comfort




**uvex 3D hydroflex® foam**

- optimum moisture absorption and release
- excellent shock absorption in high-strain zones such as the ball and heel of the foot
- smooth surface
- excellent abrasion resistance

**Orthopaedic Adjustment**

- modular concept
- adapts to assist natural movement

**Supporting Core**

- 2 levels of shore hardness (medium/soft) selected according to requirements: Individually adaptable to body type and support requirements
- high support, guiding and shock absorption properties through soft, raised heel shell

Orthopaedic uvex comfort custom insole
**Art. no.** 6499902








6499911



6499913





6499915

## Orthopaedic shoe adjustments

**Shoe lift**
A shoe lift is required to balance legs of different length.
A shoe lift should never exceed 3 cm.

**Roller sole**
A roller sole eases the burden on the feet during your stride. The precise effect is governed by the location of the pressure point. This helps adjust the length of your stride.

**Outer and inner sole wedges**
By using a wedge, you can adjust the slope beneath the feet in a standing position and correct the line of your stride when walking.

| Orthopaedic shoe adjustments | |
|---|---|
| **Art. no.** | 6499911 |
| **Design** | orthopaedic shoe lift<br>up to 1 cm per side |
| **Art. no.** | 6499912 |
| **Design** | shoe lift per additional cm<br>(up to max. 3 cm) per side |
| **Art. no.** | 6499913 |
| **Design** | rocker sole |
| **Art. no.** | 6499915 |
| **Design** | external or internal edge lift |

▶ All adjustments are available exclusively in black material.



uvex

# uvex medicare

## Orthopaedic solutions for uvex safety shoes

### uvex as a partner for customised protective equipment

Scientific studies prove that well over half the adult population suffers from orthopaedic problems such as flat feet, skewfoot, splayfoot or fallen arches. These conditions have an undisputed effect on the entire musculoskeletal system and physical performance.

With our orthopaedic uvex medicare solutions for uvex safety shoes we offer various orthopaedic protection solutions that are tailored to each individual employee. Maximum comfort and quality guaranteed.

### Our service – your benefits

uvex offers maximum service with maximum flexibility. Our experts are happy to advise you on professional and flexible solutions, tailored to the individual requirements of your company.

**uvex experts:**
- specialists in on-site service
- qualified advisors in uvex customer service
- comprehensive uvex orthopaedics service partner network throughout Germany

**uvex flexibility:**
- on-site product consultation and customisation on request
- appointments for early, late or night shifts also available
- optimal planning via the uvex online appointment portal

**uvex knowledge:**
- decades of experience in orthopaedics and products under continuous development
- training courses/practical seminars can be provided for your employees (e.g. company doctors, occupational safety specialists)
- 'made in uvex' quality: commitment to a comprehensive quality system with a focus on production facilities in Germany/Europe

### Steps to orthopaedic solutions for uvex safety shoes

**1 Appointment and consultation**

Make an appointment by email and receive advice from uvex experts.

medicare@uvex.de

**2 Workplace analysis and product identification**

Our uvex experts will be happy to introduce you to our uvex medicare programme at your premises. Each orthopaedic medicare solution is designed using a medical diagnosis and a blueprint of the foot.

Together, we can find the ideal products for you so you can protect your employees.

**3 Complete orthopaedic solution**

Delivery is quick and easy.

**Contact us for more information with no obligation.**