



uvex

Safety Footwear with BOA® Fit System

protecting people

uvex

Safety Footwear with BOA® Fit System

Dial. Lace. Guides.

The Boa® fit system.

Delivering fit solutions purpose-built for performance, the Boa® Fit System is featured in products across industries (in medical, sports and workwear) and consists of three integral parts: a micro-adjustable dial, a super-strong lightweight lace and low friction lace guides.

Each unique configuration is engineered for effortless precision delivering a connected, fast, customized and durable fit, and is backed by The Boa Guarantee.

DIAL A dial that adjusts fit with precision click by click.
LACE Lightweight, super-strong lace, expertly configured for comfort and performance.
GUIDES Low-friction guides to ensure a smooth closure, every time.

The Boa® benefits.

Fit to perform.

Dial in your perfect fit for custom comfort that's consistent all-day, the micro-adjustable Boa Fit System is fast, easy and built to perform, so you can always get the job done.

as you do, so you can stay focused and confident in any environment – without ever having to remove your gloves.

Stay secure and focused.

Boa's precision engineered laces are contained inside the system, out of your way and out of machinery.

Built for life.

When we say tough, we mean it. Engineered with ultra-durable materials, the Boa Fit System is extensively tested in the harshest conditions.

Confidence in all conditions.

Designed to reduce contamination by shedding ice, dirt, oil and other elements, the Boa Fit System will work as hard



Fit for life with Boa®.

The Boa® Fit System dials and laces are guaranteed for the lifetime of the product on which they are integrated.

How it works.



push in to engage



turn to tighten



pull up for quick release





uvex 1 Shoe S2 SRC

uvex 1	Shoe S2 SRC		
Art. no.	65667	65668	65669
Width	10	11	12
Standard	EN ISO 20345:2011 S2 SRC		
Upper	microvelour		
Lining	distance mesh lining		
Sizes	35 to 52	35 to 52	35 to 52
Order unit	PR	PR	PR



uvex 1

General features:

- ultra-lightweight, versatile and perforated S1 safety shoe and S2 safety shoe
- made from synthetic materials, so suitable for people allergic to chrome
- all sole materials are free of silicones, plasticisers and other paint wetting impairment substances
- Boa® Fit System (consisting of a micro-adjustable dial, super-strong lightweight laces and low friction lace guides) engineered to optimise fit and provide precision, adaptability, and control

Protection features:

- meets the ESD specification with volume resistance under 35 megaohms
- 100% metal-free uvex xenova® toe cap – compact design, anatomical shape, good lateral stability, no thermal conductivity
- ergonomically designed outsole made from dual density polyurethane with excellent slip resistance

Comfort features:

- outstanding wearer comfort results from a newly developed last and climate-optimised, breathable materials with perforation (S1 model)
- virtually seam-free construction made from high-tech microvelour material to eliminate pressure points
- removable antistatic comfortable insole, with a moisture transport system and additional shock absorption around the heel and forefoot
- soft padding on collar and tongue
- sizes 35 to 40 have been produced using a women's last

Areas of application:

- light applications



uvex 1 Perforated shoe S1 SRC

uvex 1	Perforated shoe S1 SRC		
Art. no.	65657	65658	65659
Width	10	11	12
Standard	EN ISO 20345:2011 S1 SRC		
Upper	microvelour		
Lining	distance mesh lining		
Sizes	35 to 52	35 to 52	35 to 52
Order unit	PR	PR	PR





**uvex 1 x-tended support
Perforated Shoe
S1 P SRC**

uvex 1 x-tended support	Perforated Shoe S1 P SRC		
Art. no.	65681	65682	65683
Width	10	11	12
Standard	EN ISO 20345: 2011 S1 P SRC		
Upper	microvelour		
Lining	distance mesh lining		
Sizes	35 to 52	35 to 52	35 to 52
Order unit	PR	PR	PR

uvex 1 x-tended support

General features:

- ultra-lightweight and versatile perforated S1 P safety shoe and S3 safety shoe
- made from synthetic materials, so suitable for people allergic to chrome
- all sole materials are free of silicones, plasticisers and other paint wetting impairment substances
- foamed polyurethane scuffcap helps increase product life of upper
- Boa® Fit System (consisting of a micro-adjustable dial, super-strong lightweight laces and low friction lace guides) engineered to optimise fit and provide precision, adaptability, and control

Protection features:


- meets the ESD specification with volume resistance under 35 megaohms
- 100% metal-free uvex xenova® toe cap – compact design, anatomical shape, good lateral stability, no thermal conductivity
- ergonomically designed outsole made from dual density polyurethane with excellent slip resistance
- 'x-tended' support: medial and lateral heel support for the foot with specially designed side frame – provides additional protection from ankle twisting, stabilises and guides the foot while providing impact protection
- penetration-resistant, non-metallic midsole in accordance with the latest safety standards, does not restrict flexibility of the shoe

Comfort features:

- outstanding wearer comfort thanks to a newly developed last and climate-optimised, breathable materials with perforation (S1 P model) or water-repellent (S3 model)
- virtually seam-free construction made from high-tech microvelour material to eliminate pressure points
- removable antistatic comfortable insole, with a moisture transport system and additional shock absorption around the heel and forefoot
- soft padding on collar and tongue
- sizes 35 to 40 have been produced using a women's last

Areas of application:

- light applications

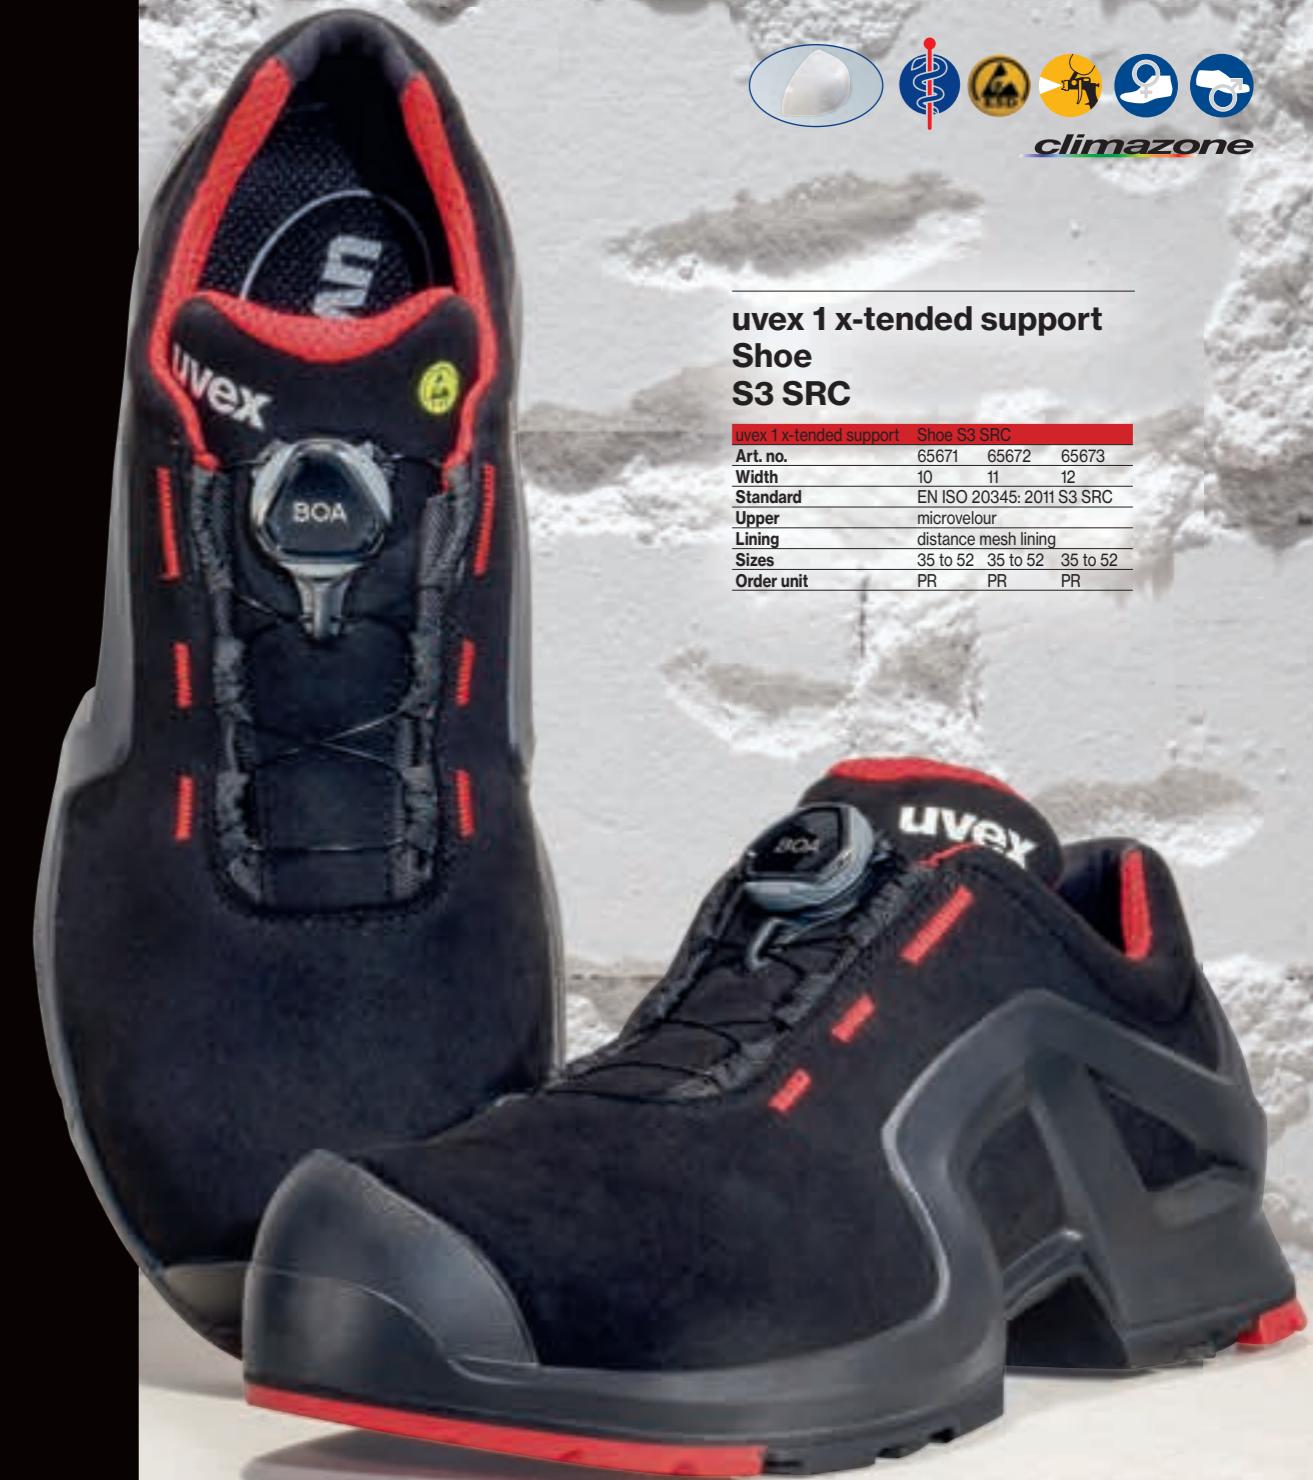

**uvex 1 x-tended support
Shoe
S3 SRC**

uvex 1 x-tended support	Shoe S3 SRC		
Art. no.	65671	65672	65673
Width	10	11	12
Standard	EN ISO 20345: 2011 S3 SRC		
Upper	microvelour		
Lining	distance mesh lining		
Sizes	35 to 52	35 to 52	35 to 52
Order unit	PR	PR	PR

uvex 2 VIBRAM®

General features:

- lightweight and flexible S3 HI safety shoe/ waterproof safety shoe in S3 WR
- foamed polyurethane scuffcap helps increase product life of upper
- Boa® Fit System (consisting of a micro-adjustable dial, super-strong lightweight laces and low friction lace guides) engineered to optimise fit and provide precision, adaptability, and control

Protection features:

- 100% waterproof thanks to GORE-TEX® lining (WR label)
- meets the ESD specification with volume resistance under 35 megaohms
- 100% metal-free uvex xenova® toe cap – compact design, anatomical shape, good lateral stability, no thermal conductivity
- ultra lightweight, double-layer sole made from optimal shock-absorbing midsole and VIBRAM® rubber outsole with excellent anti-slip properties
- HI marking for heat-insulating substructure (tested in accordance with standard at +150°C)
- HRO marking for heat-resistant substructure for brief exposure up to +300°C
- secure grip when climbing on ladders due to the stabilising arch support
- penetration-resistant, non-metallic midsole in accordance with the latest safety standards, does not restrict flexibility of the shoe

Comfort features:

- outstanding wearer comfort thanks to a newly developed last and climate-optimised, breathable materials
- virtually seam-free construction made from particularly soft cowhide leather to eliminate pressure points
- removable antistatic comfortable insole, with a moisture transport system and additional shock absorption around the heel and forefoot
- soft padding on collar and dust tongue
- sizes 35 to 40 have been produced using a women's last

Areas of application:

- medium applications

GORE-TEX® is a registered trademark of W. L. GORE & Associates.
VIBRAM® is a registered trademark of VIBRAM S.P.A.



uvex 2 VIBRAM® Shoe S3 HI HRO SRC

uvex 2 VIBRAM® Shoe S3 HI HRO SRC		
Art. no.	65311	65312 65313
Width	10	11 12
Standard	EN ISO 20345:2011 S3 HI HRO SRC	
Upper	sturdy water-repellent leather upper	
Lining	distance mesh lining	
Sizes	35 to 52	35 to 52 35 to 52
Order unit	PR	PR PR

uvex 2 VIBRAM® Shoe S3 WR HI HRO SRC

uvex 2 VIBRAM® Shoe S3 WR HI HRO SRC		
Art. no.	65331	65332 65333
Width	10	11 12
Standard	EN ISO 20345:2011 S3 WR HI HRO SRC	
Upper	microvelour	
Lining	GORE-TEX® laminate	
Sizes	35 to 52	35 to 52 35 to 52
Order unit	PR	PR PR



uvex 2 xenova® Perforated shoe S1 P SRC

uvex 2 xenova® Perforated shoe S1 P SRC		
Art. no.	95581	95582 95583
Width	10	11 12
Standard	EN ISO 20345:2011 S1 P SRC	
Upper	microvelour	
Lining	distance mesh lining	
Sizes	38 to 52	38 to 52 38 to 52
Order unit	PR	PR PR



uvex 2 xenova®

General features:

- lightweight, modern, perforated S1 P safety shoe
- made from synthetic materials, so suitable for people allergic to chrome
- all sole materials are free of silicones, plasticisers and other paint wetting impairment substances
- Boa® Fit System (consisting of a micro-adjustable dial, super-strong lightweight laces and low friction lace guides) engineered to optimise fit and provide precision, adaptability, and control.

Protection features:

- meets the ESD specifications with volume resistance under 35 megaohms
- 100% metal-free uvex xenova® safety toe cap – compact design, anatomical shape, good lateral stability, no thermal conductivity
- penetration-resistant, non-metallic midsole in accordance with the latest safety standards, does not restrict flexibility of the shoe
- ergonomically designed outsole made from dual density polyurethane with excellent slip resistance
- reflective elements for better visibility

Comfort features:

- lightweight with excellent shock-absorbing properties
- outstanding wearer comfort thanks to a newly developed last and climate-optimised, breathable materials, plus perforated upper
- removable antistatic comfortable insole, with a moisture transport system and additional shock absorption around the heel and forefoot
- soft padding on tongue and collar

Areas of application:

- medium applications



uvex 2 trend



uvex 2 trend Perforated shoe S1 P SRC

uvex 2 trend	Perforated shoe S1 P SRC		
Art. no.	69081	69082	69083
Width	10	11	12
Standard	EN ISO 20345:2011 S1 P SRC		
Upper	microvelour		
Lining	distance mesh lining		
Sizes	38 to 52	38 to 52	38 to 52
Order unit	PR	PR	PR

uvex 2 trend	Perforated shoe S1 P SRC		
Art. no.	69381	69382	69383
Width	10	11	12
Standard	EN ISO 20345:2011 S1 P SRC		
Upper	microvelour		
Lining	distance mesh lining		
Sizes	38 to 52	38 to 52	38 to 52
Order unit	PR	PR	PR



General features:

- sporty S1 P safety sandal with a wide fit
- breathable microvelour is made from synthetic materials, so suitable for people allergic to chrome
- all sole materials are free of silicones, plasticisers and other paint wetting impairment substances
- Boa® Fit System (consisting of a micro-adjustable dial, super-strong lightweight laces and low friction lace guides) engineered to optimise fit and provide precision, adaptability, and control.

Protection features:

- meets the ESD specifications with volume resistance under 35 megaohms
- reliable protection for the wearer and material: penetration-resistant steel midsole, steel toe cap and stabilising uvex anti-twist heel cap to prevent ankle twisting
- ergonomically designed outsole made from dual density polyurethane with excellent slip resistance
- reflective elements for better visibility

Comfort features:

- ideal foot climate constantly maintained due to uvex climazone: highly breathable lining and upper with perforation and comfortable climatic insole with moisture transport system
- soft, comfortable fit with no pressure points – with soft padding on the collar and a padded tongue
- removable antistatic comfortable insole, with a moisture transport system and additional shock absorption around the heel and forefoot

Areas of application:

- medium applications



Models at a glance

S1



Shoe

uvex 1
65657
65658
65659

S1P



Shoe

uvex 1 x-tended support
65681
65682
65683



uvex 2 xenova®
95581
95582
95583

S1P



Shoe

uvex 2 trend
69381
69382
69383



uvex 2 trend
69081
69082
69083

S2



Shoe

uvex 1
65667
65668
65669

S3



Shoe

uvex 1 x-tended support
65671
65672
65673



uvex 2 VIBRAM®
65311
65312
65313



uvex 2 VIBRAM®
65331
65332
65333

uvex



1.001.429/1019/PDF Rights of technical changes reserved.
© 2019 – UVEX-ARBEITSSCHUTZ GMBH

UVEX ARBEITSSCHUTZ GMBH
Würzburger Straße 181-189
90766 Fürth
GERMANY

T +49 911 9736-0
F +49 911 9736-1760
E safety@uvex.de
I uvex-safety.com

UVEX SAFETY Austria mbH
Kamerlweg 33
4600 Wels
AUSTRIA

T +43 7242 210 745
F +43 7242 210 745-28
E safety@uvex.at
I uvex-safety.at

UVEX Arbeitsschutz (Schweiz) AG
Uferstrasse 90
4057 Basel
SWITZERLAND

T +41 61 638 84 44
F +41 61 638 84 54
E info@uvex.ch
I uvex-safety.ch

protecting people

uvex-safety.com